


Location:



## Lavatory Faucet S-240 Series

### Specification Submittal

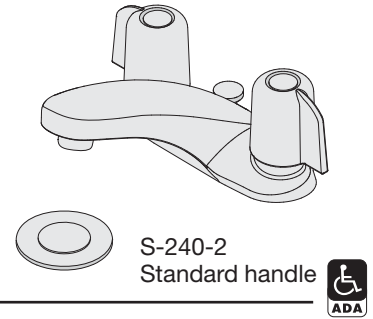

#### Feature Highlights

- Two handle 4 inch centerset lavatory faucet with quarter turn ceramic control components.
- Blade metal insert handles with red & blue indicators on handle
- 1/2 inch IPS shanks

- Aerator with 2.2 gpm flow rate (8.3 L/min)
- Metal construction, polished chrome finish

#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

#### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

#### S-240 series handle options

| LAM / LPO / LCF | LTM | CR | LWG | LCT |
|-----------------|-----|----|-----|-----|
|                 |     |    |     |     |

#### Model Numbers

Append appropriate -suffix to model number.

- ☐ S-240 Faucet only
- ☐ S-240-0 Faucet only, with no lift rod hole
- ☐ S-240-1 Faucet with lift rod
- ☐ S-240-2 Faucet with pop-up drain & lift rod

#### Finish Options

Append appropriate -suffix to model number.

- ☐ -STN Radiance® satin finish\*
- Standard chrome finish

\*Note (1) Handles with red/blue indicators are not available with decorative finishes. (2) Handles may not be available in all decorative finishes.

#### Handle Options

Append appropriate -suffix to model number.


- ☐ -LAM Lever handle with metal finish, metal insert and red & blue indicators
- ☐ -LPO Lever handle with metal finish, white insert and red & blue indicators
- ☐ -LCF Lever handle with metal finish, clear faceted insert and red & blue indicators
- ☐ -LTM Lever handle with metal finish, red & blue indicators on handles
- ☐ -CR Cross handle with metal finish, and red & blue indicators on handles
- ☐ -LWG Wrist blade handle with metal finish and red & blue indicators on handles
- ☐ -LCT Clear acrylic handle with red & blue indicators on handles

#### Other Options


Append appropriate -suffix to model number.

- ☐ -G Grid drain in lieu of pop-up (S-240-2 only)
- ☐ -IPS 1/2 inch IPS connections
- ☐ -1.5 1.5 gpm (5.7 L/min) flow restrictor,
- ☐ -1.0 1.0 gpm flow (3.8 L/min) restrictor,
- ☐ -.5 .5 gpm flow (1.9 L/min) restrictor,
- ☐ -VP Vandal resistant (with standard aerator 2.2 gpm flow-rate only)
- ☐ -NA Non-aerated laminar flow outlet
- ☐ -OFG Offset grid strainer (S-240-2 only)


**Dimensions** S-240 series with standard handle

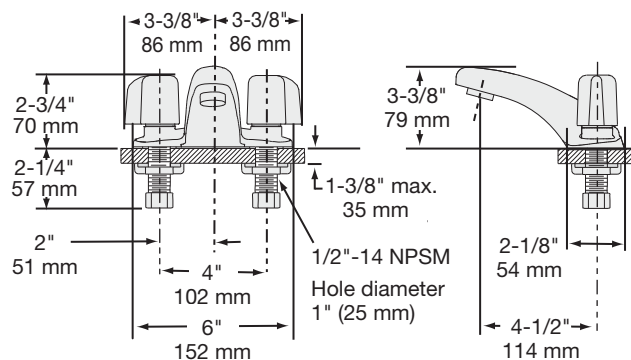


**Dimensions** S-240 series with LAM, LCF, LPO handles

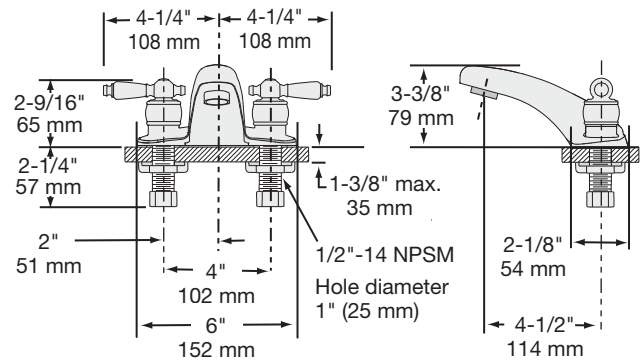


**Dimensions** S-240 series with LCT style handle

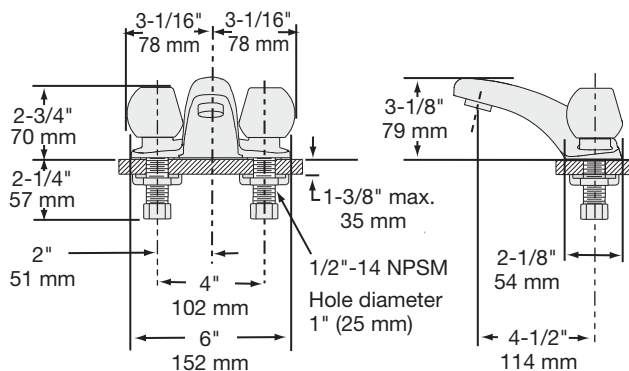

**Dimensions** S-240 series with CR style handle

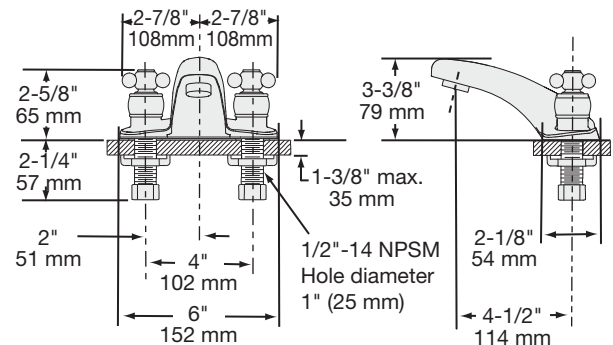

**Dimensions** S-240 series with LTM style handle

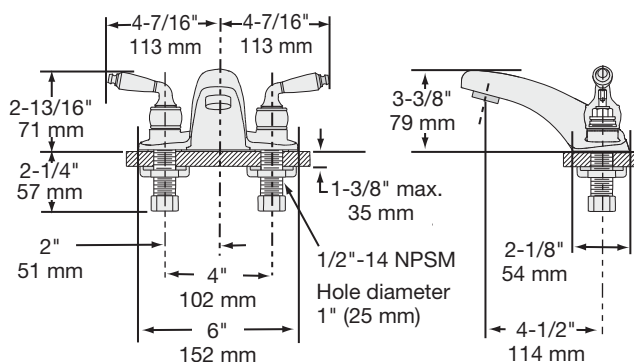

**Dimensions** S-240 series with LWG style handle

