

Product
Appliance Stub Out for Use with TracPipe and CounterStrike
Project Information

| | |
|-------------|---------------------|
| Job Name: | Date Submitted: |
| Location: | Submitted By: |
| Engineer: | Approved By: |
| Contractor: | Manufacturer's Rep: |

Installation

Must be installed in accordance with the TracPipe Design Guide and Installation Instructions and all applicable codes

Application Information

Schedule 40 B.I.P. stub out for use at movable appliance locations, with mounting plate

Technical Data
Materials

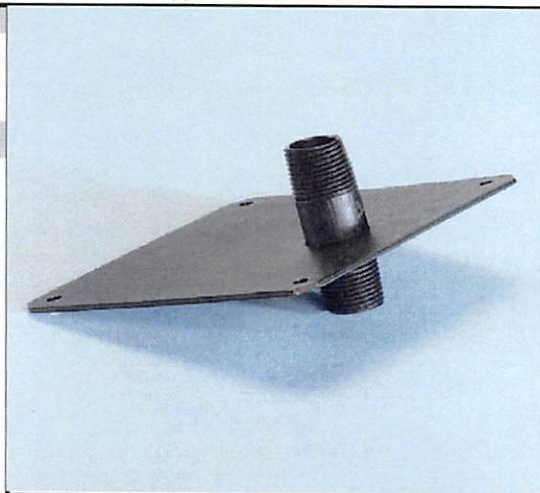
 Schedule 40 B.I.P.
 Mounting Plate 12 Ga. Carbon Steel

Pressure Ratings (used with tubing)

| | |
|--|----------|
| Specification Operating Pressure | 25 PSIG |
| CSA International Evaluation Report - Max Operating Pressure, 3/8" through 1-1/4" | 125 PSIG |

Temperature Ratings (used with tubing)

| | |
|-----------------------------|------------------|
| Operating Temperature Range | -20 to 200 Deg F |
|-----------------------------|------------------|


Codes
Standards

NPT Thread per ANSI B1.20.1

Listings
Dimensional Information

| | Size | P/N | Mounting Flange Dim (Nom) | Fitting length (Nom. in.) | TracPipe or CounterStrike Size | Weight (lbs) |
|-------------------------------------|------|-------------|------------------------------|---------------------------------|--------------------------------------|--------------|
| <input checked="" type="checkbox"/> | 1/2" | FGP-ASP-500 | 5" x 5" | 2-9/16" | 1/2" | 0.72 |

Omega Flex, Inc. * 451 Creamery Way* Exton, PA 19341

Tel: 610-524-7272 * Toll Free: 800-671-8622 * Fax: 610-524-7282

www.omegaflex.com