

**Product**
**Termination Mount (Male - NPT) Assembly for TracPipe and CounterStrike**
**Project Information**

Job Name:	Date Submitted:
Location:	Submitted By:
Engineer:	Approved By:
Contractor:	Manufacturer's Rep:

**Installation**

Must be installed in accordance with the TracPipe Design Guide and Installation Instructions and all applicable codes

**Application Information**

Termination fitting between TracPipe or CounterStrike Tubing and NPT thread.  
 Fitting thread is Male NPT. For use indoor, outdoor, and concealed location applications.

**Technical Data**
Materials

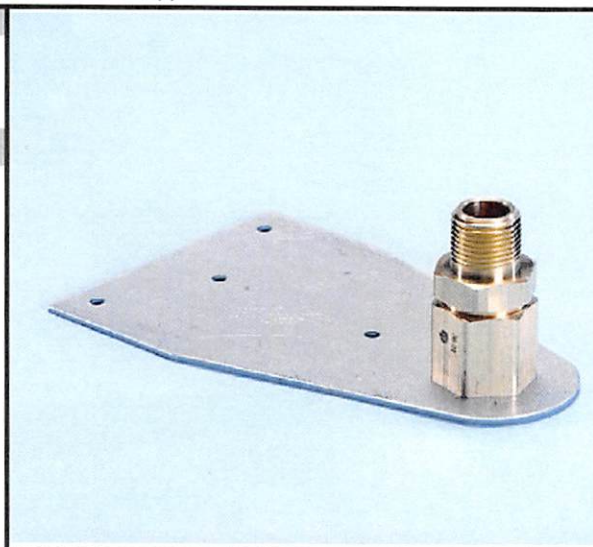
Nut, Adapter, and Split Rings	Yellow Brass
Insert	Stainless Steel
Mounting Bracket	Galvanized Steel

Pressure Ratings (used with tubing)

Specification Operating Pressure	25 PSIG
CSA International Evaluation Report - Max Operating Pressure, 3/8" through 1"	125 PSIG

Temperature Ratings (used with tubing)

Operating Temperature Range	-20 to 200 Deg F
-----------------------------	------------------


**Codes**

ICC Codes (IFGC, IRC, IMC, IPC), NFPA 54, UPC, CAN/CSA B149.1, NFPA 58

**Standards**

ANSI LC1 / CSA 6.26, ANSI Z21.15, ANSI Z223.1

**Listings**

CSA, ICC PMG 1046 / 1058, IAPMO (UPC) File No. 3682 / ES ER-0227

**Dimensional Information**

✓					TracPipe or CounterStrike	
	Size	P/N	Diameter across flats (Nom. in.)	L X W X H	Size	Weight (lbs)
<input type="checkbox"/>	3/8"	FGP-TM-375	1"	6-3/8" X 4" X 2-3/8"	3/8"	0.9
<input type="checkbox"/>	1/2"	FGP-TM-500	1-1/8"	6-3/8" X 4" X 2-7/16"	1/2"	1
<input type="checkbox"/>	3/4"	FGP-TM-750	1-3/8"	6-3/8" X 4" X 2-1/2"	3/4"	1.1
<input type="checkbox"/>	3/4"x 1/2"	FGP-TM-750-500	1-3/8"	6-3/8" X 4" X 2-1/2"	3/4"	1.1
<input type="checkbox"/>	1"	FGP-TM-1000	1-5/8"	6-3/8" X 4" X 2-3/4"	1"	1.3

Omega Flex, Inc. \* 451 Creamery Way\* Exton, PA 19341

Tel: 610-524-7272 \* Toll Free: 800-671-8622 \* Fax: 610-524-7282

www.omegaflex.com

FGP-SUB-011

Rev. 03-11

TracPipe, CounterStrike, PS-II, AutoFlare, and AutoTrip are registered trademarks of Omega Flex, Inc.