

Rear Connect Compact Style



B822Y04 shown

Designed for minimum space applications, this compact, low-cost thermometer maintains the accuracy, responsiveness, and durability for which the Trerice Line of Bimetal Thermometers is known. The stainless steel case is hermetically sealed.

• Optional features available:
Please consult the Options & Accessories Section for details.

Thermowell – Special Order Only

For correct use and application of all Bimetallic thermometers, please refer to the Bimetallic Actuated Thermometer Standard ASME B40.3.

- ▶ 2" Dial Size
- ▶ $\pm 1.0\%$ Full Scale Accuracy
- ▶ Stainless Steel Case & Stem
- ▶ Hermetically Sealed Design

Specifications

Models	Dial Size
B822Y	2" (Threaded)
B822YP	2" (Plain)
Case	300 stainless steel, hermetically sealed
Stem	B822Y: 300 stainless steel 1/4" diameter B822YP: 300 stainless steel 9/64" diameter
Coil	Bimetallic, silicone dampened on ranges to 300°F (148°C), above 300°F not dampened
Connection	B822Y: Rear, 1/4 NPT B822YP: Rear, unthreaded
Window	Glass
Pointer	Balanced, black finished
Dial Face	Aluminum, silver background with black graduations and markings
External Reset	Yes
Accuracy	$\pm 1.0\%$ Full Scale ASME B40.3 Grade A

Approximate Shipping Weight

0.4 lbs [0.18 kg]

Additional Notes:

2 1/2" stem for B822YP is pointed.
Stem for 4" and longer is rounded.

HOW TO ORDER

Sample Order Number: **B822Y 04 05**


Model	Stem Length	Range Code
B822Y	02 2 1/2"	Stem See Standard Ranges
B822YP	04 4" Stem	
	06 6" Stem	

Other stem lengths and ranges available. Please consult factory.


Standard Ranges

Dual Scale (Fahrenheit & Celsius Range)			Fahrenheit		Celsius	
Range Code	Range		Figure Intervals	Minor Divisions	Figure Intervals	Minor Divisions
02	-40° to 160°F & -40° to 70°C		20°	2°	10°	1°
03	25° to 125°F & -5° to 50°C		10°	1°	5°	1/2°
27	0° to 250°F & -20° to 120°C		50°	2°	20°	2°
05	20° to 240°F & -10° to 115°C		20°	2°	10°	1°
08	50° to 500°F & 10° to 260°C		50°	5°	20°	2°

B822Y

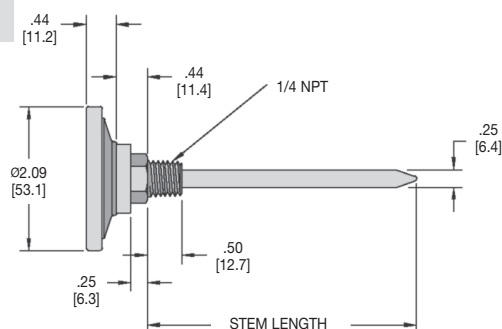

B822YP

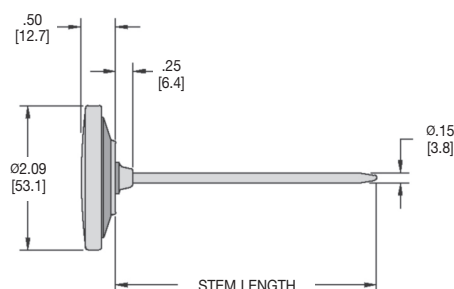

All dimensions are nominal. Dimensions in [] are in millimeters.