

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

AU1 Female Gas Adapter - Male Flare x Female Iron Pipe

Use: For use with natural, manufactured, mixed, liquefied petroleum gases and LP gas-air mixtures.


Operating Specifications:

Temperature: -40° to 150° F

Pressure: 1/2 psi maximum

MATERIAL SPECIFICATIONS	
Brass Fittings	Brass
Steel Fittings	Blue zinc plated steel

PART DIMENSIONS (Inches)			
Model	DIA. A	DIM. B	DIM. C
AU1-8	0.438	1.53	15/16
AU1-6-8	0.312	1.47	15/16
AU1-6	0.312	1.37	3/4

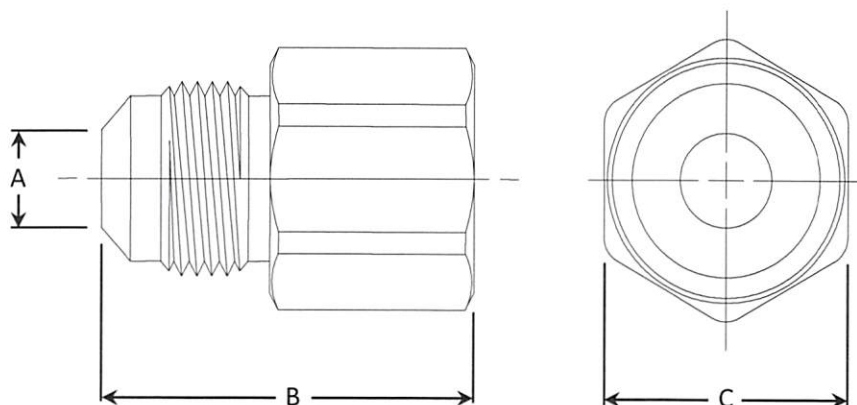

Brass Models



Part Listing:

- | | | |
|--------------------------|------------|---|
| ☐ | AU1-8S | 1/2" OD Flare x 1/2" F.I.P., steel |
| ☐ | AU1-6-8 | 3/8" OD Flare x 1/2" F.I.P., brass |
| ☐ | AU1-6-8S | 3/8" OD Flare x 1/2" F.I.P., steel |
| ☐ | AU1-6-8S B | 3/8" OD Flare x 1/2" F.I.P., steel, bulk packed |
| ☐ | AU1-6S | 3/8" OD Flare x 3/8" F.I.P., steel |

Listings & Certifications:

- For use with CSA listed ANSI Z21.24 / CSA 6.10 connectors
- For use with CSA listed ANSI Z21.75 / CSA 6.27 connectors