




Z-1204-ND ADJUSTABLE VERTICAL SIPHON JET- No-Hub

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

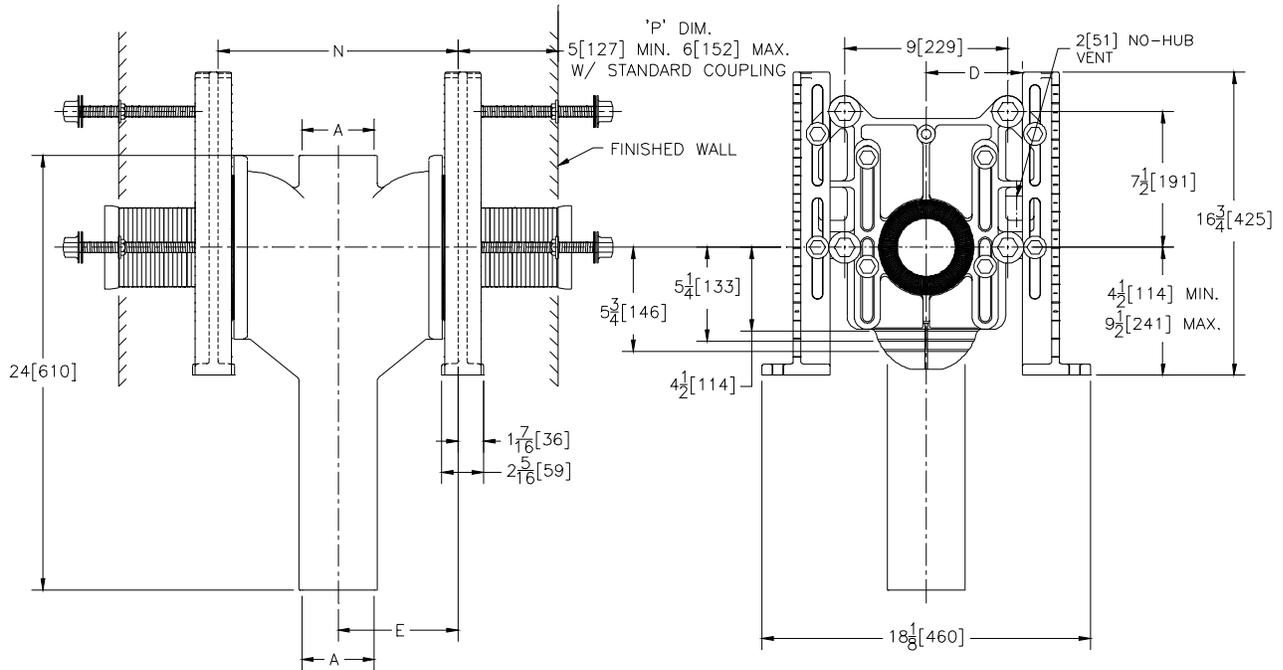

Product No.	Dimensions In Inches [mm]					Approx. Wt. Lbs. [kg]
	A	D	E	H	N	
Z-1204-ND4	4[102]	5[127]	6-5/8[168]	5-1/2[140]	13-1/4[336]	139 [63]
Z-1204-ND5	5[127]	5-1/2[140]	6-5/8[168]	6-1/2[165]	13-1/4[336]	140 [63]
Z-1204-ND6	6[152]	6[152]	7-1/8[181]	6-1/2[165]	14-1/4[362]	145 [66]

Note:

1. Min. 'P' Dim. Obtainable=2[51]
2. Two 4[102] or 5[127] side inlets as indicated.
3. Feet bolted to floor using min. 1/2[13] dia. bolts and back slots on carrier feet.

ENGINEERING SPECIFICATION: ZURN Z-1204-ND() Adjustable, vertical siphon jet water closet "Rigid System" with () size No-Hub connections and () side inlets. Complete with Dura-Coated cast iron right and left hand fitting, with 2[51] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down, and bonded "Neo-Seal" gasket.

PRODUCT/DEFINITION

_____ **Z-1204-ND** No-Hub Stack, Double Inlets, 2[51] Vent.

PREFIXES

- _____ **Z-** D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
 _____ **ZQ-** D.C.C.I. System with Non-Adjustable Coupling

SUFFIXES

- | | | | |
|------------------|--|------------------|---|
| _____ -A | Auxiliary Support Assembly (For P-Dim. greater than 18[457]) | _____ -T | Threaded Stack Connection (Available on Restricted Basis Only) |
| _____ -B | Blowout Type Fixture Support | _____ -VP | Vandal Proof Trim |
| _____ -BC | Back Cleanout | _____ -W | Adapter for Womens Urinal |
| _____ -CC | Cast Iron Coupling 6[152] Long | _____ -29 | Mechanical Test Cap Assembly (Previously Z-1210-29) |
| _____ -CL | Coupling Length Greater than 12[305] (Specify length if greater than 6[152]) | _____ -45 | Finishing Frame for Siphon Jet System (For Blowout System specify -45-B) (Previously Z-1210-45) |
| _____ -F | Floor Mounted Back Outlet, Fixture Support | _____ -50 | Flush Valve Supply Support for W.C. (Previously Z-1210-50) |
| _____ -G | Galvanized Cast Iron | _____ -61 | "ZZ" Coupling Wrench |
| _____ -JJ | 2[51] Auxiliary Inlet | | |
| _____ -JL | 2[51] Left Hand Auxiliary Inlet | | |
| _____ -JR | 2[51] Right Hand Auxiliary Inlet | | |
| _____ -M | Auxiliary Foot Support (For P-Dim. 10[254] 18[457]) | | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B **DATE: 12/11/97** **C.N. NO. 79360**
DWG. NO. 56985 **PRODUCT NO. Z-1204-ND**