


Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

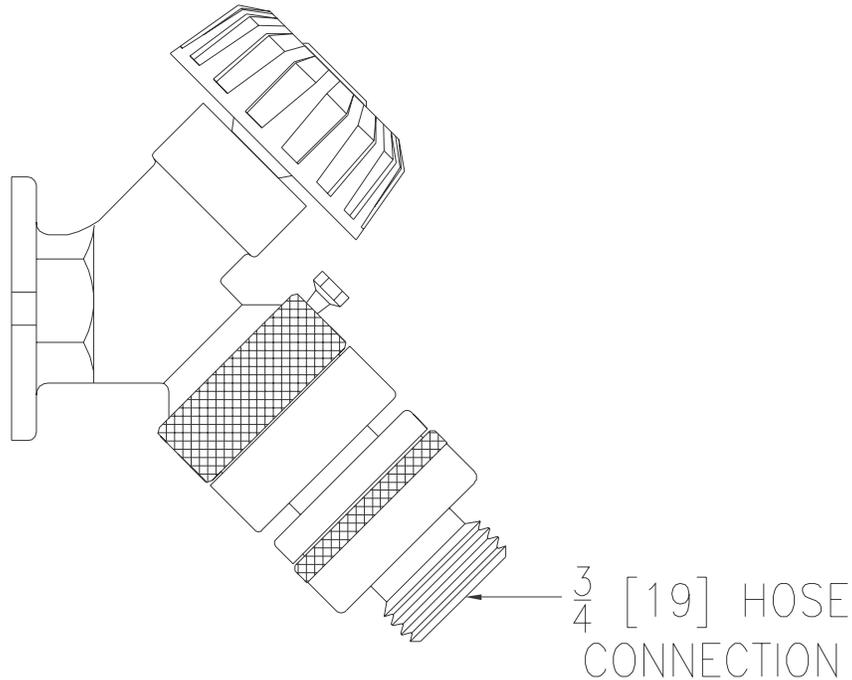

Inlet Connection	Inlet Description in Inches	Approx. Wt. Lbs. [kg]
__ -C12	1/2 [13] Solder x 3/4 [19] Solder	2 [1]
__ -C12-PX	1/2 [13] PEX	2 [1]
__ -CP12	1/2 [13] Solder x 1/2 [13] MPT	2 [1]
__ -P12	1/2 [13] FPT	2 [1]
__ -P34	3/4 [19] FPT	2 [1]

**ENGINEERING SPECIFICATION:** Z1341-BFP Exposed, anti-siphon, wall faucet for use in moderate climate installation, complete with Z1399-BFP external backflow preventer, all bronze interior components, vandal-resistant operating stem, rough bronze exterior and 3/4 [19] male hose connection (Conform to ASME B1.20.7). Furnished with choice of five different inlet connections.

**OPTIONS** (Check/specify appropriate options)

**SUFFIXES**

- \_\_\_ -LF Less Flange (-C12 and -CP12 only)
- \_\_\_ -LK Loose Key
- \_\_\_ -PB Polished Bronze Finish
- \_\_\_ -PC Polished Chrome Finish
- \_\_\_ -RC Rough Chrome Finish
- \_\_\_ -RK Hydrant Parts Repair Kit



1052

(Hose Connection Backflow Preventer)

ZURN LIGHT COMMERCIAL PLUMBING PRODUCTS ♦ 2640 South Work Street ♦ Falconer, NY 14733  
Phone: 1-800/906-5060 ♦ Fax: 716/665-3126 ♦ World Wide Web: www.zurn.com