



Z5110

20" x 17" Countertop Lavatory

TAG _____



Z5110 Series

Recommended Trim:

- ☐ **Z8743-PC** Grid Strainer
- ☐ **Z8700 SERIES** P-Trap
- ☐ **Z8800 SERIES** Stop with flexible supplies
- ☐ **Z8946-1-NT** ADA trap, stop, and supply protectors

Optional Trim:

- ☐ **Z8746-PC** ADA grid Strainer
- ☐ **Z8946-3-NT** ADA trap, stop, and supply protectors for offset grid strainers.

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when lavatory is installed 864mm (34") from finished floor.



See Zurn One Systems for suggested packages.

Z5110 Series

- 20" [508 mm] x 17" [432 mm]
- Vitreous china
- Faucet holes for single, 4" or 8" centers
- Self-rimming front overflow design
- Waste: 1-1/4" O.D.
- Depth: 6-5/8"
- Shipping Weight: 22 lbs.

Engineering Specification:

- ☐ **Z5111 Lavatory** - 20" x 17" vitreous china, self-rimming, countertop lavatory with single faucet hole.
- ☐ **Z5114 Lavatory** - 20" x 17" vitreous china, self-rimming, countertop lavatory with 4" center faucet holes.
- ☐ **Z5118 Lavatory** - 20" x 17" vitreous china, self-rimming, countertop lavatory with 8" center faucet holes.

This space is for Architectural/engineering Approval

Zurn Plumbing Products Group Commercial Brass and Fixtures Operation
2640 South Work Street · Falconer, NY 14733 · Phone: 716-665-1132 · Fax: 716-665-1135 · www.zurn.com




Z5110

20" x 17" Countertop Lavatory Rough-in

TAG _____

Rough-in dimensions for Z5110 Series

- Z5111 Countertop Lavatory with single faucet hole
- Z5114 Countertop Lavatory with 4" center faucet holes
- Z5118 Countertop Lavatory with 8" center faucet holes

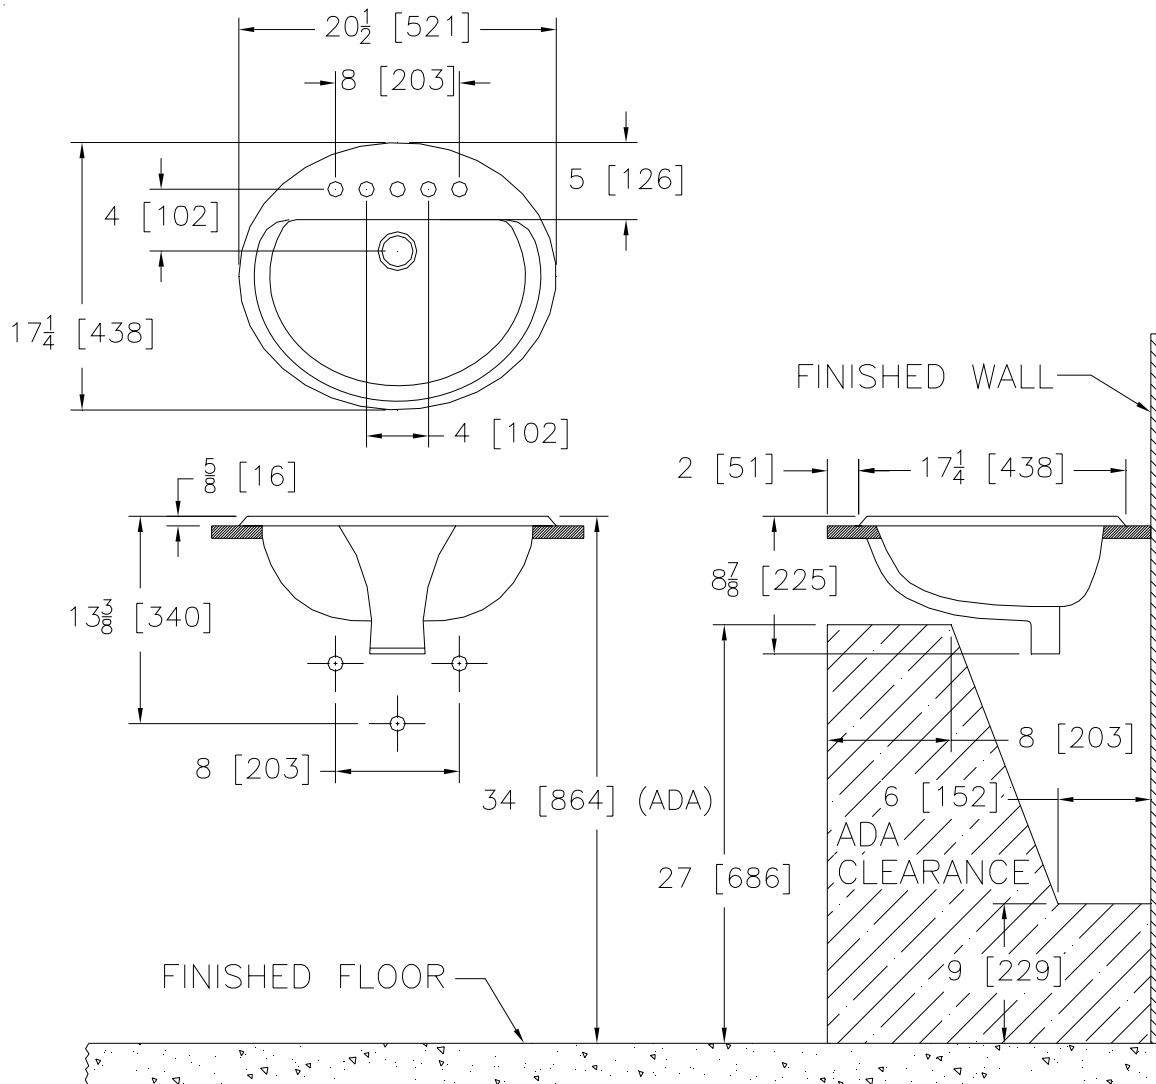

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when lavatory is installed 864mm (34") from finished floor.



Zurn Plumbing Products Group Commercial Brass and Fixtures Operation

2640 South Work Street · Falconer, NY 14733 · Phone: 716-665-1132 · Fax: 716-665-1135 · www.zurn.com



LABORATORY FAUCET - DOUBLE


Z826B4

TAG



Engineering Specifications: Zurn AquaSpec® Z826B4

Polished chrome-plated double laboratory faucet with integral shank, quarter turn ceramic disc cartridges and a 5-3/8" [137mm] centerline rigid or swing gooseneck spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and stainless steel flex connection hoses.

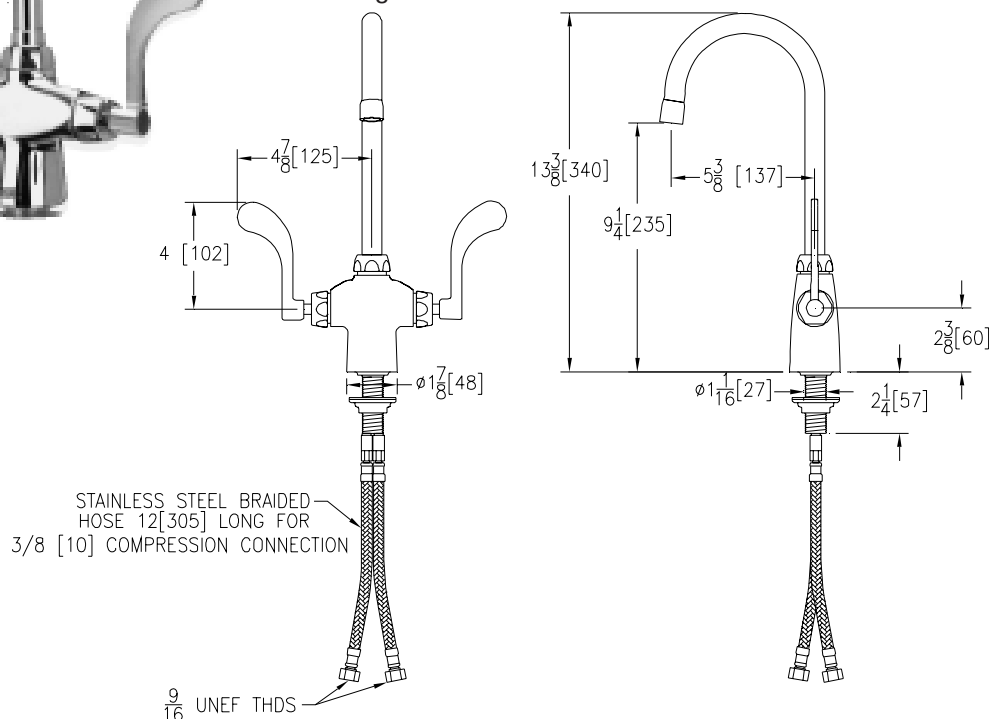

Note: All dimensions are for reference only. Do not use for pre-plumbing.

OPTIONAL ACCESSORIES

Suffix	Description
—AR	Anti-Rotation Pins
—CST	Copper Supply Tubes
—FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
—G	1-1/4" [32mm] Grid Strainer Drain
—HCT	Hot/Cold Text Indexes
—MY	Mixing Yoke Assembly Instead of Copper Supplies
—PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
—140	Restricted 140° Swing Spout
—2F	2.0 GPM [7.6 L] Vandal-Resistant Pressure Compensating Female Aerator
—3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator
—4F	2.0 GPM [7.6 L] Vandal-Resistant Pressure Compensating Female Laminar Flow
—5F	2.0 GPM [7.6 L] Female Spray Outlet
—6F	Female Serrated Nozzle Outlet
—7F	1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet
—16F	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet
—17F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator
—18F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow
—18FH	18" [457mm] S.S. Braided Flex Hoses

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292




SOLID TOP, OPEN-GRID P.O. PLUGS

Z8743-PC

TAG _____

Engineering Specification: Zurn Z8743-PC – Cast brass solid top, open grid, P.O. plug with 5[127] 17 gauge tailpiece and cast brass locknut for sink depth up to 2 1/4[57]. 6-, 8-, 10- and 12- tailpieces available.

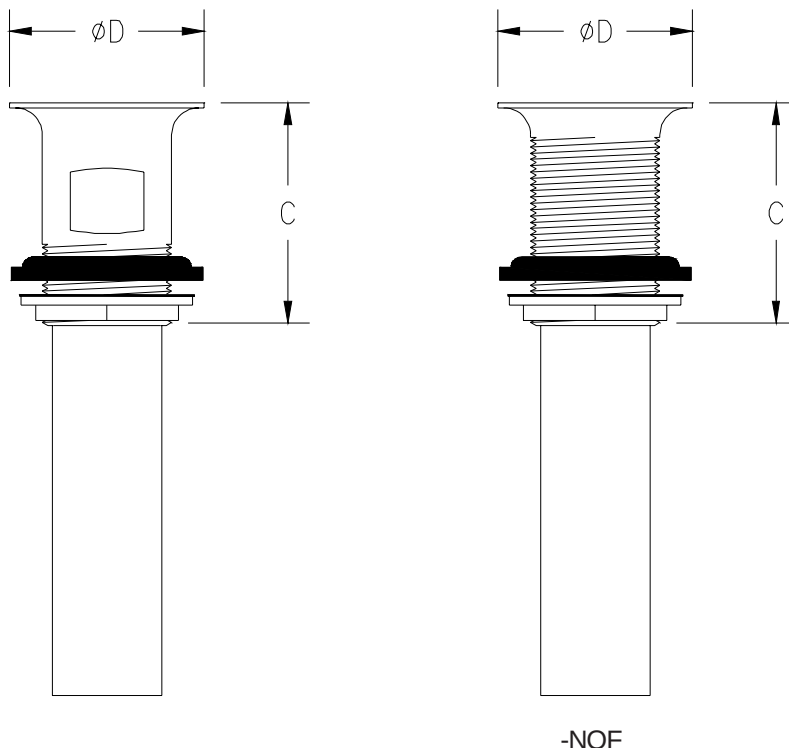

-NOF

Note: All dimensions are for reference only. Do not use for pre-plumbing

PRODUCT NUMBER	TAILPIECE	DIMENSIONS		MASTER CARTON	WEIGHT CARTON
		C	ØD		
Z8743-PC	1 1/4[32]	2 9/16[65]	2 1/4[57]	30	30
Z8743-1-PC	1 1/2[38]	2 9/16[65]	2 1/4[57]	30	30

OPTIONAL ACCESSORIES

Suffix	Description
_____	-NOF No Overflow (PC Only)
_____	-PB Polished Brass
_____	-6 w/6[152] Tailpiece
_____	-8 w/8[203] Tailpiece
_____	-12 w/12[305] Tailpiece

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292




SEMI-CAST P-TRAPS WITH WALL BEND

Z8700-PC - Z8708-PC

TAG

Engineering Specification: Zurn Z8700-PC to Z8708-PC. – Chrome-plated cast body P-trap with cleanout, tubular wall bend as specified, die-cast nuts, and shallow escutcheon with compression inlet.

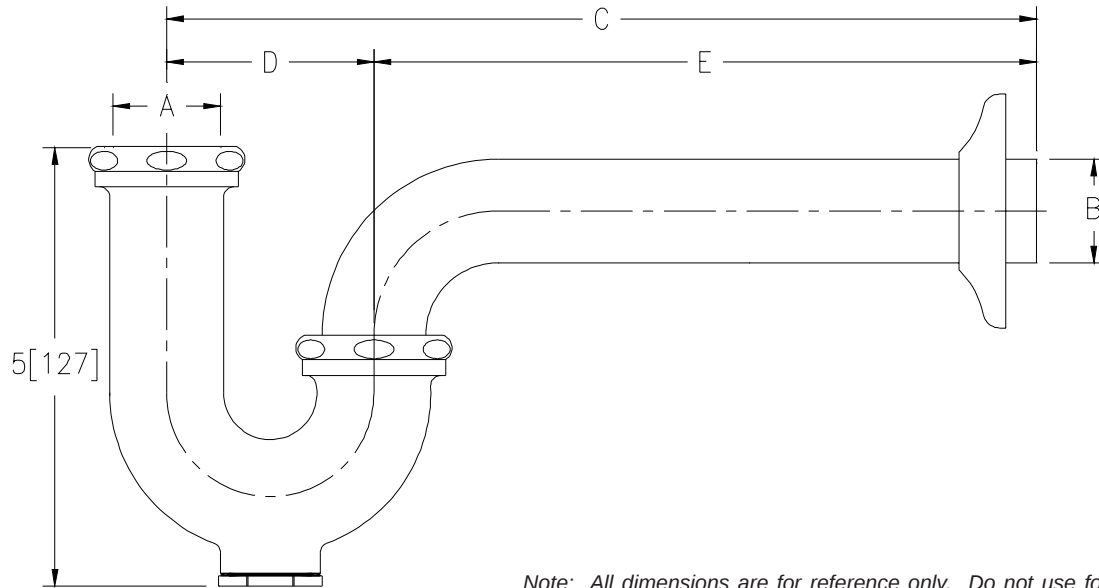

Note: All dimensions are for reference only. Do not use for pre-plumbing.

PRODUCT NUMBER	A INLET in[mm]	B OUTLET in[mm]	GAUGE	DIMENSIONS			MASTER CARTON	WEIGHT CARTON [lbs]
				C in[mm]	D in[mm]	E in[mm]		
Z8700-PC	1 1/4[32]	1 1/4[32]	17	10[254]	2 1/2[64]	7 1/2[191]	12	24
Z8700-8-PC	1 1/4[32]	1 1/4[32]	17	11[279]	2 1/2[64]	8 1/2[216]	12	24
Z8701-PC	1 1/4[32]	1 1/2[38]	17	10 1/2[267]	3[76]	7 1/2[191]	12	24
Z8701-9-PC	1 1/4[32]	1 1/2[38]	17	12[305]	3[76]	9[229]	12	24
Z8702-PC	1 1/2[38]	1 1/2[38]	17	10 1/2[267]	3[76]	7 1/2[191]	12	24
Z8702-9-PC	1 1/2[38]	1 1/2[38]	17	12[305]	3[76]	9[229]	12	24
Z8703B-PC**	1 1/2[38]	2[51]	17	10[254]	3[76]	9[229]	12	34
Z8704B-PC**	2[51]	2[51]	17	10[254]	3[76]	9[229]	12	34
Z8706-PC	1 1/4[32]	1 1/4[32]	20	10[254]	2 1/2[64]	7 1/2[191]	12	20
Z8707-PC	1 1/4[32]	1 1/2[38]	20	10 1/2[267]	3[76]	7 1/2[191]	12	20
Z8708-PC	1 1/2[38]	1 1/2[38]	20	10 1/2[267]	3[76]	7 1/2[191]	12	20

OPTIONAL ACCESSORIES

Suffix	Description
___ -B	Brass Nuts
___ -BX	Box Escutcheon
___ -CE	Cast Brass Escutcheon with Setscrew
___ -D	Deep Escutcheon
___ -J	Metal to Metal Ground Joint Connection (Available only on Z8700-PC, Z8700-8-PC, Z8701-PC, Z8701-9-PC, Z8702-PC, Z8702-9-PC)
___ -15	15[381] C Dim. 1 1/4[32] and 1 1/2[38] Only
___ -18	18[457] C Dim. 1 1/4[32] and 1 1/2[38] Only

** SHIPPED WITH BRASS NUTS UNLESS OTHERWISE SPECIFIED

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292



Z8800LR - Z8809LR


STANDARD STOP WITH FLEXIBLE LAVATORY SUPPLY




SPECIFICATION SHEET

TAG _____


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice




Z8800 THRU Z8803



Z8804 THRU Z8805



Z8806 THRU Z8807

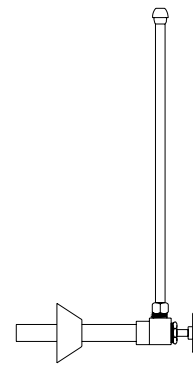

Z8808 THRU Z8809

SUFFIXES

_____	- C1	Standard Line Lock Shield Cap
_____	- CE	Chrome Plated, Cast Brass, Setscrew
_____	- D	Chrome Plated Steel, Deep Bell Flange (Bell Type)
_____	- WE	Wrot Brass, Deep Flange, (Bell Type)
_____	- XP	Cross Handle
_____	- 3	3[76] Nipple
_____	- 5	5[127] Nipple

Engineering Specification: Zurn Z8800LR to Z8809LR Two Zurn chrome plated, solid brass angle stops with round wheel handles or loose key as specified, two 12[305] flexible chrome plated copper lavatory risers complete with two chrome plated steel flanges. Z8808LR and Z8809LR include 5[127] chrome plated copper extension tubes.

PRODUCT NUMBER	CONNECTIONS	EXT.	MASTER CARTON	WEIGHT CARTON	
				LR	LRLK
Z-8800LR	3/8 [10] IPS x 3/8 [10] OD	-	25	24	
Z8800LRLK	3/8 [10] IPS x 3/8 [10] OD	-	25		25
Z8801LR	3/8 [10] IPS x 1/2 [13] OD	-	25	24	
Z8801LRLK	3/8 [10] IPS x 1/2 [13] OD	-	25		25
Z8802LR	1/2 [13] IPS x 3/8 [10] OD	-	25	24	
Z8802LRLK	1/2 [13] IPS x 3/8 [10] OD	-	25		25
Z8803LR	1/2 [13] IPS x 1/2 [13] OD	-	25	24	
Z8803LRLK	1/2 [13] IPS x 1/2 [13] OD	-	25		25
Z8804LR	1/2 [13] NOM x 3/8 [10] OD	-	25	24	
Z8804LRLK	1/2 [13] NOM x 3/8 [10] OD	-	25		25
Z8805LR	1/2 [13] NOM x 1/2 [13] OD	-	25	24	
Z8805LRLK	1/2 [13] NOM x 1/2 [13] OD	-	25		25
Z8806LR	1/2 [13] SWT x 3/8 [10] OD	-	25	24	
Z8806LRLK	1/2 [13] SWT x 3/8 [10] OD	-	25		25
Z8807LR	1/2 [13] SWT x 1/2 [13] OD	-	25	24	
Z8807LRLK	1/2 [13] SWT x 1/2 [13] OD	-	25		25
Z8808LR	1/2 [13] SWT x 3/8 [10] OD	5	25	28	
Z8808LRLK	1/2 [13] SWT x 3/8 [10] OD	5	25		30
Z8809LR	1/2 [13] SWT x 1/2 [13] OD	5	25	28	
Z8809LRLK	1/2 [13] SWT x 1/2 [13] OD	5	25		30

*CSA APPROVED EXCEPT FOR Z8803

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B DATE: 7/16/02 C.N. NO. 88661

DWG. NO. 60968 PRODNO. Z8800LR-Z8809LR

ZURN INDUSTRIES, INC. ♦ COMMERCIAL TRAP & SUPPLIES OPERATION ♦ 929 RIVERSIDE DRIVE ♦ N. GROSVENORDALE, CT 06255

Phone: 1-800-243-1830 ♦ Fax: 1-860-923-2780 ♦ World Wide Web: www.zurn.com



In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292



Z8946-1
COMBINATION KIT:
ONE TRAP AND TWO STOP SUPPLY PROTECTORS

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

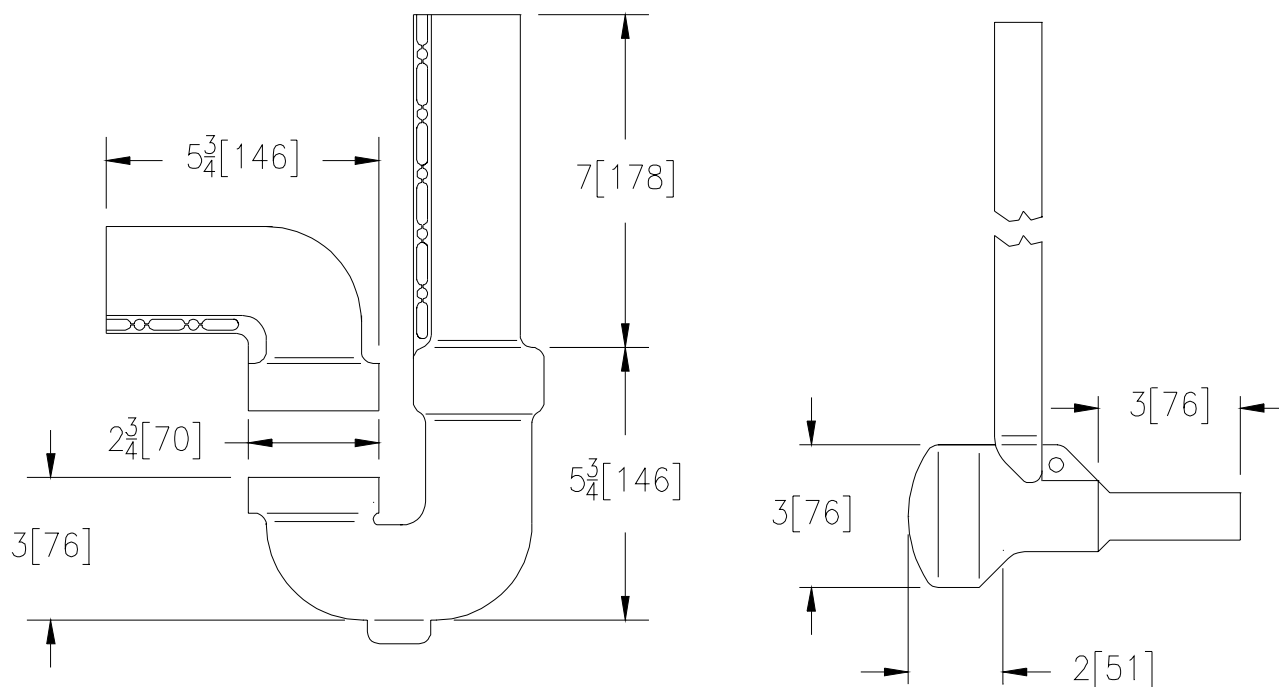

ENGINEERING SPECIFICATION: ZURN Z8946-1 Combination Kit: One trap protector and two stop and supply protectors, satin white PVC resin with a nominal 3/8[10] wall. Resists thermal transfer and is ADA compliant. Trap fits both tubular and semi-cast p trap.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 2/21/02	C.N. NO. 89453
DWG. NO. 66243	PRODUCT NO. Z8946-1	