



Z6920-XL

AquaSense Battery Powered Faucet

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
1.5 gpm Vandal Resistant Aerator
- Occupant Detection
Infrared convergence-type proximity sensor
Thirty Second Time out feature
- Spout module
Chrome Plated Cast Brass
- Also Includes
In-line filter
4 "AA" batteries
Inlet for a 1/2"[13] ball riser

*Option not compliant for -XL faucets

Accessories

- ☐ -ADM Above Deck Mixer*
- ☐ -ADM-1 Above Deck Mixer w/ 4" Cover Plate*
- ☐ -ADM-2 Above Deck Mixer w/ 8" Cover Plate*
- ☐ -CG CareGuard Aerator
- ☐ -CP4 Cover Plate 4[102] Centers
- ☐ -CP8 Cover Plate 8[204] Centers
- ☐ -DSA Drug Screening Applications
- ☐ -FC Flow Control in Base of Spout
- ☐ -GA 3-1/2" Goosneck Spout
- ☐ -GC 8" Goosneck Spout
- ☐ -H4 Wrist Blade Handle for ADM*
- ☐ -IA3 Inlet Adaptor (3/8"[10] compression)
- ☐ -MT Mixing Tee*
- ☐ -MV Temperature Mixing Valve
- ☐ -SH Supply Hoses for Mixing Valve
- ☐ -SSH Single Stainless Supply Hose (-XL)
- ☐ -SO Rosette Spray Aerator
- ☐ -TMV Thermostatic Mixing Valve for Multiple Faucets
- ☐ -TMV-1 Thermostatic Mixing Valve for Single Faucets
- ☐ -_____ Other

Careguard currently only available with -E, 1.5 Vandal Resistant Laminar Aerator.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.



Flow Control Options

- ☐ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- ☐ -J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- ☐ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- ☐ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- ☐ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated
- ☐ -N 0.5 gpm/ 1.9 Lpm Vandal-Resistant Laminar Flow

Power Supply Choices (Sold Separately)

- ☐ -ACA 6 VDC Plug-In Power Converter
- ☐ -HW6 Hardwired Power Converter

Optional Power Supply Accessories

- ☐ -CWB Connector Wire for Hardwire Install
- ☐ -MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately.


The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.


ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541
www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

AquaSense® is a registered trademark of Zurn Industries, LLC.


Typical Z6920-XL AquaSense Battery Powered Faucet

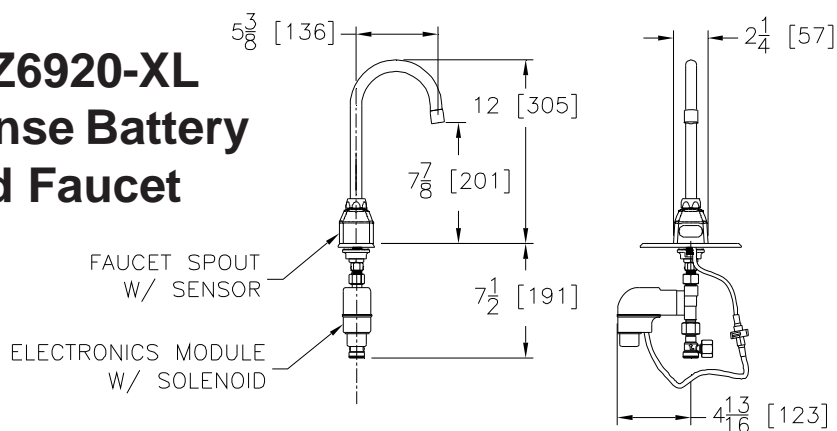


Typical Z6920-XL-ACA AquaSense Plug-In Powered Faucet

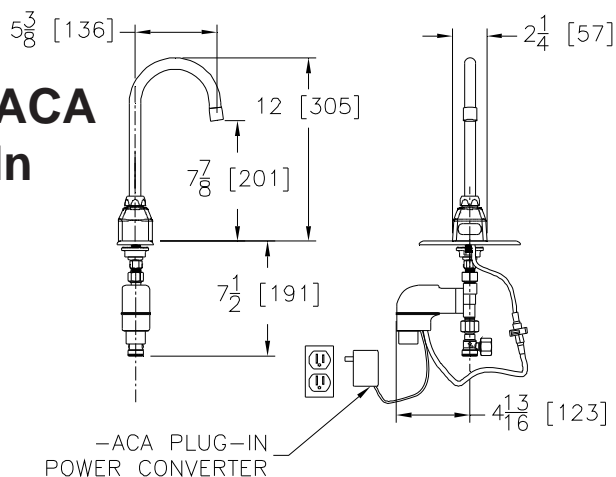

Optional Mixing Valves

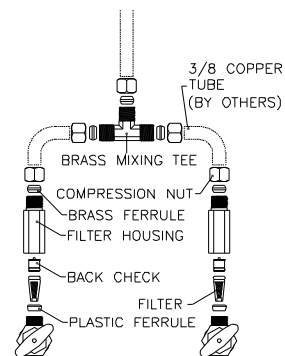


P6900-MT Mixing Tee



P6900-MV Temperature Mixing Valve

Typical Z6920-XL-CWB AquaSense Hardwire Powered Faucet

Optional:
* Optional -MJ mini junction box
for connecting up to 8 faucets

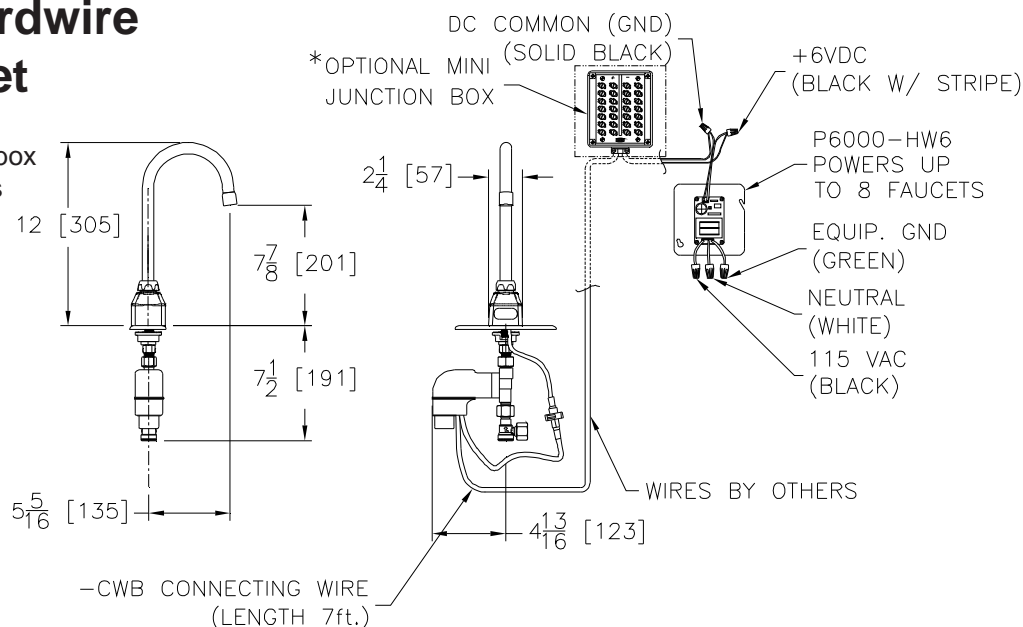

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6900-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.