





Sentinel® Connector Systems Inc.

1953 Stanton Street

York, Pa. 17404

PART NO.: 111-08080090L34

- * EIGHT CONDUCTOR MODULAR PLUG
- * FOR CONDUCTORS WITH AN O.D. RANGE OF .044-.048
- * USES .012 CONTACT
- * PRODUCT REQUIRES CONDUCTIVE LOAD BAR
- * FOR CAT 6 PATCH CORD APPLICATIONS
- * FOR SOLID OR STRANDED WIRE APPLICATIONS

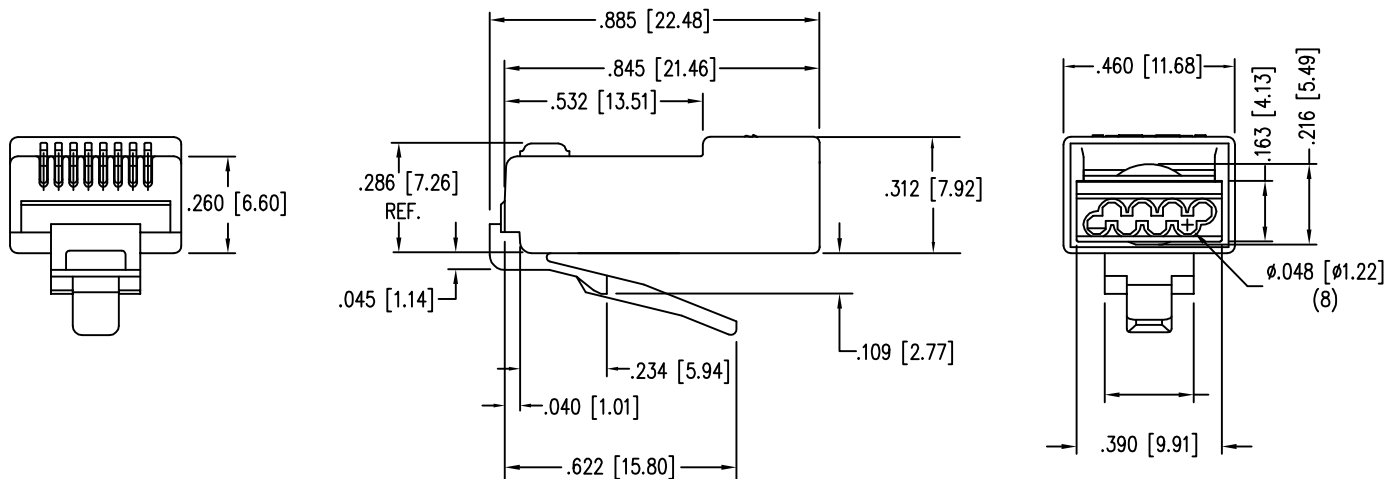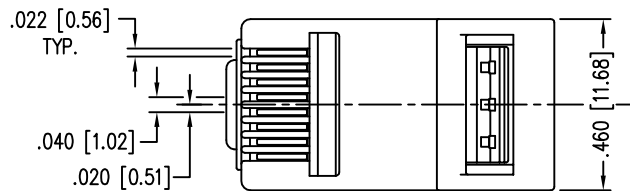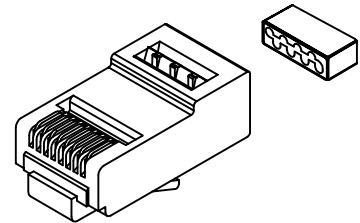

"PATENTED"

SPECIFICATIONS :

PERFORMANCE:

MEETS OR EXCEEDS CATEGORY 6 ANSI/EIA 568-C.2
PERFORMANCE TUNED TO CABLES MEETING CATEGORY 6 SPECIFICATIONS.
PHOSPHOR BRONZE - .012 THK

CONTACT MATERIAL:

CONTACT PLATING:

50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE
SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA
OVER 100 MICRO-INCH MINIMUM NICKEL PLATE
PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.

PLUG MATERIAL:

POLYCARBONATE

PLUG TOLERANCES AND DIMENSIONS:

U.L. RECOGNIZED

FLAME AUTO EXTINGUISH

OPERATION TEMPERATURE:

INSERTION/EXTRACTION LIFE:

CONTACT RESISTANCE:

CURRENT/VOLTAGE:

(RoHS COMPLIANT)

File# E188111

94-V0

-40°C TO +85°C

1000 CYCLES

10 MILLOHMS MAX.

30 VAC/42 VDC AT 1.5 AMPS

* FORMER COMPLIANCE, FCC PART 68.500

PRODUCT LINE

SIZE

OPENING

SPECIAL

PART NO. = 111-08080090L34

SERIES

CONTACTS

KEY

CONTACT/PLATING
LOAD BAR