



**2A08 Power Supply Module**



The 2A08 Power Supply Module supplies operating power to the EOTec 2000 Modem.


The basic modem configuration consists of a Power Supply Module, Electrical Interface Module, and an Optical Interface Module. However, additional Power Supply modules may be added to address Redundant Power Supply applications. A maximum combination of five optical or electrical modules may be powered from one supply, inter-module communications and operating power is achieved through the integrated module interconnections.

**SPECIFICATIONS**

Mechanical:

Mounting: 35mm DIN Rail

Weight: < 9oz ( 250g )

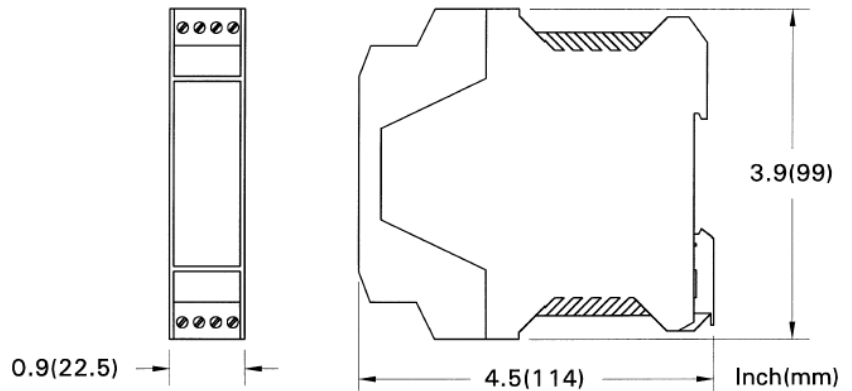

Input Power Range: 24 VDC  $\pm$ 20%, 400mA

Operating Power Output: Regulated 9VDC, 1.1A Max

Input Connection: Pluggable, Screw Terminal Block  
12 to 24 AWG Cage-Clamp

Input Fuse Type: 400 mA slow-blow

Power On Indicator: Green LED

Ambient Conditions: -40°C to 85°C Operational  
0 to 95% Relative Humidity Non-Condensing



Approved  
Class I, Division 2,  
Groups A, B, C & D

