



Weed Instrument

Fiber Optics



EOTec 2000

2C02 Electrical Interface Module



The 2C02 Module provides electrical interface for GE Fanuc Genius™ network by conditioning the electrical signals supplied to and from the GE equipment for transmission over the fiber optic network.


The simplest modem configuration consists of a Power Supply, an Electrical Interface, and an Optical Interface Module. However, additional modules may be added to configure Daisy Chain, Star, Self-Healing Ring topologies and provide Redundancy. A maximum combination of five optical or electrical modules may be connected together in one modem, inter-module communications and operating power is achieved through the integrated module interconnections.

SPECIFICATIONS

Mechanical:

Mounting: 35mm DIN Rail

Weight: < 9oz (250g)

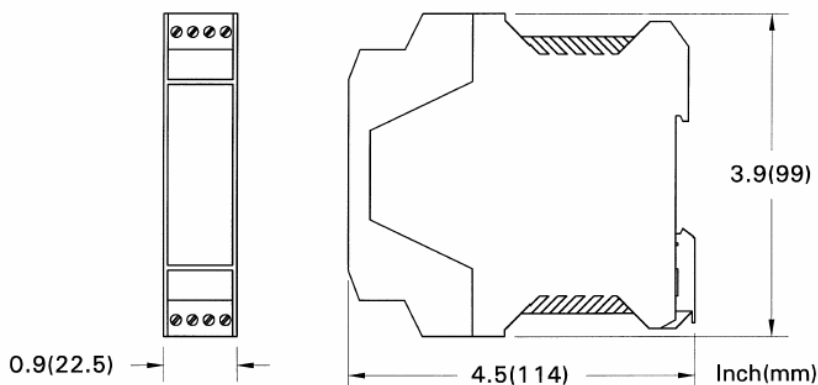

Baud Rate:

153.6K Baud, Extended

Copper Cable Connector:

De-Pluggable Screw Terminal Block
Cage-Clamp Type for 12 to 24 AWG Size

Cable End Termination:

External, User Supplied, Based on
Wire Cable Specifications

Maximum Devices and Copper Cable Length Supported per Module:

32 Devices, 3500 feet

Power Indicator:


Green LED

Communications Activity Indicator:

Amber LED

Ambient Conditions:

-40°C to 85°C Operational
0 to 95% Relative Humidity Non-Condensing

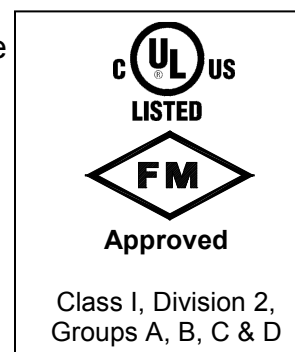

Genius is a trademark of GE Fanuc



Weed Instrument, P.O. Box 300, Round Rock, Texas 78680
Shipping: 707 Jeffrey Way, Round Rock, TX 78664
Phone: (512) 434-2850, Toll Free: (800) 880-9333, Fax: (512) 434-2851
Mail: fiberop@weedinstrument.com
Home Page: <http://www.weedinstrument.com>

Rev. 6/2004
Pub: RM0900594