


## Product Data Sheet

### 2E07 – 850nm Multi-mode

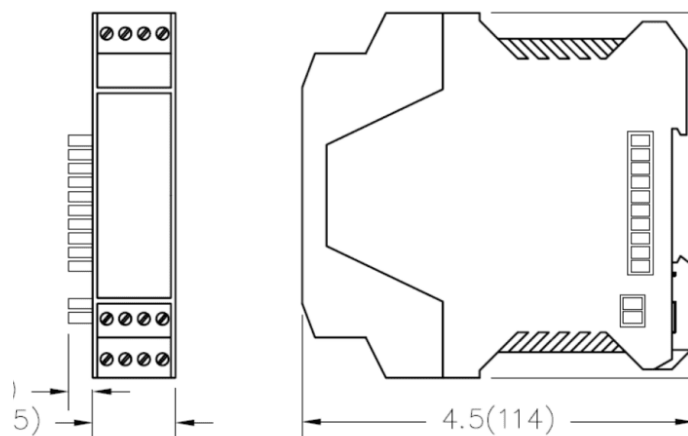

Optical Interface Modules are connected to EIMs to transmit information between drop locations. The OIMs can be used in various network topologies to create point to point, daisy chain, self-healing ring, and single or dual-channel network topologies. A maximum combination of five optical or electrical modules may be connected together in one modem stack. Intermodule communications and operating power are achieved through the integrated module backplane connections.. The basic modem configuration consists of a Power Supply Module, Electrical Interface Module, and an Optical Interface Module.

# Specifications

NAME	DESCRIPTION
Optical Wavelength	850nm
Optical Mode	Multi-mode
Communications Data Rate	9.6K to 12M Baud
Optical Port Connection	ST Compatible
Optical Dynamic Range	21db into 200/230µm, 12dB into 62.5/125µm, 9dB into 50/125µm
Diagnostic Output 4-20mA	2D07 only

# Accessories

---

Power Supply

2A06, 2A16, 2A08, 2A18

# Documents

NAME	VIEW / DOWNLOAD
2E07 - ST, 850NM, MM, STD PWR, 9.6KB-5MB INSTALLATION INSTRUCTIONS	<a href="#">View / Download</a>

**Ultra Electronics, Energy**  
www.ultraelectronicsenergy.com

**Phone:** (512) 434-2800



Energy