


Product Data Sheet

2E09 – 1300nm Multi-mode

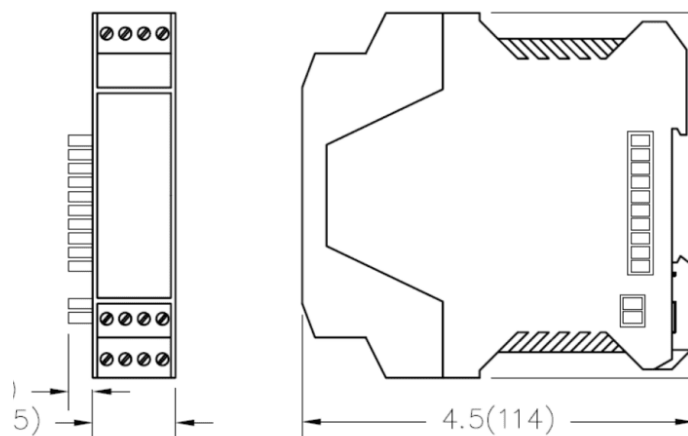

Optical Interface Modules are connected to EIMs to transmit information between drop locations. The OIMs can be used in various network topologies to create point to point, daisy chain, self-healing ring, and single or dual-channel network topologies. A maximum combination of five optical or electrical modules may be connected together in one modem stack. Inter-module communications and operating power are achieved through the integrated module back plane connections.. The basic modem configuration consists of a Power Supply Module, Electrical Interface Module, and an Optical Interface Module.

Specifications

NAME	DESCRIPTION
Optical Wavelength	1300nm
Optical Mode	Multi-mode
Communications Data Rate	9.6K to 12M Baud
Optical Port Connection	ST Compatible
Optical Dynamic Range	12dB into 62.5/125µm, 9dB into 50/125µm
Diagnostic Output 4-20mA	2D09 only

Accessories

Power Supply

2A06, 2A16, 2A08, 2A18

Documents

NAME	VIEW / DOWNLOAD
2E09 - ST, 1300NM, MM, STD PWR, 9.6KB-5MB INSTALLATION INSTRUCTIONS	View / Download

Ultra Electronics, Energy
www.ultraelectronicsenergy.com

Phone: (512) 434-2800



Energy