



REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	6/2/06	NEW	RBS

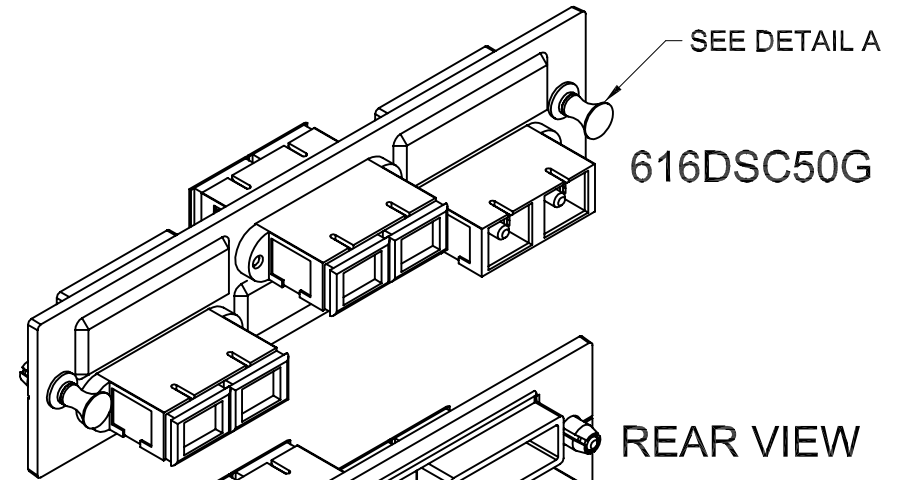


616DSC50G

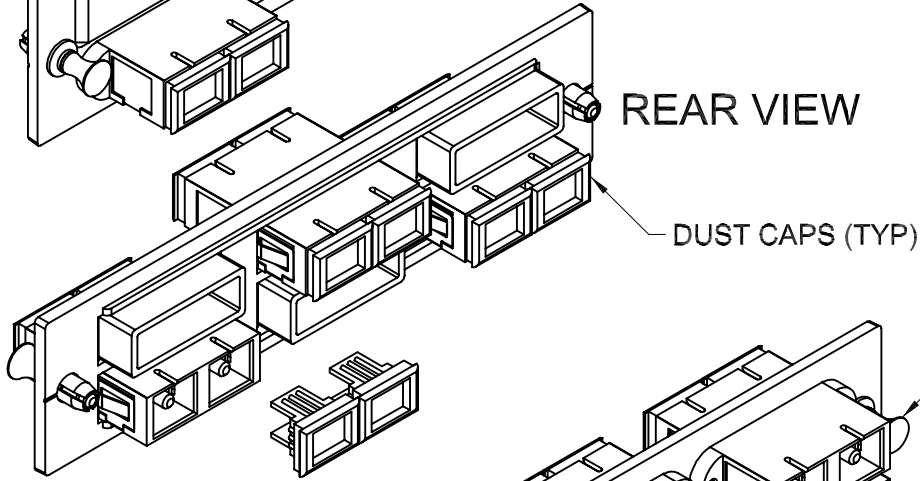


REAR VIEW

DUST CAPS (TYP)

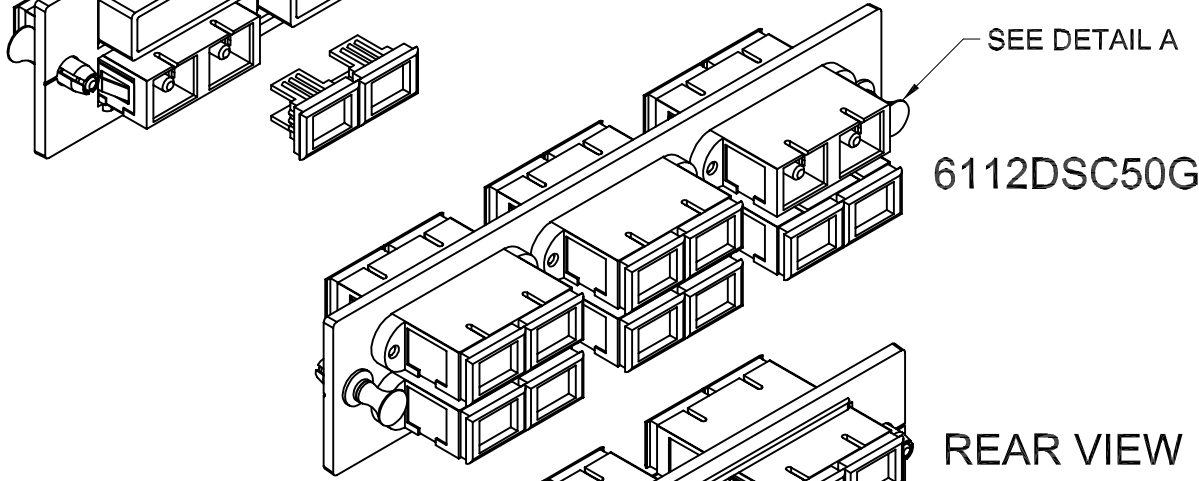


6112DSC50G

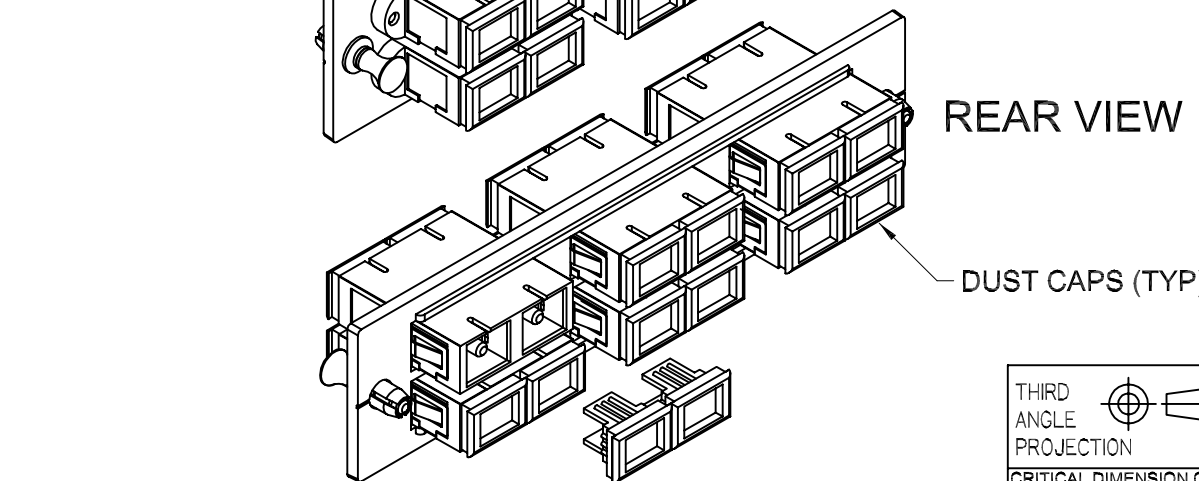

REAR VIEW

DUST CAPS (TYP)

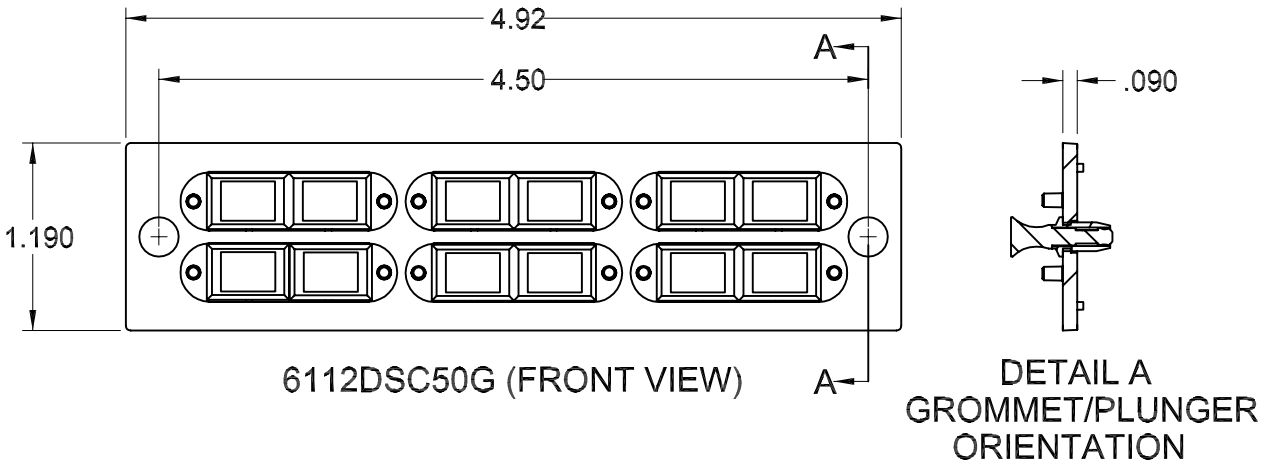

6112DSC50G (FRONT VIEW)


DETAIL A
GROMMET/PLUNGER
ORIENTATION

- NOTES: UNLESS OTHERWISE SPECIFIED.
1. EACH FIBER ADAPTER KIT IS SUPPLIED WITH COMPONENTS SHOWN.
 2. ADAPTER SPECIFICATIONS (MULTIMODE) 50µm, 50µm 10 GIG, 62.5µm
INSERTION LOSS (AVERAGE): PHOSPHOR BRONZE SLEEVE: ≤ 0.3 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)
 3. ADAPTER SPECIFICATIONS (SINGLEMODE)
INSERTION LOSS (AVERAGE): ZIRCONIA CERAMIC SLEEVE: ≤ 0.2 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)

616DSC50G	ADAPTER PLATE ASSY, DSCX3, 50/125 µm 10 GIG, 6 PORT, OCC
6112DSC50G	ADAPTER PLATE ASSY, DSCX6, 50/125 µm 10 GIG, 12 PORT, OCC
OCC PART NO.	DESCRIPTION

THIRD
ANGLE
PROJECTION

CRITICAL DIMENSION CODE
(F) = FUNCTION
(M) = MATING
(A) = AUDIT

UNCONTROLLED COPY				 5290 Concourse Drive Roanoke, VA 24019 Phone: 800-622-7711 Fax: 540-265-0724 www.occfiber.com				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANU- FACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.						
MATERIAL SEE BILL OF MATERIAL		DRAWN	D.A.HOLBERT	DATE	6/2/06	DWG TITLE CUSTOMER DRAWING, ADAPTER PLATE ASSY, DUAL SC, 50/125µm 10 GIG		
		CHECKED	R.B.SMITH	DATE	6/6/06			
FINISH SEE NOTES		ENGINEER	J.YANIK	DATE	6/2/06			
		APPROVED	R.B.SMITH	DATE	6/6/06			
		PREVIOUS DWG				SIZE B	DWG NO. CI07709	REV A
		NEXT DWG		FILENAME C107709A.DFT				

REV
A