




REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	12/10/01	NEW	RBS
B	-	CHGD: PART NUMBER LIST FOR DUAL SC X 6 PORT	9/16/04	-	DAH
C	-	CHGD: PLATE FROM ALUMINUM TO GLASS FILLED PLASTIC	5/22/06	-	DAH

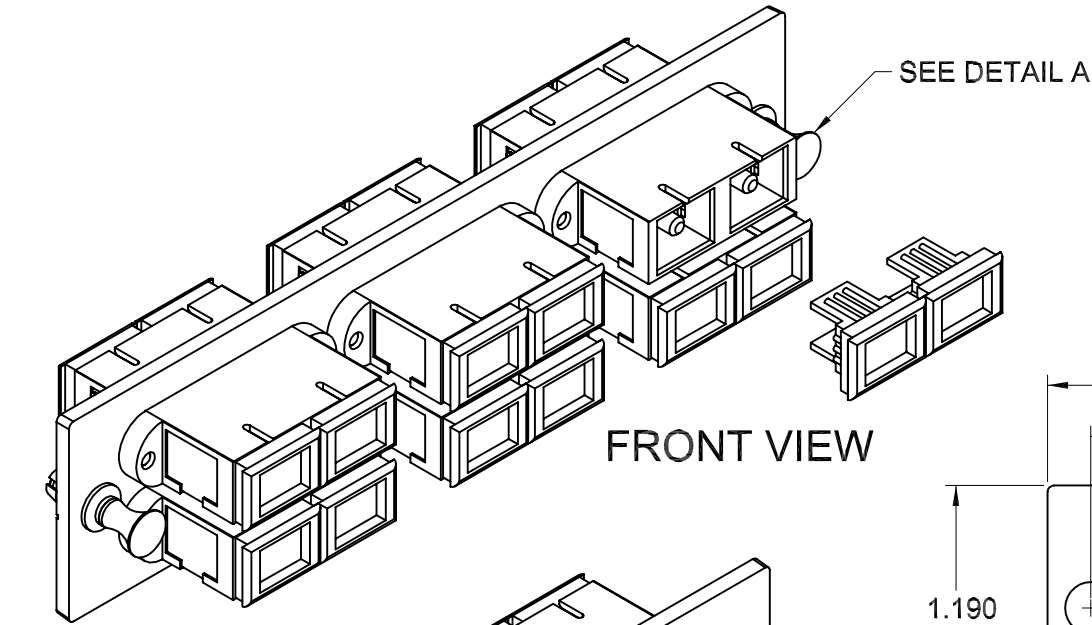

FRONT VIEW

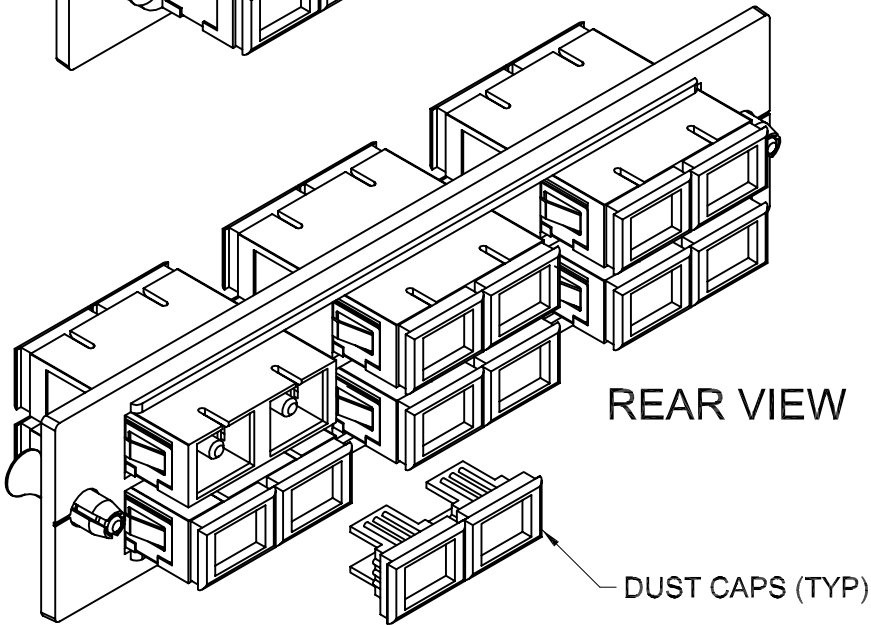

REAR VIEW

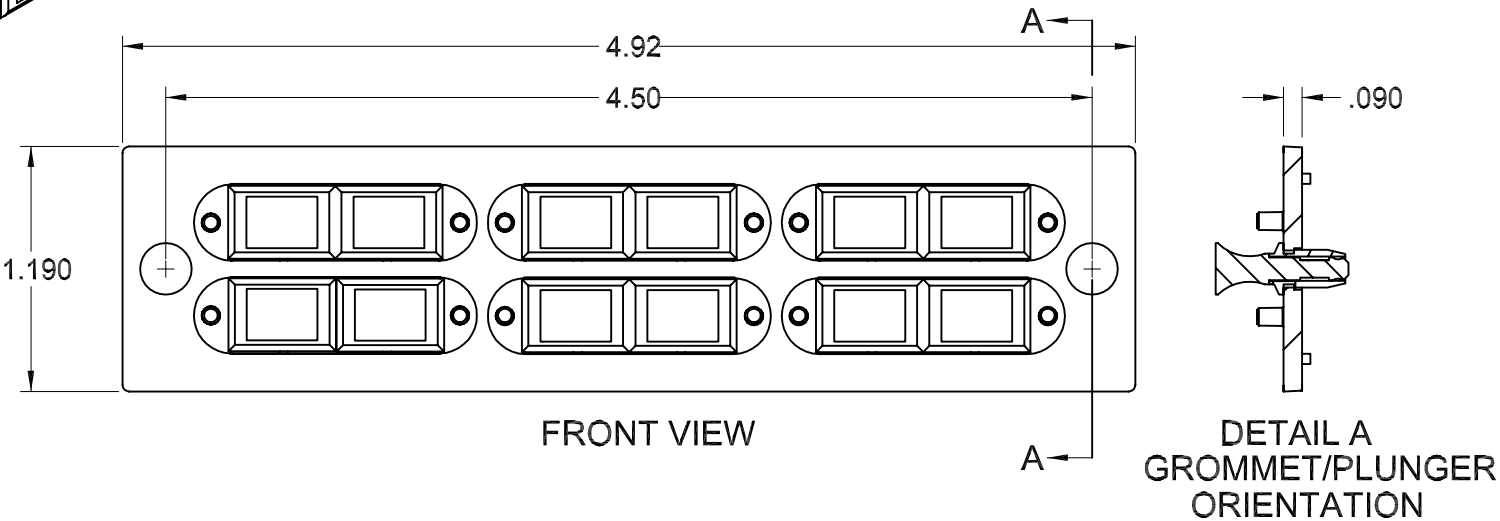


FRONT VIEW

DETAIL A
GROMMET/PLUNGER
ORIENTATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1. EACH FIBER ADAPTER KIT IS SUPPLIED WITH COMPONENTS SHOWN.
2. ADAPTER SPECIFICATIONS (MULTIMODE) 50µm, 50µm 10 GIG, 62.5µm
INSERTION LOSS (AVERAGE): PHOSPHOR BRONZE SLEEVE: ≤0.3 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)
3. ADAPTER SPECIFICATIONS (SINGLEMODE)
INSERTION LOSS (AVERAGE): ZIRCONIA CERAMIC SLEEVE: ≤0.2 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)



CRITICAL DIMENSION CODE
(F) = FUNCTION
(M) = MATING
(A) = AUDIT

6112MMDSC	ADAPTER PLATE ASSY, DUAL SC X 6, MM, 12 PORT, OCC
6112SMDSC	ADAPTER PLATE ASSY, DUAL SC X 6, SM, 12 PORT, OCC
6112DSC	ADAPTER PLATE ASSY, DUAL SC X 6, SM/MM, 12 PORT, OCC
OPTICAL PART NO.	DESCRIPTION

UNCONTROLLED COPY				 OPTICAL CABLE CORPORATION		5290 Concourse Drive Roanoke, VA 24019 Phone: 800-622-7711 Fax: 540-265-0724 www.occfiber.com				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANU- FACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.								
				DRAWN D.A.HOLBERT		DATE 12/10/01				
MATERIAL SEE BILL OF MATERIAL		CHECKED R.B.SMITH		DATE 1/16/02		DWG TITLE CUSTOMER DRAWING, ADAPTER PLATE ASSY, DUAL SC X 6, SM/MM, 12 PORT				
		ENGINEER J.YANIK		DATE 12/10/01						
FINISH SEE BILL OF MATERIAL		APPROVED R.B.SMITH		DATE 5/22/06				SIZE B	DWG NO. C103340	REV C
		PREVIOUS DWG								
		NEXT DWG		FILENAME C103340C.DFT		SCALE: NONE		SHEET 1 OF 1		