
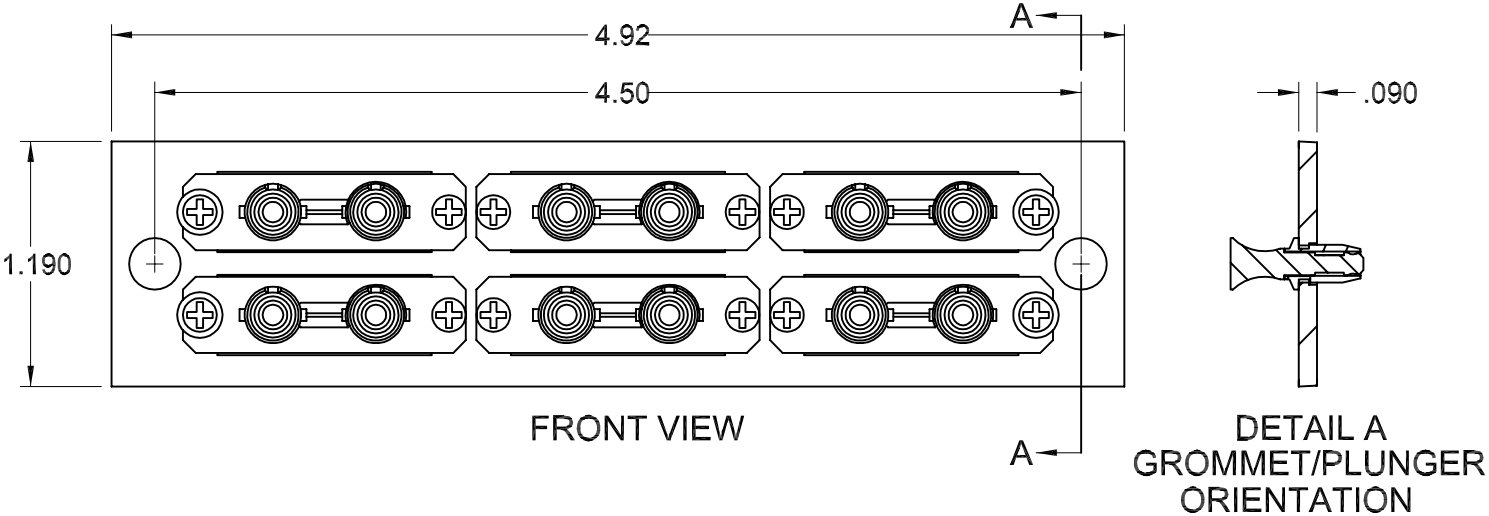


REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	5/16/03	NEW	RBS
B	-	CORRECTED: DRAWING VIEWS AND PART NUMBER DESCRIPTION	9/24/04	-	DAH
C	-	REVERSED: LC ADAPTERS 180 DEG TO ACCOMODATE ASSEMBLY	4/22/05	-	DAH
D	-	UPDATED: ISOMETRIC VIEWS; ADDED: ORTHO VIEWS	5/22/06	-	DAH

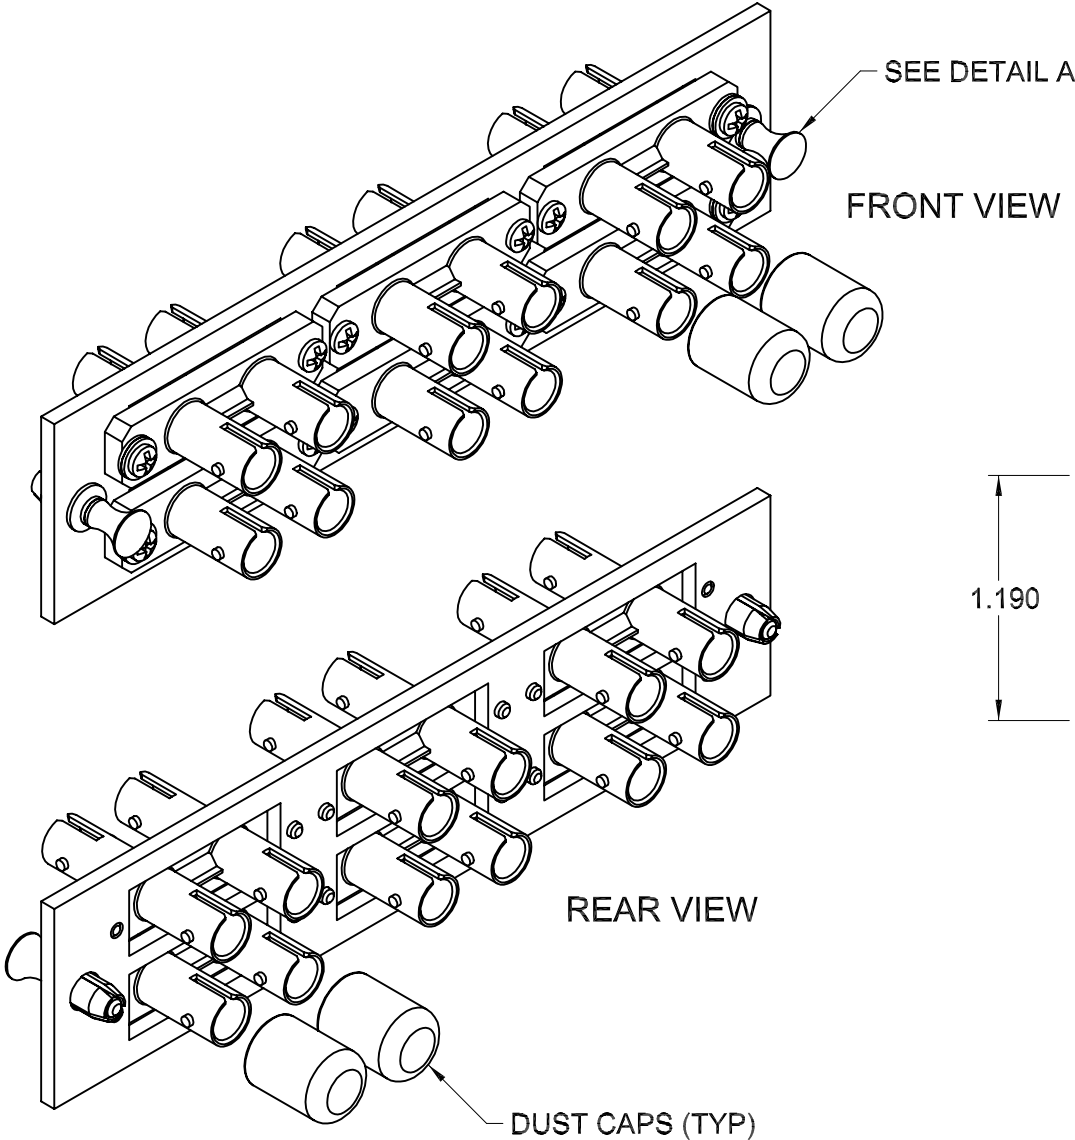

6112DSTM	ADAPTER PLATE ASSY, DUAL STX6 METAL, SM/MM, 12 PORT
6112MMDST	ADAPTER PLATE ASSY, DUAL STX6, MM, 12 PORT, OCC
6112SMDST	ADAPTER PLATE ASSY, DUAL STX6, SM, 12 PORT, OCC
6112DST	ADAPTER PLATE ASSY, DUAL STX6 , SM/MM, 12 PORT, OCC
OCC PART NO.	DESCRIPTION

- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1. EACH FIBER ADAPTER KIT IS SUPPLIED WITH COMPONENTS SHOWN.
 - 2. ADAPTER SPECIFICATIONS (MULTIMODE) 50µm, 50µm 10 GIG, 62.5µm
INSERTION LOSS (AVERAGE): PHOSPHOR BRONZE SLEEVE: ≤0.3 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)
 - 3. ADAPTER SPECIFICATIONS (SINGLEMODE)
INSERTION LOSS (AVERAGE): ZIRCONIA CERAMIC SLEEVE: ≤0.2 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)

		UNCONTROLLED COPY				 OPTICAL CABLE CORPORATION		5290 Concourse Drive Roanoke, VA 24019 Phone: 800-622-7711 Fax: 540-265-0724 www.occfiber.com	
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" 							