

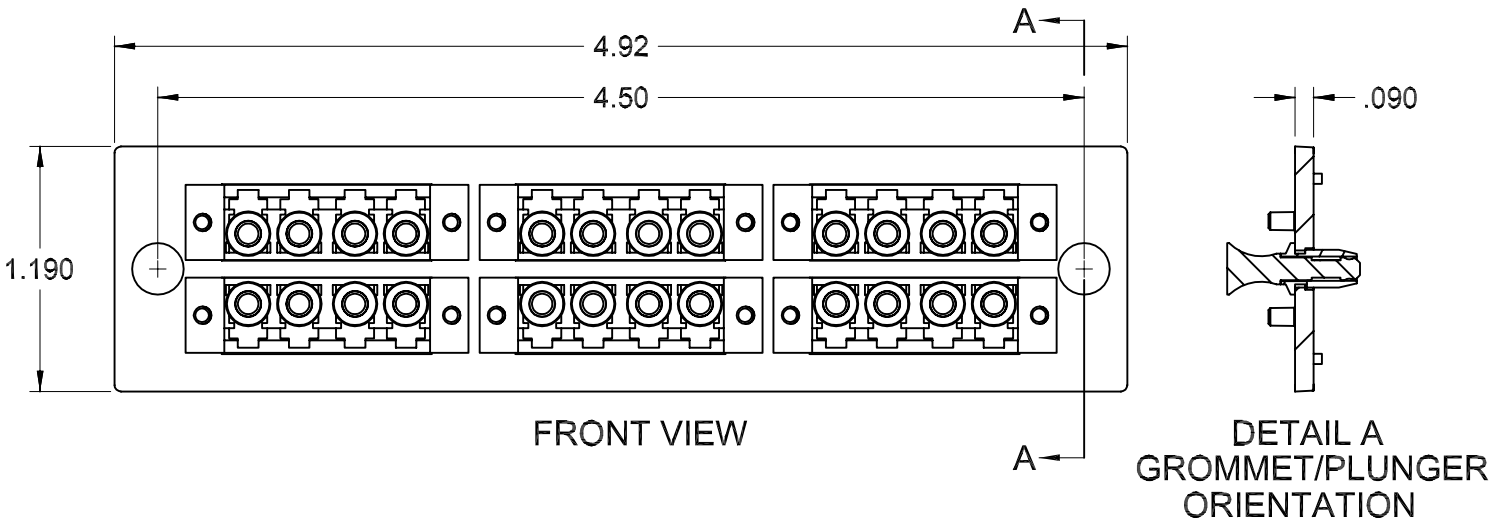



REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	6/2/06	NEW	RBS

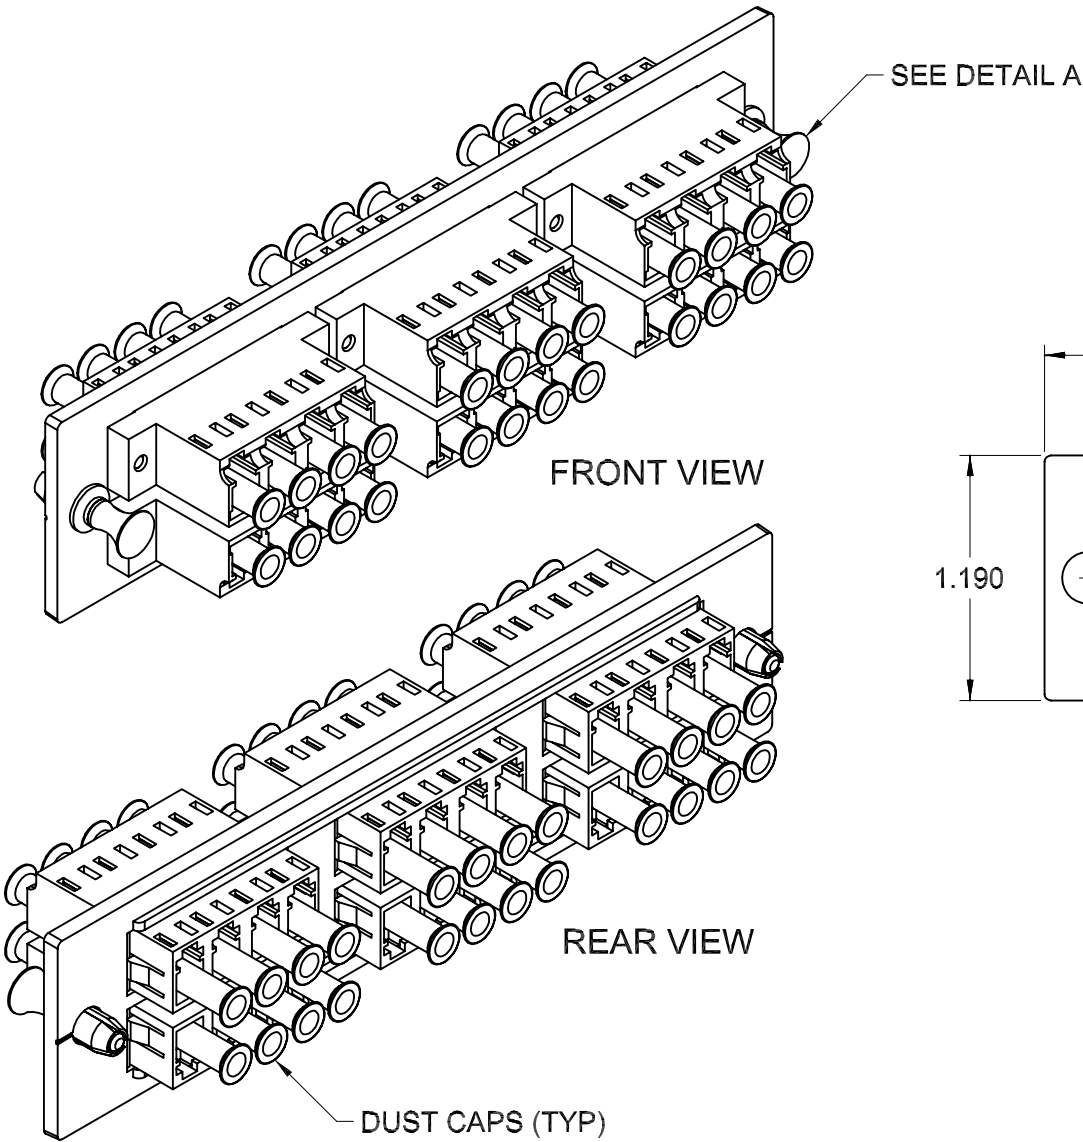

- NOTES: UNLESS OTHERWISE SPECIFIED.
1. EACH FIBER ADAPTER KIT IS SUPPLIED WITH COMPONENTS SHOWN.
 2. ADAPTER SPECIFICATIONS (MULTIMODE) 50µm, 50µm 10 GIG, 62.5µm
INSERTION LOSS (AVERAGE): PHOSPHOR BRONZE SLEEVE: ≤ 0.3 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)
 3. ADAPTER SPECIFICATIONS (SINGLEMODE)
INSERTION LOSS (AVERAGE): ZIRCONIA CERAMIC SLEEVE: ≤ 0.2 dB MAX.
SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)



6124QLCAPC	ADAPTER PLATE ASSY, QLCAPCX6, SM, 24 PORT, OCC
6124QLC50G	ADAPTER PLATE ASSY, QLCX6, 50/125 µm 10 GIG, 24 PORT, OCC
OCC PART NO.	DESCRIPTION

UNCONTROLLED COPY				 OPTICAL CABLE CORPORATION		5290 Concourse Drive Roanoke, VA 24019 Phone: 800-622-7711 Fax: 540-265-0724 www.occfiber.com					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANU- FACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.									
				DRAWN D.A.HOLBERT		DATE 6/2/06		DWG TITLE CUSTOMER DRAWING, ADAPTER PLATE ASSY, QUAD LC X 6 PORT			
MATERIAL SEE BILL OF MATERIAL		CHECKED R.B.SMITH		DATE 6/6/06							
		ENGINEER J.YANIK		DATE 6/2/06							
FINISH SEE BILL OF MATERIAL		APPROVED R.B.SMITH		DATE 6/6/06		SIZE B		DWG NO. C107710		REV A	
		PREVIOUS DWG									
		NEXT DWG		FILENAME C107710A.DFT		SCALE: NONE		SHEET 1 OF 1			