
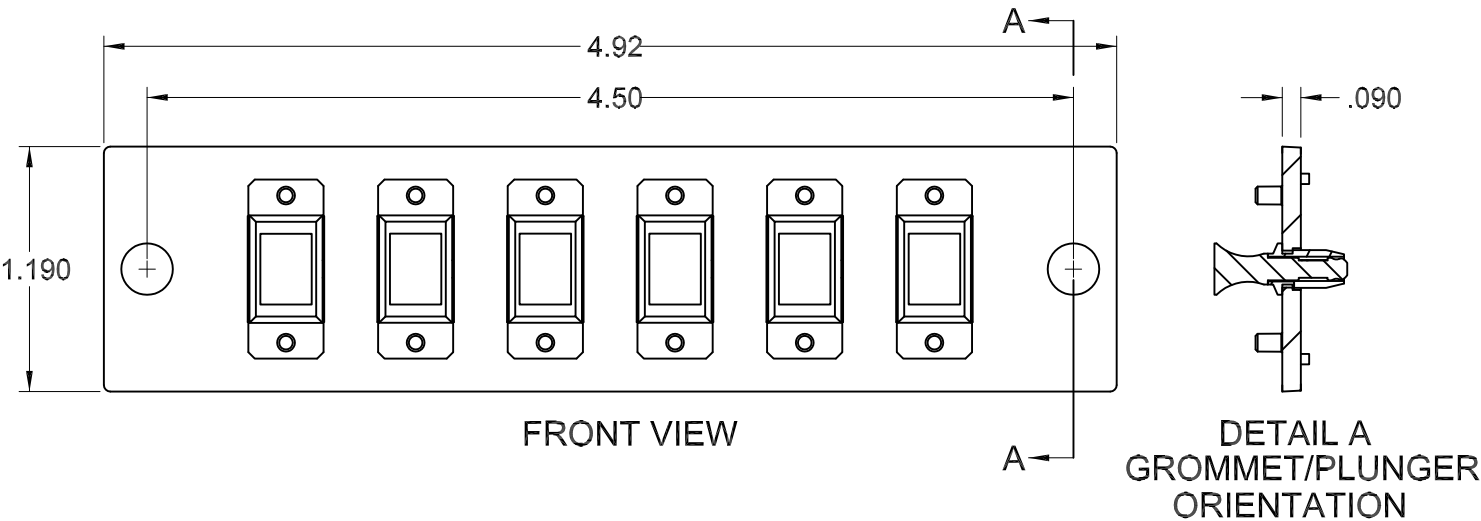




REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	6/2/06	NEW	RBS
J	-	ADDED: MORE 6 PORT SC ADAPTER OPTIONS	1/25/12	-	RBS

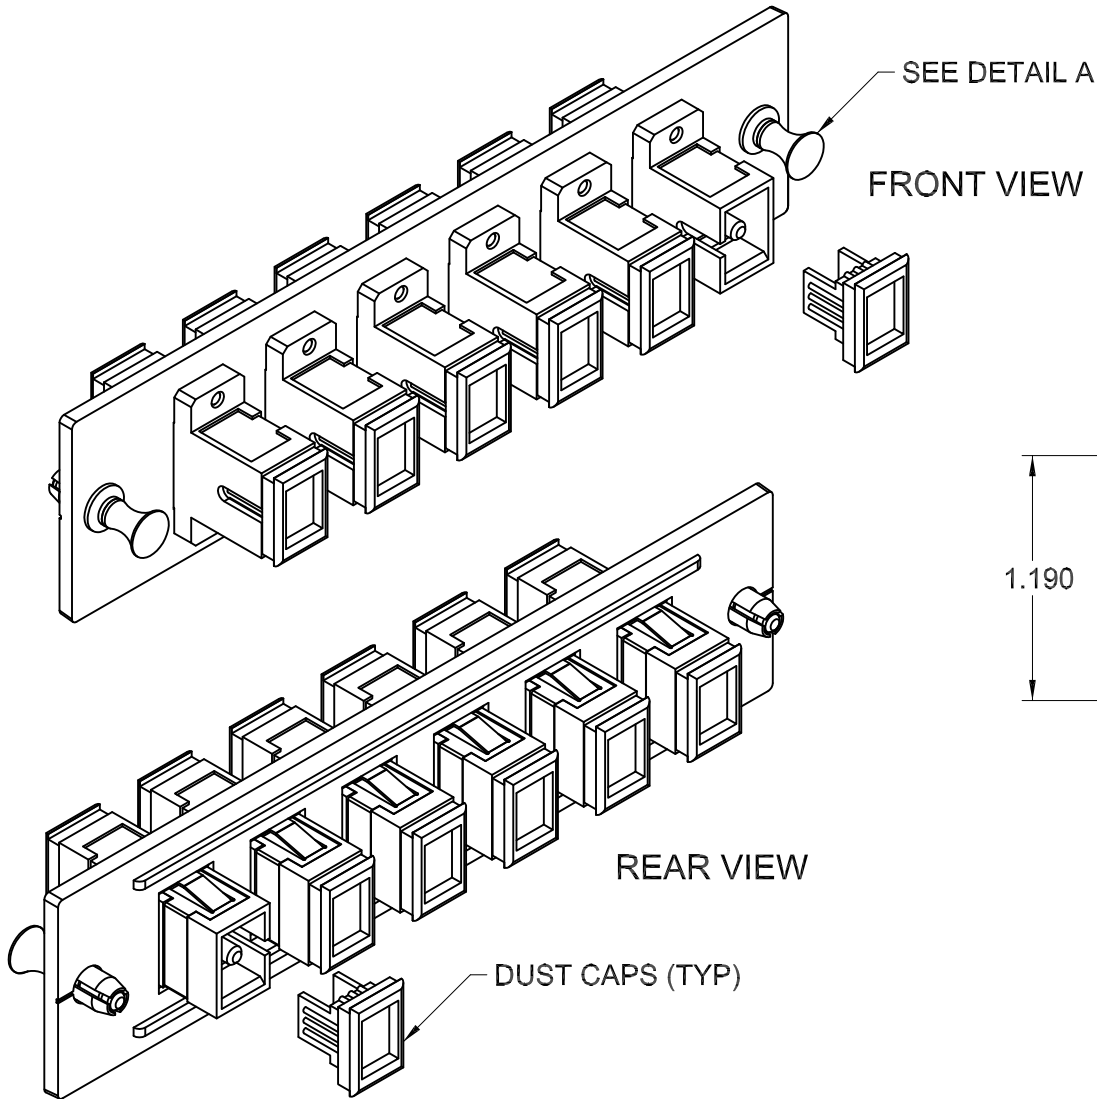

NOTES: UNLESS OTHERWISE SPECIFIED.

1. EACH FIBER ADAPTER KIT IS SUPPLIED WITH COMPONENTS SHOWN.
2. ADAPTER SPECIFICATIONS (MULTIMODE) 50µm, 50µm 10 GIG, 62.5µm INSERTION LOSS (AVERAGE): PHOSPHOR BRONZE SLEEVE: ≤ 0.3 dB MAX. SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)
3. ADAPTER SPECIFICATIONS (SINGLEMODE) INSERTION LOSS (AVERAGE): ZIRCONIA CERAMIC SLEEVE: ≤ 0.2 dB MAX. SLEEVE/FERRULE WITHDRAWAL FORCE: 2.0N ~ 5.9N (200gf ~ 600gf)

616SCAPC	ADAPTER PLATE ASSY, SCAPCX6, SM, 6 PORT, OCC
616SMSC	ADAPTER PLATE ASSY, SCX6, SM, 6 PORT, OCC
616MMSC	ADAPTER PLATE ASSY, SCX6, MM, 6 PORT, OCC
616SC	ADAPTER PLATE ASSY, SCX6, SM/MM, 6 PORT, OCC
616SC50G	ADAPTER PLATE ASSY, SCX6, 50/125 µm 10 GIG, 6 PORT, OCC
OCC PART NO.	DESCRIPTION

		UNCONTROLLED COPY				 5290 Concourse Drive Roanoke, VA 24019 Phone: 800-622-7711 Fax: 540-265-0724 www.occfiber.com	
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANU- FACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.			
THIRD ANGLE PROJECTION 	MATERIAL SEE BILL OF MATERIAL	DRAWN	D.A.HOLBERT	DATE	6/2/06	DWG TITLE CUSTOMER DRAWING, ADAPTER PLATE ASSY, SC, SM/MM, 6 PORT, OCC	
		CHECKED	R.B.SMITH	DATE	6/6/06		
		ENGINEER	J.YANIK	DATE	6/2/06		
		APPROVED	R.B.SMITH	DATE	1/25/12		
CRITICAL DIMENSION CODE Ⓡ = FUNCTION Ⓜ = MATING Ⓐ = AUDIT	FINISH SEE BILL OF MATERIAL	PREVIOUS DWG			SIZE B	DWG NO. C107711	REV J
		NEXT DWG		FILENAME	C107711J.DFT	SCALE: NONE	SHEET 1 OF 1