


# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

## features and benefits |

|                                                        |                                                |
|--------------------------------------------------------|------------------------------------------------|
| <b>Universal design approach</b>                       | One-size-fits-all LANscape® Solutions housings |
| <b>Broadest range of fiber count and adapter types</b> | Solutions for all needs                        |
| <b>Colored icon labeling</b>                           | Easy connector identification                  |

Corning Cable Systems Closet Connector Housing Panels (CCH-CP) are offered in a variety of fiber counts for use with LANscape® Solutions hardware products for a “one-size-fits-all” approach. Used with factory-installed or field-installable connectors, these panels provide interconnect or cross-connect capability in a housing at main cross-connections, intermediate cross-connections, telecommunication rooms or work areas. Available with a variety of industry-standard adapter types, the CCH-CP provides an efficient way to securely mate two connectors and offers multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber count options, plus 36-, 72-, 96- and 144-fiber count options with MTP® Connector adapters.

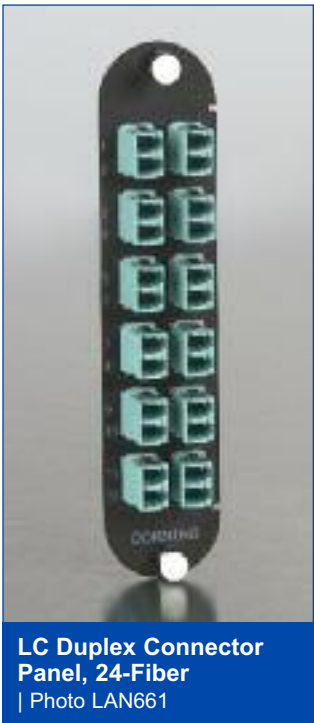

# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

ordering information |

CCH - CP - 

|1

|2

|1

Select fiber count.

06 = 6 fibers  
08 = 8 fibers  
12 = 12 fibers  
16 = 16 fibers  
24 = 24 fibers  
36 = 36 fibers  
72 = 72 fibers  
96 = 96 fibers  
E4 = 144 fibers

See Note 1.

|2

Select adapter code  
(see Adapter/Connector  
Code Options table on  
following page).

*Note:*  
1) Fiber count for desired adapter  
is available in table on following  
page.

## Part Number Example

| Part Number | Description                                                                  |
|-------------|------------------------------------------------------------------------------|
| CCH-CP12-A9 | Closet Connector Housing Pigtail Panel with 6 LC duplex single-mode adapters |

# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

## adapter/connector code options |

| Adapter Code             | Fiber Type        | Alignment | Housing   | Fiber/<br>Adapter | Available Fiber/Panel Counts |   |    |    |    |    |    |    |     |   |
|--------------------------|-------------------|-----------|-----------|-------------------|------------------------------|---|----|----|----|----|----|----|-----|---|
|                          |                   |           |           |                   | 6                            | 8 | 12 | 16 | 24 | 36 | 72 | 96 | 144 |   |
| LC Duplex                |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| A7                       | 62.5 µm multimode | Metal     | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| D3                       | 50 µm multimode   | Ceramic   | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| E4                       | 50 µm LOMMF*      | Ceramic   | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| A9                       | Single-mode, UPC  | Ceramic   | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| SC Duplex                |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 91                       | 62.5 µm multimode | Metal     | Composite | 2                 |                              | X | X  |    |    |    |    |    |     |   |
| G7                       | 50 µm multimode   | Ceramic   | Composite | 2                 |                              | X | X  |    |    |    |    |    |     |   |
| E7                       | 50 µm LOMMF*      | Ceramic   | Composite | 2                 |                              | X | X  |    |    |    |    |    |     |   |
| 59                       | Single-mode, UPC  | Ceramic   | Composite | 2                 |                              | X | X  |    |    |    |    |    |     |   |
| SC                       |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 56                       | 62.5 µm multimode | Metal     | Composite | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| G6                       | 50 µm multimode   | Ceramic   | Composite | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| E6                       | 50 µm LOMMF*      | Ceramic   | Composite | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| 3C                       | Single-mode, UPC  | Ceramic   | Composite | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| 6C                       | Single-mode, APC  | Ceramic   | Composite | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| ST® Compatible Connector |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 25T                      | 62.5 µm multimode | Metal     | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| 15T                      | 62.5 µm multimode | Ceramic   | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| G5                       | 50 µm multimode   | Ceramic   | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| H3                       | 50 µm LOMMF*      | Ceramic   | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| 19T                      | Single-mode, UPC  | Ceramic   | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| FC                       |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 11                       | Single-mode, UPC  | Metal     | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| 21                       | Single-mode, APC  | Metal     | Metal     | 1                 |                              | X | X  | X  |    |    |    |    |     |   |
| MTP® Connector           |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 69                       | 62.5 µm multimode | N/A       | Composite | 12                |                              |   |    |    |    |    | X  | X  | X   | X |
| G3                       | 50 µm multimode   | N/A       | Composite | 12                |                              |   |    |    |    |    | X  | X  | X   | X |
| E3                       | 50 µm LOMMF*      | N/A       | Composite | 12                |                              |   |    |    |    |    | X  | X  | X   | X |
| 89                       | Single-mode, UPC  | N/A       | Composite | 12                |                              |   |    |    |    |    | X  | X  | X   | X |
| 90                       | Single-mode, APC  | N/A       | Composite | 12                |                              |   |    |    |    |    | X  | X  | X   | X |
| MT-RJ                    |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 97                       | 62.5 µm multimode | N/A       | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| G1                       | 50 µm multimode   | N/A       | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| E1                       | 50 µm LOMMF*      | N/A       | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| 98                       | Single-mode, UPC  | N/A       | Composite | 2                 |                              | X | X  | X  | X  |    |    |    |     |   |
| Fiber Type               |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| Housing Color            |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 62.5 µm multimode        |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 50 µm multimode          |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| 50 µm LOMMF*             |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| Single-mode, UPC         |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |
| Single-mode, APC         |                   |           |           |                   |                              |   |    |    |    |    |    |    |     |   |

\*LOMMF = Laser-optimized multimode fiber.

# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

## ordering information | (continued)

### Colored Icons (pack of 50)

ICN - ☐ ☐ ☐  
|1

|1

Select icon.

#### Blank Icons



YLB = Blank (Yellow)

RDB = Blank (Red)

GRB = Blank (Green)

BLB = Blank (Blue)

WTB = Blank (White)

#### Etched Icons



BLP = Phone (Blue)



RDC = Computer (Red)



GRT = Cable TV (Green)

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA  
800-743-2675 • FAX: 828-901-5973 • International: +1-828-901-5000 • [www.corning.com/cablesystems](http://www.corning.com/cablesystems)

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. LANscape and MIC are registered trademarks of Corning Cable Systems Brands, Inc. MTP is a registered trademark of USConec, Ltd. ST is a registered trademark of Lucent Technologies. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. ©2007, 2009 Corning Cable Systems. All rights reserved. Published in the USA.  
LAN-133-EN / April 2009