

FOR-CC Output Module Fiber Optic Contact Closure




The FOR-CC Contact Closure Output Module provides Form-C relay output connections that change state (open/closed) based on the state of the input contacts supplied to the partnered FOT-CC Contact Closure Input Module. The input information is transferred to the FOR-CC over a single fiber. LED Indicators on the FOR-CC provide visible monitoring of the operating power and the state of the output contacts.

SPECIFICATIONS:

Mechanical:

Mounting: Universal DIN Rail Mounting

Weight: < 5oz (140g)

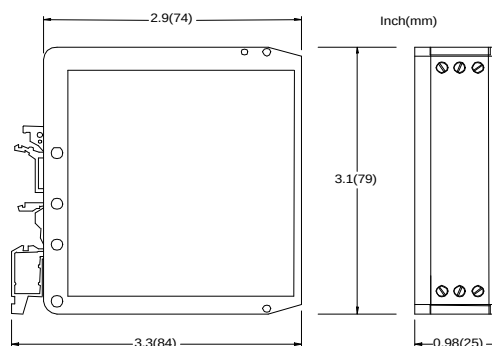

Operating Power: Regulated, 24Vdc, 50mA

Wire Connections: Cage-Clamp Screw Terminals, Accepts 12 to 24AWG

Relay Contact Rating: 5A @ 30Vdc, 10A @ 125Vac, 6A @ 277Vac - UL/CSA Rating

Optical Wavelength/Connection: 850nm, ST* Compatible

Optical Dynamic Range: 40dB, utilizing 200/230mm fiber cable
18dB, utilizing 62.5/125mm fiber cable

LED Indicators

Power On: Green

Input Contacts Closed: Green

Ambient Conditions: -40°C to 80°C Storage
0°C to 70°C Operational
0 to 90% Relative Humidity Non-Condensing

*ST is a trademark of AT&T