

NOTES: UNLESS OTHERWISE SPECIFIED.


1. APPROVAL BY OCC ENGINEERING ONLY

2. PRODUCT APPROVAL REQUIRES
CERTIFICATION OF COMPLIANCE TO E.U.
DIRECTIVE RoHS 2002/95/EC

REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	05/07/18	NEW	D.S.

Specifications

Specification Type	Application
Applicable Fiber	Standard silica optical fiber
Fiber Count	Single fiber
Coating Diameter	250-900µm
Cladding Diameter	125 µm
Cleave Length	10 - 16mm
Cleave Angle Capability	Average 1°
Dimensions (W x D x H)	90mm x 58mm x 58mm (3.5" x 2.9" x 2.9")
Weight	276 g (0.6 lbs)
Blade Lifetime	75,000 fibers (non-adjustable self rotating blade)

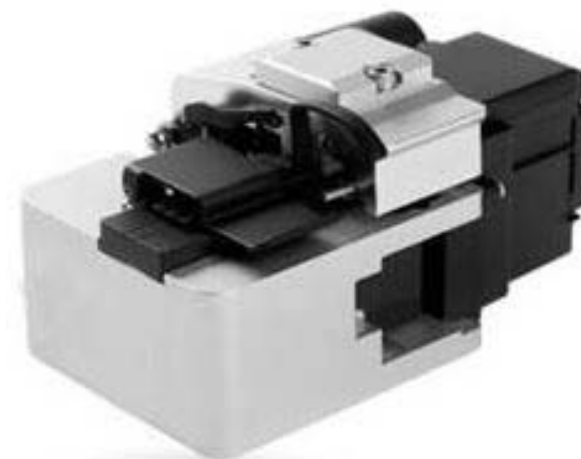

UNCONTROLLED COPY

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.		OPTICAL CABLE CORPORATION		33 Superior Way Swannanoa, NC 28778 Phone: 828-298-2260 Fax: 828-298-2487 www.occfiber.com	
CRITICAL DIMENSION CODE (F) = FUNCTION (M) = MATING (A) = AUDIT	MATERIAL AS SUPPLIED	FINISH AS SUPPLIED	DRAWN J. Yanik	DATE 05/07/18	DWG TITLE CLEAVER, FIBER OPTIC				
			CHECKED J. Howe	DATE 05/07/18					
			ENGINEER J. Yanik	DATE 05/07/18					
			APPROVED		DATE	SIZE A	DWG NO. C113067	REV A	
			PREVIOUS DWG						
NEXT DWG		FILENAME C113067A.DFT		SCALE: NONE	SHEET 1 OF 1				