

Coaxial Surge Protectors - 4GHz

P8AX Series



P8AX09-N/MF

- **4GHz Bi-Directional Coaxial Surge Protector**
- **High Energy GDT Technology**
- **Low Insertion Loss**
- **Field Replaceable GDT**
- **Waterproof Design**
- **DC Pass Configuration**
- **UL497E Listed**

P8AX- - -

Type : MF = Male/Female


FF = Female/Female

Connectors (see reference system page 112)


Voltage (see reference system page 112)

Dimensions and Electrical Diagram

(in mm)

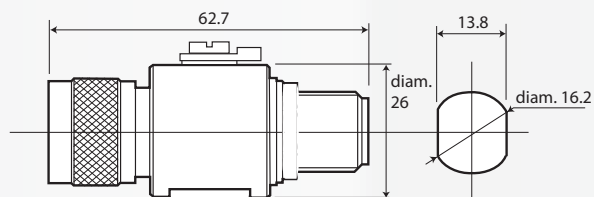

Dimensions vary by connector, N connector shown



GDT: 2-electrode gas discharge tube

Characteristics

CITEL Part Number	P8AX09	P8AX25	P8AX50
Frequency range	DC-4GHz ¹	DC-4GHz ¹	DC-4GHz
Technology	GDT	GDT	GDT
Insertion loss	≤0.2db	≤0.2db	≤0.2db
Return Loss	≥20 db	≥20 db	≥20 db
VSWR	<1.2:1	<1.2:1	<1.2:1
Discharge Current (8/20 μs)	20 kA	20 kA	20 kA
Protection Level	<600 V	<600 V	<1000 V
Maximum Power	25 W	190 W	780 W
Maximum Current	10 A	10 A	10 A
Impedance	50 ohms ²	50 ohms ²	50 ohms ²
Connection Method	Series (bi-directional)		
Mechanical characteristics			
Connectors	N, TNC, SMA, F, BNC, 7/16, UHF		
Grounding	M6 Screw, Bulkhead, Bracket		
Environmental Rating	IP65		
Operating Temperature	-40°C to +85°C		
Operating Altitude	4,000 m		
Relative Humidity	Up to 5 to 95% non-condensing, up to 100%		

¹ Maximum frequency type F : 2GHz

² Impedance for F type connector is 75 ohms

Material

Component	Body	Male Contacts	Female Contacts	Insulators
Material	Brass	Bronze	Bronze	PTFE
Surface Plating	Cu Zn Sn	Gold/Silver	Gold/Silver	N/A

