

PSM-CC Power Supply Module

The PSM-CC Power Supply Module supplies 24Vdc operating power for the FOT-CC and FOR-CC Contact Closure Modules.


Each PSM-CC power supply provides an isolated, low noise output that can supply up to four Contact Closure Modules. The supply's input is protected from over-voltages and its regulated output is designed to withstand a short circuit for an indefinite period of time.

SPECIFICATIONS:

Mechanical:

Mounting: Universal DIN Rail Mounting

Weight: < 5oz (140g)

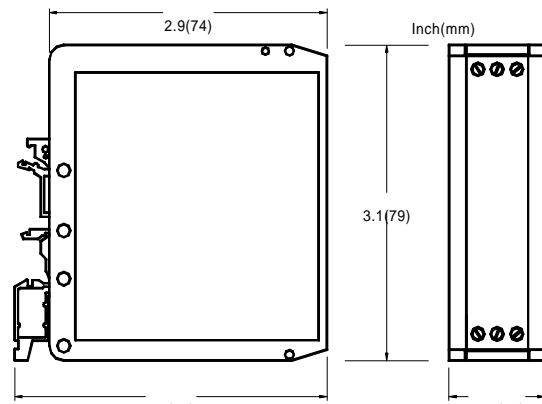

Input Power Range: 100 to 250 VAC, 50/60Hz, 400mA

Operating Power Output: Regulated, 24VDC, 200mA

Input Connection: Cage-Clamp Screw Terminals, Wire Sizes 12 to 24AWG

Power Input Fuse: 400 mA slow-blow

Power On Indicator: Green LED

Ambient Conditions: -25°C to 70°C Storage
0°C to 60°C Operational
0 to 90% Relative Humidity Non-Condensing

