


CONFIGURATION			
ST	FIBER	MTRJ	
A	BLUE	B	
B	ORANGE	A	

Table 1

LENGTH TOLERANCE	
Standard Tolerance	
0 – 3ft (1m)	-0" / +2"
>3ft (1m)	±2: "
<25ft(10m)	
>25ft(10m)	±6"

Table 2

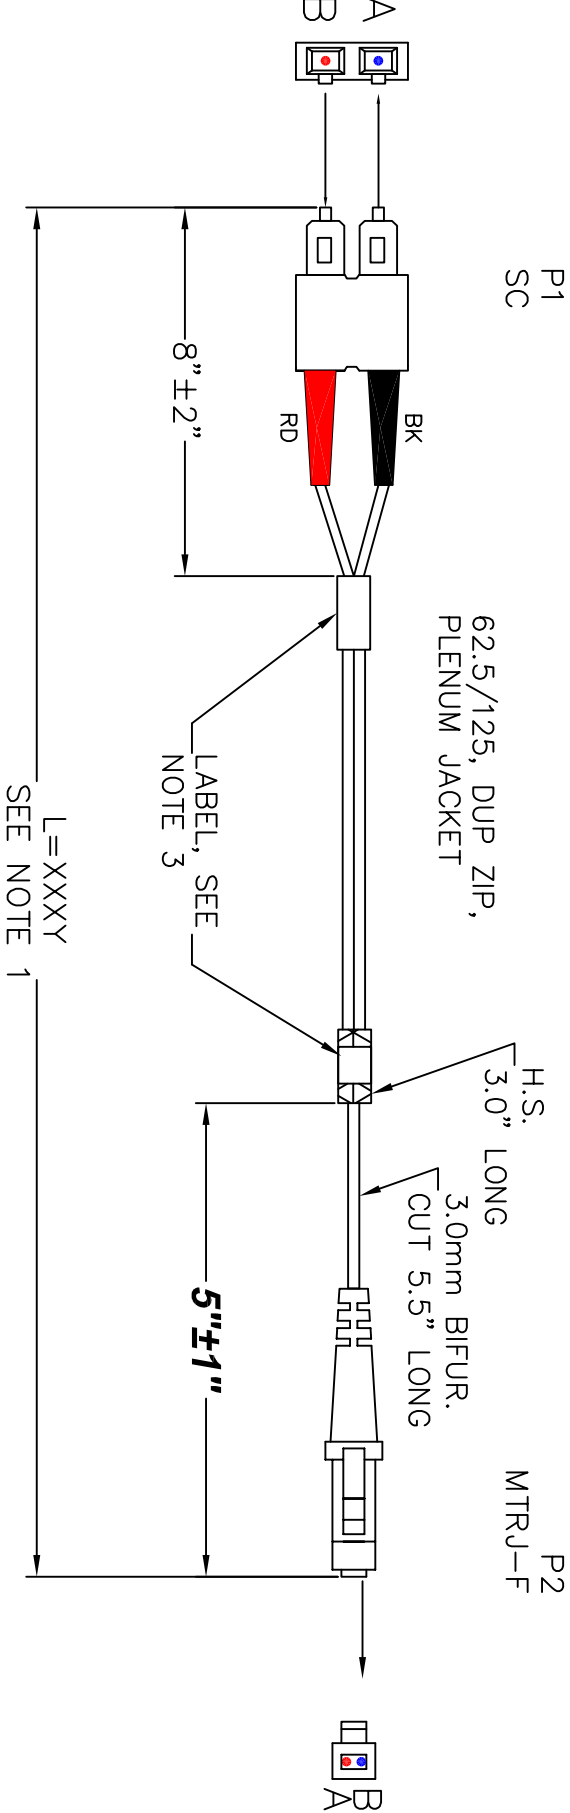

NOTES:

- 1) SEE TABLE 2 FOR TOLERANCE.
- 2) SEE TABLE 1 FOR CONFIGURATION.
- 3) MAXIMUM LOSS –.4dB (LOSS PER CHANNEL)

Accurate Connections Inc.

1321 Valwood Parkway #670, Dallas, TX

75006

972-484-8500

Property of Accurate Connections Inc. All rights reserved.

Dimensions in	SCALE	DRAWN BY	APPROVED BY	DATE
Inches Unless Noted	NTS	Boor		9/17/04

DESCRIPTION: SC-MTRJ, 62.5/125, 3MM ZIP CORD, PLENUM, WITH REVERSE BREAKOUT TO MTRJ

DWG:	SCMJ-Z62P	SHT	1	OF	1	REV:	A
------	-----------	-----	---	----	---	------	---