



# MAX

- An Economical, Flexible LTE Cellular Modem -

# Adapter

Headquarters



## Instant configurability

Remote device management with **Peplink's InControl and InTouch** eliminates the need for pre-staging configurations and eliminates truck rolls.

Remote Location A



Remote Location B



The MAX Adapter comes with **1GB of Peplink's eSIM Data Plan\***. Connect the device to InControl and download your own eSIMs straight out of the box for quick and easy deployments.

\*1GB Peplink Global Single Device Plan (valid for 1 year).



# 1GB

Peplink eSIM  
Data Plan included



## Add rugged, reliable cellular to your network anywhere it's needed

- ✓ Metal, ventless case design
- ✓ Wide temperature operation range  
-22° – 149°F / -30° – 65°C



## Better connectivity to your devices

- ✓ Ethernet LAN port
- ✓ USB-C LAN port

## CAT-4 Cellular modem

✓ Certified with all major US Carriers

**T Mobile**

**verizon**

**AT&T**

**FIRSTNET**  
Built with AT&T

Built-in / Bring  
Your Own eSIM



Physical Nano-SIM card


## Flexible powering options

✓ Low power input requirement and fast bootup time

Easily powered by  
external batteries or  
power banks

USB-C power input

Wide DC operating range:  
9V - 36V DC

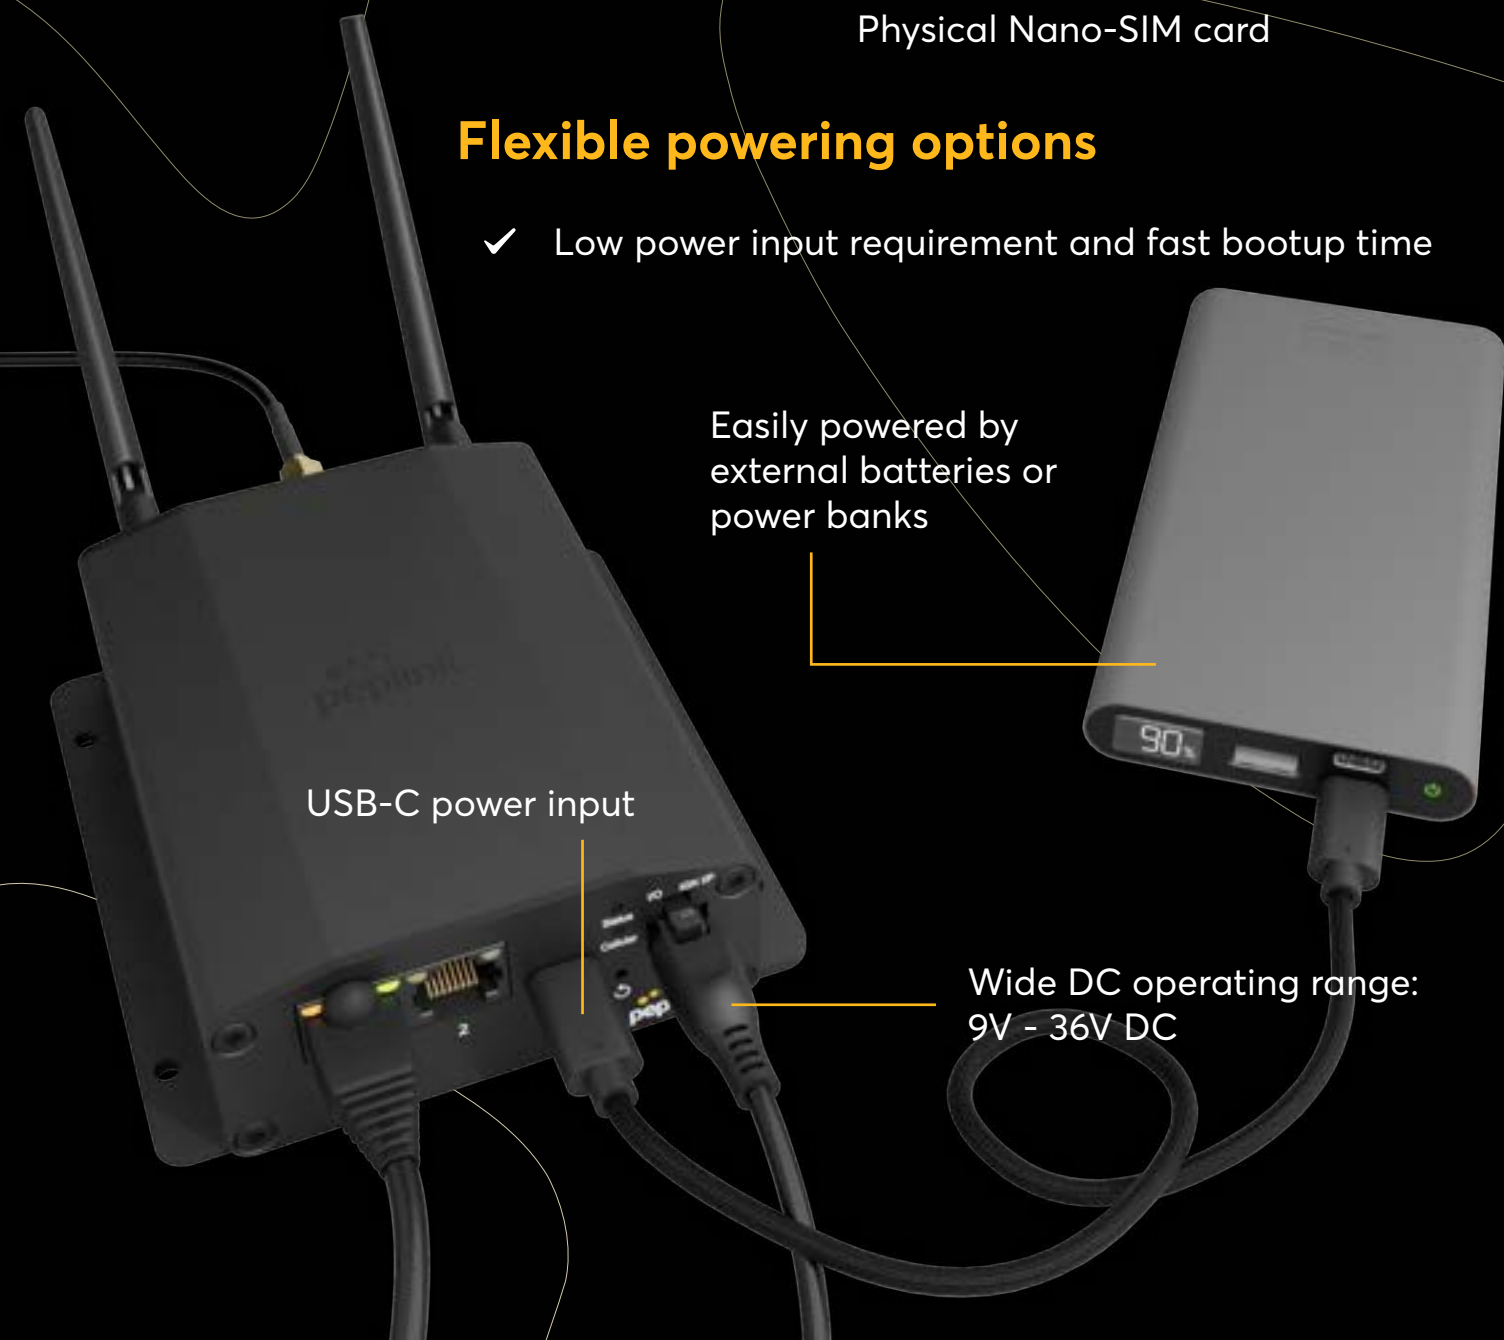



Specifications

WAN Interface	1x Embedded Cellular Modem	Antenna Connectors	2x SMA Cellular Antenna Connectors 1x SMA GPS Antenna Connector
LAN Interface	2x 10/100/1000M Ethernet 1x USB-C <sup>1</sup>	Power Input	AC Adapter: AC Input 100V–240V / DC Output 12V Power Port: 9V – 36V DC USB-C Port: 5V 2A DC
Feature	GPIO, Ignition Sensing	Power Consumption	2.2W (nominal), 5.7W (max.)
Recommended Users	1-60	Dimension	5.0 x 4.2 x 1.4 inches / 125.7 x 107 x 35 mm
Cellular Data Rate <sup>2</sup> (Downlink/Uplink)	CAT-4: 150 Mbps/50 Mbps	Weight	0.78 pounds / 355 grams
		Operating Temperature	-22° – 149°F / -30° – 65°C
		Humidity	15% – 95% (non-condensing)
		Certifications	FCC, CE, RoHS EN 61000 Electromagnetic Compatibility
		Package Content	1x MAX Adapter 2x LTE Antennas (ACW-234) 1x GPS Active Antenna 1x 12V 2A 4-pin Power Supply
		SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (1 profile)
		Warranty	1-Year Limited Warranty

<sup>1</sup> USB-C port supports RNDIS driver for virtual ethernet.  
<sup>2</sup> Maximum theoretical data rate.

Specifications are subject to change without notice.

## Ordering Information

Product Code	Regions^	LTE Bands	3G Bands
MAX-ADP-LTE-US-T-PRM Embedded Modem(s): 1x CAT-4	North America*  *US Carrier Certifications: AT&T, T-Mobile, Verizon, FirstNet	B2, B4, B5, B12, B13, B14, B66, B71	B2, B4, B5

MAX-ADP-LTE-EU-T-PRM Embedded Modem(s): 1x CAT-4	APAC, EMEA	B1, B3, B7, B8, B20, B28A, B38, B40, B41	B1, B8
--	------------	--	--------

^ Regions are for reference only. For specific location compatibility, please refer to the bands.

## Featured Add-on

Product Code	Description
PRM-Z-1Y / PCP-Z-1Y	PrimeCare Z / PrimeCare+ Z (1-Year)
PRM-Z-2Y / PCP-Z-2Y	PrimeCare Z / PrimeCare+ Z (2-Year)
PRM-Z-4Y / PCP-Z-4Y	PrimeCare Z / PrimeCare+ Z (4-Year)
ACW-232	Magnetic GPS Antenna
ACW-634	10ft DC Power Cable
ACW-643	Vehicle Cigarette to Molex Power Cable
ACW-791	Peplink 4-Pin Microfit to USB-C Power Cable
ACW-DIN-BR1-MINI	DIN Rail mount kit
ANT-MB-20G-S-B-6	Mobility 20G - 2x2 MIMO 5G Ready Cellular Antenna System with GPS Receiver (Black)
ANT-MB-20G-S-W-6	Mobility 20G - 2x2 MIMO 5G Ready Cellular Antenna System with GPS Receiver (White)
ANT-SLM-22G-S-B-6	Slim 22G - 2x2 MIMO 5G Ready Cellular Antenna System with GPS (Black)