


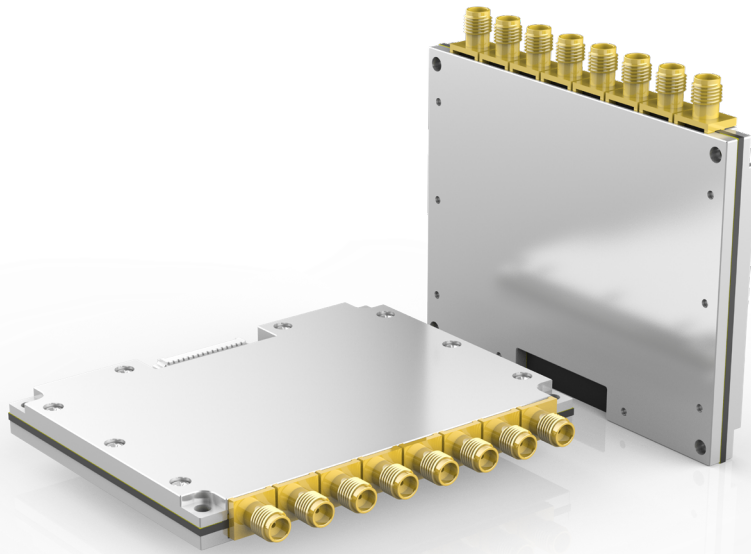


CM710-8


8-Port RFID Module

Chainway CM710-8 is an 8-port RFID module based on Impinj E710 supporting the latest Impinj Gen2X. It can be integrated in fixed UHF RFID readers and etc. With high integration level and superb performance, this module is low in power consumption as well. It is also resistant to electromagnetic interference and good at heat dispersion. The module is ideal for industries like warehousing, logistics, apparel, production lines and such to boost efficiency.

Dimensions

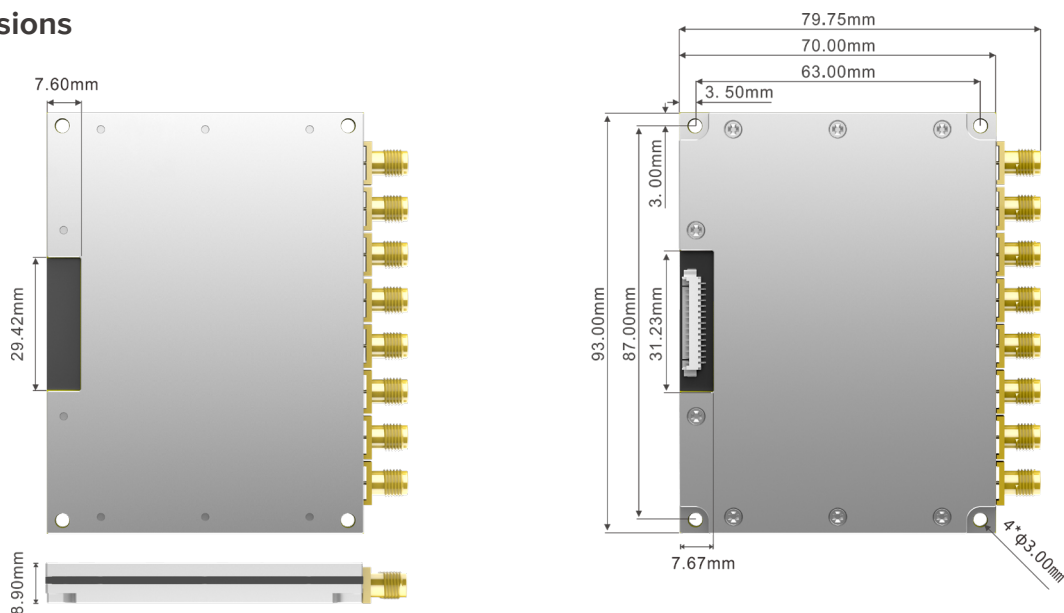

Interface Definition (15 PIN)

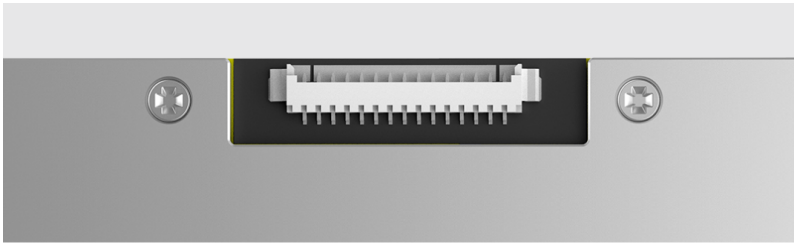

PIN	Interface	Description
1	GND	Negative
2	GND	
3	VIN	Positive Input voltage range: 3.5-5.25 VDC
4	VIN	
5	GPIO3	Reserved GPIO 3.3V TTL level
6	NC	
7	GPIOI	Reserved GPIO 3.3V TTL level
8	BUZZ	Driving 3.3V buzzer
9	UART_RXD	UART receive 3.3V TTL level
10	UART_TXD	UART send 3.3V TTL level
11	USB_DM	USB_DATA(-)
12	USB_DP	USB DATA(+)
13	GPIO2	Reserved GPIO 3.3V TTL level
14	EN	>1.25V power-on mode <1.18V standby mode
15	NC	

Specification

Model	
8-Ports RFID Module	CM710-8
Development Board Module	CM-X_EDCB
Physical Characteristics	
Dimensions	93.0 mm x 79.75 mm x 8.9 mm
Weight	108.0 g / 3.81 oz.
RFID Features	
RF Chip	Impinj E710
Impinj Gen2X	Supported
Air Interface Protocol	EPCglobal Gen2 (ISO18000-6C)
Working Frequency	865-868 / 920-925 / 902-928 MHz (custom-design for frequency band)
Output Power	5-30dBm adjustable; 1dB step interval; +/- 1dB precision
Output Power Flatness	+/- 0.2dB
Antenna Interface	8-channel 50Ω RF connector SMA Receptacle
Regions Supported	FCC 902-928 MHz; ETSI 865.6-867.6 MHz; China 920-925MHz; Others for customization (865-868, 902-928MHz)
Receive Sensitivity	< -86 dBm
Tag RSSI	Supported
Antenna Detector	Supported
Ambient Temp Monitor	Supported
Working Mode	Single/DRM

Communication Interface	
Connector	15 PIN FPC Connector
Host Communication	UART 3.3V TTL Level Baud Rate: 115200bps
Power Supply	
Input Voltage	DC 3.5-5.25V
Power Consumption in RF Output Mode	7.5W
Power Consumption in Standby (EN high TTL level)	0.175W
Power Consumption in Power Down (EN low TTL level)	42.5μW
User Environment	
Operating Temp.	-13°F to 149°F / -25°C to 65°C
Storage Temp.	-40°F to 185°F / -40°C to 85°C
Humidity	10% - 95%
Reading Performance	
Fastest Read Rate	950+ tags/s
Reading Range	Up to 34m (with 6dBi antenna & M750 tag)

Notice: Product specifications are subject to change without prior notice. / Model: CM710-8 / Update Date: 2025-07-07

CHAINWAY®

Shenzhen Chainway Information Technology Co., Ltd

Address: 9F, Building2, Phase 2, Gaoxinqi Industrial Park, Liuxian 1st Rd., Bao'an District, Shenzhen, Guangdong 518102, China
Tel: 0086-755-23223316 Fax: 0086-755-23223310 Email: sales@chainway.cn Web: <http://www.chainway.net>