



**BEN
SEN**

Fabrics & Leathers

2024

BENSEN Leathers

Category	Leathers (Stocked in Europe)
A	P 4 House Leather P 5 Prescott P 11 Toscano (Category A, Tokyo only) (Category B, Stax only)
B	P 13 Cashmere P 14 Elmosoft IX P 18 Elmonordic IV P 20 Lord
C	P 22 Acquario P 23 Shearling

BENSEN Leathers

Category	Fabrics	*NEW
B	P 25 Boira* P 27 Drop* P 29 Emyr GRS* P 31 Lecco P 33 Moulin* P 35 Noah* P 37 Ombra* P 38 Rialto P 40 Sorra* P 42 Teddybea	
C	P 44 Delta* (Indoor/Outdoor) P 46 Donnafugata Soft P 48 Gaja Classic (Gabriel) P 51 Maple (Kvadrat) P 53 Moovie* P 54 Nina* P 56 Nobilis (New Colors) P 58 Quiche MT* P 60 Relax* P 62 Sobral P 64 Tundra 01	
D	P 66 Annik GRS* P 68 Barnum (New Colors) P 71 Credo (Rohi) P 73 Esopo 01 P 75 Europost 2 (Gabriel) P 78 Katmandu P 80 Mica (Rohi) P 82 Savanna (Kvadrat) P 84 Sera (Rohi) P 86 Shake (Rohi)	
E	P 90 Dhogar* P 92 Divina 3 (Kvadrat) P 96 Divina MD (Kvadrat) P 98 Divina Melange 3 (Kvadrat) P 101 Everest P 103 Harald 3 (Raf Simons/ Kvadrat) P 105 Vidar 4* (Raf Simons/ Kvadrat)	
F	P 109 Comfort+ (Gabriel) P 114 Ecriture (Sahco) P 117 Moss (Sahco) P 120 Safire (Sahco) P 122 Zero* (Sahco) +5% P 124 Nabis* (Sahco) +5% P 127 Cifrado* (Sahco) +10%	

Leather Category






7763



7738



7060

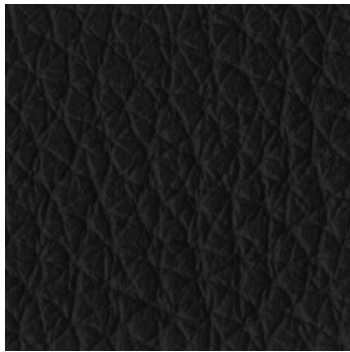

7150

House Leather (Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.4 - 1.6 mm
Leather type	Pigmented - Corrected grain through dye aniline
Raw material	Chrome tanned raw hides with European origin



Prescott

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



Prescott

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



241 Blood



232 Antique



247 Parrot



248 Siam




288 Phonebox



234 Bombay



242 Wine



235 Ribes



284 Aubergine



218 Dune




226 Pottery



252 Volcano



227 Jasper



398 Horse



300 Crocus



236 Carrubo



216 Antilop



224 Acajou



217 Peatmoos



231 Chestnut

Prescott

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



Prescott

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



Prescott

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather



204 Iron



304 Grey



210 Graystone



211 Grayshadow



207 Black Ink

Prescott

(Leather)

Category




TECHNICAL PROPERTIES


PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Through dyed - finishing with resins & pigments
Raw material	Natural corrected grain bovine leather




Natural

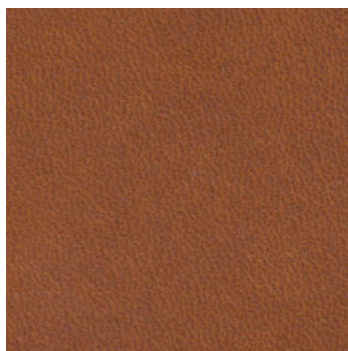

Honey

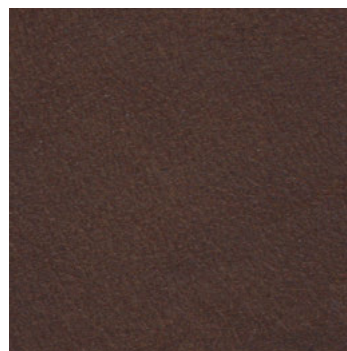

Brown

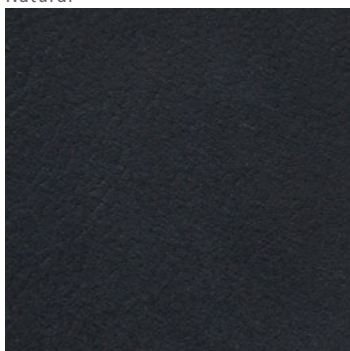

Black

Toscana

(Leather, Tokyo and Stax only)

Category



Category A for Tokyo

Category



Category B for Stax

Leather Category

B



Sabbia



Biscotto



Cuoio



Taupe



Ebano



Castagna



Ferro



Nero

Cashmere

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.2 - 1.4 mm
Leather type	Semi aniline - Full grain aniline through dyed
Raw material	Chrome tanned bovine raw hides



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmosoft IX

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.1 - 1.3 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmonordic IV

(Leather)

TECHNICAL PROPERTIES

Category



PROPERTIES	VALUE
Thickness	1.3 - 1.5 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Elmonordic IV

(Leather)

Category

B

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.3 - 1.5 mm
Leather type	Semi - Aniline leather
Raw material	Grain leather from Scandinavian cattle



Lord

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.3 - 1.5 mm
Leather type	Aniline - Full grain through dyeing aniline
Raw material	European raw hides

Leather Category






Polvere



Fango

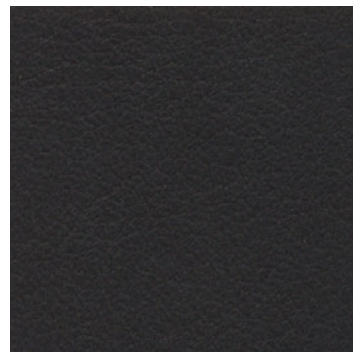

Antracite



Collant



Cuio



Marrone



T. moro

Acquario

(Leather)

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	1.0 - 1.2 mm
Leather type	Aniline - Full grain through dyeing aniline
Raw material	European raw hides



Shearling

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Thickness	16 mm

Fabric Category

B



Boira




Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	85% Polyester 15% Recycled Polyester
Weight	708 g/m ²
Martindale	35,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	Pilling 3-4, Fuzzing 4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1, CAL-TB 117 NFPA 260
Fabric care instruction	

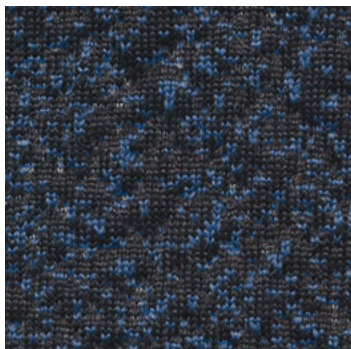

47

Boira



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	85% Polyester 15% Recycled Polyester
Weight	708 g/m ²
Martindale	35,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	Pilling 3-4, Fuzzing 4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1, CAL-TB 117 NFPA 260
Fabric care instruction	     




03




06




09

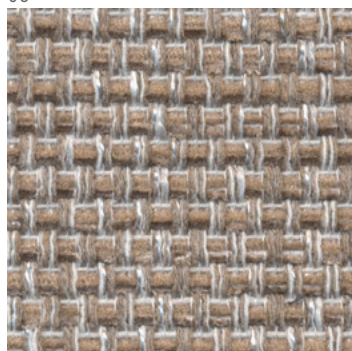

07

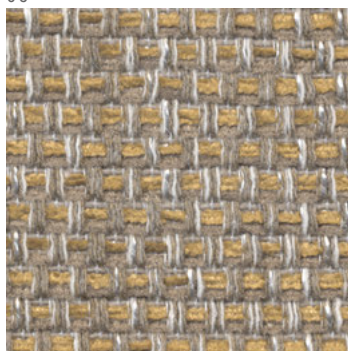


08

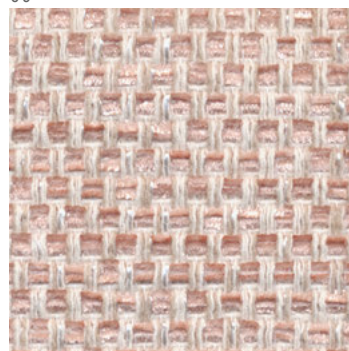


05



11

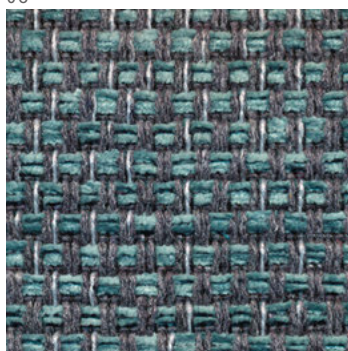

38

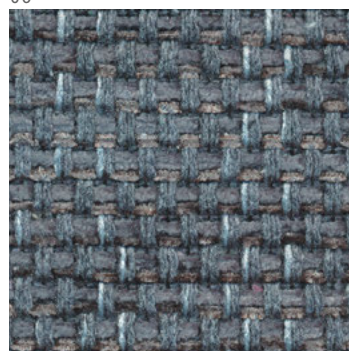

27


Drop

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	59% Cotton 41% Polyester
Weight	610 g/ml
Martindale	≥25,000
Light fastness	≥4/5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	

Category





35

Drop

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	59% Cotton 41% Polyester
Weight	610 g/ml
Martindale	≥25,000
Light fastness	≥4/5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	    

Category






14



15/3



109

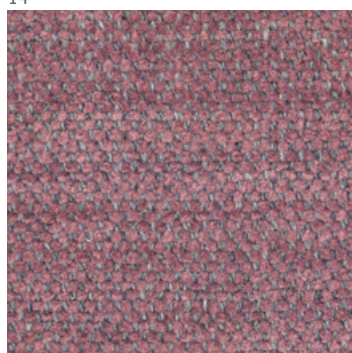

34/3




42




200



34/2

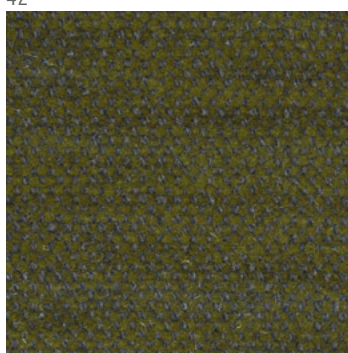

2781

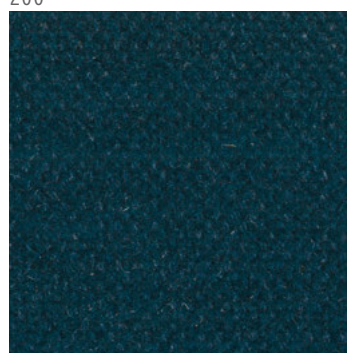

20/1

EMYR GRS




Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	50% Polyester 33% Recycled Polyacrylic 13% Recycled Wool 3% Recycled Other fibers
Weight	460 g/m ²
Martindale	>96,000
Light resistance	4/5
Pilling	4
Flame resistance	BS 5852-Part 0-1(C&M), CAL-TB 117:2013
Fabric care instruction	    

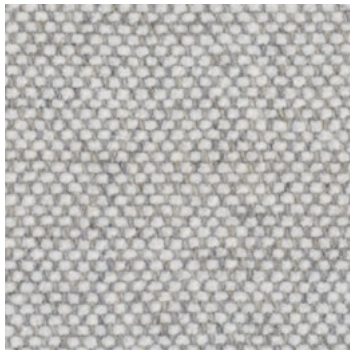

05/2

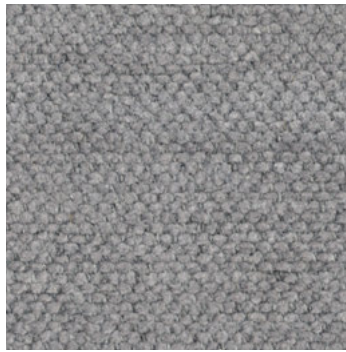

34/1



07/1

EMYR GRS



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	50% Polyester 33% Recycled Polyacrylic 3% Recycled Wool 3% Recycled Other fibers
Weight	460 g/m ²
Martindale	>96,000
Light resistance	4/5
Pilling	4
Flame resistance	BS 5852-Part 0-1(C&M), CAL-TB 117:2013
Fabric care instruction	    




Lecco

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	30% Viscose 27% Acrylic 19% Linen 14% Cotton 10% Polyester
Weight	770 g/ml
Martindale	25,000
Light fastness	4/5
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category




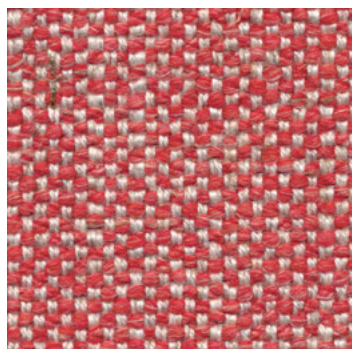


224



214



225

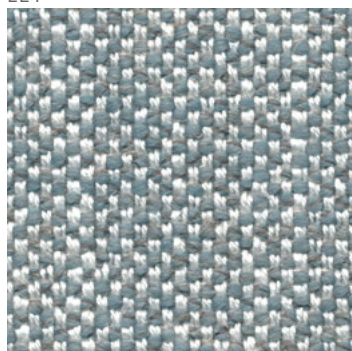

04



234



126

Lecco

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	30% Viscose 27% Acrylic 19% Linen 14% Cotton 10% Polyester
Weight	770 g/ml
Martindale	25,000
Light fastness	4/5
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category







05

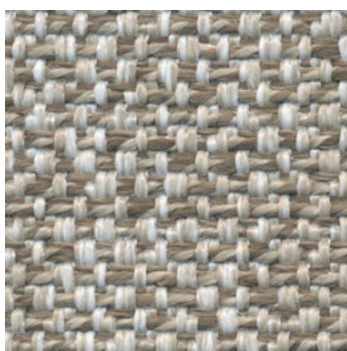

07

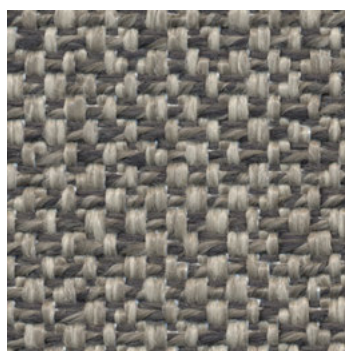

10

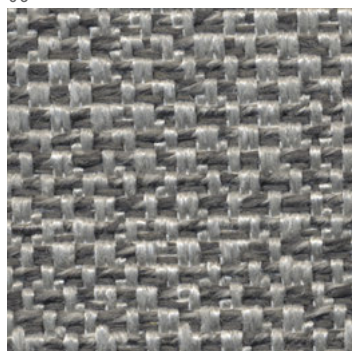


50




54




51

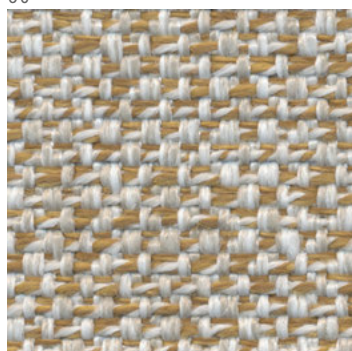

20

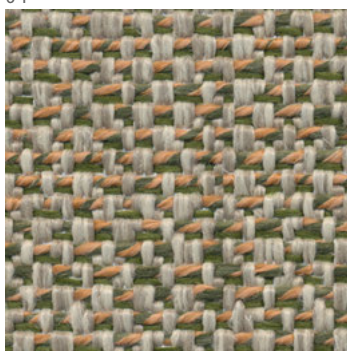

38

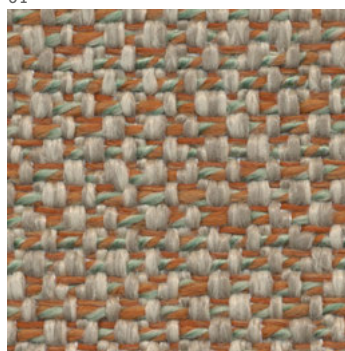

26

Moulin

PERFORMANCE+




Category




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	80% Polypropylene 14% Recycled Polyester 3% Recycled Cotton 3% Recycled Other Fibers
Weight	550 g/m²
Martindale	80,000
Light fastness	>6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9157 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	

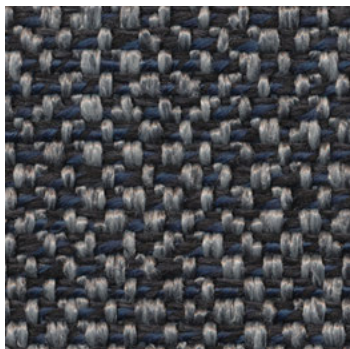

47



52

Moulin

PERFORMANCE+

STANDARD
100

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	80% Polypropylene 14% Recycled Polyester 3% Recycled Cotton 3% Recycled Other Fibers
Weight	550 g/m ²
Martindale	80,000
Light fastness	>6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9157 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	     




Noah




TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Recycled Polyester
Weight	543 g/m ²
Martindale	>100,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1:2006 CAL-TB 117:2013, NFPA 260:2013
Fabric care instruction	

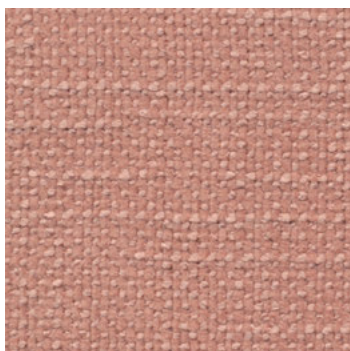

71

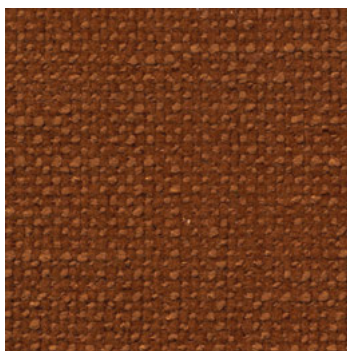

26



53

Noah



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Recycled Polyester
Weight	543 g/m ²
Martindale	>100,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Source 0, EN1021-Part 1:2006 CAL-TB 117:2013, NFPA 260:2013
Fabric care instruction	     




01




02



18

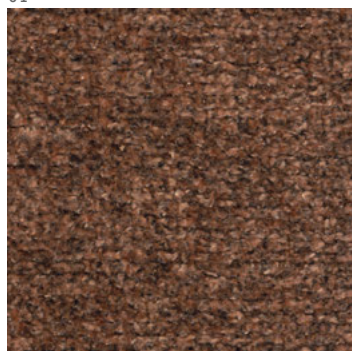

27

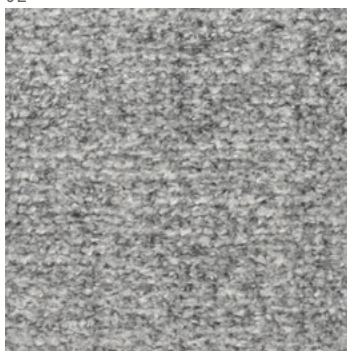

05



08

Ombra

PERFORMANCE+



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	65% Polyester 35% Recycled Polyester
Weight	561 g/m ²
Martindale	100,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9157 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	     




214




13




15

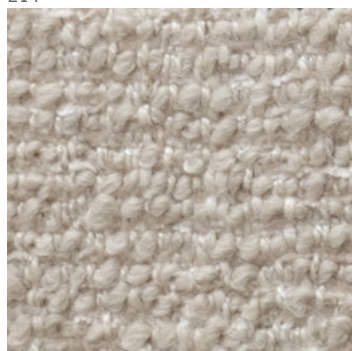


01

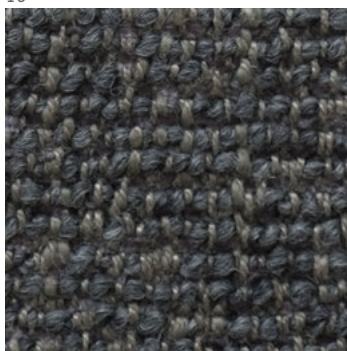

206

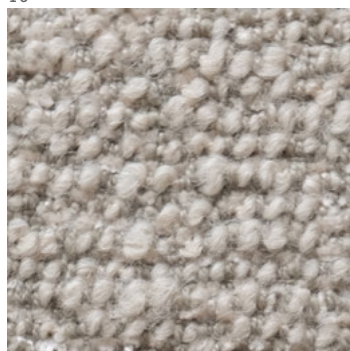


101

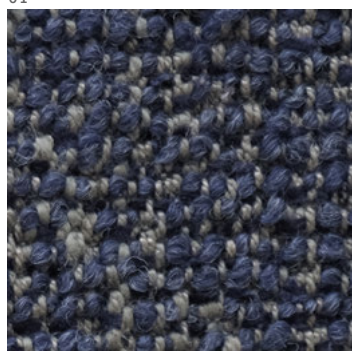

207



201

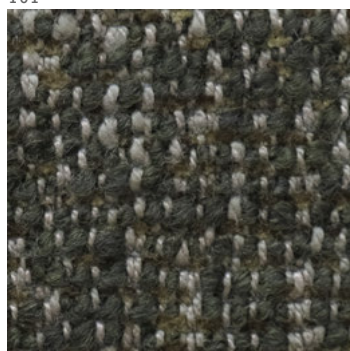

217

Rialto

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	46% Cotton 24% Acrylic 13% Virgin Wool 11% Viscose 6% Linen
Weight	830 g/ml
Martindale	18,000
Light fastness	4
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Fabric care instruction	    

Category





202



216

Rialto

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	46% Cotton 24% Acrylic 13% Virgin Wool 11% Viscose 6% Linen
Weight	830 g/ml
Martindale	18,000
Light fastness	4
Fastness to rubbing	Dry 4, Wet 4
Pilling	4
Fabric care instruction	    

Category





Sorra

PERFORMANCE+




Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	60% Polyester 40% Recycled Polyester
Weight	654 g/m²
Martindale	80,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9175 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	

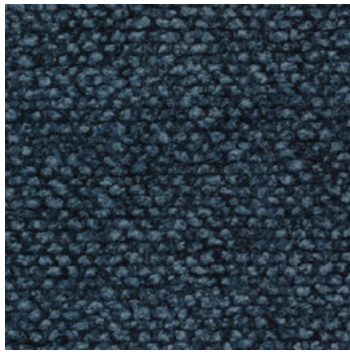


43




51

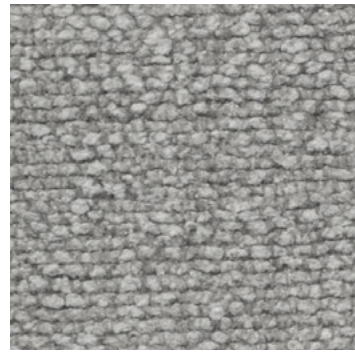

54

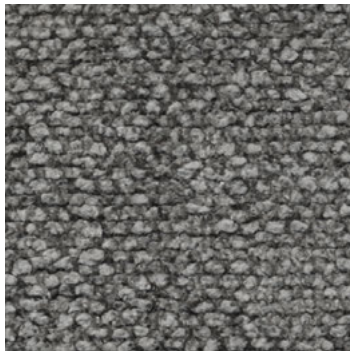

52

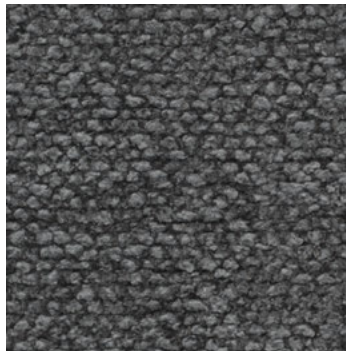

53

Sorra

PERFORMANCE+



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	60% Polyester 40% Recycled Polyester
Weight	654 g/m ²
Martindale	80,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	CAL-TB 117:2013, NFPA 260:2013 BS 7176 Low Hazard, BS 5852 Source 0,1 UNI 9175 Class 3IM, EN1021-Part 1,2:2006
Fabric care instruction	     



Teddybea

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Polyester
Weight	800 g/ml
Martindale	100,000
Light fastness	5
Fastness to rubbing	Dry 5, Wet 4
Pilling	4
Flame resistance	CAL-TB 117:2013, BS 5852 P1/2 with coating
Fabric care instruction	     

Category




Fabric Category







01

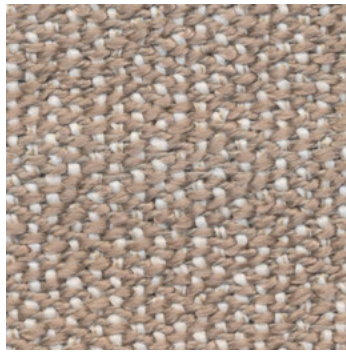


01/1

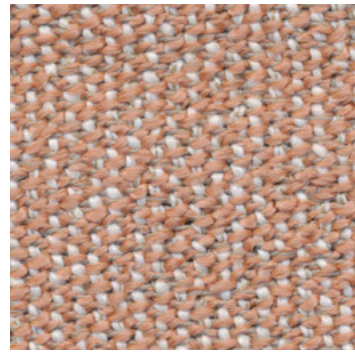


01/3

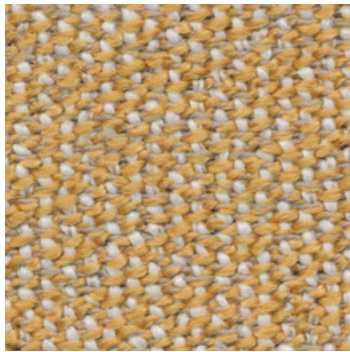


01/4

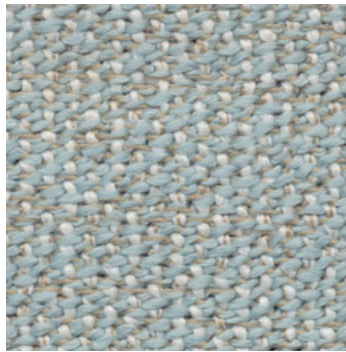


01/6

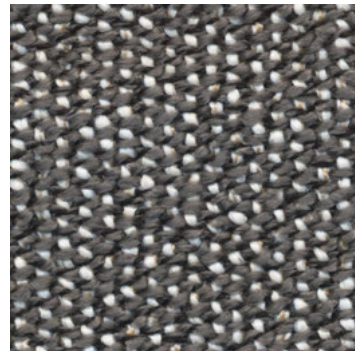


01/5

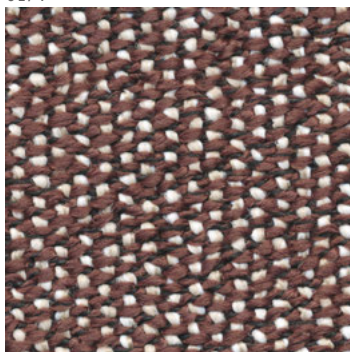

02

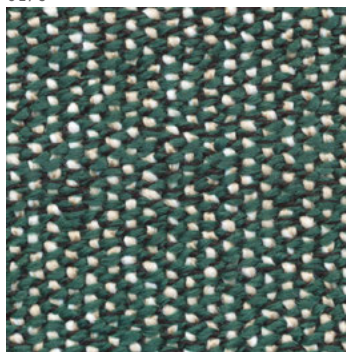

02/1

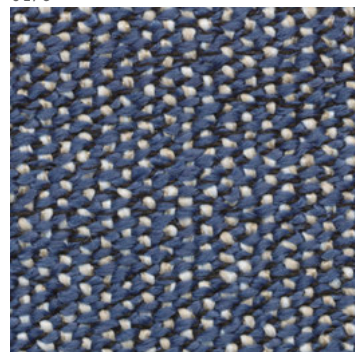

02/3

Delta

PERFORMANCE+

INDOOR / OUTDOOR

Category




TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	80% Polypropylene 20% Polyester
Weight	590 g/m ²
Martindale	80,000
Light fastness	7
Fastness to rubbing	Dry 4/5, Wet 5
Pilling	4/5
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	




90




03




03/1

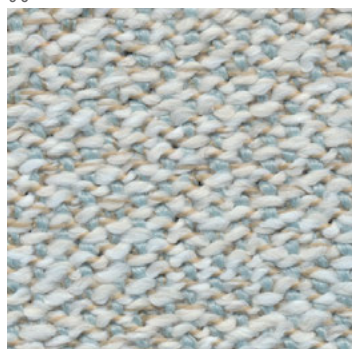


80



80/1




15

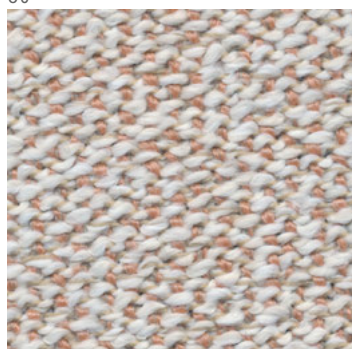

45/1



45



15/1

Delta

PERFORMANCE+

INDOOR / OUTDOOR

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	80% Polypropylene 20% Polyester
Weight	590 g/m ²
Martindale	80,000
Light fastness	7
Fastness to rubbing	Dry 4/5, Wet 5
Pilling	4/5
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	




Donnafugata Soft

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Viscose 35% Acrylic 15% Cotton 10% Polyester
Weight	950 g/mtl
Martindale	50,000
Light fastness	5
Fastness to rubbing	Dry 4/5, Wet 3/4
Pilling	4
Flame resistance	BS 1021-1&2, CAL-TB 117:2013+2015
Fabric care instruction	   

Category



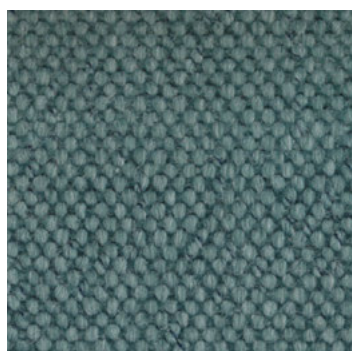


12



22




16

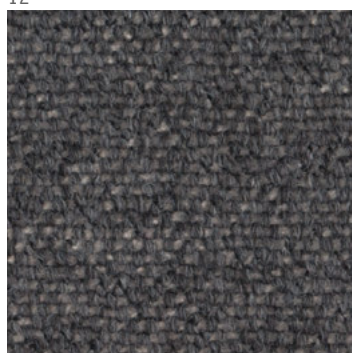


168




13

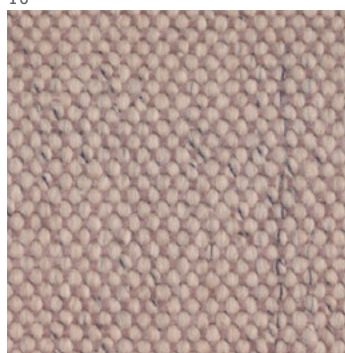

17

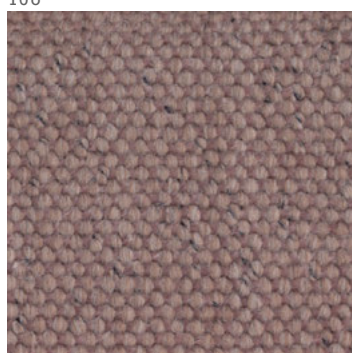

18

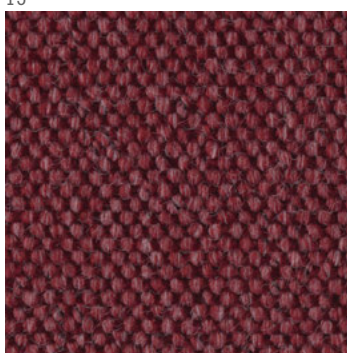

14



19

Donnafugata Soft

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Viscose 35% Acrylic 15% Cotton 10% Polyester
Weight	950 g/mtl
Martindale	50,000
Light fastness	5
Fastness to rubbing	Dry 4/5, Wet 3/4
Pilling	4
Flame resistance	BS 1021-1&2, CAL-TB 117:2013+2015
Fabric care instruction	    

Category





Gaja Classic

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	530 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	EN 1021 1&2, BS 5852 Crib 5, BS 5852 0&1 BS 476 P.7 Class 1, CAL-TB 117:2013
Fabric care instruction	    

Category



[Complete specifications at gabriel.dk](http://gabriel.dk)



Gaja Classic


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	530 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	EN 1021 1&2, BS 5852 Crib 5, BS 5852 0&1 BS 476 P.7 Class 1, CAL-TB 117:2013
Fabric care instruction	    

Category



[Complete specifications at gabriel.dk](https://gabriel.dk)

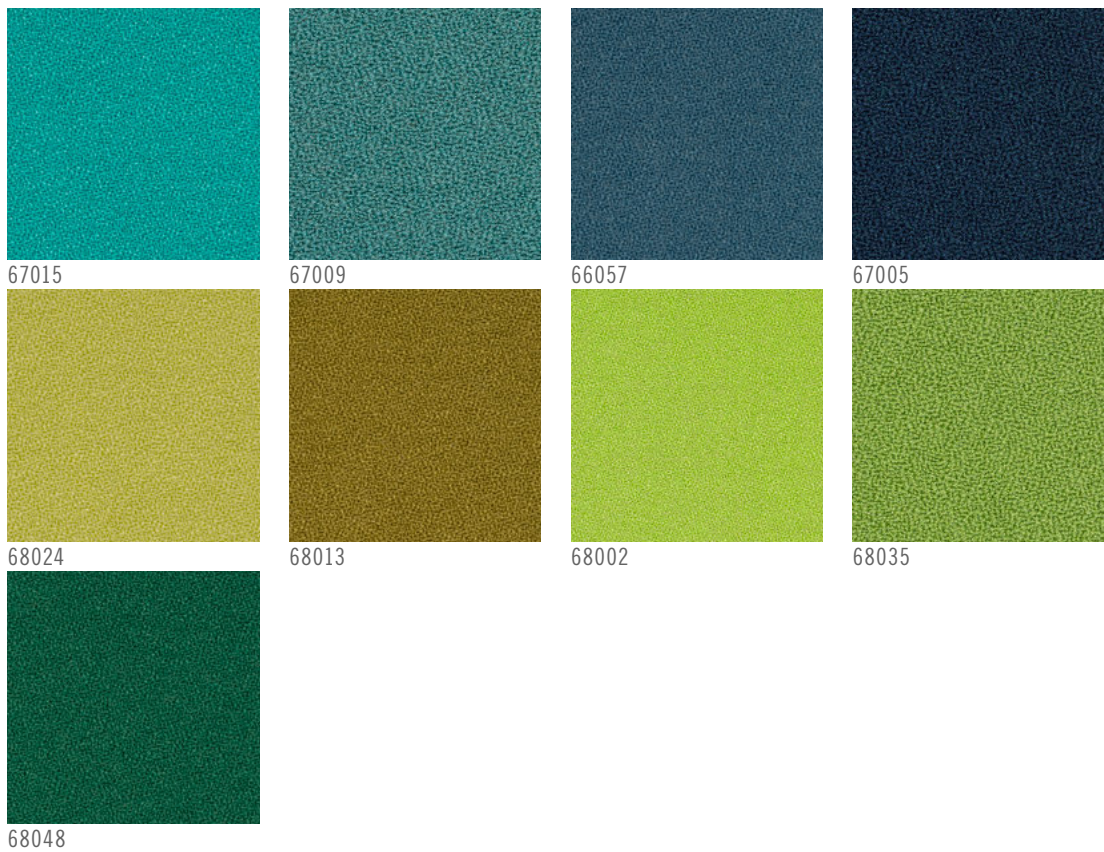

Gaja Classic

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	530 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	EN 1021 1&2, BS 5852 Crib 5, BS 5852 0&1 BS 476 P.7 Class 1, CAL-TB 117:2013
Fabric care instruction	    

[Complete specifications at gabriel.dk](#)





Maple


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	81% Viscose 15% Linen 4% Polyester
Weight	910 g/ml
Martindale	30,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, AS/NZS 1530.3&3837 class 2
Fabric care instruction	    

[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category



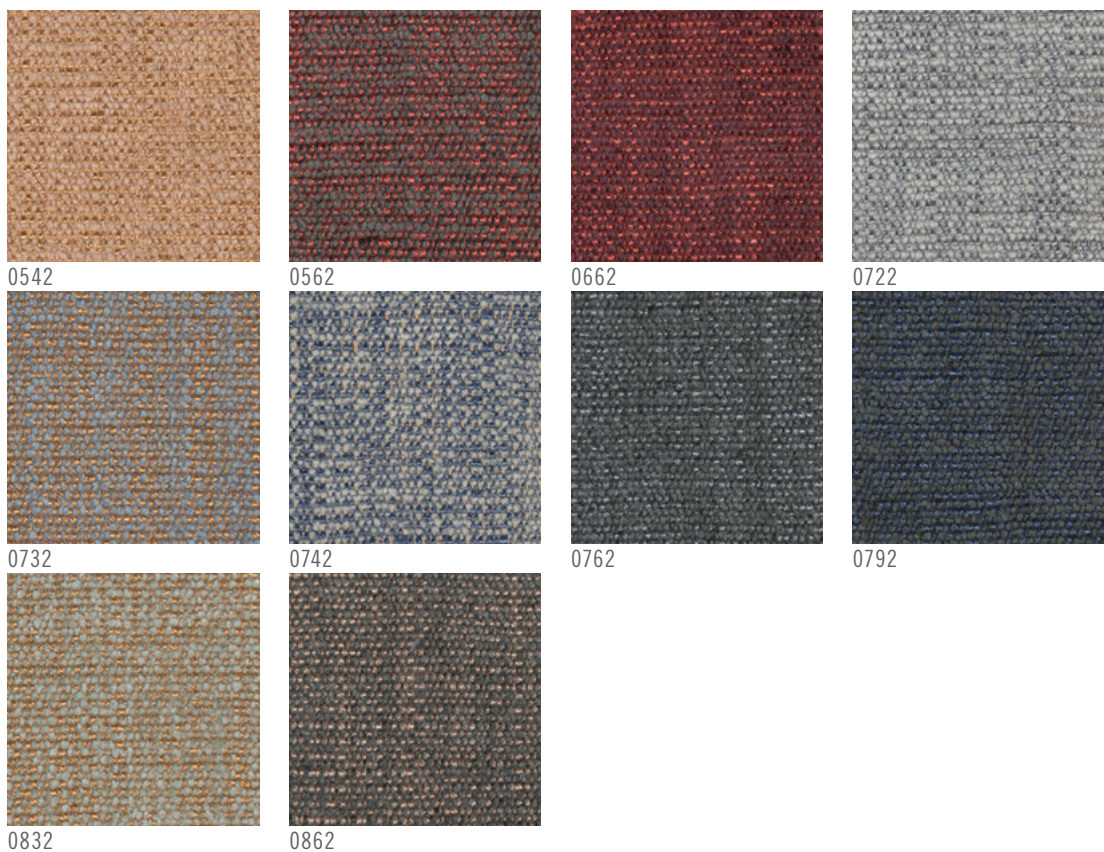

Maple

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	81% Viscose 15% Linen 4% Polyester
Weight	910 g/ml
Martindale	30,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, AS/NZS 1530.3&3837 class 2
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category





014



009



013



011



005



007



001



002



006

Moovie

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	30% Linen 30% Viscose 25% Polyester 15% Cotton
Weight	940 g/ml
Martindale	≥50,000
Light fastness	≥4/5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category





Nina

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	39% Linen 27% Jute 24% Viscose 10% Cotton
Weight	930 g/ml
Martindale	25,000
Light fastness	≥3/4
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥3/4
Flame resistance	BS 5852-1:1979, CAL-TB 117:20/03
Fabric care instruction	    

Category






40




51




21



39



52



4

Nina

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	39% Linen 27% Jute 24% Viscose 10% Cotton
Weight	930 g/ml
Martindale	25,000
Light fastness	≥3/4
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥3/4
Flame resistance	BS 5852-1:1979, CAL-TB 117:20/03
Fabric care instruction	    

Category





Nobilis

(Velvet)

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	100% Cotton
Weight	440 g/m ²
Martindale	>65,000
Light fastness	5
Fastness to rubbing	Dry 5, Wet 4
Pilling	5
Flame resistance	EN 1021-1&2:2006, BS 5852:2006 (Crib 5) CAL-TB 117:2013, IMO 2010 FTP CODE, M1 UNI 9175 Class IIM
Fabric care instruction	    

Category







21



33



30



16

Nobilis

(Velvet)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Cotton
Weight	440 g/m ²
Martindale	>65,000
Light fastness	5
Fastness to rubbing	Dry 5, Wet 4
Pilling	5
Flame resistance	EN 1021-1&2:2006, BS 5852:2006 (Crib 5) CAL-TB 117:2013, IMO 2010 FTP CODE, M1 UNI 9175 Class 1IM
Fabric care instruction	    

Category





Quiche MT

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton 38% Viscose 15% Polyester 5% Linen
Weight	980 g/mtl
Martindale	25,000
Light fastness	5
Fastness to rubbing	Dry 4, Wet 3/4
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	    

Category





29


Quiche MT

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton 38% Viscose 15% Polyester 5% Linen
Weight	980 g/mtl
Martindale	25,000
Light fastness	5
Fastness to rubbing	Dry 4, Wet 3/4
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	

Category



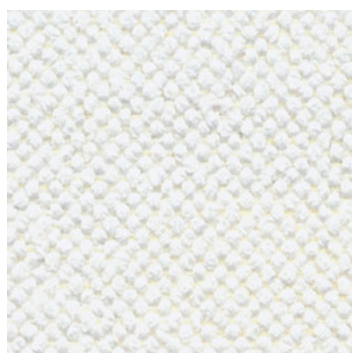


3152



3145



3146

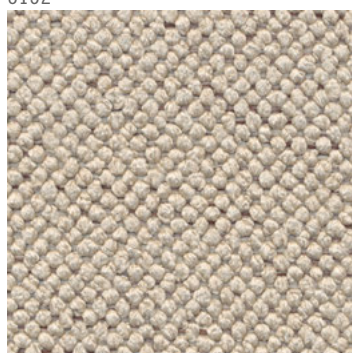


3147




3148




3149

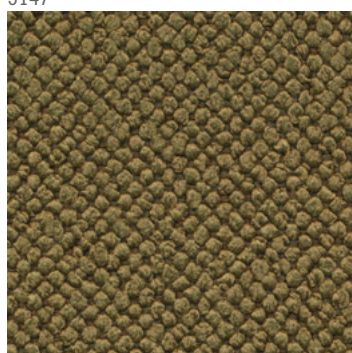

3157

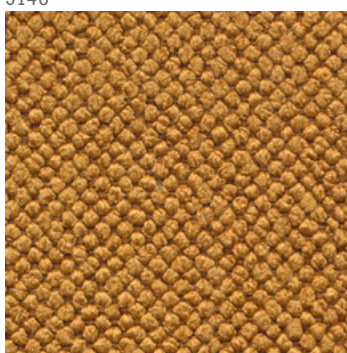

3156

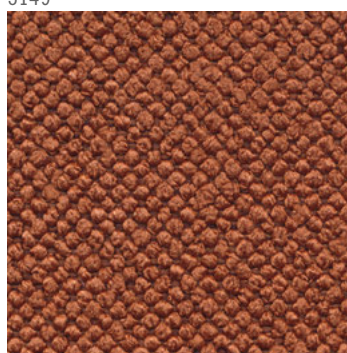

3155

Relax


PERFORMANCE+

Category



TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	100% Polyester
Weight	644 g/mtq
Martindale	100,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	

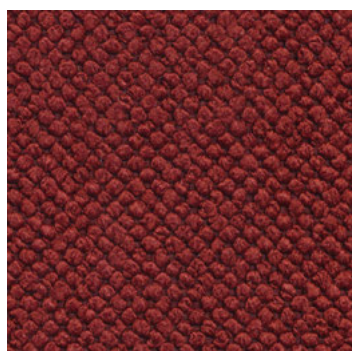


3154




3153

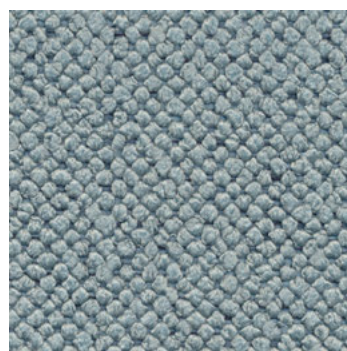


3163

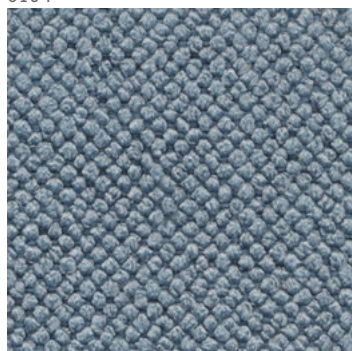


3164

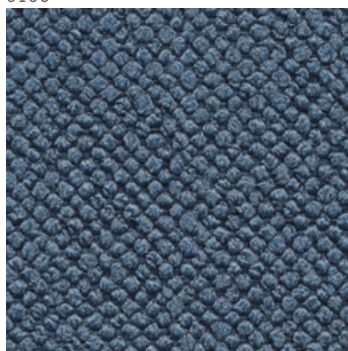


3165

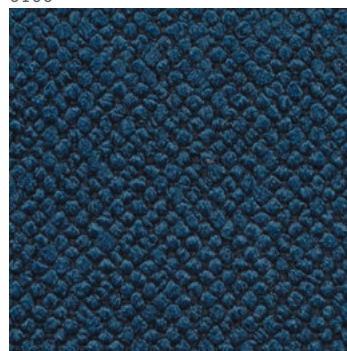

3161

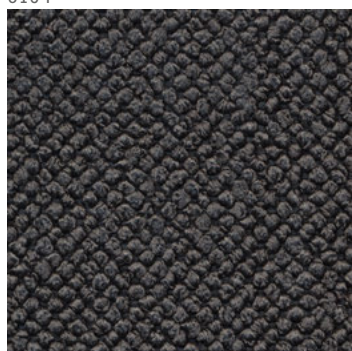

3151

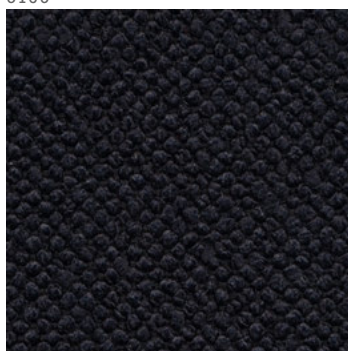

3168

Relax

PERFORMANCE+

Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Polyester
Weight	644 g/mtq
Martindale	100,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	4
Flame resistance	CAL-TB 117:2013
Fabric care instruction	



Sobral

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	53% Viscose 24% Linen 21% Cotton 2% Polyamide
Weight	700 g/m²
Martindale	>50,000
Light fastness	3-5
Fastness to rubbing	Dry 5, Wet 3/4
Pilling	3/4
Fabric care instruction	    

Category





Sobral

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	53% Viscose 24% Linen 21% Cotton 2% Polyamide
Weight	700 g/m ²
Martindale	>50,000
Light fastness	3-5
Fastness to rubbing	Dry 5, Wet 3/4
Pilling	3/4
Fabric care instruction	    

Category





Tundra 01

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Viscose 36% Cotton 16% Acrylic 6% Polyester
Weight	720 g/m ²
Martindale	30,000
Light fastness	5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	3/4
Flame resistance	BS 58529:1979, EN 1021-1&2, NFPA 260:2013 CAL-TB 117:2013
Fabric care instruction	    

Category



Fabric Category





601/12




601/7




601/1



604/7

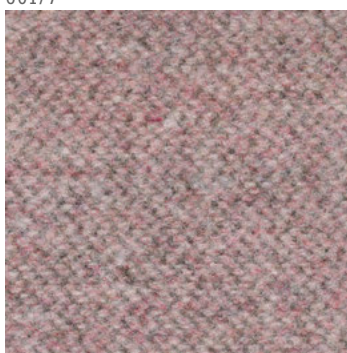


604/9

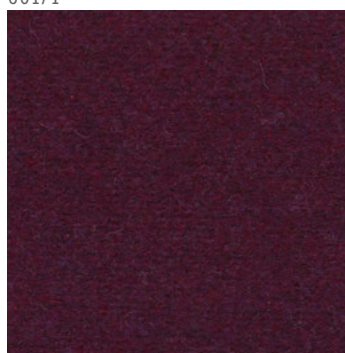

855



609/3

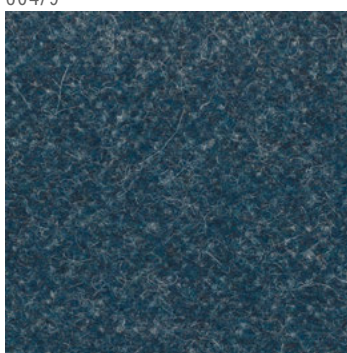

608/3



609/7

Annik GRS



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	44% Recycled Wool 24% Wool 6% Alpaca 16% Polyamide 3% Recycled Other Fibers 3% Recycled Polyacrylic
Weight	565 g/m ²
Martindale	>100,000
Light resistance	4/5
Pilling	3
Flame resistance	BS 5852-1979, CAL-TB 117:2013 NFPA 260:2019
Fabric care instruction	    



609/9

Annik GRS



Category



TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	44% Recycled Wool 24% Wool 6% Alpaca 16% Polyamide 3% Recycled Other Fibers 3% Recycled Polyacrylic
Weight	565 g/m²
Martindale	>100,000
Light resistance	4/5
Pilling	3
Flame resistance	BS 5852-1979, CAL-TB 117:2013 NFPA 260:2019
Fabric care instruction	    



Barnum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	45% Cotton 19% Viscose 15% Wool 13% Acrylic 8% Polyester
Weight	950 g/ml
Martindale	≥60,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category





Barnum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	45% Cotton 19% Viscose 15% Wool 13% Acrylic 8% Polyester
Weight	950 g/ml
Martindale	≥60,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category






14



12



13

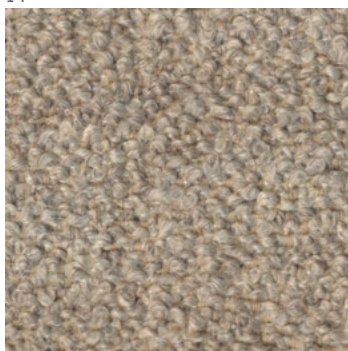

03

Barnum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	45% Cotton 19% Viscose 15% Wool 13% Acrylic 8% Polyester
Weight	950 g/ml
Martindale	≥60,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4/5, Wet ≥3/4
Pilling	≥4
Flame resistance	BS 5852-1:1979, CAL-TB 117:2013
Fabric care instruction	    

Category





Credo


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	870 g/ml
Martindale	100,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category



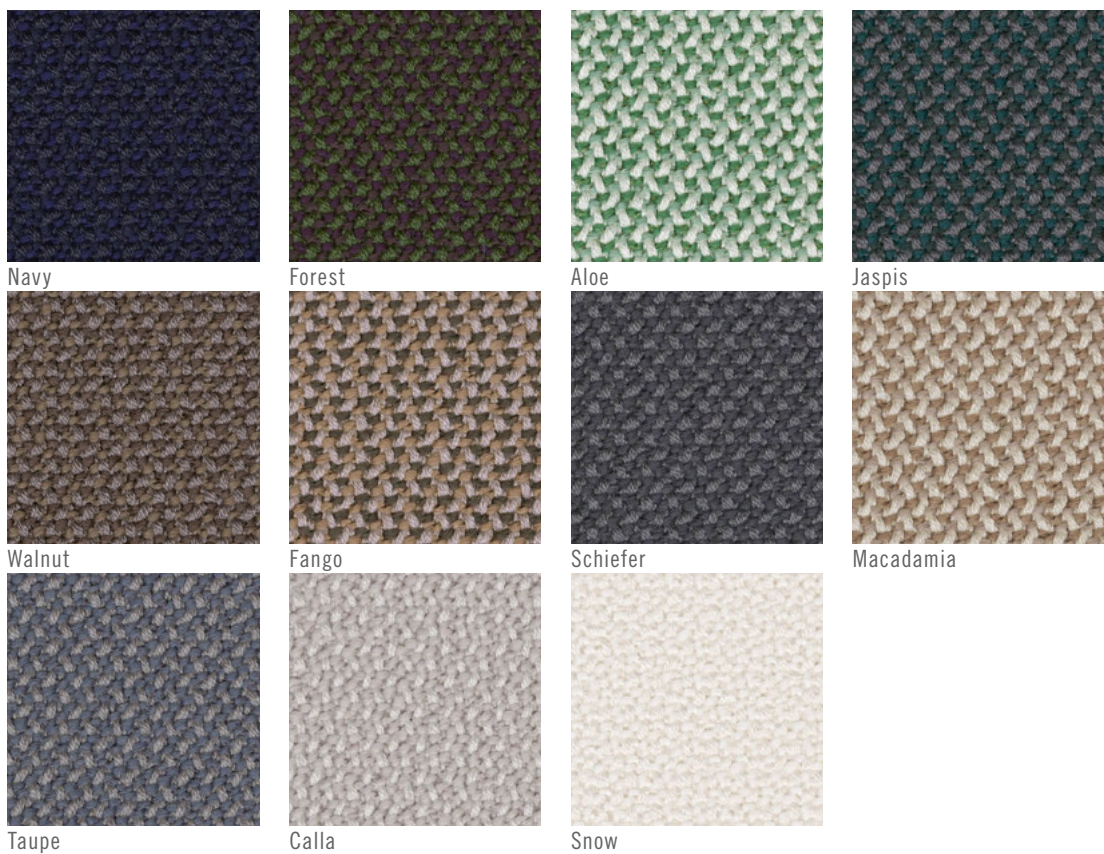

Credo

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	870 g/ml
Martindale	100,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category





Esopo 01

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	33% Acrylic 25% Viscose 17% Wool 14% Polyester 11% Cotton
Weight	800 g/m ²
Martindale	45,000
Light fastness	3-5
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013 EN 1021-1&2
Fabric care instruction	    

Category





9/1

Esopo 01

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	33% Acrylic 25% Viscose 17% Wool 14% Polyester 11% Cotton
Weight	800 g/m²
Martindale	45,000
Light fastness	3-5
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013 EN 1021-1&2
Fabric care instruction	    

Category





Europost 2

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	800 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	    

Category



[Complete specifications at gabriel.dk](https://gabriel.dk)



Europost 2


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	800 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	    

[Complete specifications at gabriel.dk](http://gabriel.dk)

Category



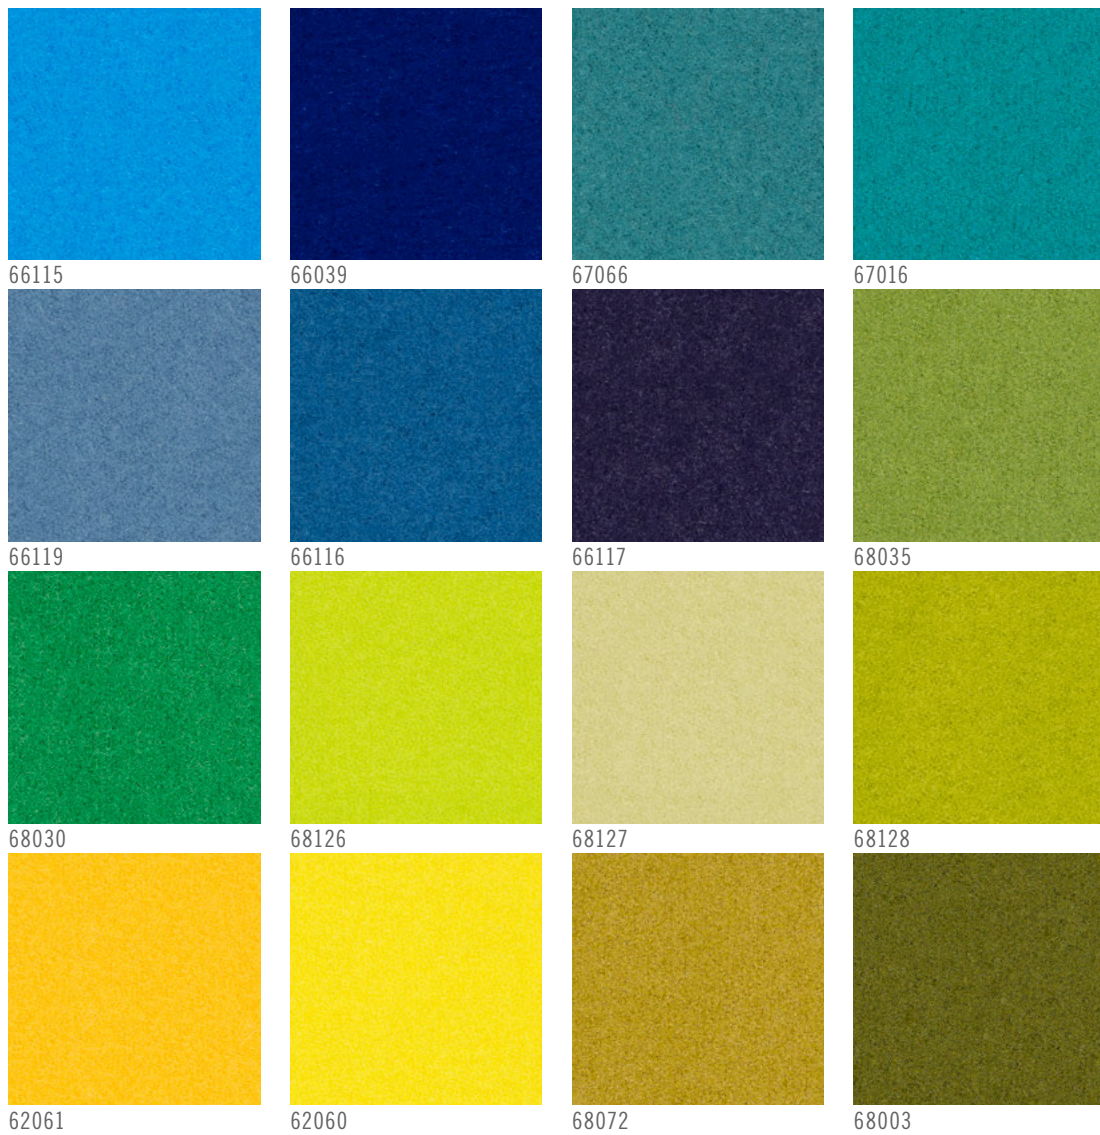

Europost 2

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Wool
Weight	800 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4
Flame resistance	EN 1021-1&2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1-0&1, Regulations 1988
Fabric care instruction	    

Category




[Complete specifications at gabriel.dk](http://gabriel.dk)




01



1/1

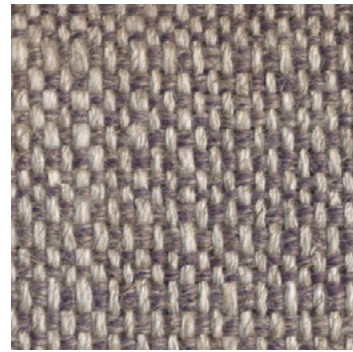

1/3

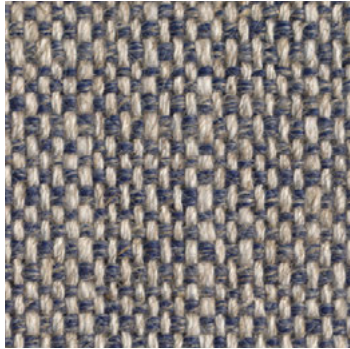

1/6



1/7



1/8



1/11



1/12



1/13


Katmandu

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	36% Viscose 32% Linen 24% Acrylic 4% Polyamide 4% Polyester
Weight	710 g/m ²
Martindale	45,000
Light fastness	3/4
Fastness to rubbing	Dry 5, Wet 4/5
Pilling	3/4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013
Fabric care instruction	    

Category



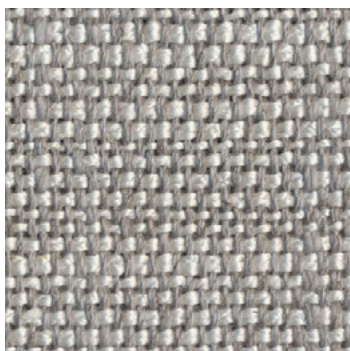

3/2

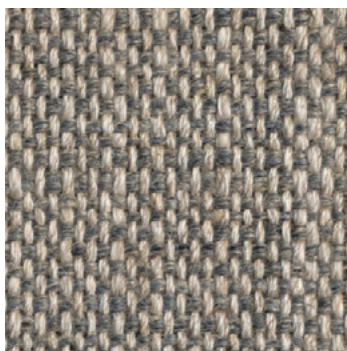

1/15



3/3

Katmandu

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	36% Viscose 32% Linen 24% Acrylic 4% Polyamide 4% Polyester
Weight	710 g/m²
Martindale	45,000
Light fastness	3/4
Fastness to rubbing	Dry 5, Wet 4/5
Pilling	3/4
Flame resistance	BS 5852-1-1979 C&M, CAL-TB 117:2013
Fabric care instruction	    

Category






Melba




Sanddorn




Breva




Indio



Glow



Corn



Mirror




Flanell




Calla



Aqua




Papillon



Reseda




Sesam



Night




Secret




Pepper




Kies



Fels



Carbon



Arion


Mica

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamid
Weight	840 g/ml
Martindale	50,000
Fabric care instruction	  

Category





Black




Jungle



Lanoso




Ivy




Taupe



Torba



Delphi



Peat



Crisp



Amber

Mica

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamid
Weight	840 g/ml
Martindale	50,000
Fabric care instruction	  

Category






0122




0152



0192

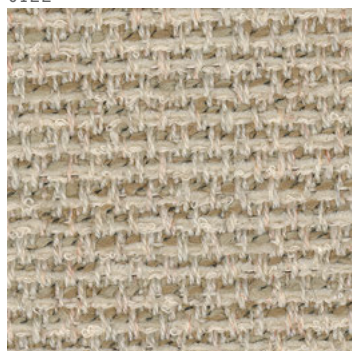


0202

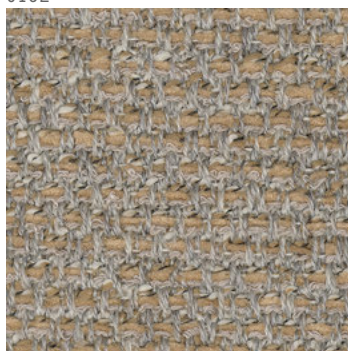


0222




0242

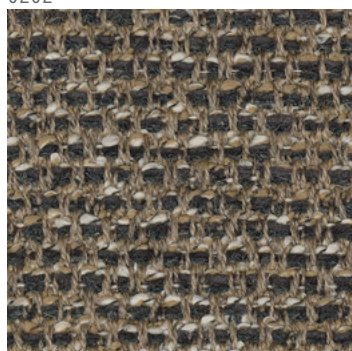

0262

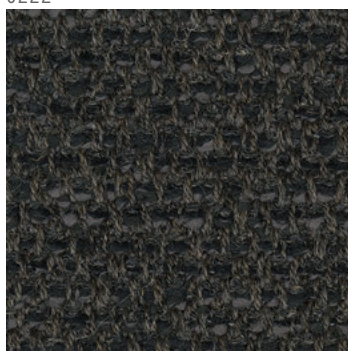

0292

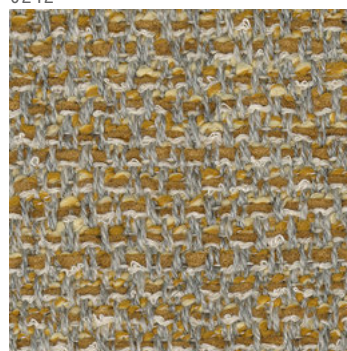

0442

Savanna


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	34% Polyester 31% New Wool 4% Cotton 26% Polyacrylic 3% Nylon 2% Linen
Weight	681 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 3837 Class 2, CAL-TB 117:2013 EN 1021-1/2, BS 5852 part 1 with treatment
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)

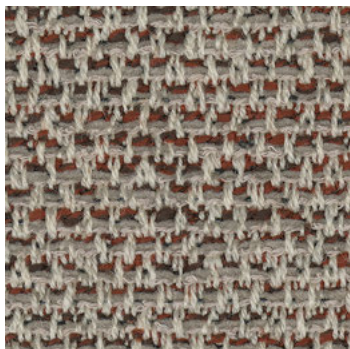

0622



0672



0952

Savanna

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	34% Polyester 31% New Wool 4% Cotton 26% Polyacrylic 3% Nylon 2% Linen
Weight	681 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 3837 Class 2, CAL-TB 117:2013 EN 1021-1/2, BS 5852 part 1 with treatment
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category





Sera


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% Virgin Wool 6% Polyamide
Weight	910 g/ml
Martindale	122,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


[Complete specifications at rohi.com](https://www.rohi.com)

Category







Chutney




Berry




Lotus




Tivoli




Mirage




Mare




Torba



Anthrazit



Amur



Rosewood

Sera

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% Virgin Wool 6% Polyamide
Weight	910 g/ml
Martindale	122,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Chalk




Porcelain




Lake




Calla



Terra




Hazelnut




Stone




Clay




Nougat




Coral




Malve



Espresso



Cherry



Kandis



Plaza



Seal

Shake


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	≥70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category






Carbon




Anthrazit




Galaxy




Walnut




Mountain




Night




Amur




Cobalt




Pepper




Vivid




Aurum




Kurkuma




Sol



Gold



Algae



Bold

Shake


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	≥70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Ivy




Vulcan



Fero



Ray



Jade

Shake

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	≥70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category



Fabric Category





Dhogar

(Mohair)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton (back side) 30% Wool 28% Lyocell
Weight	620 g/ml
Martindale	≥45,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥4/5
Flame resistance	BS 5852-1:1979
Fabric care instruction	    

Category





Dhogar

(Mohair)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Cotton (back side) 30% Wool 28% Lyocell
Weight	620 g/ml
Martindale	≥45,000
Light fastness	≥5
Fastness to rubbing	Dry ≥4, Wet ≥3
Pilling	≥4/5
Flame resistance	BS 5852-1:1979
Fabric care instruction	    

Category





Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



Divina 3


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

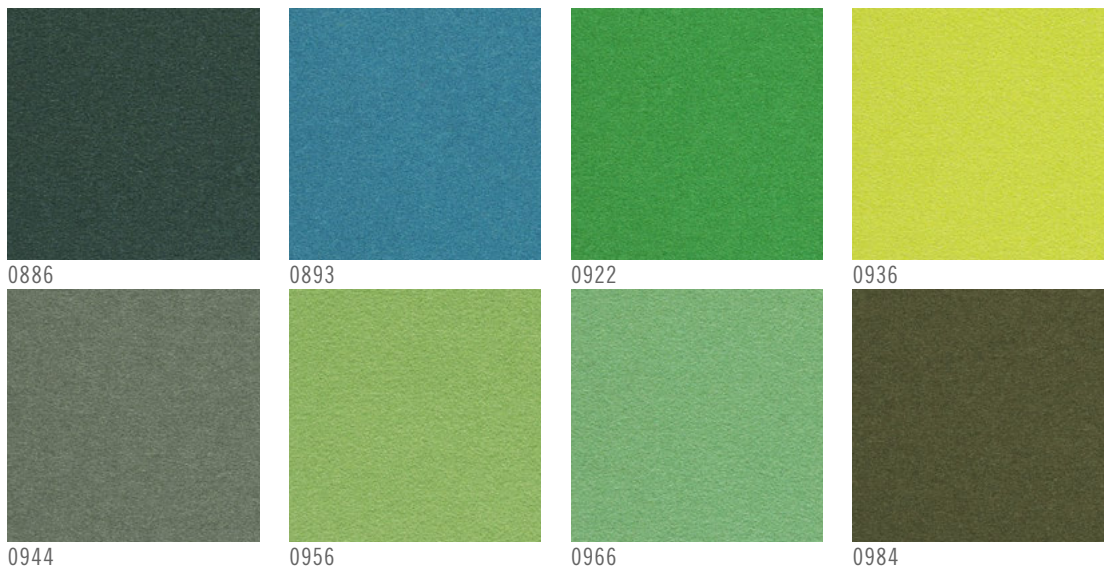

Divina 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 IIM
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



Divina MD


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 11M
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

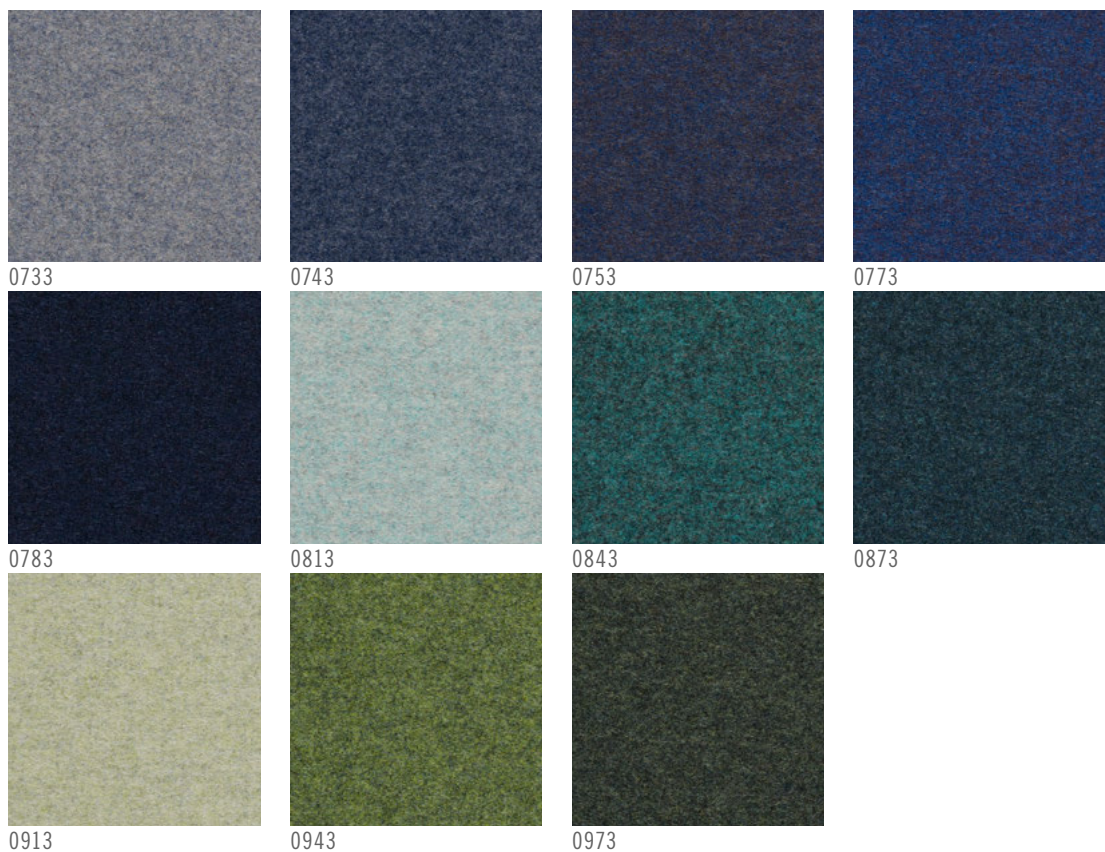

Divina MD

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category





Divina

Melange 3


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category



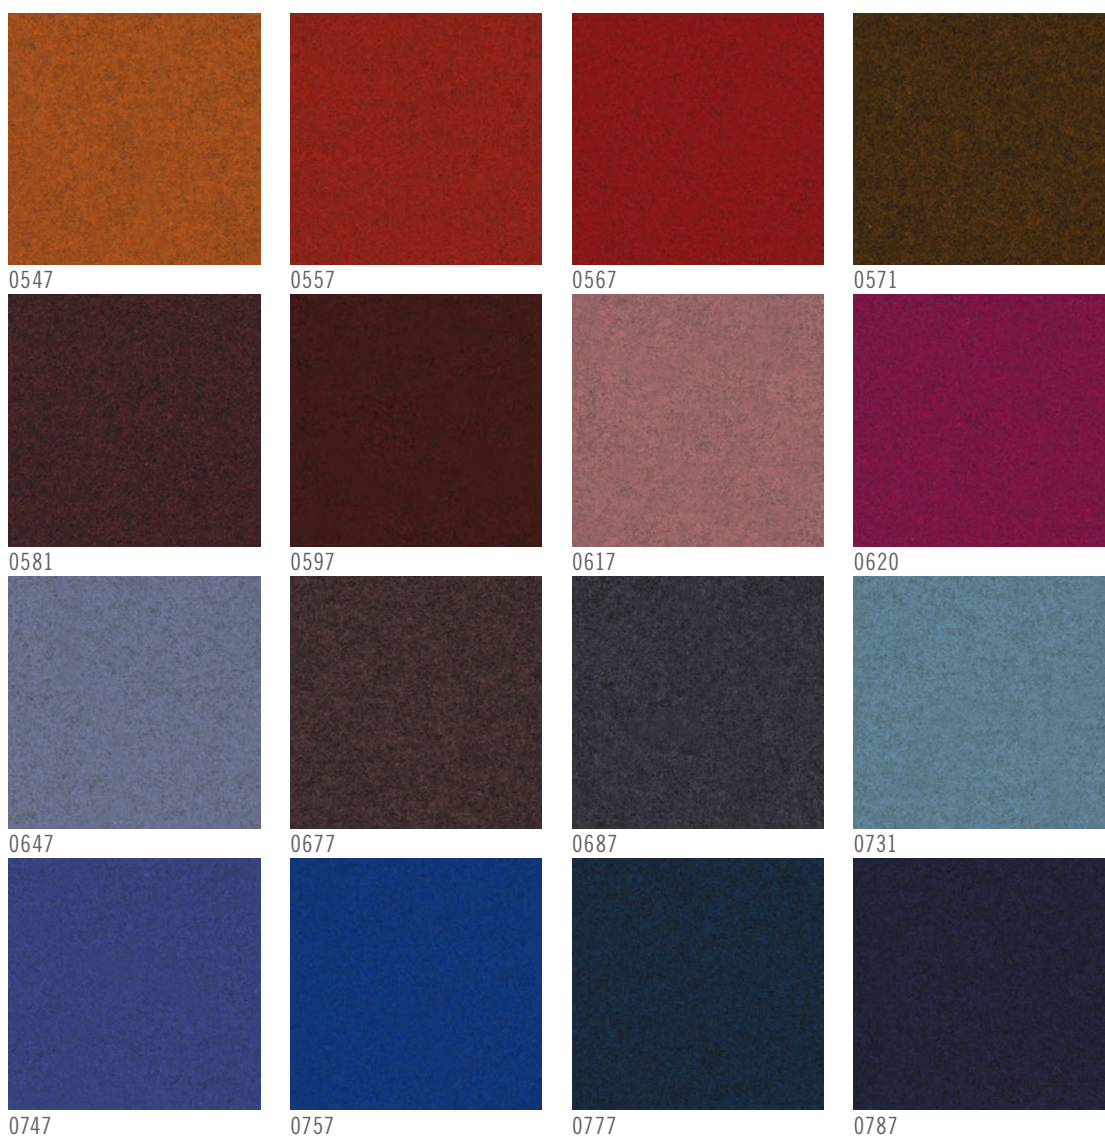

Divina

Melange 3


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    


[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category







0821




0871




0917



0937



0967



0977

Divina Melange 3

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% New Wool
Weight	840 g/ml
Martindale	45,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	AS/NZS 1530.3, BS 5852 Part 1, EN 1021-1/2 CAL-TB 117:2013, NFPA 260, UNI 9175 1IM
Fabric care instruction	    

Category

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



Everest

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	75% Wool 15% Alpaca 10% Polyamid
Weight	525 g/m ²
Martindale	130,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	3/4
Flame resistance	UNI 9175 Class 1IM, CAL-TB 117:2013 BS 5852 Part 0-1(C&M), EN 1021-1&2
Fabric care instruction	    

Category







808/1




808/2



806



812



605

Everest

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	75% Wool 15% Alpaca 10% Polyamid
Weight	525 g/m ²
Martindale	130,000
Light fastness	4/5
Fastness to rubbing	Dry 4/5, Wet 4/5
Pilling	3/4
Flame resistance	UNI 9175 Class 1IM, CAL-TB 117:2013 BS 5852 Part 0-1(C&M), EN 1021-1&2
Fabric care instruction	    

Category





Harald 3

(Velvet)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Cotton
Weight	520 g/ml
Martindale	100,000
Light fastness	4-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4-5
Flame resistance	AS/NZS 1530.3, AS/NZS 3837 class 1 EN 1021-1, CAL-TB 117:2013
Fabric care instruction	    

[Complete specifications at kvaadrat.dk](http://kvaadrat.dk)

Category





Harald 3

(Velvet)

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	100% Cotton
Weight	520 g/ml
Martindale	100,000
Light fastness	4-7
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	4-5
Flame resistance	AS/NZS 1530.3, AS/NZS 3837 class 1 EN 1021-1, CAL-TB 117:2013
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category





Vidar 4

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% New Wool 6% Nylon
Weight	770 g/ml
Martindale	100,000
Light fastness	5-7
Fastness to rubbing	Dry 3-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, UNI 9175 1IM, NF D 60 013
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



Vidar 4


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% New Wool 6% Nylon
Weight	770 g/ml
Martindale	100,000
Light fastness	5-7
Fastness to rubbing	Dry 3-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, UNI 9175 1IM, NF D 60 013
Fabric care instruction	    


[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category







0872




0913




0932




0943




0956




0972



1062



1511



1880

Vidar 4

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	94% New Wool 6% Nylon
Weight	770 g/ml
Martindale	100,000
Light fastness	5-7
Fastness to rubbing	Dry 3-5, Wet 3-5
Pilling	4
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 NFPA 260, UNI 9175 1IM, NF D 60 013
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category



Fabric Category





Comfort+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	    

Category



[Complete specifications at gabriel.dk](https://gabriel.dk)



Comfort+

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	    

[Complete specifications at gabriel.dk](https://gabriel.dk)

Category





Comfort+


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	    

Category



[Complete specifications at gabriel.dk](https://gabriel.dk)

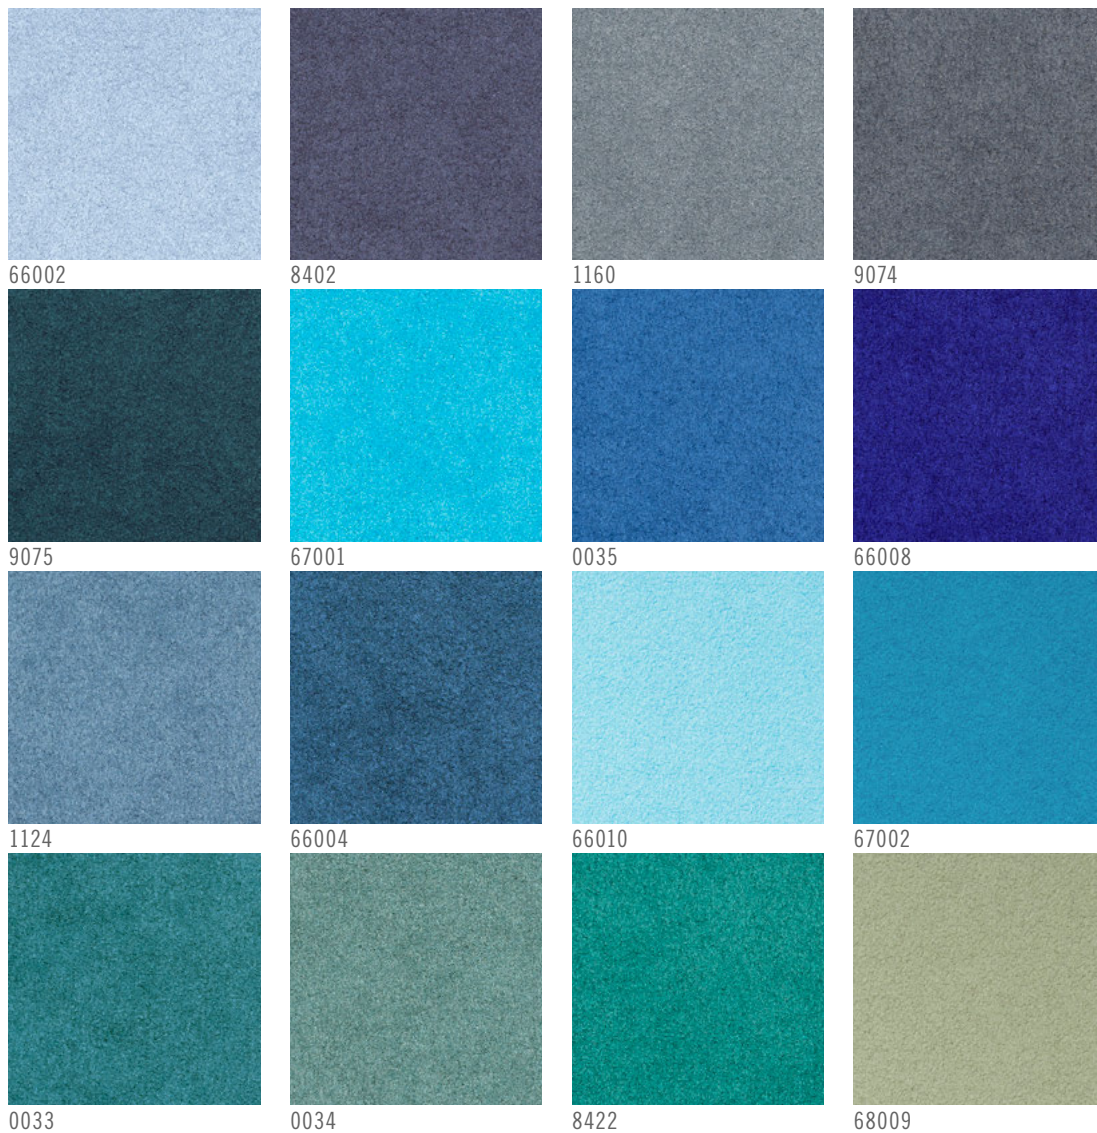

Comfort+


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	    

Category



[Complete specifications at gabriel.dk](https://gabriel.dk)

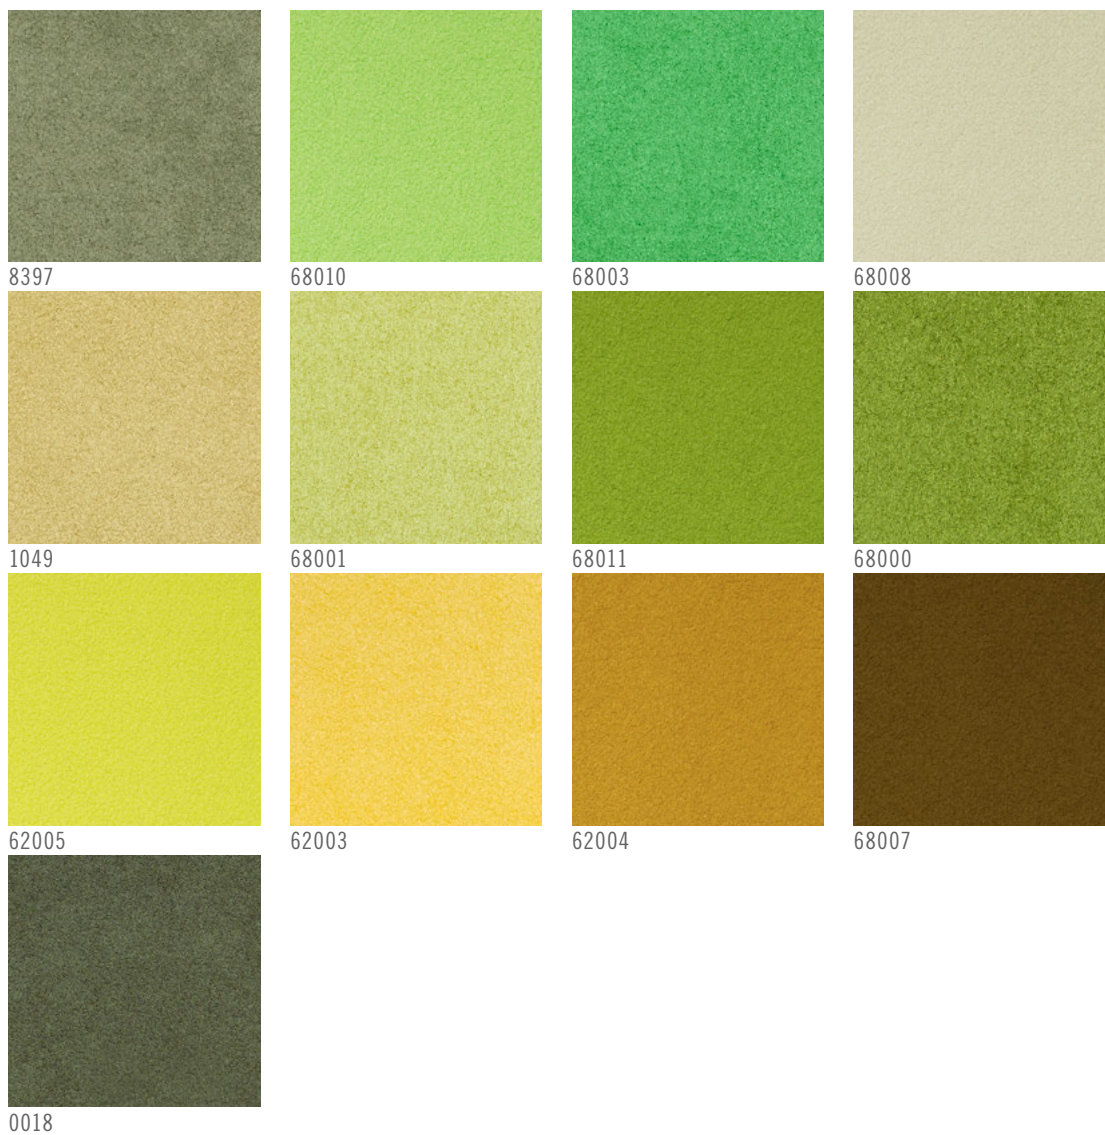

Comfort+


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	88% Polyester 12% Polyurethane
Weight	385 g/ml
Martindale	150,000
Light fastness	5-7
Fastness to rubbing	Dry 4, Wet 4-5
Pilling	5
Flame resistance	Önorm B 3825 B1 3800-Q1 UK, EN 1021 1&2 NFP 92-503:M3, CAL-TB 117:2013
Fabric care instruction	    

[Complete specifications at gabriel.dk](https://gabriel.dk)

Category




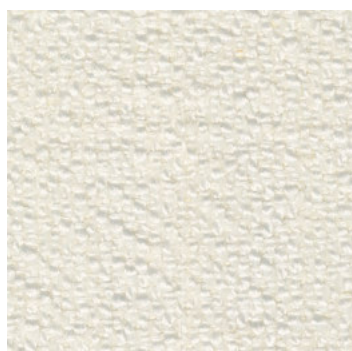

0100



0130

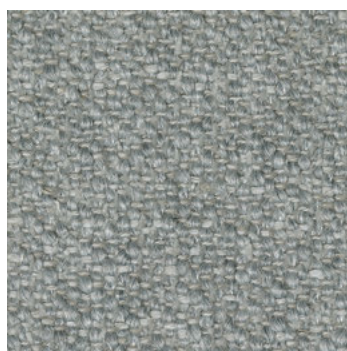

0150




0170




0180



0200

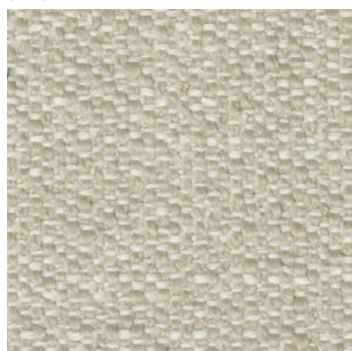

0210

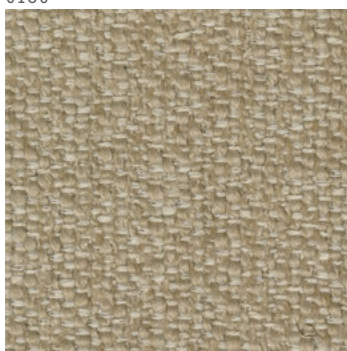

0240



0270

Ecriture

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Polyacrylic 27% Polyester 9% Linen 18% Viscose 6% Cotton
Weight	1035 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-4
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	    


Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)




0380

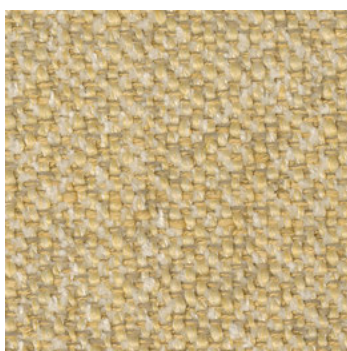


0410




0470

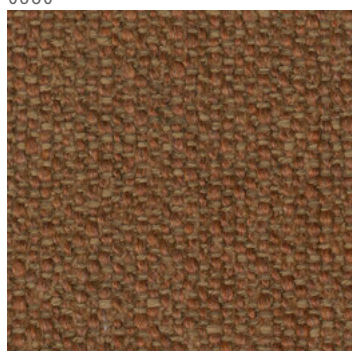


0570

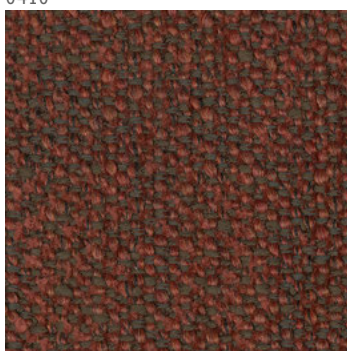


0580

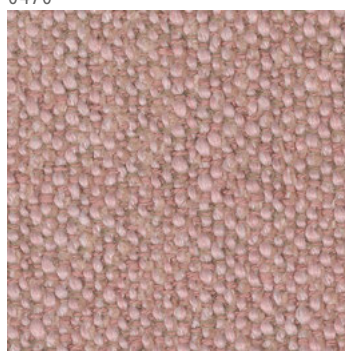


0640

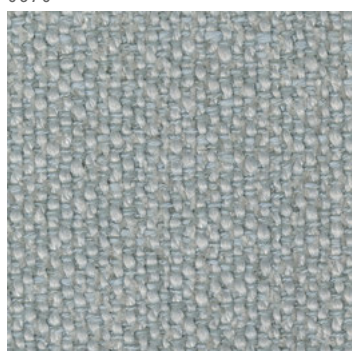

0710

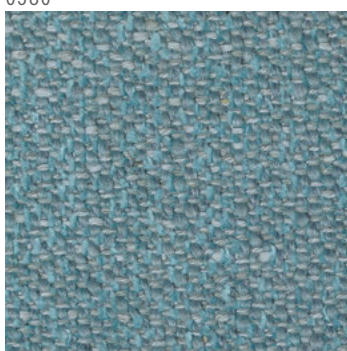

0760

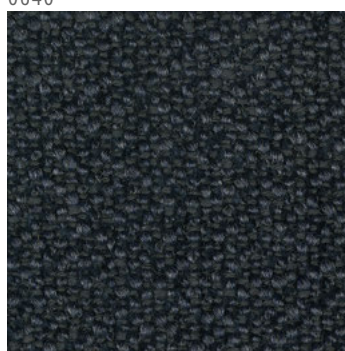

0780

Ecriture

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Polyacrylic 27% Polyester 9% Linen 18% Viscose 6% Cotton
Weight	1035 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-4
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	    


Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)



0910



0970

Ecriture

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	40% Polyacrylic 27% Polyester 9% Linen 18% Viscose 6% Cotton
Weight	1035 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-4
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



0001



0002



0003



0004




0005




0006



0007

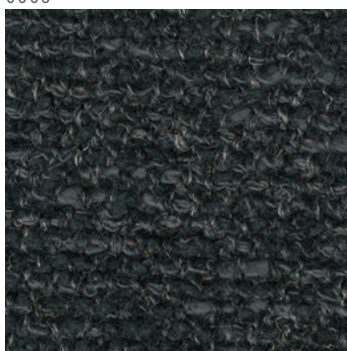

0008

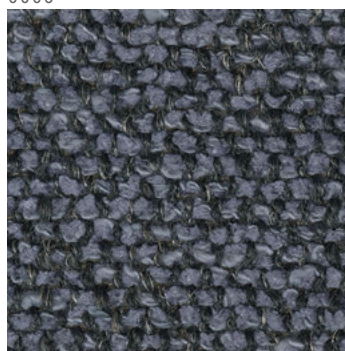

0009

Moss


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	52% Cotton 14% Acrylic 6% Linen 3% Nylon 3% Polyester 2% Viscose
Weight	1030 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	     

Category




[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

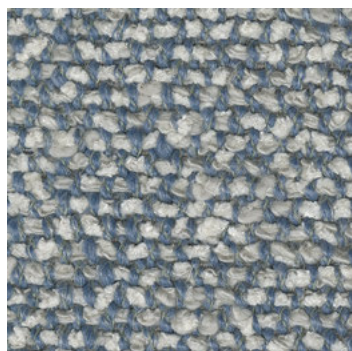


0010



0011

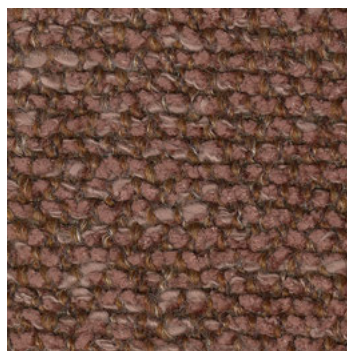

0012

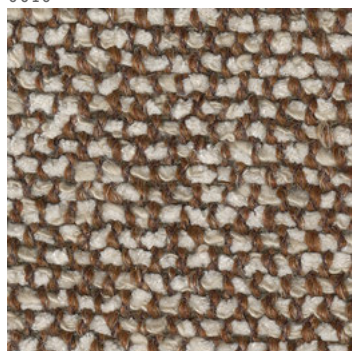

0013



0014




0015



0016



0017

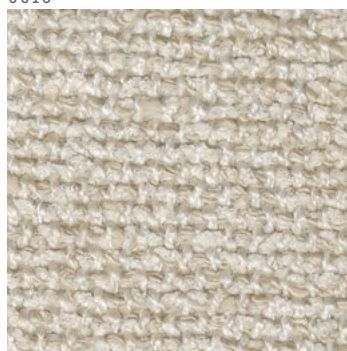

0018

Moss

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	52% Cotton 14% Acrylic 6% Linen 3% Nylon 3% Polyester 2% Viscose
Weight	1030 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)



0019



0020



0021



0022

Moss

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	52% Cotton 14% Acrylic 6% Linen 3% Nylon 3% Polyester 2% Viscose
Weight	1030 g/ml
Martindale	50,000
Light fastness	5-7
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	4-5
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category






0001




0002




0003



0004




0005



0006



0007



0008



0009

Safire

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	43% Viscose 17% Polyacrylic 15% Wool 9% Cotton 8% Linen 8% Polyester
Weight	1010 g/ml
Martindale	40,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	    


Category




[Complete specifications at kvadrat.dk](http://kvadrat.dk)




0010



0011



0012

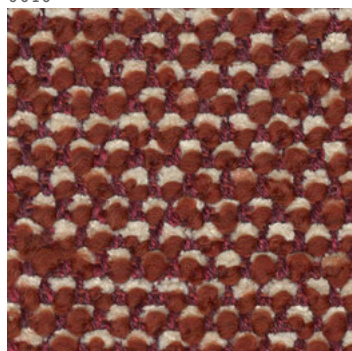


0013



0014



0015

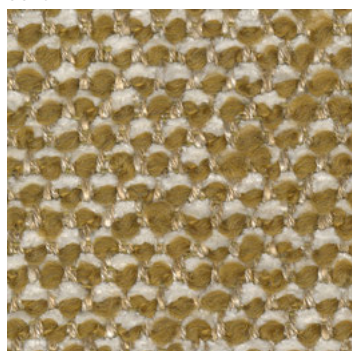

0016



0017

Safire

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	43% Viscose 17% Polyacrylic 15% Wool 9% Cotton 8% Linen 8% Polyester
Weight	1010 g/ml
Martindale	40,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	3
Flame resistance	BS 5852 Part 1, CAL-TB 117:2013, EN 1021-1/2 BS 5852 Crib 5 with treatment
Fabric care instruction	    


[Complete specifications at kvadrat.dk](http://Complete.specifications.at.kvadrat.dk)

Category





0001

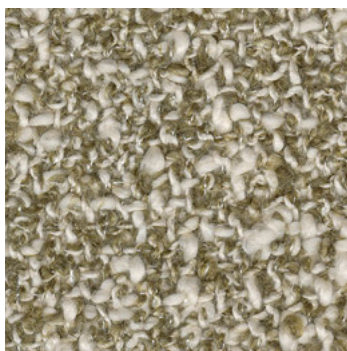

0002



0003




0004



0005




0006

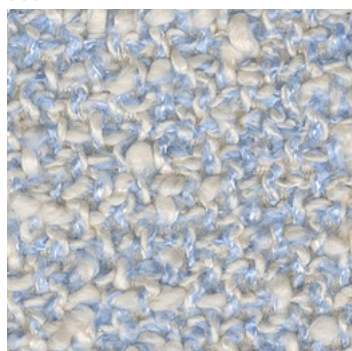

0007



0008

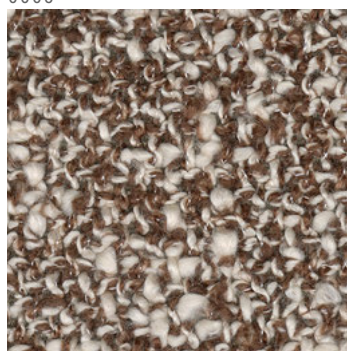

0009

Zero

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	65% Cotton 20% Polyacrylic 15% Polyester
Weight	740 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 Part 1, Crib 5 with treatment CAL-TB 117:2013, EN 1021-1
Fabric care instruction	    

[Complete specifications at kvadrat.dk](http://kvadrat.dk)

Category






0010



0011



0012

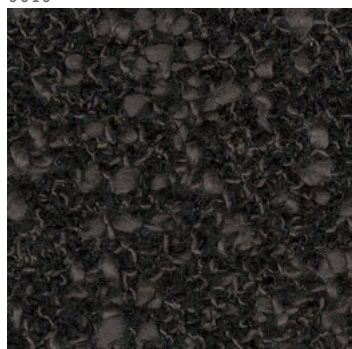

0013



0014



0015



0016

Zero


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	65% Cotton 20% Polyacrylic 15% Polyester
Weight	740 g/ml
Martindale	70,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 Part 1, Crib 5 with treatment CAL-TB 117:2013, EN 1021-1
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](http://kvadrat.dk)

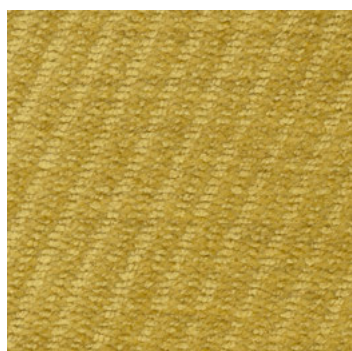


0001




0002




0003

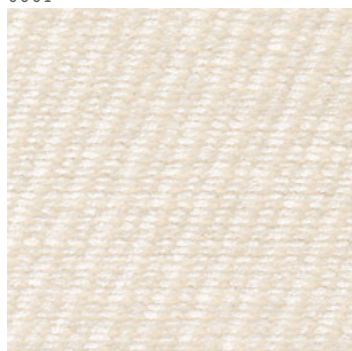


0004

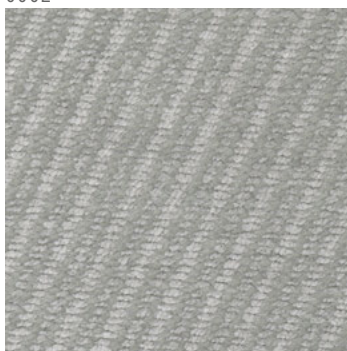


0005

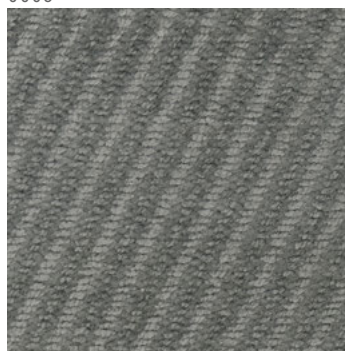

0006

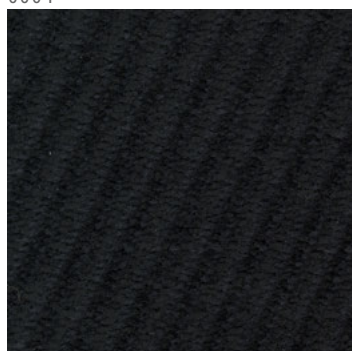

0007

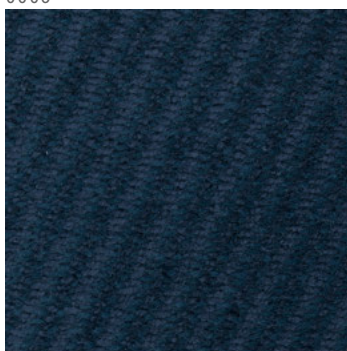

0008



0009

Nabis


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	48% Cotton 30% Viscose 22% polyester
Weight	890 g/ml
Martindale	40,000
Light fastness	6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	5
Flame resistance	BS 5852 Crib 5 with treatment, EN 1021-1/2 CAL-TB 117:2013 with CAL.117 compliant interliner IMO FTP Code 2010 Part 8
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

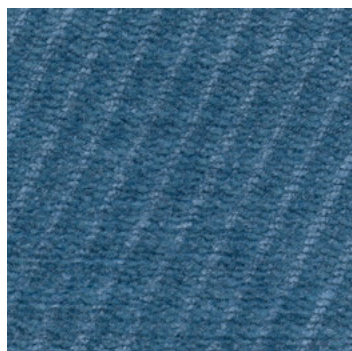


0010




0011



0012

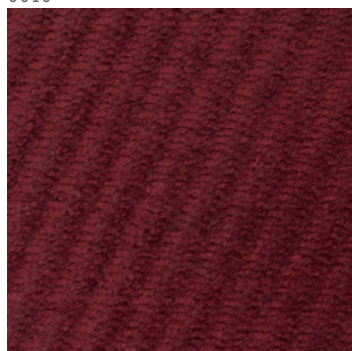


0013

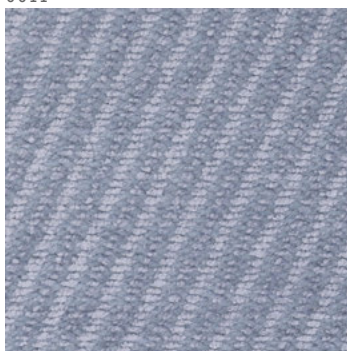


0014



0015

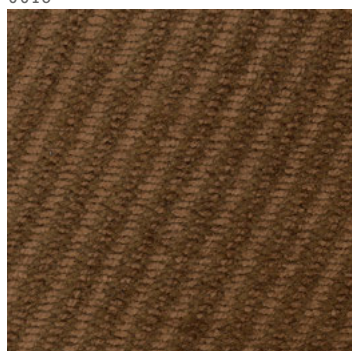

0016

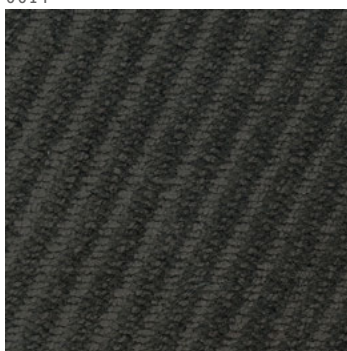

0017



0018

Nabis

TECHNICAL PROPERTIES


PROPERTIES	VALUE
Composition	48% Cotton 30% Viscose 22% polyester
Weight	890 g/ml
Martindale	40,000
Light fastness	6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	5
Flame resistance	BS 5852 Crib 5 with treatment, EN 1021-1/2 CAL-TB 117:2013 with CAL.117 compliant interliner IMO FTP Code 2010 Part 8
Fabric care instruction	    

Category


[Complete specifications at kvadrat.dk](http://kvadrat.dk)



0019



0020



0021



0022



0023

Nabis

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	48% Cotton 30% Viscose 22% polyester
Weight	890 g/ml
Martindale	40,000
Light fastness	6
Fastness to rubbing	Dry 4-5, Wet 3-5
Pilling	5
Flame resistance	BS 5852 Crib 5 with treatment, EN 1021-1/2 CAL-TB 117:2013 with CAL.117 compliant interliner IMO FTP Code 2010 Part 8
Fabric care instruction	    

Category



[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)




0111



0121



0131

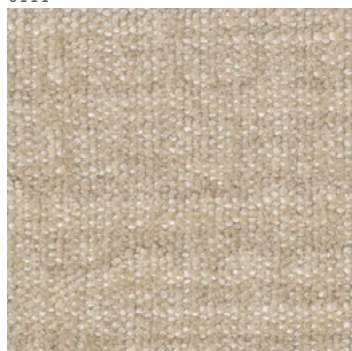

0221



0231




0241



0381



0401

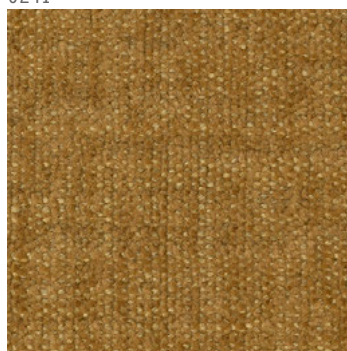

0451

Cifrado

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Recycled Polyester 27% Viscose 24% Recycled Cotton 7% Linen
Weight	1100 g/ml
Martindale	30,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 part 1 ignition source 0, EN 1021-1/2 CAL-TB 117:2013, AS/NZS 3837 Class 2
Fabric care instruction	    

Category


[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)




0611




0671



0741

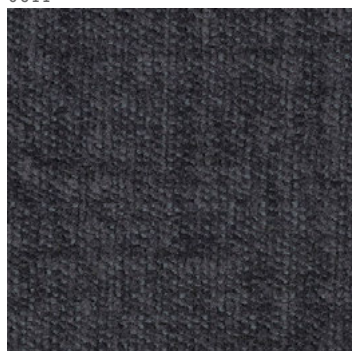

0771

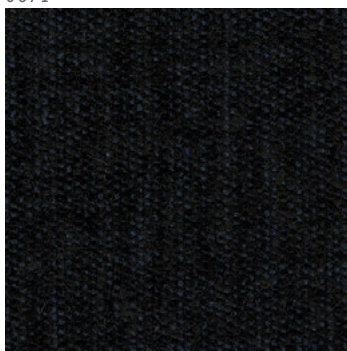

0791



0901

Cifrado

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	42% Recycled Polyester 27% Viscose 24% Recycled Cotton 7% Linen
Weight	1100 g/ml
Martindale	30,000
Light fastness	5-6
Fastness to rubbing	Dry 4-5, Wet 4-5
Pilling	5
Flame resistance	BS 5852 part 1 ignition source 0, EN 1021-1/2 CAL-TB 117:2013, AS/NZS 3837 Class 2
Fabric care instruction	    

[Complete specifications at kvadrat.dk](https://www.kvadrat.dk)

Category



Leather Care

BENSEN works with a selection of beautiful open-grain, full aniline and semi-aniline dyed leathers from Sweden (Elmo Leather) and Italy (Acquario). These are characterized by a buttery soft hand which feels natural and unpainted, as well as by the depth of colour achieved in the through-dyeing process. The leathers are put through a gentle correcting process to help normalize the surface, although discrete insect bites, small scars, and graining variations can be visible which adds to the character and subtle patina of the material. All leather material used comes from cows reared on ethically managed free-range farms in Sweden and Brazil specifically intended for leather production, rather than milk and meat production.

Leather is a living material that matures beautifully if treated properly. You should therefore consider the following:

- Never place leather furniture closer than 20-30cm to a radiator or in direct sunlight.
- Vacuum clean leather often with a soft brush and, when necessary, clean any exposed surfaces, such as armrests and headrests. For stains that are water-soluble, dampen the area and dry using a paper towel.
- If you should get a stain that cannot be removed, never experiment with strong solvents or chemicals. The problem could get worse, needing to be repaired. Instead, seek advice from a professional upholstery cleaning service.
- Water-based leather cleaning and protective products are available at specialty stores which can improve the longevity of leather. Always avoid using solvent based products for cleaning leather.

Shearling (Sheepskin) Care

With appropriate maintenance and cleaning, a sheepskin product can remain for a lifetime. Refer to the following instructions for care and maintenance:

- Avoid prolonged to direct sunlight.
- Regularly vacuum and air clean the sheepskin.
- Address stains promptly by soaking spots with water then utilize a dry cloth to apply pressure and remove any excess moisture.
- When cleaning, use a sponge, lukewarm water, and mild wool detergent.

Fabric Care

BENSEN offers a beautiful collection of different fabrics, each available in numerous colourways and luxuriously soft to touch. These are sourced directly from some of the best and oldest fabric producers in Italy and Denmark. Our fabrics are produced almost exclusively with natural fibres (Cotton, Viscose, and Wool in various proportions), that are yarn-dyed before weaving to achieve the most consistent and vivid colours.

The most common method of cleaning is Dry Cleaning. Dry Cleaning should be done at the lowest possible temperature. The dry clean process can apply any mild solvent except trichloroethylene and should not involve any oxidizing agents. After washing, use an iron on the lowest possible setting to remove any wrinkles, or a clothing steamer once the covers are fitted.

Note: It is advised to apply lengths of Velcro strip to the Velcro tabs before Dry Cleaning to avoid the possibility of the Velcro sticking to the fabric during cleaning or drying and subsequently damaging it.

For more involved cleaning, we recommend using a professional upholstery cleaning service only. They generally come on site, clean the covers while still on the sofa using a steam cleaner and specialized detergents, and guarantee the work they do.

Fabric Care Symbol Guide

Washing

-  Do Not Wash
-  Hand Wash
-  Machine Wash, Cold

Ironing

-  Do not iron
-  Ironing, Low temp
-  Ironing, Medium temp

Bleaching

-  Do not bleach
-  Do not bleach
-  Non-Chlorine Bleach

Dry/Wet Cleaning

-  Do not dry clean
-  Dry Clean, Petroleum only, Delicate
-  Dry Clean, PCE only
-  Dry Clean, PCE only, Delicate
-  Wet Clean
-  Wet Clean, Delicate

Drying

-  Do not Spin
-  Do not tumble dry
-  Natural Drying, Dry Flat
-  Natural Drying, Drip Dry

**BEN
SEN**

bensen.com



Arco

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	980 g/ml
Martindale	70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  

[Complete specifications at rohi.com](https://www.rohi.com)

Category





Arco


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	980 g/ml
Martindale	70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Cherry




Circus




Garden




Forest




Pond




Aqua



Jade




Secret




Espresso



Truffle



Nube



Coffee

Arco

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	980 g/ml
Wartindale	70,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category






Snow



Angora




Moon




Stone




Cocos



Kies



Paradise




Cacao




Plaza



Santos




Flamingo




Prime




Lagoon



Pear



Delphi



Pepper

Novum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	96% Virgin Wool 4% Polyamide
Weight	990 g/ml
Martindale	90,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category






Ebony



Lanoso




Carbon




Azur




Blues




Samoa




Lord




Pinie



Rosewood




Seed




Moos




Tivoli




Amur



Prisma



Mambo



Prune

Novum

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	96% Virgin Wool 4% Polyamide
Weight	990 g/ml
Martindale	90,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Viola




Magenta




Heart




Sunset




Terra



Litchi



Curry



Coral

Novum


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	96% Virgin Wool - 4% Polyamide
Weight	990 g/ml
Martindale	90,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Guave




Clementine




Indio




Aloe




Smaragd




Delphi




Brick




Bleu




Lake




Navy




Delft




Jade




Sorbet



Aureo



Kristall



Macadamia

Opera

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	96% Virgin Wool 4% Polyamide
Weight	1010 g/ml
Martindale	90,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Calla




Mirror




Flanell




Fango




Maple




Taupe




Anthrazit



Kies




Prime




Ebony



Rosewood



Carbon



Pepper

Opera


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	96% Virgin Wool 4% Polyamide
Weight	1010 g/ml
Martindale	90,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, UNI 9175 1IM BS 5852 Part 1:1979, IMO 2014/90/EU MED
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category



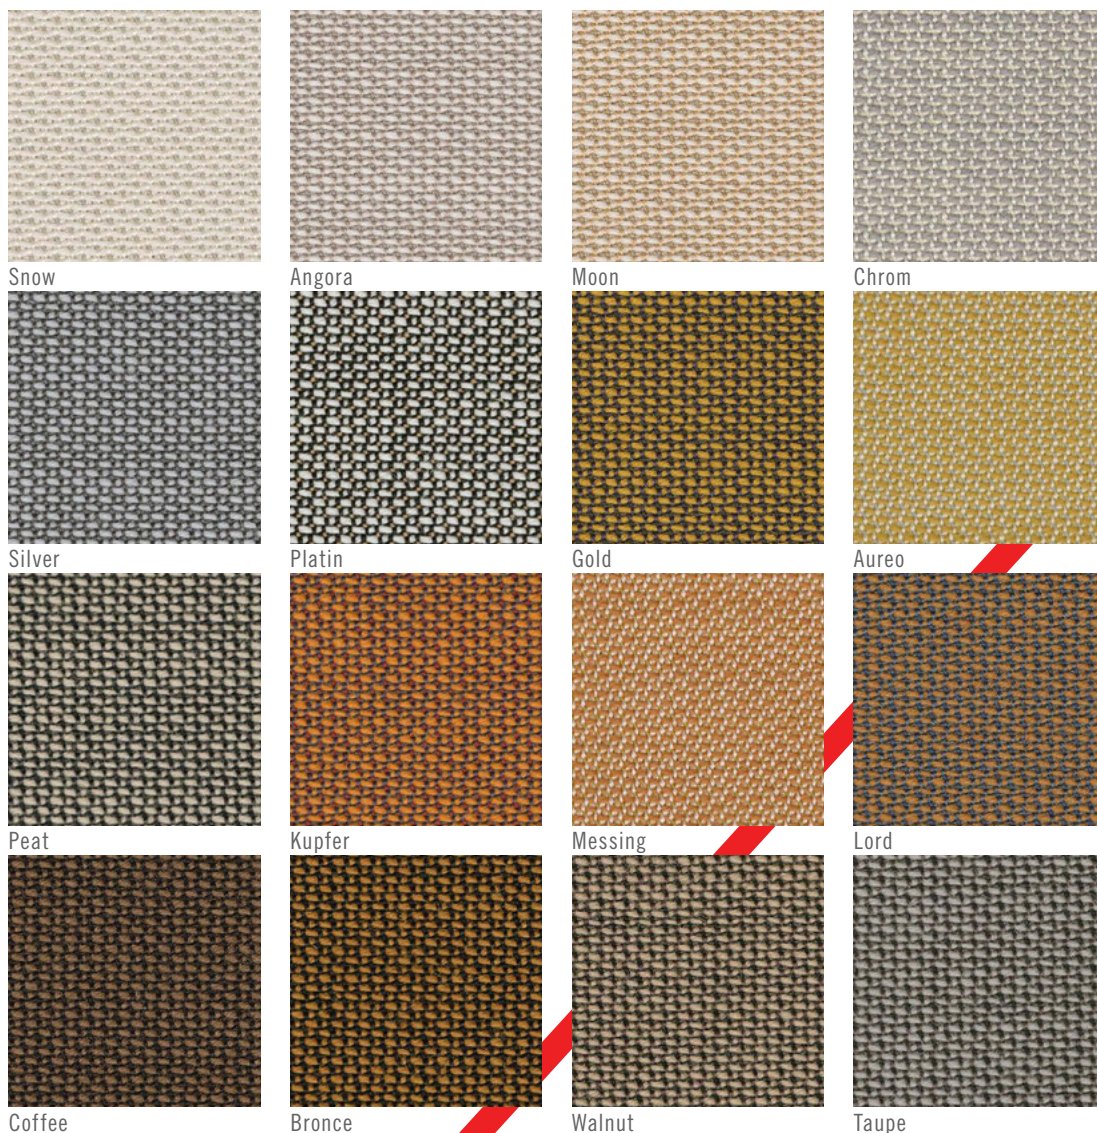

Topia


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	50,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Fabric care instruction	  

[Complete specifications at rohi.com](https://rohi.com)

Category



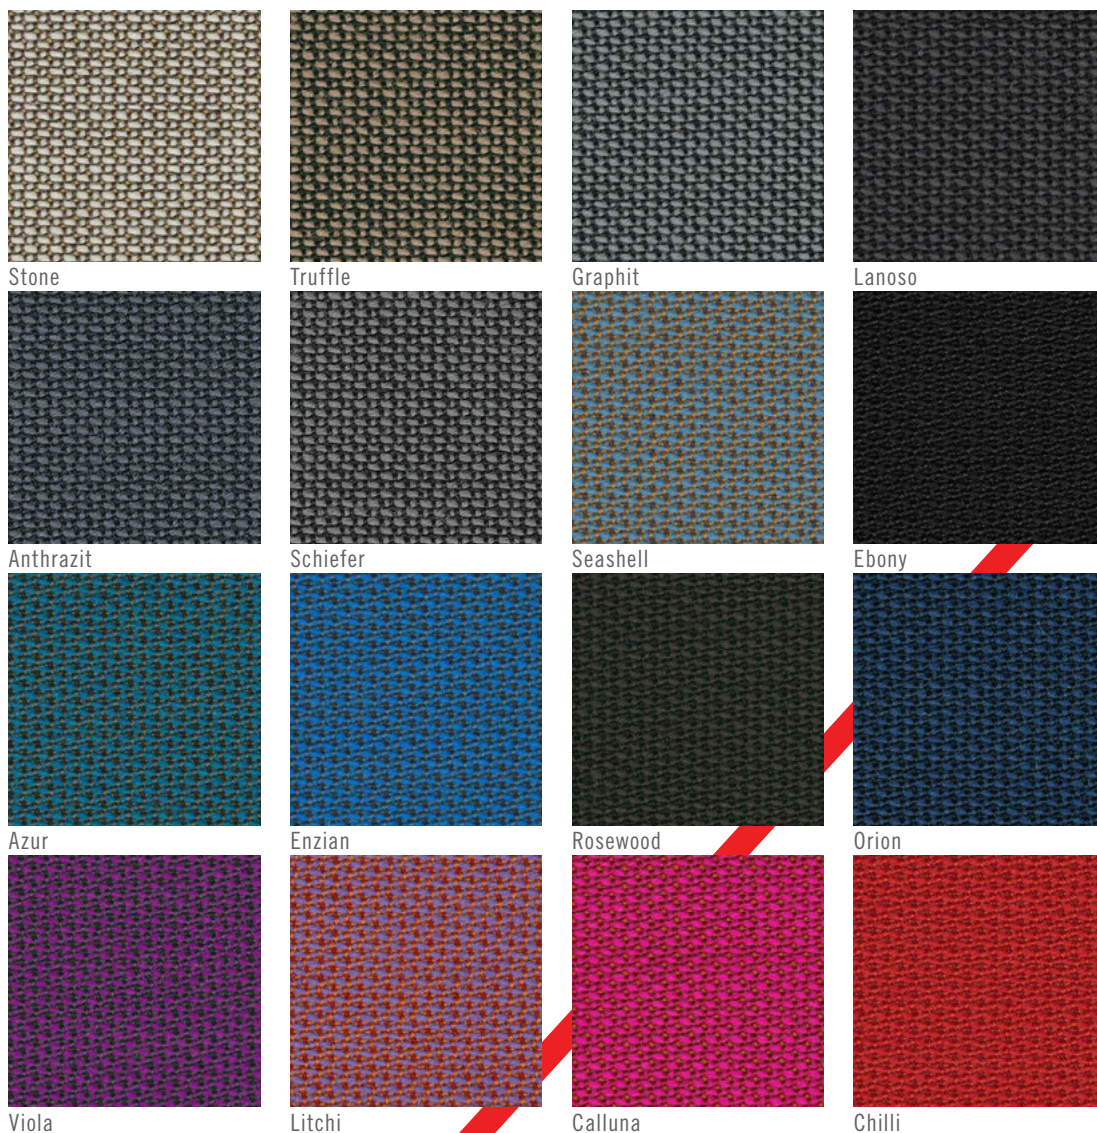

Topia


TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	50,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 11M, BS 5852 Part 1:1979
Fabric care instruction	  


[Complete specifications at rohi.com](https://rohi.com)

Category







Heart




Coral




Jelly




Tivoli




Curry



Pinie



Tropic



Palm

Topia

TECHNICAL PROPERTIES

PROPERTIES	VALUE
Composition	95% Virgin Wool 5% Polyamide
Weight	660 g/ml
Martindale	50,000
Light fastness	≥5
Pilling	≥4-5
Flame resistance	EN 1021-1/2, CAL-TB 117:2013, ÖNORM B1/Q1 UNI 9175 1IM, BS 5852 Part 1:1979
Care instruction	  

Category



[Complete specifications at rohi.com](https://www.rohi.com)