


PH 3-2½ Wall

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades have a matte white painted interior surface, diffusing the light in a comfortable way.

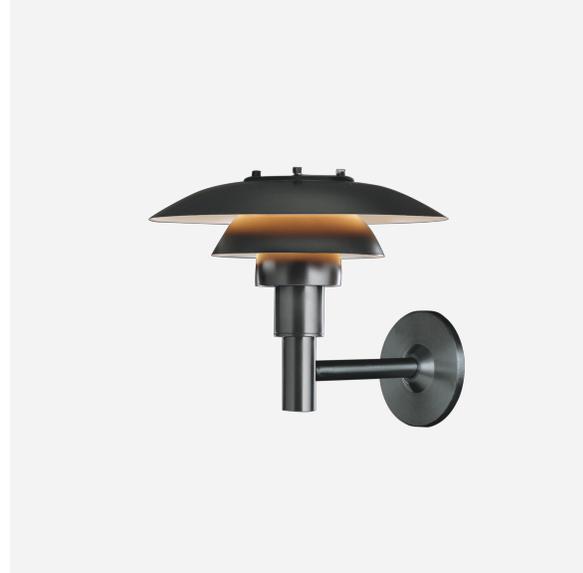

Product info

Information

Electrical: System Wattage: 15 W Delivered lumens: 720 lm Efficacy: 48.0 lm/W Certifications: cULus, Wet Location Protection class IP44 BUG Rating: B0-U3-G1 Controllability: Phase dimming Min.-Max. Ambient Temp: -20°C to +40°C Actual performance dependent upon screw-base lamp used.

Mounting

Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Finish

Black, powder coated.

Materials

Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Die formed glass. Mounting plate: Die cast aluminum. Mounting plate cover: Spun aluminum. Arm: Stainless steel.

Sizes and weight

Width x Height x Length (in.) | 11.1 x 10.9 x 12.1 Max 4.7 lbs

Compliance

cULus, Wet location.

Light source

1x15W A-19/medium

Information

Electrical:

System Wattage: 15 W

Delivered lumens: 720 lm

Efficacy: 48.0 lm/W

Certifications:

cULus, Wet Location

Protection class IP44

BUG Rating: B0-U3-G1

Controllability: Phase dimming

Min.-Max. Ambient Temp: -20°C to +40°C

Actual performance dependent upon screw-base lamp used.



Product family



PH 3-2½ Bollard

Product variants

Light source

1x15W A-19/medium

Voltage frequency

120V

Product description

The fixture is designed based on Poul Henningsen's renown three shade reflector system, which has no glare and provides a gentle illumination of the shade, while directing a majority of the light downward. The black shades have a matte white interior surface to efficiently reflect and diffuse the light.

Mounting

Surface: Arm mounted directly to the wall with a 5.9" diameter plate, centered over junction box. The three 0.37 inch mounting holes are arranged in a 5.2 inch diameter at 120 degrees. Mounting hardware by others.

Light description

The luminaire emits symmetrical glare-free light directed downwards and outwards, from a screw-base lamp (by others). The shades have a matte white painted interior surface, diffusing the light in a comfortable way. Form of the luminaire can be appreciated illuminated at night as well as during the daylight.

Design

Poul Henningsen

Material

Shades: Spun stainless steel, 0.04" thick. Arm: extruded stainless steel, 0.06" thick. Lamp enclosure: Die formed clear glass, 0.2" thick. Mounting plate: Die cast aluminum, 0.24" thick. Mounting plate cover: Spun aluminum, 0.04" thick.

Standard finish is matte, smooth surface powder coat with minimum 2 mils thickness in black.

Weight

4.674

Other functions

Custom finishes. Custom wall brackets.
