



QUIET CUBE SPECIFICATIONS

Manufactured by Industrial Vacuum Equipment Corporation.

- **SKID MOUNTED**
4" x 8" rectangular tube frame, fork pockets, and certified lifting cage.
- **POWER SOURCE**
250 HP electric motor, 460 volt, 3-phase, hostile duty (Full Load amps 282, no load 86)
- **SOUND ATTENUATION PACKAGE**
Inlet and discharge silencers with sound attenuation enclosure.
- **VACUUM AIR FLOW (blower)**
Positive displacement 5600 CFM capable of 28" Hg, 5 belt driven, with guard
- **FILTRATION SYSTEM**
Cyclonic separation. Baghouse - Teflon coated, quick change filter bags with continuous reverse pulse air cleaning. Dual high efficiency blower safety filters.
- **INSTRUMENT PANEL (NEMA 4)**
Soft start package, push button on/off switch with indicator light, disconnect lever, air pulse on/off switch, material dump on/off switch.

STANDARD EQUIPMENT

- Paint-one color (custom lettering available)
- Wet or dry operation
- Automatic cone vibrator
- Emergency stop button
- 10" inspection manhole
- One year warranty

OPTIONS

- Manual discharge valve
- Auger in hopper (cone)
- Hydraulics (lift cylinder)
- HEPA filtration
- Tool box
- Air compressor - 120 PSI
- Trailer mounted to DOT standards
- 300 HP electric motor

Distributed By:



2717 Tobey • Indianapolis, IN 46219

(317) 545-0665 • FAX (317) 545-0670 • (800) 800-0665

www.idsblast.com



Dimensional Drawing On Reverse Side




INDUSTRIAL VACUUM



Quiet Cube 250


The Strong Silent Type.

Raised Height - 183"

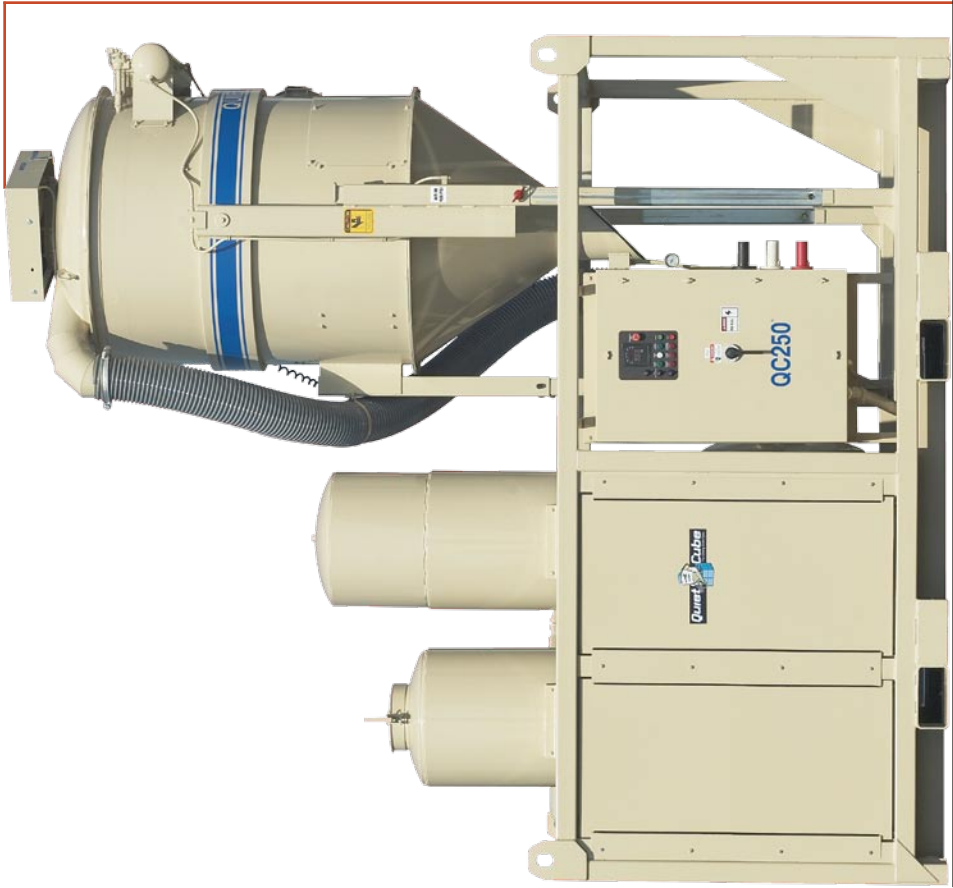

Weight - 16,000 lbs.

Stowed Height - 126"

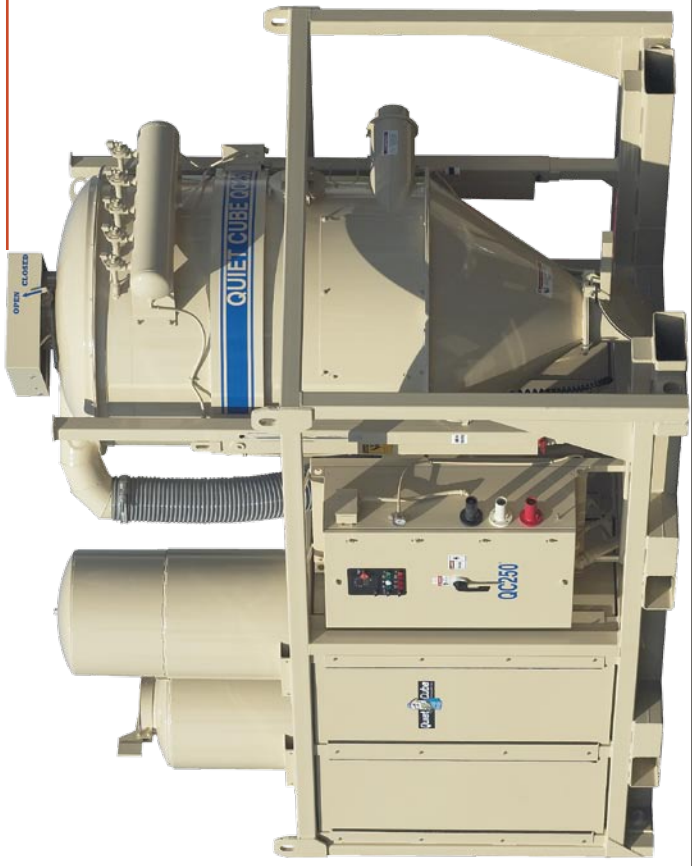

Length - 162"

Width - 100"