

QUIET CUBE SPECIFICATIONS

- **SKID MOUNTED**
4" X 8" rectangular tube frame, fork pockets, and certified lifting cage.
- **POWER SOURCE**
150 HP electric motor, 460 volt, 3-phase, hostile duty (Full Load amps 163, no load 48.8)
- **SOUND ATTENUATION PACKAGE**
Dual inlet and discharge silencers with sound attenuation enclosure.
- **VACUUM AIR FLOW (blower)**
Roots Dresser 2350 CFM capable of 27" Hg, 5 belt driven, with guard
- **FILTRATION SYSTEM**
Cyclonic separation. Baghouse - 37 Teflon coated, quick change filter bags with continuous reverse pulse air cleaning. High efficiency blower safety filter.
- **INSTRUMENT PANEL (NEMA 4)**
Soft start package, push button on/off switch with indicator light, disconnect lever, air pulse on/off switch, material dump on/off switch.

STANDARD EQUIPMENT

- Paint-one color (custom lettering available)
- Wet or dry operation
- Automatic cone vibrator
- Emergency stop button
- 10" inspection manhole

OPTIONS

- Slide gate discharge
- 16" manhole on baghouse
- Auger in hopper (cone)
- Hydraulics (lift cylinder)
- HEPA filtration
- Tool box
- Air compressor - 120 PSI
- Trailer mounted to DOT standards

Distributed By:





2717 Tobey • Indianapolis, IN 46219
(317) 545-0665 • FAX (317) 545-0670 • (800) 800-0665
www.idsblast.com



Dimensional Drawing On Reverse Side




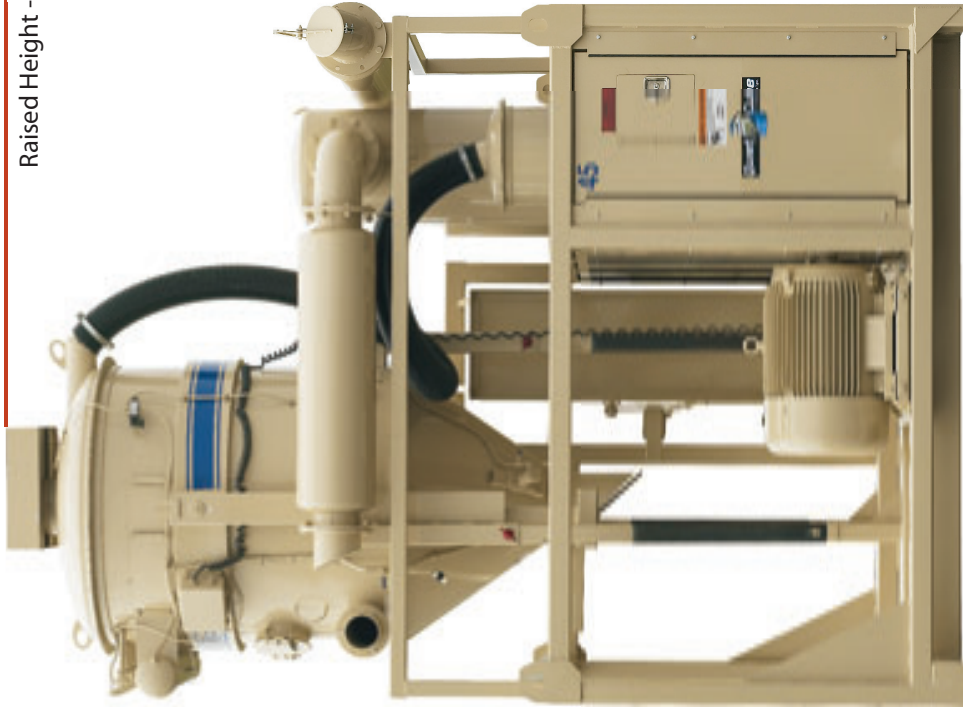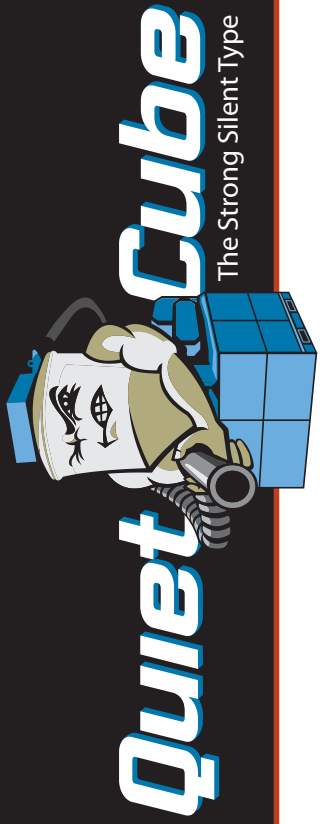

Raised Height - 183"

Length - 126"

Weight - 9500 lbs.

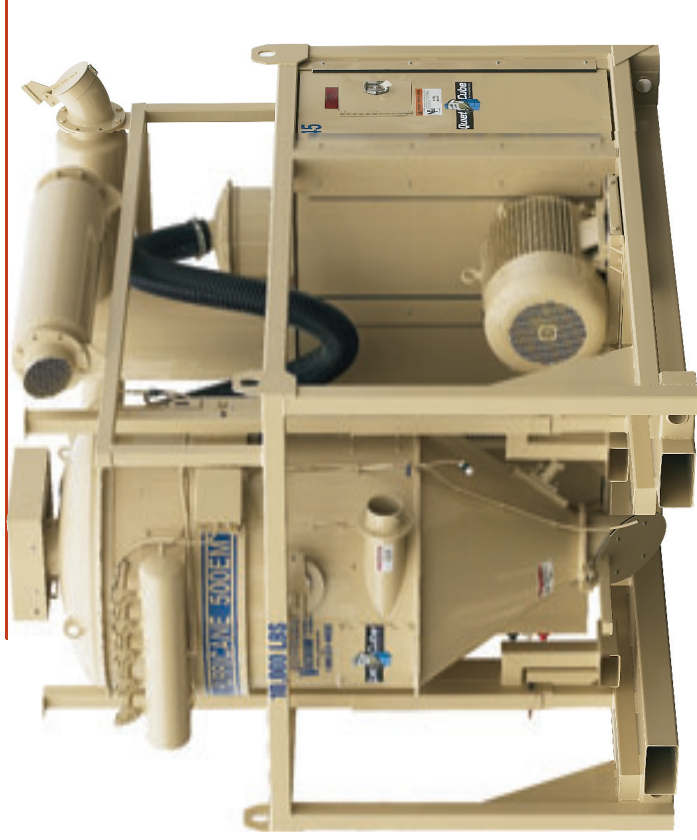

Stowed Height - 126"

Width - 100"