
WILLIAMS

WORK TOOLS

WEIIIM.





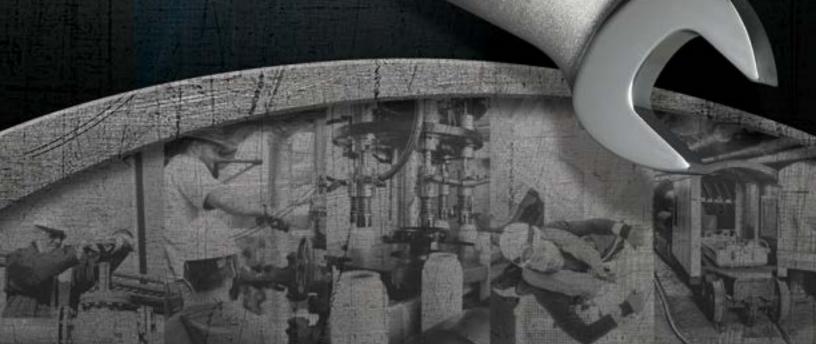

INNOVATING FOR 140 YEARS

Williams has made strong, trusted tools for Industrial professionals since 1882. Due to their precise manufacturing process, Williams' products were used in the countless industrial shops of 19th century America.

From innovative products that helped make us famous, like Superrench®, Supersocket™, and Supertorque™ we're carrying on the tradition of forging top-quality tools that hard-working people depend on.

Today with world-class factories across the United States, Williams' heritage of high-quality, industrial-focused tools continues to deliver a brand of tools that is ready to work.

EXPERIENCE MATTERS

At Williams, we believe selling a product is more than an exchange of tools. When you work with Williams, you work with industrial tool professionals whose experience in the field and the factory help you make smart decisions for your business.

With demanding timelines, unusually tough conditions and many other obstacles businesses face today, it is important to partner with a company that understands your challenges.

Williams and our distributors are here to help you find the right solutions for your individual business. Williams has a network of professionals with knowledge you can count on.



TRUSTED. STRONG. VALUED.



BUILT FOR INDUSTRIAL APPLICATIONS

Our growing assortment includes tools that are engineered to withstand demanding needs of industrial environments. Where the hard work is done, and steel strength is essential.

Williams' special blend of steel allows for a higher heat treat than average steel. This means each tool gets just the right hardness, toughness and strength for industrial applications.

And we know how to make great tools. Williams tools keep factories running safely and efficiently. They build and maintain ships. They keep power generation plants and oil production flowing and so much more. With 8,000+ tools in our portfolio, you will find the right tools to get the job done.

UNDERSTANDING WORK

With almost 140 years of experience, people trust Williams to design and manufacture tools that are safe, strong and reliable.

We know that keeping your people safe is the top priority. That's why we offer not just the safest products in the business, but the training and instruction on how to use them properly.

Our training programs help tool users learn about dangers involving misused, modified, and poorly maintained tools and how to determine the right tool for any and every job. In addition, we teach importance of ergonomics, tethered tools, proper calibration and more.





OUTIER ENCE

MASTER SETS

TOOL STORAGE

TORQUE TOOLS

TOOLS@HEIGHT

WRENCHES

SOCKETS AND DRIVE TOOLS

SCREWDRIVERS

PLIERS, CLAMPS AND PIPE TOOLS

HAMMERS, PUNCHES, CHISELS AND PRYBARS

INDUSTRIAL HYDRAULICS

TOOLS FOR THE TRADES

INSULATED TOOLS

CONVERSION CHART / SAFETY ICONS

INDEX





SETS DEVELOPED WORKING SIDE BY SIDE WITH INDUSTRY PROFESSIONALS

 Whatever the industry, Williams[®] Master Tool Sets will keep your equipment and assets working at peak performance

 Sets available in various formats and sizes to meet the specific needs of your application

- Electrical Maintenance Sets
- General Maintenance Sets
- Heavy Duty Maintenance Sets



MASTER SETS





TOOLS@HEIGHT MASTER MAINTENANCE TOOL SET

Contains the following tools:

| • | |
|---------------------------------------|--|
| Product Category | Product Category |
| Adjustable & Miscellaneous Wrenches | Miscellaneous Tools |
| Combination, Box, & Open End Wrenches | Pliers |
| Hammers | Pry Bars, Punches & Chisels |
| Hand Sockets, Ratchets, & Accessories | Screwdrivers & Nut drivers |
| Hex Keys & Sockets | Tool Storage |
| Impact Sockets & Accessories | Tools@Height Tethers, Lanyards,& Specialties |

Set Configurations Available


| Product Code | Description |
|--------------|---|
| JHWSC409THTB | Complete Tools@Height Master Maintenance Tool Set With Tool Boxes |
| JHWWSC409TH | Complete Tools@Height Master Maintenance Tool Set Only |

Tool Boxes Included

| Product Code | Description |
|--------------|---|
| JHWW40TC4 | 40" Wide x 20" Deep 4 Drawer Top Chest |
| JHWW40RC7 | 40" Wide x 20" Deep 7 Drawer Tool Cabinet |

- The Tools@Height Master Maintenance set provides a great assortment of tools for all types of maintenance
- · All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- · Productivity and safety right out of the box
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost production time
- · High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- Set is available with foamed tool control drawers on a special order basis
- Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt such as the Comfort and Utility belts on page 96



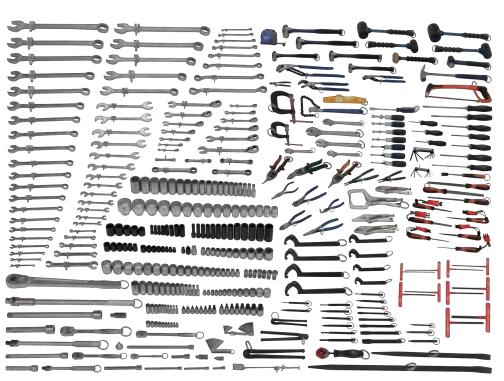





















TOOLS@HEIGHT INTERMEDIATE MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|---------------------------------------|--|
| Adjustable & Miscellaneous Wrenches | Miscellaneous Tools |
| Combination, Box, & Open End Wrenches | Pliers |
| Hammers | Pry Bars, Punches & Chisels |
| Hand Sockets, Ratchets, & Accessories | Screwdrivers & Nut drivers |
| Hex Keys & Sockets | Tool Storage |
| Impact Sockets & Accessories | Tools@Height Tethers, Lanyards & Specialties |

Set Configurations Available

| Product Code Description | |
|--------------------------|---|
| JHWSC225THTB | Complete Tools@Height Intermediate Tool Set With Tool Boxes |
| JHWWSC225TH | Complete Tools@Height Intermediate Tool Set Only |

Tool Boxes Included

| Product Code | Description |
|--------------|---|
| JHWW26TC4 | 26" Wide x 20" Deep 4 Drawer Top Chest |
| JHWW26RC7 | 26" Wide x 20" Deep 7 Drawer Tool Cabinet |

- The Tools@Height Intermediate Maintenance set provides a full complement of tools
- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- Productivity and safety right out of the box
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost production time
- High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- Set is available with foamed tool control drawers on a special order basis
- Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt such as the Comfort and Utility belts on page 96





JHWWSC225TH



TOOLS@HEIGHT GENERAL MAINTENANCE SERVICE SET

Contains the following tools:

Product Category Product Category Pliers Pry Bars, Punches & Chisels Adjustable & Miscellaneous Wrenches Combination, Box, & Open End Wrenches Screwdrivers & Nut drivers Hand Sockets, Ratchets, & Accessories Tool Storage Tools@Height Tethers, Lanyards,& Specialties Hex Keys & Sockets Miscellaneous Tools

Set Configurations Available

| Product Code | Description | |
|--------------|---|--|
| JHWWSC116TH | Complete Tools@Height General Service Tool Set Only | |

Tool Boxes Included

| Product Code | Description |
|--------------|----------------------------------|
| JHW50950B | 32" Wide x 19" Deep Job Site Box |

- The Tools@Height General Maintenance Service set provides a solid complement of tools
- · All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- · Productivity and Safety right out of the box
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost production time
- · High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- . Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- . Set is available with foamed tool control drawers on a special order basis
- Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt such as the Comfort and Utility belts on page 96





















TOOLS@HEIGHT BASIC MAINTENANCE SERVICE SET

| Conf | laine | the | follo | wing | too | le |
|-------|--------|------|-------|-------|------|----|
| CUIII | Lallis | HILE | IUIIU | willy | LUUI | ıə |

| • | |
|---------------------------------------|--|
| Product Category | Product Category |
| Adjustable & Miscellaneous Wrenches | Miscellaneous Tools |
| Combination, Box, & Open End Wrenches | Pliers |
| Hammers | Pry Bars, Punches & Chisels |
| Hand Sockets, Ratchets, & Accessories | Screwdrivers & Nut drivers |
| Hex Keys & Sockets | Tools@Height Tethers, Lanyards,& Specialties |

Set Configurations Available

| Product Code | Description |
|--------------|---|
| JHWWSC-72-TH | Complete Tools@Height Basic Maintenance Tool Set in Safe Bucket |

- Furnished in Safe Bucket for easy portability
- Safety right out of the box
- The Tools@Height Basic Maintenance set provides a good start to a Tools@Height tool program
- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost production time
- High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- Williams' Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt
- An assortment of Comfort and Utility belts can be found on page 96
- The full assortment of Tools@Height lanyards, tethers, and other accessories is on pages 91 through 97





TOOL@HEIGHT STARTER PLUS SET

Contains the following tools:

Product Category Adjustable Wrenches **Combination Wrenches** File

Hammer

Hand Sockets, Ratchets & Accessories

Pick up Tool

Pliers

Screwdriver

Tape Measure

Tools@Height Tethers, Lanyards & Specialties

Grand Total

Set Configurations Available

| Product Code | Description |
|--------------|--|
| WSC-45-TH | Complete Tools@Height Starter Set in Safe Bucket |

Features

- . The ideal way to start a drop prevention program
- . Use where dropped tools can harm personnel, damage components, or cause down time
- Excellent assortment of basic hand tools for most maintenance applications
- · Furnished in Safe Bucket for easy portability



WSC-45-TH

TOOL@HEIGHT STARTER SET

Contains the following tools:

Product Category

Adjustable Wrenches

Hammer

Pick up Tool

Pliers

Screwdriver

Tape Measure

Tools@Height Tethers, Lanyards & Specialties

Set Configurations Available

Description **Product Code** JHWWSC-27-TH Complete Tools@Height Starter Set in Safe Bucket

- · Ideal for general maintenance work in the factory or job site
- · All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies.
- Includes tools and assortment of pouches and lanyards designed for use with a suitable belt.
- · Williams' Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt
- An assortment of Comfort and Utility belts can be found on page 96
- . The full assortment of Tools@Height lanyards, tethers, and other accessories is on pages 91 through 97



JHWWSC-27-TH

















KWTBM



TOOLS@HEIGHT BOILMAKER'S TOOL KIT

Contains the following tools:

| Product Category | Product Category |
|--------------------------------|--|
| Pliers | Torpedo Level |
| Adjustable Construction Wrench | Hammer |
| Open End Structural Wrench | Measuring Tape |
| Bull Pin | Tools@Height Tethers, Lanyards & Specialties |

Set Configurations Available

| Product Code | Description |
|--------------|----------------------|
| KWTBM | Boilmaker's Tool Kit |

Features

- All tools are designed to be used with our tethering and retention systems which maintain
 or enhance the tools' functionality when used at height or near critical assemblies
- Tool Kit includes the tools, tethers, lanyards needed to keep boilermakers safe and productive while working at height

TOOLS@HEIGHT HRSG HIGH RIGGING TOOLKIT

Contains the following tools:

| Product Category | Product Category |
|--------------------------------|--|
| Pliers | Hammer |
| Adjustable Construction Wrench | Measuring Tape |
| Open End Structural Wrench | Sleever Bar |
| Bull Pin | Tools@Height Tethers, Lanyards & Specialties |
| Torpedo Level | |

Set Configurations Available

| Product Code | Description |
|--------------|---------------------------|
| KWTHRSGHR | HRSG High Rigging Toolkit |

- All tools are designed to be used with our tethering and retention systems which maintain
 or enhance the tools' functionality when used at height or near critical assemblies
- Tool kit includes bull pin, sleever bars, wrenches, hammer, torpedo level, measuring tape and many more tools with attachment points along with the tethers and lanyards for working at height



TOOLS@HEIGHT PIPEFITTER'S FOREMAN'S TOOLKIT

Contains the following tools:

| Product Category | Product Category |
|----------------------|------------------|
| Combination Wrenches | Pinch Bar |
| Sockets | Hex Keys |
| Drive Tools | Tape Measure |
| Screwdrivers | Tool Box |
| Files | Pin Release Tool |
| Hammer | Tool Pouch |

Set Configurations Available

| Product Code | Description |
|--------------|--------------------------------|
| KWTPFFOR | Pipefitter's Foreman's Toolkit |

Features

- · All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- · Pipefitter's Foreman's Tool kit includes sockets, drive tools, combination wrenches, screwdrivers and many more tools with attachment points for working at height



KWTPFFOR

TOOLS@HEIGHT PIPEFITTER'S GANG BOX KIT

Contains the following tools:

| Product Category | Product Category |
|---------------------------|-------------------|
| Utility Superjoint Pliers | Chisels & Punches |
| Side Cutters | Ratchet |
| Adjustable Wrenches | Pipe Wrench |
| Measuring Tape | Plastic Tool Box |
| Hammers | |

Set Configurations Available

| Product Code | Description |
|--------------|---------------------------|
| KWTPFBOX | Pinefitter's Gang Box Kit |

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- · Pipefitter's Gang Box Kit includes pliers, hammer, adjustable wrenches and many more tools with attachement points for working at height



KWTPFBOX

















TOOLS@HEIGHT INDIVIDUAL ELECTRICIAN'S TOOLKIT

Contains the following tools:

| Product Category | Product Category |
|---------------------------|--|
| Pliers, Side Cutter & Cri | mper Files |
| Screwdrivers | Superjoint Pliers |
| Adjustable Wrenches | Hammers |
| Chisels & Punches | Hex Key |
| Hacksaw Frame | Measuring Tape |
| Torpedo Level | Tools@Height Tethers, Lanyards & Specialties |
| Miscellaneous Tools | |

Set Configurations Available

| Product Code | Description |
|--------------|--|
| KWTELEKITM | Individual Electrian's Toolkit with S/M Comfort Belt |
| KWTELEKITL | Individual Electrian's Toolkit with L/XL Comfort Belt |
| KWTELEKITXL | Individual Electrian's Toolkit with 2X/3X Comfort Belt |
| | |

Features

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- The Individual Electrician's Toolkit contains an assortment of tools with engineered attachment points, tethers and laynards designed to keep electrican's safe and productive while working at heights



KWTELEKITM



KWTELECWKT

TOOLS@HEIGHT ELECTRICIAN CREW KIT

Contains the following tools:

| Product Category | Product Category |
|------------------|-------------------------------------|
| C-Clamps | Pin Release Tool |
| Pliers | Sockets |
| Pipe Wrenches | Combination Wrenches |
| Files | Level |
| Hammer | Lift Bucket & Hardhat Lanyard Strap |
| Drive Tools | , , |

Set Configurations Available

| Product Code | Description | |
|--------------|----------------------|--|
| KWTELECWKT | Electrian's Crew Kit | |

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- The Electrician's Crew Kit contains an assortment of tools with engineered attachment points, tethers and laynards designed to keep electrican's safe and productive while working at heights



MAMMOTH TOOL SET

The largest tool set in the industry. Contains the following tools:

| Product Category | Product Category |
|----------------------------|--|
| Chisel and Punches | Miscellaneous Tools |
| Clamps | Pliers |
| Electrical Crimping Pliers | Prybars |
| Files | Ratchets, Drive Tools, and Accessories |
| Hammers | Saws and Saw Blades |
| Hand Sockets | Scrapers |
| Hex Keys | Screwdrivers |
| Holesaw Set | Snips |
| Impact Drive Tools | Tool Boxes |
| Impact Sockets | Torque Wrenches |
| Knives | Wrenches |

Set Configurations Available

| Product Code | Description |
|---------------|--|
| JHWMAMMOTHMM | Mammoth Tool Set with Metric Wrenches and Sockets Only |
| JHWMAMMOTHSAE | Mammoth Tool Set with Fractional Wrenches and Sockets Only |
| JHWMAMMOTH | Mammoth Tool Set Only |
| JHWMAMMOTHTB | Complete Mammoth Tool Set with Tool Boxes |
| | |

Tool Boxes Included

| JHWW40TC4 | 40" Wide x 20" Deep 4-Drawer Top Chest |
|------------|--|
| JHWW40RC7 | 40" Wide x 20" Deep 7-Drawer Roll Cabinet |
| JHWW55TC10 | 55" Wide x 20" Deep 10-Drawer Top Chest |
| JHWW55RC11 | 55" Wide x 20" Deep 11-Drawer Roll Cabinet |
| JHW50721 | 3-Drawer Service Cart with Lid |

- . It's better to have it and not need it than need it and not have it and with this tool set, you're almost certain to have what you need. This set contains the tools to handle almost any job your shop is likely to see, in both fractional and metric sizes. It includes a comprehensive assortment of sockets, ratchets, and accessories in 1/4", 3/8", 1/2", and 3/4" drive, for both hand and impact use. A full complement of wrenches in a number of styles helps you tackle increasingly complex maintenance tasks. A comprehensive assortment of screwdrivers, pliers, hammers, punches and chisels, is there when you need them, and specialty items such as saws, scrapers, and other tools for industrial maintenance mechanics and tradesmen round out this truly Mammoth tool set.
- You'll want to keep your tools safe and secure, and our industry-leading Mammoth Tool Set includes the storage cabinets necessary to do that. Two top-chest / roll-cabinet combinations are included, as well as a rolling three-drawer tool cart. A total of 35 drawers and over 75,000 cubic inches of storage capacity will help you organize your tools effectively. And the mobile tool cart helps bring your tools to the job, where you need them.
- Whatever the industry, this set will help you keep your equipment and assets working, helping you compete more effectively. Get your work done faster, easier, and safer with the Mammoth Tool Set from Williams. All other tool sets are simply ordinary.



Professional industrial cabinets JHWW40RC7-JHWW40TC4 are also included in JHWMAMMOTHTB
















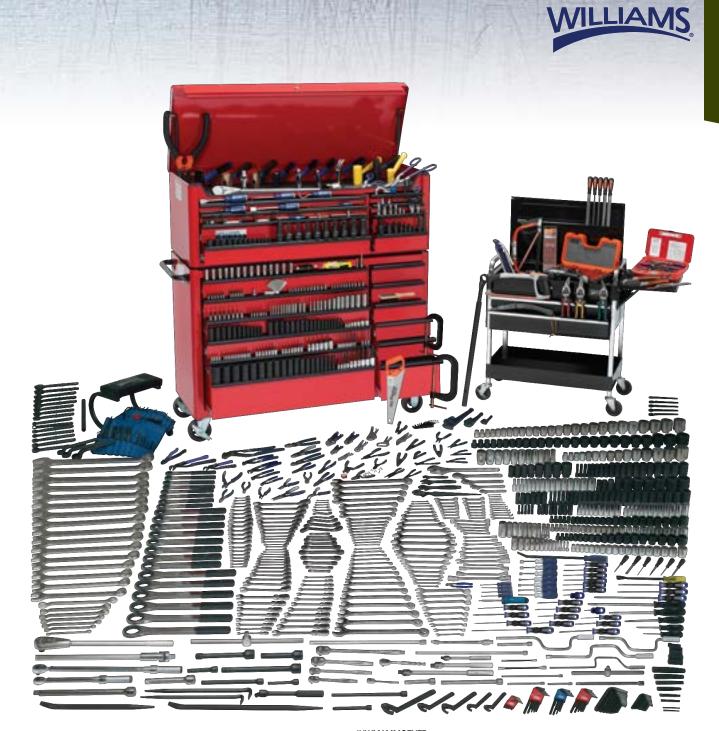

JHWMAMMOTHTB



MEGA TOOL SET

A comprehensive assortment. Contains the following tools:

| Product Category | Product Category | Product Category | Product Category |
|----------------------------|--------------------|--|------------------|
| Chisel and Punches | Hand Sockets | Miscellaneous Tools | Scrapers |
| Clamps | Hex Keys | Pliers | Screwdrivers |
| Electrical Crimping Pliers | Impact Sockets | Prybars | Snips |
| Files | Impact Drive Tools | Ratchets, Drive Tools, and Accessories | Tool Boxes |
| Hammers | Knives | Saws and Saw Blades | Torque Wrenches |

| Set Configurations Available | | |
|------------------------------|---|--|
| Product Code | Description | |
| JHWMEGAMM | Mega Tool Set with Metric Wrenches and Sockets Only | |
| JHWMEGASAE | Mega Tool Set with Fractional Wrenches and Sockets Only | |
| JHWMEGA | Mega Tool Set Only | |
| JHWMEGATB | Complete Mega Tool Set with Tool Boxes | |
| Tool Boxes Included | | |
| JHWW55TC10 | 55" Wide x 20" Deep 10-Drawer Top Chest | |
| .IHWW55RC11 | 55" Wide x 20" Deep 11-Drawer Boll Cabinet | |

3-Drawer Service Cart with Lid

JHW50721 **Features**

- . The Mega Set contains a comprehensive assortment of tools, in both fractional and metric sizes. Includes an extensive assortment of sockets, ratchets, and accessories in 1/4", 3/8", 1/2", and 3/4" drive, for both hand and impact use. A full complement of wrenches in a number of styles helps you tackle increasingly complex maintenance tasks. Over 150 screwdrivers, pliers, hammers, punches and chisels, are included, and specialty items such as saws, scrapers, and other tools for industrial maintenance mechanics and tradesmen round out the Mega Set from Williams.
- Mega Set includes the tool storage cabinets necessary to organize your tools. A top-chest / roll-cabinet combination is included, as well as a rolling three-drawer tool cart. A total of 26 drawers and over 45,000 cubic inches of storage capacity will help you store your tools effectively. The mobile tool cart helps bring your tools to the job, where you need them.
- · Get your work done faster, easier, and safer with the Mega Tool Set from Williams. All other tool sets are simply ordinary.



















JHWMEGATB



MAXXUM TOOL SET

Contains the following tools:

| Product Category | Product Category | Product Category | Product Category |
|----------------------------|---------------------|--|------------------|
| Chisel and Punches | Hex Keys | Prybars | Tool Boxes |
| Clamps | Impact Sockets | Ratchets, Drive Tools, and Accessories | Torque Wrenches |
| Electrical Crimping Pliers | Impact Drive Tools | Saws and Saw Blades | Wrenches |
| Files | Knives | Scrapers | |
| Hammers | Miscellaneous Tools | Screwdrivers | |
| Hand Sockets | Pliers | Snips | |

Set Configurations Available

| Product Code | Description | |
|---------------------|---|--|
| JHWMAXXUMMM | Maxxum Tool Set with Metric Wrenches and Sockets Only | |
| JHWMAXXUMSAE | Maxxum Tool Set with Fractional Wrenches and Sockets Only | |
| JHWMAXXUM | Maxxum Tool Set Only | |
| JHWMAXXUMTB | Complete Maxxum Tool Set with Tool Boxes | |
| Tool Boxes Included | | |
| JHWW55TC10 | 55" Wide x 20" Deep 10-Drawer Top Chest | |
| JHWW55RC11 | 55" Wide x 20" Deep 11-Drawer Roll Cabinet | |
| .IHW50721 | 3-Drawer Service Cart with Lid | |

- . The Maxxum Set contains a full complement of tools, in both fractional and metric sizes. It includes an assortment of sockets, ratchets, and accessories in 1/4", 3/8", and 1/2" drive, for both hand and impact use. Hand wrenches in a number of styles helps you tackle increasingly complex maintenance tasks. Over 100 screwdrivers, pliers, hammers, punches and chisels, are included, and specialty items such as saws, scrapers, and other tools for industrial maintenance mechanics and tradesmen round out the Maxxum Set from Williams.
- . Maxxum includes the tool storage cabinets necessary to organize your tools. A top-chest / roll-cabinet combination is included, as well as a rolling three-drawer tool cart. A total of 26 drawers and over 35,000 cubic inches of storage capacity will help you store your tools effectively. The mobile tool cart helps bring your tools to the job, where you need them.
- Get your work done faster, easier, and safer with the Maxxum Tool Set from Williams. All other tool sets are simply ordinary.
















WILLIAMS

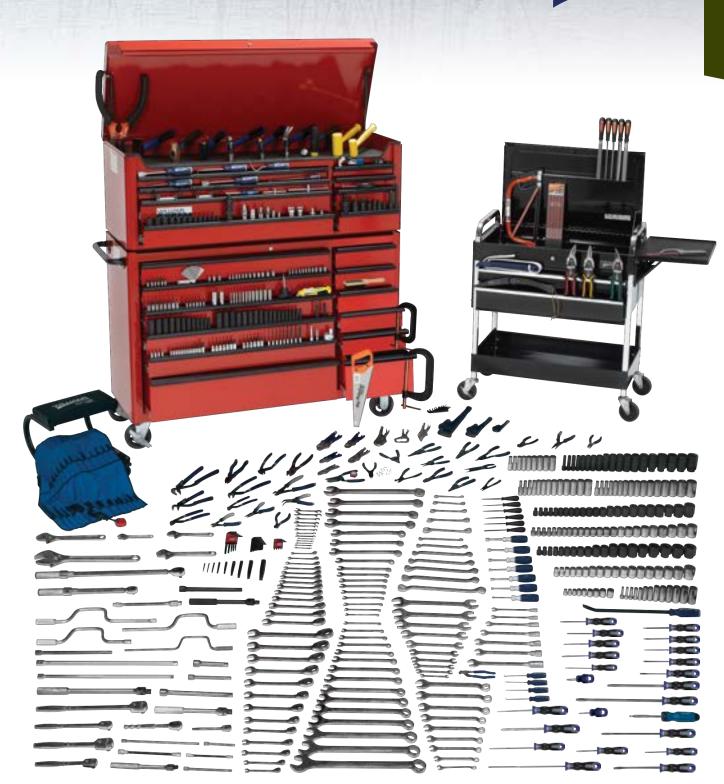



MONSTER TOOL SET

| Contains | 440 | حالمة | | toolo. |
|-----------------|-----|-------|------|--------|
| Contains | tne | TOIIO | wina | toois: |

| Product Category | Product Category | Product Category |
|-------------------|---------------------|--|
| Crowfoot Wrenches | Miscellaneous Tools | Screwdriver |
| Hacksaw Frame | | Snips |
| Hammer | Pliers | Sockets, Ratchets, Drive Tools and Accessories |
| Hex Key | Prybars | Tape Measure |
| Knives | Punch & Chisels | Wrenches |

Set Configurations Available

| Product Code | Description | |
|---------------------|--|--|
| JHWMONSTER | Monster Tool Set Only | |
| JHWMONSTERTB | Complete Monster Tool Set with Tool Boxes | |
| Tool Boxes Included | | |
| JHWW55TC10 | 55" Wide x 20" Deep 10 Drawer Top Chest | |
| JHWW55RC11 | 55" Wide x 20" Deep 11 Drawer Tool Cabinet | |

- The Monster Set contains a full complement of tools, in both fractional and metric sizes. It includes an assortment of sockets, ratchets, and accessories in 1/4", 3/8" and 1/2" drive.
- · Hand wrenches in a number of styles helps you tackle increasingly complex maintenance tasks. Also included are screwdrivers, pliers, hammers, punches and chisels, are included, and specialty items such as hacksaws, tape measure, and other tools for industrial maintenance mechanics and tradesmen round out this Master set from Williams.
- Includes the tool storage cabinets necessary to organize your tools. A top-chest /roll-cabinet combination is included.
- Get your work done faster, easier, and safer with this Monster Tool Set from
- Williams. All other tool sets are simply ordinary.


















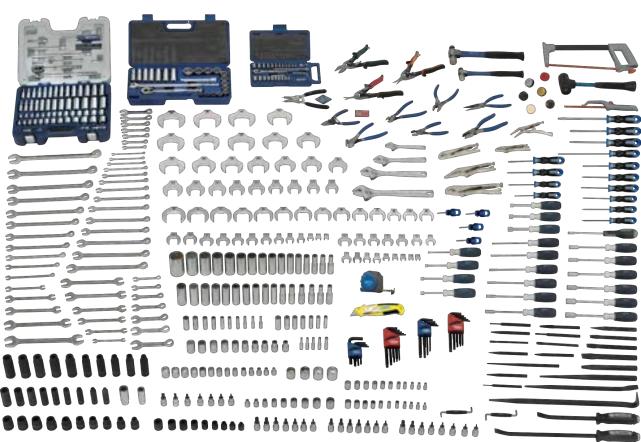

JHWMONSTER



MASTER MAINTENANCE TOOL SET

Contains the following tools:

| Product Category | Product Category | Product Category | Product Category |
|--------------------|---------------------|--|------------------|
| Chisel and Punches | Hand Sockets | Pliers | Screwdrivers |
| Clamps | Impact Drive Tools | Ratchets, Drive Tools, and Accessories | Snips |
| Files | Impact Sockets | Saws and Saw Blades | Tool Boxes |
| Hammers | Miscellaneous Tools | Scrapers | Wrenches |

Set Configurations Available

| Product Code | Description | | |
|---------------------|--|--|--|
| JHWMASTER | Master Maintenance Tool Set Only | | |
| JHWMASTERTB | Complete Master Maintenance Tool Set with Tool Boxes | | |
| Tool Boxes Included | | | |
| JHWW40TC4 | 40" Wide x 20" Deep 4-Drawer Top Chest | | |
| JHWW40RC7 | 40" Wide x 20" Deep 7-Drawer Roll Cabinet | | |

- This set provides the tools necessary for most general service and repair applications
- Included are a wide variety of fractional wrenches, hand and impact sockets, and popular 1/4", 3/8" and 1/2" drive ratchets and accessories
- · An assortment of professional industrial tools such as pliers, screwdrivers, hammers, punches, chisels, and other tools round out the offering




















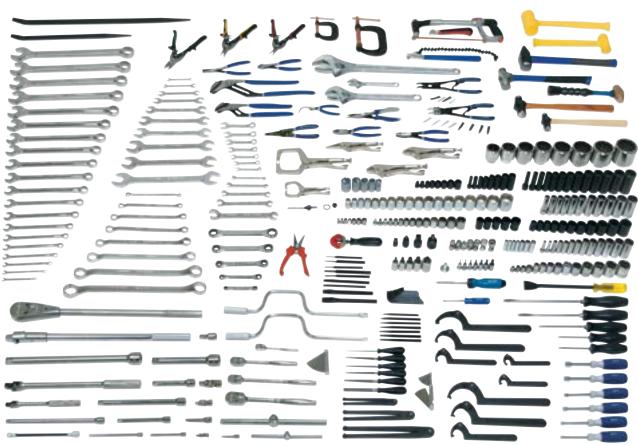

JHWMASTER



INTERMEDIATE TECHNICIAN'S TOOL SET

Contains the following tools:

| Product Category | Product Category |
|--------------------|--|
| Chisel and Punches | Ratchets, Drive Tools, and Accessories |
| Extractor | Screwdrivers |
| Feeler Gauge | Hand Sockets |
| Files | Tape Measure |
| Hammers | Torque Wrenches |
| Hex Keys | Wrenches |
| Pliers | |

Set Configurations Available

| Product Code | Description |
|--------------|---|
| JHWMECMNT | Intermediate Technician's Tool Set Only |
| JHWMECMNTTB | Complete Intermediate Technician's Tool Set with Tool Boxes |
| • | |


Tool Boxes Included

| JHWW40RC7 | 40" 4 Drawer Professional Top Chest |
|-----------|--|
| JHWW40TC4 | 40" 7 Drawer Professional Roll Cabinet |

Features

- This set provides the tools necessary for many general service and repair applications
- Included are a variety of fractional wrenches, hand and impact sockets, and 1/4", 3/8" and 1/2" drive ratchets and accessories
- · An assortment of professional industrial tools such as pliers, screwdrivers, hammers, punches, chisels, and other tools round out the offering



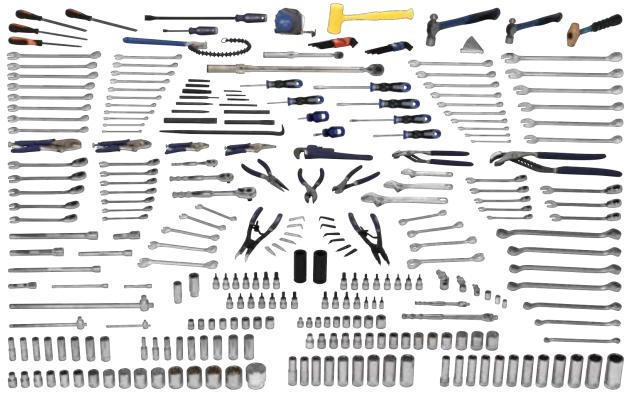

JHWMECMNT

















ADVANCED MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|---------------------|--|
| Chisel and Punches | Pliers |
| Files | Ratchets, Drive Tools, and Accessories |
| Hammers | Saws and Saw Blades |
| Hand Sockets | Screwdrivers |
| Impact Drive Tools | Tool Boxes |
| Impact Sockets | Wrenches |
| Miscellaneous Tools | |

Set Configurations Available

| Product Code | Description |
|--------------|--|
| JHWADVMNT | Advanced Maintenance Service Tool Set Only |
| JHWADVMNTTB | Complete Advanced Maintenance Service Tool Set with Tool Boxes |

Tool Boxes Included

| JHWW40TC4 | 40" Wide x 20" Deep 4-Drawer Top Chest |
|-----------|---|
| JHWW40RC7 | 40" Wide x 20" Deep 7-Drawer Roll Cabinet |

- This set provides the tools necessary for many general service and repair applications
- Included are a variety of fractional wrenches, hand and impact sockets, and 1/4", 3/8" and 1/2" drive ratchets and accessories
- An assortment of professional industrial tools such as pliers, screwdrivers, hammers, punches, chisels, and other tools round out the offering



JHWADVMNT



PETROLEUM OIL FIELD SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|-------------------------------------|------------------|
| Chisels & Punch | Scraper |
| Haer | Screwdrivers |
| Pipe Wrenches | Sockets |
| Pliers | Utility Tools |
| Prybar | Wrenches |
| Ratchets, Drive Tools & Accessories | |

Set Configurations Available

| Product Code | Description |
|---------------|---|
| JHWPETROSET | Petroleum Oil Field Tool Set Only |
| JHWPETROSETTB | Complete Petroleum Oil Field Tool Set with Tool Boxes |

Tool Boxes Included

| JHWW40RC7 | 40" 4 Drawer Professional Top Chest |
|-----------|--|
| JHWW40TC4 | 40" 7 Drawer Professional Roll Cabinet |

- The set provides the tools necessary for Petroleum Oil field general service and repair applications
- · Included are a wide variety of chisels, punches, haers, pliers, adjustable wrenches, pipe wrenches, 3/8" and 1/2" drive sockets, ratchets and accessories
- Also includes is professional utility tools and scrapers























OIL FIELD TOOL SET

| Contains | tha | fall | owina | toole | |
|-----------------|-----|------|--------|--------|--|
| Contains | uie | IUII | uwilla | LUUISi | |

| Product Category | Product Category |
|------------------|---------------------------------------|
| C-Clamp | Puller |
| Chain Wrench | Punch & Chisels |
| Hammer | Ratchets, Drive Tools and Accessories |
| Hex Key | Scraper |
| Miscellaneous | Screwdrivers |
| Nut Drivers | Snips |
| Pipe Wrench | Sockets |
| Pliers | Torque Wrench |
| Pryhar | Wrenches |


Set Configurations Available

| Product Code | Description |
|---------------|---|
| JHWOILFIELD | Oil Field Tool Set Only |
| JHWOILFIELDTB | Complete Oil Field Tool Set with Tool Boxes |

Tool Boxes Included

| JHWW40TC4 | 40" Wide x 20" Deep 4 Drawer Top Chest |
|-----------|---|
| JHWW40RC7 | 40" Wide x 20" Deep 7 Drawer Tool Cabinet |

- The set provides the tools necessary for oilfield general service and
- repair applications
 Included are a wide variety of pliers, box wrenches, combination wrenches, flare wrenches, 1/4", 3/8" and 1/2" drive sockets, ratchets and accessories
 Also includes is c-clamps, chain wrench and other tools

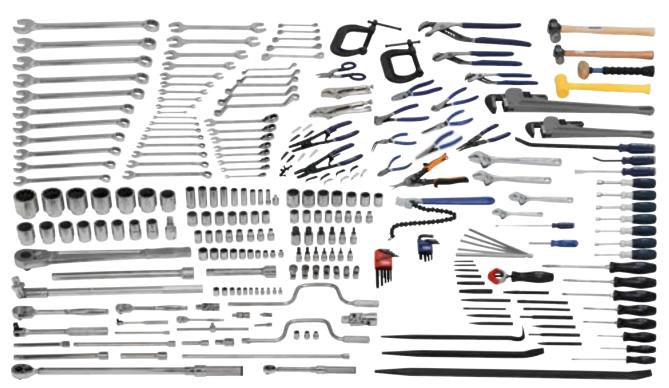



MECHANICAL MAINTENANCE SET

Contains the following tools:

| Product Category | Product Category |
|------------------|--------------------------------------|
| Hammer | Ratchet, Drive Tools and Accessories |
| Hex Key | Screwdriver |
| Pliers | Sockets |
| Punch & Chisels | Wrenches |

Set Configurations Available


| Product Code | Description |
|--------------|--|
| JHWTMNT | Mechanical Maintenance Tool Set Only |
| JHWTMNTTB | Complete Mechanical Maintenance Tool Set with Tool Boxes |

Tool Boxes Included

| JHWW26TC4 | 26" Wide x 20" Deep 4 Drawer Top Chest |
|-----------|---|
| JHWW26RC7 | 26" Wide x 20" Deep 7 Drawer Tool Cabinet |

- The set provides the tools necessary for many general service and repair applications
- Included are a wide variety of pliers, box wrenches, hex keys, flare wrenches, 1/4", 3/8" and 1/2" drive sockets, ratchets and accessories
- . Also includes is punch, chisels, hammers and other tools



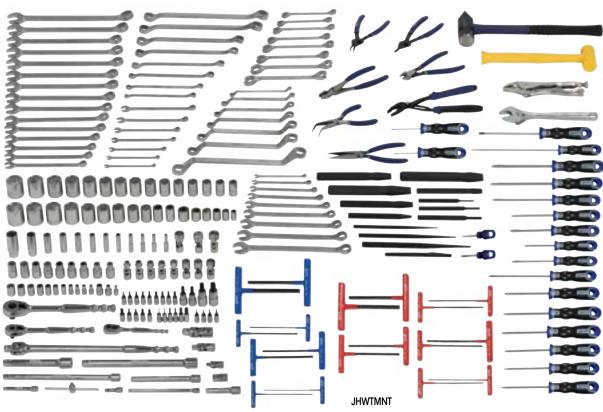



















GENERAL MAINTENANCE TOOL SET

Contains the following tools:

| Product Category | Product Category |
|-------------------|------------------------------------|
| C-Clamps | Ratchet, Drive Tools & Accessories |
| Chisels & Punches | Scrapers |
| Hammers | Screwdrivers & Bits |
| Files | Snips |
| Hacksaws | Sockets |
| Nutdrivers | Wrenches |
| Ditana | |

Set Configurations Available

| Product Code | Description |
|--------------|---|
| JHWGMNT | General Maintenance Tool Set Only |
| JHWGMNTTB | Complete General Maintenance Tool Set with Tool Boxes |

Tool Boxes Included

| JHWW26TC4 | 26" Wide x 20" Deep 4 Drawer Top Chest |
|-----------|---|
| JHWW26RC7 | 26" Wide x 20" Deep 7 Drawer Tool Cabinet |

- $\bullet\,\,$ This set provides the tools necessary for most general service and repair applications
- Included are a wide variety of adjustable wrenches, locking pliers, screwdrivers, hammers and 1/4", 3/8" and 1/2" drive ratchets and accessories
- An assortment of professional industrial tools such as punches, chisels and pliers are also included





HEAVY DUTY MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|--------------------|--|
| Chisel and Punches | Pliers |
| Clamps | Ratchets, Drive Tools, and Accessories |
| Feeler Gauge Set | Screwdrivers |
| Hammers | Tool Box |
| Hand Sockets | Wrenches |

Set Configurations Available


| Product Code | Description |
|--------------|--|
| JHWHDMNT | Heavy Duty Maintenance Tool Set Only |
| JHWHDMNTTB | Complete Heavy Duty Maintenance Tool Set with Tool Boxes |

Tool Box Included

| JHWW40RC7 | 40" Wide x 20" Deep 7-Drawer Roll Cabinet |
|-----------|---|
| | |

- . Designed for the shop that performs maintenance on heavy equipment, this set emphasizes larger tools, including combination wrenches up to 2" and sockets
- Ratchets, drive tools, and fractional sockets in 3/8", 1/2" and 3/4" drive are included, as well as a complement of screwdrivers, pliers, chisels, punches, hammers, and other common tools
- · If you need a basic assortment of beefy tools, this is the set for you



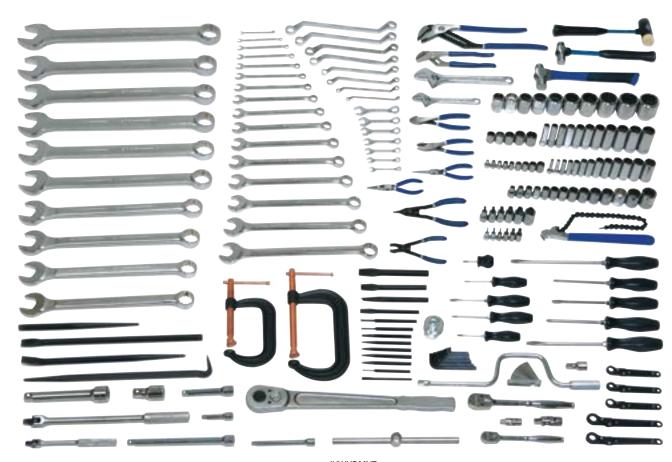



















ELECTRICAL MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|----------------------------|--|
| Electrical Specialty Tools | Ratchets, Drive Tools, and Accessories |
| Hammers | Saws and Saw Blades |
| Hand Sockets | Screwdrivers |
| Miscellaneous Tools | Screwdrivers - Insulated |
| Pliers | Tool Box |
| Pliers - Electrical | Wrenches |
| Pliers - Insulated | |

Set Configurations Available

| Product Code | Description |
|-----------------|--|
| JHWELECTRICAL | Electrical Maintenance Service Tool Set Only |
| JHWELECTRICALTB | Complete Electrical Maintenance Service Tool Set with Tool Boxes |

Tool Box Included

| JHWW40RC7 | 40" Wide x 20" Deep 7-Drawer Roll Cabinet |
|-----------------------------------|---|
| JUAN NA d ono <i>l</i> | 40 Wide x 20 Deep 7-Drawer holl Cabille |

Features

- Designed to satisfy electrical maintenance tool requirements, this set has both the standard hand tools and special tools needed to accomplish a wide variety of electrical maintenance and installation
- 1/4" and 3/8" drive sockets and accessories, hammers, and hand wrenches, and add the special items needed for electrical work: insulated and non-insulated pliers and screwdrivers
- Full-size roll cabinet to organize, store, and move your tool set
- Unique in the industry, this set will help you get those critical electrical maintenance tasks done quickly, efficiently, professionally, and safely



JHWELECTRICAL



MAINTENANCE TOOL SET

| Contains the | following | tools: |
|--------------|---------------|----------|
| Contains the | . 10110441110 | 1 10013. |

| Product Category | Product Category |
|-------------------|------------------------------------|
| Chisels & Punches | Ratchet, Drive Tools & Accessories |
| Hammers | Screwdrivers & Bits |
| Hex Key Set | Sockets |
| Pliers | Wrenches |

Set Configurations Available

| Product Code | Description |
|---------------------|---|
| JHWMNTCART | Maintenance Tool Tool Set Only |
| JHWMNTCARTTB | Complete Maintenance Tool Tool Set with Tool Cart |
| Tool Boxes Included | |

| JHW50721 | 3 Drawer Service Cart with Lid |
|----------|--------------------------------|
| | |

Features

This set provides the tools necessary for most general service and repair applications. Included are a wide variety of adjustable wrenches, locking pliers, screwdrivers, hammers and 1/4", 3/8" and 1/2" drive ratchets and accessories. An assortment of professional industrial tools such as punches, chisels and pliers are also included.





ELECTRICIAN'S KIT TOOL BACKPACK

- Portable and lightweight, allows the electrical technician on-the-go to safely and securely take tools to the job
- Rigid plastic bottom and heavy duty zippers
- Water resistant 1680D heavy duty material
- Padded shoulder straps and rear panel
- Tape measure clip and tape loop
- 2 sturdy carrying handles
- 32 internal pockets & 4 external pockets
- Includes common tools needed for electrical installation, repair and
 - (2) slotted screwdrivers, (1) Phillips screwdriver, (1) 16oz. claw hammer, (1) HD side-cutting combo pliers, (2) adjustable joint pliers, (1) wire stripper, (1) 9" torpedo level, (1) 25ft tape measure, (1) retractable utility knife, (1) 12" professional hack saw, (1) 150 lumen LED work light and (1) AC voltage tester
















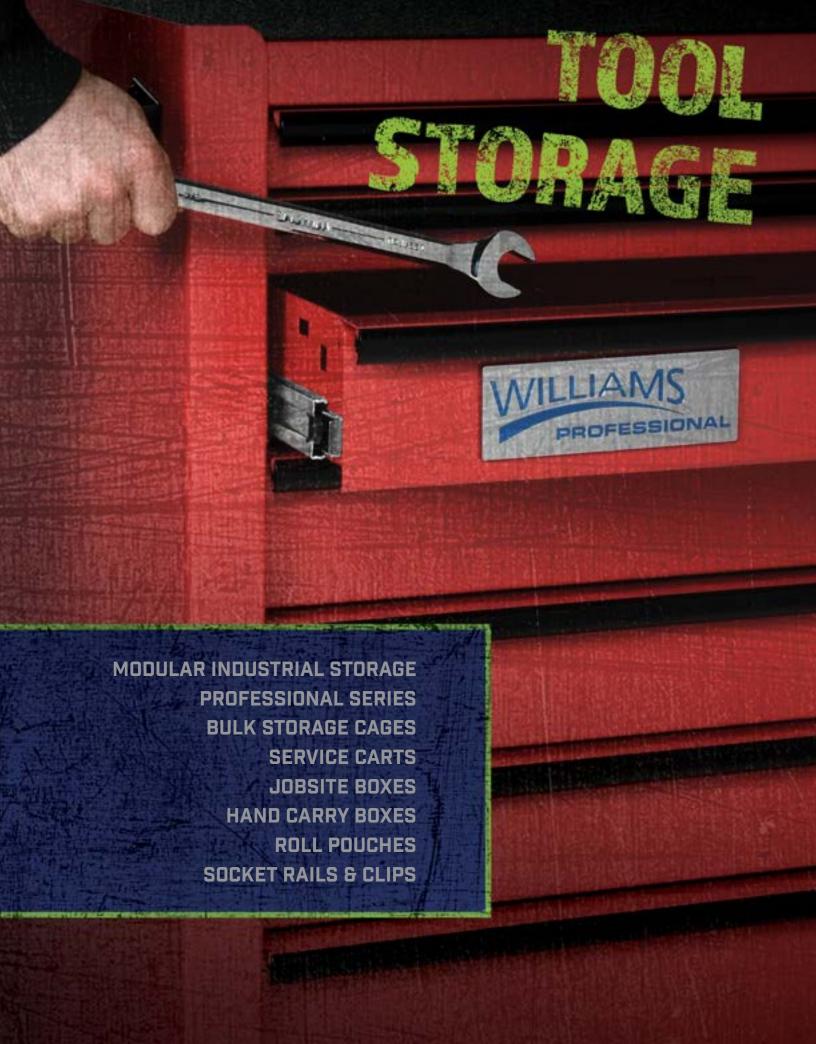




Reinforced overlapping lid provides / protection from weather and forced entry

Tread plate design for rugged durability

Recessed side handles for easy transportation

Heavy 16 gauge steel construction with 12 gauge feet

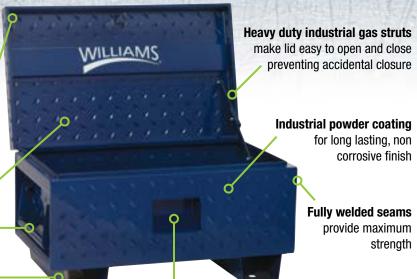

Recessed and concealed locking area

protects padlock for ultimate security against drills and bolt cutter

PROFESSIONAL SERIES

Colors Available:



Heavy duty industrial gas struts make lid easy to open and close preventing accidental closure

Drawer liners included to keep tools in place

High-Quality Class I steel for enhanced strength and finish

Double wall construction provides strength

Reinforcement corner gussets add strength and reduce racking

2" mounting centers provide flexibility in arranging drawers to individual needs

All 4" and deeper drawers provide for adding additional slides to double drawer capacity



Two point locking design adds extra security on all chests

High luster paint protects against scratches, peeling, blistering and corrosion

Drawers equipped with positive latching drawer retention to prevent unwanted drawer opening

Rolled hem on all drawers provide superior strength, rigidity and safety

All drawers equipped with 75 pound full extension ball bearing slides with quick disconnect

TOOLSTORAGE

latch available

CUSTOMIZE. ORGANIZE. OPTIMIZE.

MODULAR INDUSTRIAL STORAGE

Colors Available:



Hinged locking bar available for additional security



Work surfaces available in a variety of shapes and materials




Fully MIG welded and surface ground on all eight corners, creating a cabinet that looks as good as it performs



Heavy duty 11ga plug-in guide rail allows for quick adjustment to accept different drawer sizes and combinations

Heavy duty 11ga carriage with six ball bearing rollers and four steel rollers ensures smooth operation of every drawer

Full-width aluminum handles with safety overlap and 45° angle Overlap helps prevent injury by eliminating sharp edges and pinch points **100% View drawer extension** provides full visibility and access to drawer contents via double roller tracks






Full height drawer sidewalls provide maximum cubic storage capacity

Standard full length forklift base provides a safe platform for installing cabinets or for moving them when reconfiguring workspace



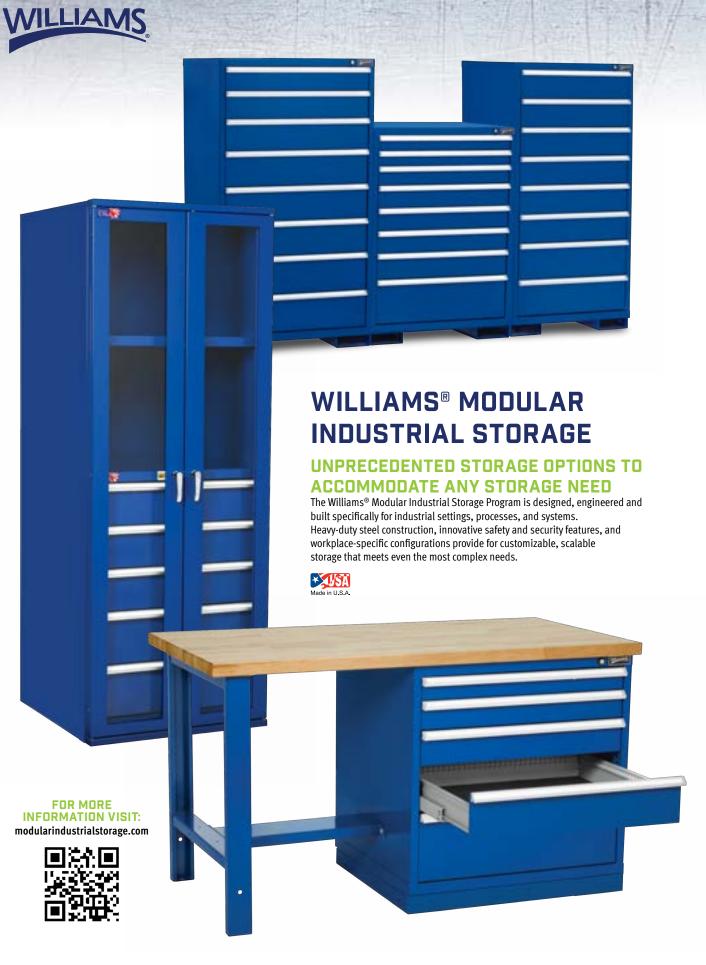



















AVAILABLE SECURITY OPTIONS AND WORKSURFACES



LOCK IN/LOCK OUT LATCH Locks individual drawers into position, either closed or fully extended. Recommended for truck and van storage applications.



HINGED LOCK BARFeatures padlock hasp for additional protection and security of drawers and contents.



WORK SURFACESAvailable in a variety of shapes and materials.



ENGINEERED FOR INDUSTRIAL USE

SUPERIOR DESIGN AND CONSTRUCTION-INSIDE AND OUT



Fully MIG Welded and surface ground on all eight corners, creating a cabinet the looks as good as it performs.

Heavy duty 11ga plug-in guide rail allows for quick adjustment to accept different drawer sizes and combinations.

> Heavy duty 11ga carriage with six ball bearing rollers and four steel rollers ensures smooth operation of every drawer, even when loaded to the 400 lb. capacity.

Full height sidewalls provide maximum cubic storage capacity, while reducing item spillover into adjacent compartments.

Full Width 45 degree angle aluminum handles for easy identification of contents.

Standard full length forklift base provides a safe platform for installing cabinets or for moving them when reconfiguring workspace. The removable kick panel combines enhanced safety with a clean look. (11ga fully welded optional pallet truck base available).

ESSENTIAL DRAWER FEATURES

17 Unique Drawer Sizes/Depths

Drawer heights in 20mm increments

| Drawer | Drawer Model Point Value | Drawer Front Height (Inches) | Drawer Inside Usable Height (Inches) | Drawer Side Wall Height (Inches) |
|--------|--------------------------------|---------------------------------------|---|---|
| 1 | 80 | 3 | 2 1/8 | 2 |
| 2 | 100 | 3 1/8 | 3 | 3 |
| 3 | 120 | 4 3/4 | 3 1/8 | 3 1/8 |
| 4 | 140 | 5 ½ | 4 3/4 | 3 1/8 |
| 5 | 160 | 6 ½ | 5 1/2 | 3 1/8 |
| 6 | 180 | 7 | 6 1/8 | 6 |
| 7 | 200 | 7 3/4 | 7 | 6 |
| 8 | 220 | 8 1/2 | 7 3/4 | 6 |
| 9 | 240 | 9 1/4 | 8 1/2 | 8 1/2 |
| 10 | 260 | 10 1/8 | 9 1/4 | 8 1/2 |
| 11 | 280 | 11 | 10 1/8 | 8 1/2 |
| 12 | 300 | 11 3/4 | 11 | 10 1/8 |
| 13 | 320 | 12 1/2 | 11 3/4 | 10 1/8 |
| 14 | 340 | 13 1/4 | 12 % | 10 1/8 |
| 15 | 360 | 14 1/4 | 13 1/4 | 10 1/8 |
| 16 | 380 | 14 1/8 | 14 | 10 1/8 |
| 17 | 400 | 15 ½ | 14 3/4 | 10 1/8 |

Taller drawers are available. Call your Williams Territory Manager for assistance, Drawer Capacity: 400-lbs UDL @ 100% extension






SAFE, STRONG & EFFICIENT DRAWER DESIGN

Riveted Drawer Fronts & Handles

Stainless steel rivets provide 650 lbs. of shear strength per rivet for outstanding durability. A minimum of 4 rivets are used to fasten the drawer front to the body and the drawer pull to the drawer front, creating a stronger bond than screws can.

> Full-Width Aluminum Handles with Safety Overlap and 45° Angle Overlap helps prevent injury by eliminating sharp edges and pinch points. The angled design allows improved handle label visibility.



SAFE OVERLAPPING HANDLE



SUPPORTS UP TO **400 LBS. PER DRAWER**
















59" Eye Level

CABINET HEIGHTS & WIDTH OPTIONS

CHOOSE FROM SIX CABINET HEIGHTS

The Williams® Modular Industrial Storage Program features a large

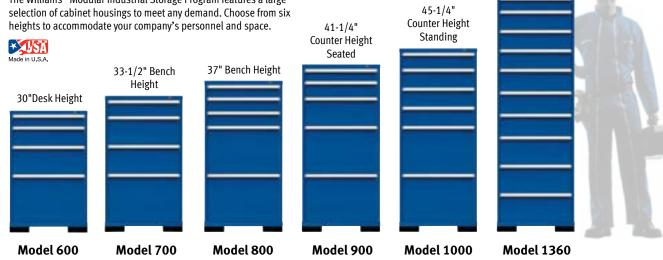

CHOOSE FROM FIVE CABINET WIDTHS

Cabinets are available in five different widths. Choose widths to accommodate your specific storage needs. All cabinets are 27-3/4" deep and are available in all cabinet heights.



23" Narrow-Wide (NW)

- Makes excellent work station pedestals or mobile cabinets where space is limited
- Accommodates 18" items



29-1/4" Standard-Wide (SW)

- · Recommended for most applications and provides the fastest pick-rates
- · Accommodates items up to 24-1/2"



32-1/2" Standard-Wide Plus (SWP)

- Recommended for most applications and provides the fastest pick-rates
- Accommodates 28" items



46" Extra-Wide Plus (EWP)

- Recommended where parts or tools exceed 39"
- Accommodates 42" items



58-1/4"Double-Wide (DW)

- · Recommended for extra-long items
- Accommodates items up to 53-1/2"wide



HUMAN-ENGINEERED DRAWERS - SQUARE DESIGN

The square Standard Wide (SW) drawer was ergonomically designed to accommodate the reach of the average person from either the front or the side, increasing picking productivity. Picking stock or retrieving parts from the side keeps aisles clear for increased efficiency and productivity.





DRAWER CONFIGURATIONS TO MEET EVERY NEED

BENCH HEIGHT - 33" TALL

CHOOSE FROM FIVE CABINET HEIGHTS

• Custom configurations are also available. Contact your Williams Territory Manager for details.



DESK HEIGHT - 30" TALL





200 - D 300 - D

160 - D 240 - D

Colors Available:



SW600F3DB

SW600F52DB

SW700F4DB

SW700F55DB

COUNTER HEIGHT (SEATED) - 41" TALL











SW900F5DB

SW900F6DB

SW900F74DB

SW900F83DB

SW900F10DB

COUNTER HEIGHT (STANDING) - 45" TALL











SW1000F5DB

SW1000F6DB


SW1000F8DB

SW1000F10DB

SW1000F11DB

EYE LEVEL HEIGHT - 59" TALL













SW1360F6DB

SW1360F72DB



⚠WARNING







CUSTOM DRAWER LAYOUTS FOR BETTER ORGANIZATION









SLOTTED PARTITIONS

| Product Code | Height (Inches) | For Use with Drawer Number |
|-----------------|-----------------|-------------------------------|
| SLC80-P | 2 | 80 |
| SLC100-P | 3 | 10 |
| SLC120-P | 3 1/8 | 120, 140, 160 |
| SLC180-P | 6 | 180, 200 |
| SLC240-P | 8 1/2 | 240 |
| SLC300-P | 10 1/8 | 300 and up |

Features

• Powder-coated steel partitions subdivide drawers from front to back





STEEL DIVIDERS

| Usable width of compartment (inches) | Number of units (spaces) |
|--------------------------------------|--------------------------|
| 1 1/8 | 3U |
| 2 5/8 | 4U |
| 3 1/2 | 5U |
| 4 1/4 | 6U |
| 5 1/8 | 7U |
| 7 % | 10U |
| 9 1/8 | 12U |
| 12 1/4 | 16U |


Features

- Powder-coated steel dividers further separate drawers when used with slotted partitions
- Dividers slide into slots of partitions or drawer sidewalls to form compartments






Layout No. 5



Layout No. 3



Layout No. 9

STANDARD WIDE (SW) DRAWER LAYOUTS

- Most popular drawer layouts shown
- Custom drawer layouts available

Layout No. 1

- 16 compartments
- 3 slotted partitions 12 divider plates 8U

Layout No. 3

- 20 compartments
- 3 slotted partitions 16 divider plates 8U

Layout No. 5

- 12 compartments
- 2 slotted partitions 6 divider plates 10U
- 3 divider plates 12U

Layout No. 9

- 36 compartments
- 5 slotted partitions 20 divider plates 5U
- 10 divider plates 6U

OPTIONS FOR EVEN GREATER SECURITY AND SAFETY





HINGED LOCK BAR

• Features a padlock hasp for additional protection and security of drawers and contents

LOCK IN/LOCK OUT LATCH

- Locks individual drawers into position, either closed or fully extended
- Recommended for truck and van storage applications



DRAWER ACCESSORIES MAXIMIZE STORAGE SPACE

MAXIMUM STORAGE IN MINIMUM SPACE!

Grooved Plastic Trays and Small Parts Containers

• Drawers are easily configured to perfectly match a wide variety of storage needs, from small parts such as fasteners and connectors, to delicate measuring equipment, cutting tools and electronic parts. Small parts containers and grooved plastic trays create custom layouts and drawer interiors to meet your specific needs.





GROOVED PLASTIC TRAYS

- · Designed to protect sidesensitive tooling
- · Available in 3 sizes

SLC50077

• Size 2 (2-7/8")

SLC50078

• Size 3 (1-7/8")

SLC50079

• Size 4 (1-3/8")



SLC50077



SLC50078



SLC50079



SLCA80A



SLCA80B



SLCN80

PLASTIC BINS

Size (Inches)

6 x 6

. Modular design made of tough plastic with a

N Series **Product Code**

SLCN80-DIV

Features

usable height of 2"

SLCN80



SLCN80-DIV

6 x 6 (subdivided into four 3 x 3 compartments)



IARFI HAIDERS

| EADEL HOLDEHO | | | |
|---------------|---------------------------|--|--|
| Size (Inches) | | | |
| 1 1/8 | | | |
| 1 1/8 | | | |
| 1 1/8 | | | |
| | Size (Inches) 1 1/8 1 7/8 | | |

Features

- Transparent label holders clip onto plastic bins, grooved trays, and steel dividers
- Available in three sizes

PLASTIC BINS

A Series

| Product Code | Size (Inches) | |
|--------------|---------------|--|
| SLCA80A | 2 ½ x 2 ½ | |
| SLCA80B | 2 ½ x 5 | |

- Modular design made of tough plastic with a usable height of 2"
- Two sizes available



















MORE WAYS TO CUSTOMIZE, ORGANIZE, OPTIMIZE

ORGANIZE BULKY ITEMS BY ADDING SHELVING

SHELVING UNITS

Organize bulky items by adding shelving storage to your cabinets. Their rugged, all-welded construction assures smooth operation, durability and years of dependable heavy-duty service. And because they're adjustable, you can rearrange the shelves to flexibly adapt to your storage needs for years to come.



Choose Options and accessories

Select between shelves and drawers, or a combination of the two, for the interior. You can also further customize the shelving unit with solid doors, Clear Vue doors, a fork lift base and extra shelves.

Choose from various sizes

Shelving units are available in different widths, depths and heights to meet your specific storage needs.

Widths: Narrow-Wide (NW) – 23-1/4" Standard-Wide (SW) – 29-1/4" Standard-Wide Plus (SWP) – 32-1/2"

Depths: Shallow-Depth (SD) – 23-1/2" Standard-Depth (S) – 27-3/4"

Heights: 78" and 84"

Solid maple work surfaces are available in a variety of shapes and sizes. Stainless tops also available upon request. Supports up to 25,000 lbs Customizable Height and Length workstations available in 5 heights and 7 lengths Colors Available:

SLC50226

Royal

GIVE YOUR WORKPLACE A PLACE TO WORK

WORKSTATIONS

Every workplace needs a place to work. We deliver highly customizable workstations to fit your specific needs.

- \bullet Available as stationary or mobile
- Available with shelves, cabinets, or risers
- Can be topped with a variety of work surfaces and even add footrests
- Available in five heights
- Lengths available: 48", 60", 72", 84", 90", 120" and 144"
- Riser shelves are available in steel (painted or stainless) or maple
- Can be configured with various options such as an open leg or panel leg, casters, steel or maple work surfaces, risers, drawers, and more

WORKSTATION TOPS

| Product Code | Description |
|---------------|-------------------------|
| NWMAPLETOP | NW Maple Top 30D X 24L |
| SWMAPLETOP | SW Maple Top 30D X 30L |
| SWPMAPLETOP | SWP Maple Top 30D X 33L |
| EWPMAPLETOP | EWP Maple Top 30D X 48L |
| DWMAPLETOP | DW Maple Top 30D X 60L |
| MAPLETOP3048 | Maple Top 30D X 48L |
| MAPLETOP3060 | Maple Top 30D X 60L |
| MAPLETOP3072 | Maple Top 30D X 72L |
| MAPI FTOP3090 | Maple Top 30D X 90L |

Features

 Powder-coated steel partitions subdivide drawers from front to back

HANDLES & WHEELS

| Product Code | Description |
|--------------|---------------------------------|
| SLC50227 | Caster Kit Set 4 and Handle Kit |
| SLC50226 | Caster Kit Set 4 |
| | |

- Make your storage mobile with our selection of handles and wheels
- Mobility workstations let you bring the work environment to the job, instead of going back and forth to and from the workstation



55" PROFESSIONAL SERIES TOOL CABINETS

Designed for industrial use

| Product Code | Description | |
|--------------|--|--|
| JHWW55TC10 | 55" Wide x 24" Deep 10-Drawer Tool Chest | |
| JHWW55RC11 | 55" Wide x 24" Deep 11-Drawer Roll Cabinet | |

Color Options: Standard color is red. To order in an optional color, simply add the appropriate color code to the end of the product code.

Example: To order #JHWW55TC10 in Blue, specify product code JHWW55TC10BL

JHWW55TC10 Top Chest Overall Dimensions

| Capacity (cu.in.) | Width (Inches) | Depth (Inches) | Height (Inches) |
|-------------------|----------------|----------------|-----------------|
| 21283 | 55 | 24 | 28.5 |

Top Chest Drawer Sizes

| Number | Width (inches) | Depth (inches) | Height (inches) |
|--------|----------------|----------------|-----------------|
| 2 | 14 % | 21 5/8 | 1 3/4 |
| 3 | 14 % | 21 % | 4 |
| 2 | 30 1/2 | 21 % | 1 3/4 |
| 3 | 30 1/2 | 21 % | 4 |

JHWW55RC11 Roll Cabinet Overall Dimensions

| Capacity (cu.in.) | Width (Inches) | Depth (Inches) | Height (Inches) |
|-------------------|----------------|----------------|-----------------|
| 25000 | 55 | 24 | 39 |

Roll Cabinet Drawer Sizes

| Number | Width (inches) | Depth (inches) | Height (inches) |
|--------|----------------|----------------|-----------------|
| 1 | 14 5/8 | 21 7/8 | 1 3/4 |
| 2 | 14 1/8 | 21 1/8 | 4 |
| 1 | 14 % | 21 ¾ | 10 %16 |
| 3 | 30 %16 | 21 1/8 | 1 3/4 |
| 2 | 30 %16 | 21 7/8 | 4 |
| 1 | 30 %16 | 21 7/8 | 6 3/16 |
| 1 | 49 | 21 1/8 | 3 3/16 |

Features

- . Made of High-Quality Class I steel to enhance strength and finish
- · Double wall construction provides strength
- · Reinforcement corner gussets add strength and reduce racking
- 2" mounting centers provide flexibility in arranging drawers to individual needs
- . Drawers equipped with positive latching drawer retention to prevent unwanted drawer opening
- · All drawers equipped with 75 pound full extension ball bearing slides with quick disconnect
- All 4" and deeper drawers provide for adding additional slides to double drawer capacity
- · Rolled hem on all drawers provide superior strength, rigidity and safety
- · Casters absorb vibrations transmitted to frame while moving on uneven surfaces
- · Casters equipped with pedal brake and ball bearings for easy operation
- · High luster paint protects against scratches, pealing, blistering and corrosion
- · Paint pretreatment process both sprays and immerses boxes for added corrosion protected
- . Drawer liners included at no extra charge
- . Gas struts in lid of chest make lid easy to open and close
- . Two point locking design adds extra security on all chests















JHWW55TC10



Colors Available:









55" PROFESSIONAL SERIES ROLL CABINET

Designed for industrial use

Product Code Description JHWW55RC5BS 55" Wide x 24" Deep 5-Drawer Roll Cabinet with Bulk Storage JHWW55RC5BS Roll Cabinet Overall Dimensions

| Capacity (cu.in.) | Width (Inches) | Depth (Inches) | Height (Inches) |
|-------------------|----------------|----------------|-----------------|
| 25,000 | 55 | 24 | 39 |

Roll Cabinet Drawer Sizes

| Number | Width (inches) | Depth (inches) | Height (inches) |
|--------|----------------|----------------|-----------------|
| 4 | 30 %16 | 21 1/8 | 5 |
| 1 | 30 %16 | 21 7/8 | 7 |
| Bulk | 23 | 21 7/8 | 33 |

- · Wide Drawer to hold long tools such as pry bars and extensions
- . Bulk section with adjustable shelf perfect for storing large, bulky tools
- · Made of High-Quality Class I steel to enhance strength and finish
- Double wall construction provides strength
- · Reinforcement corner gussets add strength and reduce racking
- 2" mounting centers provide flexibility in arranging drawers to individual needs
- Drawers equipped with positive latching drawer retention to prevent unwanted drawer opening
- · All drawers equipped with 75 pound full extension ball bearing slides with quick disconnect
- . All 4" and deeper drawers provide for adding additional slides to double drawer capacity
- · Rolled hem on all drawers provide superior strength, rigidity and safety
- · Casters absorb vibrations transmitted to frame while moving on uneven surfaces
- Casters equipped with pedal brake and ball bearings for easy operation
- High luster paint protects against scratches, pealing, blistering and corrosion
- · Paint pretreatment process both sprays and immerses boxes for added corrosion protected
- Drawer liners included at no extra charge
- · Gas struts in lid of chest make lid easy to open and close
- . Two point locking design adds extra security on all chests
- 8-05188ALRS Replacement Slides



40" PROFESSIONAL SERIES TOOL CABINETS

Designed for industrial use

| Product Code | Description |
|--------------|---|
| JHWW40TC4 | 40" Wide x 20" Deep 4-Drawer Top Chest |
| JHWW40RC7 | 40" Wide x 20" Deep 7-Drawer Roll Cabinet |

Color Options: Standard color is red. To order in an optional color, simply add the appropriate color code to the end of the product code. Example: To order #JHWW40TC4 in Blue, specify product code JHWW40TC4BL

JHWW40TC4 Top Chest Overall Dimensions

| Capacity (cu. in.) | Width (inches) | Depth (inches) | Height (inches) |
|-----------------------|---|----------------------------------|-----------------|
| 9746 | 40 1/32 | 19 ¹³ / ₁₆ | 19 7/16 |
| Top Chest Dra | | | |
| Number | Width | Depth | Height |
| Top Compartment | 39 ²⁹ / ₃₂ | 18 ²³ / ₃₂ | 4 23/32 |
| 2 | 34 ¹¹ / ₁₆ | 17 ¹⁷ / ₃₂ | 1 13/32 |
| 2 | 34 ¹¹ / ₁₆ | 17 ¹⁷ / ₃₂ | 3 19/32 |

JHWW40RC7 Roll Cabinet Overall Dimensions

| Capacity (cu. in.) | Width (inches) | Depth (inches) | Height (inches) |
|--------------------|----------------|----------------------|-----------------|
| 15253 | 40 | 19 ¹³ /16 | 37 % |
| Roll Cabinat I | JESWOE SIZOS | | |

Roll Cabinet Drawer Sizes

| Number | Width | Depth | Height |
|--------|---|----------------------------------|---------------------------------|
| 2 | 34 ¹¹ / ₁₆ | 17 ¹⁷ / ₃₂ | 1 13/32 |
| 4 | 34 ¹¹ / ₁₆ | 17 ¹⁷ /32 | 3 ¹⁹ / ₃₂ |
| 1 | 34 ¹¹ / ₁₆ | 17 ¹⁷ /32 | 7 ²¹ / ₃₂ |

Features

- Made of High-Quality Class I steel to enhance strength and finish
- Double wall construction provides strength
- · Reinforcement corner gussets add strength and reduce racking
- . 2" mounting centers provide flexibility in arranging drawers to individual needs
- . Drawers equipped with positive latching drawer retention to prevent unwanted
- · All drawers equipped with 75 pound full extension ball bearing slides with quick
- . All 4" and deeper drawers provide for adding additional slides to double drawer
- · Rolled hem on all drawers provide superior strength, rigidity and safety
- · Casters absorb vibrations transmitted to frame while moving on uneven surfaces
- · Casters equipped with pedal brake and ball bearings for easy operation
- · High luster paint protects against scratches, pealing, blistering and corrosion
- · Paint pretreatment process both sprays and immerses boxes for added corrosion protected
- . Drawer liners included at no extra charge
- . Gas struts in lid of chest make lid easy to open and close
- . Two point locking design adds extra security on all chests
- · Casters 5"x2", weight capacity 330 lbs. per caster
- · Weight capacity 75 lbs. per rail





Colors Available:

















Colors Available:

JHWW26RC7



26" PROFESSIONAL SERIES TOOL CABINET

Designed for industrial use

| Product Code | Description |
|--------------|---|
| JHWW26TC4 | 26" Wide x 20" Deep 4-Drawer Top Chest |
| JHWW26RC7 | 26" Wide x 20" Deep 7-Drawer Roll Cabinet |

Color Options: Standard color is red. To order in an optional color, simply add the appropriate color code to the end of the product code. Example: To order #JHWW26TC4 in Blue, specify product code JHWW26TC4BL

JHWW26TC4 Top Chest Overall Dimensions

| Capacity (cu. in.) | Width (inches) | Depth (inches) | Height (inches) |
|--------------------|----------------------------------|----------------------------------|-----------------|
| 6180 | 26 ²³ / ₃₂ | 19 ¹³ / ₁₆ | 19 13/32 |

Top Chest Drawer Sizes

| Number | Width (inches) | Depth (inches) | Height (inches) |
|-----------------|-----------------|----------------------------------|-----------------|
| Top Compartment | 26 19/32 | 18 ²³ / ₃₂ | 4 23/32 |
| 2 | 21 % | 17 17/32 | 1 13/32 |
| 2 | 21 % | 17 17/32 | 3 19/32 |

JHWW26RC7 Roll Cabinet Overall Dimensions

| Capacity (cu. in.) | Width (inches) | Depth (inches) | Height (inches) |
|--------------------|----------------|----------------------------------|-----------------|
| 9374 | 26 | 19 ¹³ / ₁₆ | 37 1/8 |

Roll Cabinet Drawer Sizes

| Number | Width (inches) | Depth (inches) | Height (inches) |
|--------|--------------------------------|----------------|---------------------------------|
| 2 | 21 % | 17 11/32 | 1 15/32 |
| 4 | 21 % | 17 11/32 | 3 ¹⁹ / ₃₂ |
| 1 | 21 ³ / ₈ | 17 11/32 | 7 21/32 |

- . Made of High-Quality Class I steel to enhance strength and finish
- · Double wall construction provides strength
- · Reinforcement corner gussets add strength and reduce racking
- 2" mounting centers provide flexibility in arranging drawers to individual needs
- Drawers equipped with positive latching drawer retention to prevent unwanted drawer opening
- All drawers equipped with 75 pound full extension ball bearing slides with quick disconnect
- All 4" and deeper drawers provide for adding additional slides to double drawer capacity
- · Rolled hem on all drawers provide superior strength, rigidity and safety
- Casters absorb vibrations transmitted to frame while moving on uneven surfaces
- · Casters equipped with pedal brake and ball bearings for easy operation
- High luster paint protects against scratches, pealing, blistering and corrosion
- Paint pretreatment process both sprays and immerses boxes for added corrosion protected
- · Drawer liners included at no extra charge
- Two point locking design adds extra security on all chests





BULK STORAGE CAGE

Secure storage with at-a-glance inventory control

| Product Code | Description | Load Capacity (lbs) |
|--------------|--|---------------------------|
| JHWWBSC2460C | Mobile Bulk Storage Cage w/ Casters | 900 |
| JHWWBSC2460S | Stationary Bulk Storage Cage | 1,800 |

Features

- Double door opening for easy access
- Door latch with padlock security loop
- Durable chrome finish
- Available with swivel and locking casters for easy mobility or stationary, without casters
- Dimensions: 62" wide x 68" high x 28.5" deep







Easy and convenient access to tools when and where you need them.

| Product Code | Description |
|--------------|--|
| JHW50721A | 4 Drawers with Lid, Rack and Shelf, Blue |
| JHW50722A | 2 Shelves, Blue |
| JHW50723A | 2 Shelves with Locking Drawer, Blue |
| .IHW50724 | 4 Drawers with Lid Back and Shelf Red |

Service Cart Overall Dimensions

| Product Code | Width (inches) | Depth (inches) | Height (inches |
|--------------|----------------|----------------|--|
| JHW50721A | 35 | 17 | 41 |
| JHW50722A | 30 | 17 | 41 |
| JHW50723A | 30 | 17 | 36 ⁷ / ₃₂ |
| JHW50724 | 35 | 17 | 41 |

- · High gloss powder coat paint is scratch & chemical resistant
- Storage drawers for frequently used tools
- . Heavy duty undercarriage to help support bottom tray load
- 18 gauge heavy duty steel
- 4" x 1" swivel casters

























JOB SITE BOXES

Designed for the toughest outdoor


work environments

| Product Code | JHW50950B | JHW50951B | JHW50952B | | | |
|--------------|--------------------------------|--------------------------------|--------------------------------|--|--|--|
| | Overall (Inches) | | | | | |
| Width | 32 | 42 | 48 | | | |
| Depth | 19 | 20 | 24 | | | |
| Height | 17 ¹ / ₂ | 23 ¹ / ₂ | 27 ¹ / ₂ | | | |
| | Inside of I | body (Inches) | | | | |
| Width | 31 | 41 ⁷ /8 | 47 ⁷ /8 | | | |
| Depth | 18 ⁷ /8 | 19 ⁷ /8 | 23 7/8 | | | |
| Height | 11 ¹ /8 | 17 | 21 ¹ / ₈ | | | |
| | Inside of to | op Lid (Inches) | | | | |
| Width | 31 ⁷ /8 | 41 ⁷ /8 | 47 ⁷ /8 | | | |
| Depth | 18 ⁷ /8 | 19 ⁷ /8 | 23 7/8 | | | |
| Height | 2 ⁵ /8 | 2 ⁵ /8 | 2 ⁵ /8 | | | |
| JHW50949 | 6" x 2" Swivel Caster Set | | | | | |

Features

- Caster weight capacity is 3500 lbs, sold separately
- Tough industrial powder coating finish
- Heavy 16 gauge steel construction with 12 gauge feet
- Recessed and concealed locking area protects padlock for ultimate security against drills and bolt cutter
- Fully welded seams provide maximum strength
- Recessed side handles for easy transportation
- Reinforced overlapping lid provides protection from weather and forced entry
- Heavy duty industrial lid stays prevents accidental closure
- Tread plate design for rugged durability





JHWS8-28139A

- Swivel Casters
- 600 lb capacity per caster
- Caster assemblies include brake

JHWS8-28239A

- Rigid Casters
- 600 lb capacity per caster







JHWS8-28239A



26" FLAT TOP TOOLBOX

| Product Code | Width (Inches) | Depth (Inches) | Height (Inches) | Cubic Inch Capacity |
|--------------|-------------------|-------------------|-----------------|------------------------|
| JHWTB-6124B | 26 1/4 | 8 1/2 | 9 1/2 | 1908 |

- Ruggedly constructed hand tool box
- Extra long tools up to 25" fit neatly inside
- . Three compartment tray with socket divider to keep small tools better organized and close at hand
- Double drawbolts keep the lid tightly closed
- · Padlock eye with slotted hasp provides security

21" FLAT TOP TOOLBOX

| Product Code | Width (Inches) | Depth (Inches) | Height (Inches) | Cubic Inch Capacity |
|--------------|-------------------|-------------------|-----------------|------------------------|
| JHWTB-6123B | 20 1/2 | 8 1/2 | 11 3/4 | 1433 |

- Ideal for general use
- Steel tote tray keeps smaller items handy
- · Combination drawbolt and padlock eye provide security

19" FLAT TOP TOOLBOX

| Product Code | Width | Depth | Height | Cubic Inch |
|--------------|----------|----------|----------|------------|
| | (Inches) | (Inches) | (Inches) | Capacity |
| JHWTB-6119B | 19 | 7 | 7 | 838 |

- · Ideal for general use
- · Steel tote tray keeps smaller Items handy
- · Combination drawbolt and padlock eye provide security

21" FOUR TRAY CANTILEVER TOOLBOX

| Product Code | Width | Depth | Height | Cubic Inch |
|--------------|----------|----------|----------|------------|
| | (Inches) | (Inches) | (Inches) | Capacity |
| JHWTB-6218B | 18 | 10 | 13 | 1532 |

- . Four trays cantilever outward when box is open providing access to the exceptionally deep box.
- Two of the trays feature movable dividers and another has a protective cover to prevent small tools or parts from spilling into the box.
- Formed feet in the box bottom add to strength and keep the box away from wet, dirty surfaces.





















JHWTOTEBAGB









14" TOOL TOTE BAG

| | Length | Width | Height |
|--------------|----------|----------|----------|
| Product Code | (Inches) | (Inches) | (Inches) |
| JHWTOTEBAGB | 14 | 11 | 10 |

Features

- Constructed from heavy Cordura® for maximum durability
- Ideal for storing and toting tools, parts, and supplies
- . Heavy duty zippers for extra long life

ROLL POUCHES

Customize Your Own Tool Sets

| Number of Pockets | Width (Inches) | Height (Inches) |
|-------------------|--|--|
| 5 | 6 | 7 ½ |
| 5 | 8 | 12 |
| | 11 ½ | 15 ½ |
| 5 | 12 ½ | 18 ½ |
| 5 | 16 | 25 |
| 15 | 17 1/4 | 10 ½ |
| 10 | 19 ¾ | 17 1/4 |
| 10 | 26 1/2 | 25 |
| 10 | 34 1/2 | 32 |
| 14 | 14 ½ | 8 |
| 8 | 23 1/4 | 26 |
| 4 | 8 ¾ | 11 |
| 17 | 23 1/4 | 17 3/4 |
| 26 | 19 1/2 | 27 |
| 8 | 11 | 12 ¾ |
| 9 | 14 % | 13 |
| 6 | 13 1/4 | 16 |
| 9 | 9 1/4 | 10 ½ |
| 15 | 37 | 26 ½ |
| 11 | 24 | 20 |
| 7 | 12 ¾ | 16 |
| 3 | 15 1/4 | 9 1/4 |
| 12 | 25 % | 29 |
| | 5 5 5 5 15 10 10 10 14 8 4 17 26 8 9 6 9 | 5 6 5 8 5 11 ½ 5 12 ½ 5 16 15 17 ¼ 10 19 ¾ 10 26 ½ 10 34 ½ 14 14 ½ 8 23 ¼ 4 8 ¾ 17 23 ¼ 26 19 ½ 8 11 9 14 % 6 13 ¼ 9 9 ½ 15 37 11 24 7 12 ¾ 3 15 ¼ |

Features

- · Heavy construction for long life
- Ideal for storing a variety of tools such as wrenches, extensions, and ratchets

VINYL POUCHES

Customize Your Own Tool Sets

| Product Code | Width (Inches) | Height (Inches) |
|--------------|----------------|-----------------|
| JHW50001A | 4 1/2 | 12 ½ |
| JHW50003A | 6 | 15 |
| JHW50005A | 7 1/2 | 19 |
| JHW50007A | 9 ½ | 19 |
| JHW097411A | 6 | 3/8 |
| JHW099965A | 9 ½ | 1/8 |

Features

- Extra heavy construction with snap fastening
- · Clear plastic front panels allows full visibility to tools
- . Metal grommets allow pouch to be hung on pegboard

WILLIAMS TOOL BACKPACK

| Customize Your | Own Tool Sets | Load Capacity |
|-----------------------|------------------|---------------|
| Product Code | Weight, lbs (kg) | lbs. (kg) |
| JHW-TBP14 | 4.8 (2.18) | 44 (19.96) |

- Rigid plastic bottom
- Heavy duty zippers
- Water resistant 1680D heavy duty material
- Tape measure clip and tape loop
- Padded shoulder straps and rear panel
- 2 sturdy carrying handles
- 32 internal pockets & 4 external pockets



METAL SOCKET SET TOOLBOXES

Rugged storage for Williams' premium socket sets

| | Width | Depth | Height | |
|--------------|-------------|----------|----------|-------|
| Product Code | (Inches) | (Inches) | (Inches) | Gauge |
| JHWTB-101 | 10 | 7 | 1 ½ | 22 |
| JHWTB-102 | 13 | 9 | 1 ¾ | 22 |
| JHWTB103 | 18 | 8 | 2 | 22 |
| JHWTB-104 | 25 | 9 | 2 | 20 |
| JHWTB-12 | 30 1/4 | 11 ½ | 4 3/4 | 18 |
| JHWTB-35 | 14 1/2 | 5 ½ | 1 ¾ | 22 |
| JHWTB-49 | 24 % | 8 % | 3 % | 18 |

Features

- · Ruggedly constructed for long life
- Ideal for storing socket sets, other tools, and small parts
- Made from cold-rolled steel





PLASTIC SOCKET RAILS AND CLIPS

| Product Code | Description | Material | Length (Inches) |
|--------------|--------------------|------------------|---------------------|
| JHWR-8BLUE | Socket Rail - Blue | Plastic | 8 |
| JHWR-8RED | Socket Rail - Red | Plastic | 8 |
| JHWR-13BLUE | Socket Rail - Blue | Plastic | 13 |
| JHWR-13RED | Socket Rail - Red | Plastic | 13 |
| JHWR-18BLUE | Socket Rail - Blue | Plastic | 18 |
| JHWR-18RED | Socket Rail - Red | Plastic | 18 |
| Product Code | Description | Package Quantity | Drive Size (Inches) |
| JHWRC-25-15P | Socket Clip | 15 Pack | 1/4 |
| JHWRC-37-15P | Socket Clip | 15 Pack | 3/8 |
| JHWRC-50-15P | Socket Clip | 15 Pack | 1/2 |

- · Socket clips sold individually
- All rails hold any size clips



METAL SOCKET RAILS AND CLIPS

| Product Code | Description | Material | Length (Inches) |
|--------------|-------------|----------|---------------------|
| JHWR-9 | Socket Rail | Metal | 9 |
| JHWR-13R | Socket Rail | Metal | 13 |
| JHWR-17 | Socket Rail | Metal | 17 |
| Product Code | Description | Material | Drive Size (Inches) |
| JHWRC-25 | Socket Clip | Metal | 1/4 |
| JHWRC-37 | Socket Clip | Metal | 3/8 |
| JHWRC-50 | Socket Clip | Metal | 1/2 |
| | Socket Clip | Metal | 3/4 |

- · Socket clips sold individually
- All rails hold any size clips



















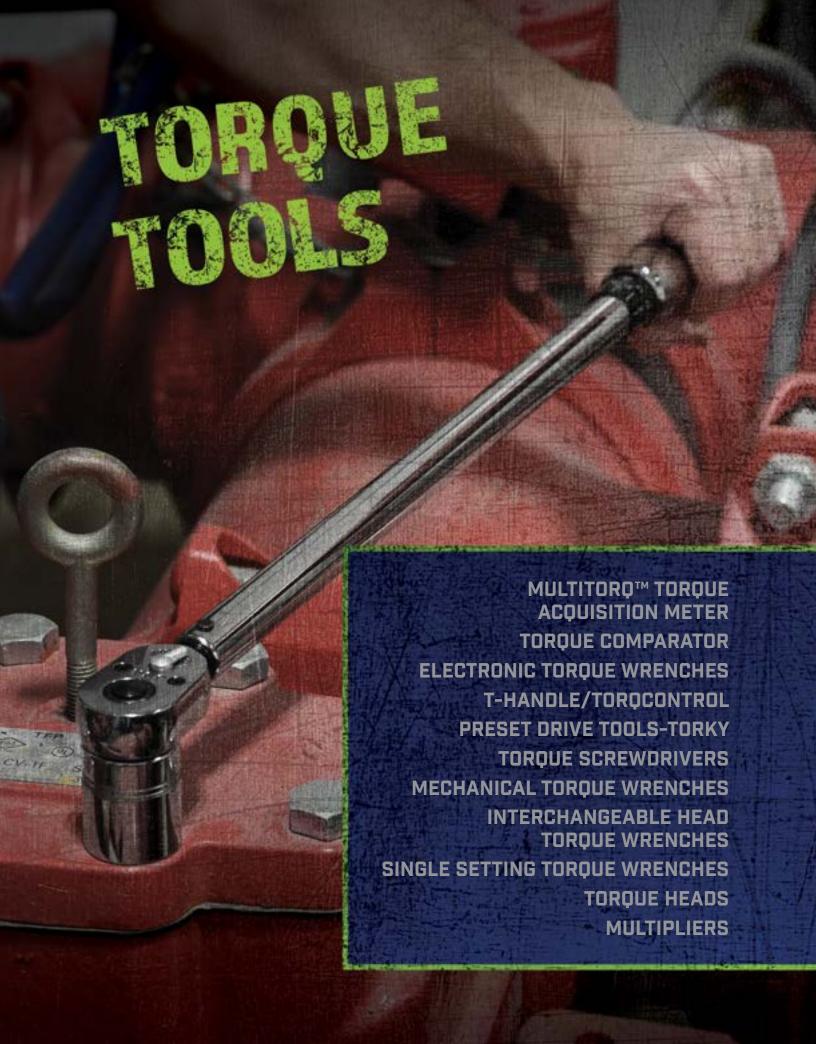





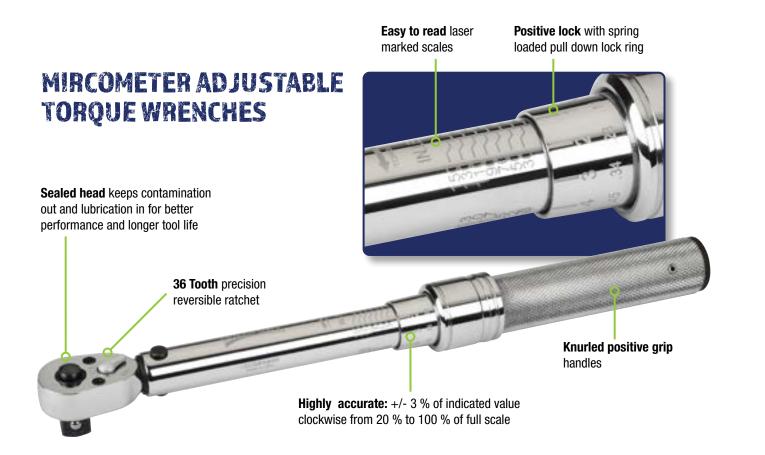


TORQUETOOLS

WORK MADE FASTER, EASIER AND SAFER



Sensors available in 1/4", 3/8", 1/2", 3/4" and 1" drive sizes







Cam-over torque limiting clutch for repeatability and accuracy

Automatic lock in counter-clockwise direction makes screw removal a snap

Permanently lubricated internal mechanism, never needs oil

Easy-to-read window scale and adjustment knob for precise settings

Industry standard 1/4" hex receiver allows use of all standard driver bits (Phillips,Torx, etc.) THE MICRO
WITH MASSIVE
VERSATILITY





Certified to the following industry specifications: ASME B107.300 - 2010 and ISO 6789



MULTITORQ™ TORQUE ACQUISITION METER

The MULTITORQ™ torque acquisition meter displays torque readings from sensors that attach between sockets and driver. MULTITORQ™ is a highly versatile torque analyzer/data acquisition system that can be used with sockets, extensions, universal joints, ratcheting drivers or any combination of these. Sensors are sold separately, available in 8 ranges from 2-20 in. ozs. to 150-1500 ft. lb. Accuracy \pm 1% of reading (\pm 2% reading for 20 in. oz., and 10 in. lb.) 10-100% of sensor range.

The torque analyzer features a wide angle viewing LCD display with selectable readouts; ft. lb., in. lb., in. oz., Nm, dNm, mkg, and cmkg units. Torque target settings are entered via a push button membrane keyboard. High and low torque limits are adjustable to give an audible and visual alarm. The user selects Track mode to display torque values as they are applied, or Peak mode to display the highest torque value applied.

Features

- 4 digit w/ alpha & numerical function flags
- 4 digit, 8000 counts display capacity
- Accuracy: ± 1% of indicated value, cw & ccw, from 10% to 100% of full scale, 201-O-MT and 101-I-MT are ± 2%
- Soft touch keys: hi/lo alarm, zero tare, set-up, units, store/recall/clear, send, statistics, enter
- Units of measurement: ft. lb., in. lb., in. oz., Nm, dNm, mkg and cmkg
- Operating Temperature: 40 to 100 Degrees Fahrenheit (4 to 43 Degrees Celsius)
- Storage: -20 to 50 degrees C (-2 to 122 degrees F)
- Humidity: up to 90%, non-condensing
- Dimensions: 3" wide, 2.5" high (3" with belt clip), 6" deep
- Weight: 1 pound
- Charge life (full charge to shutoff): 100 hours continuous
- Data storage/recall: 3500 measurements
- Mini-USB: download port
- Three AA Alkaline Batteries (included)
- Reads bi-directionally (cw and ccw)

Standard Set Includes:

| Froduct Code | Description |
|--------------|---------------------------|
| 1600-MT2W | MULTITORQ™ Unit includes: |
| PB57A | Carrying Case |
| AW2-1/2D | Hex Key (Battery Install) |
| USBATOMINIB | Mini-USB Cable |
| 276-61 | Belt Clip |



| Sensors: (sold sep | arately) | | |
|--------------------|--------------------|-------------|---------------|
| Product Code | Torque Range | Drive (In.) | |
| 201-O-MT2W | 2 - 20 in. oz. | 1/4 | N/II |
| 101-I-MT2W | 1 - 10 in. lb. | 1/4 | Made in U.S.A |
| 501-I-MT2W | 5 - 50 in. lb. | 1/4 | made in c.c.y |
| 2001-I-MT2W | 20 - 200 in. lb. | 1/4 | |
| 1002-F-MT2W | 10 - 100 ft. lb. | 3/8 | |
| 2503-F-MT2W | 25 - 250 ft. lb. | 1/2 | |
| 6004-F-MT2W | 60 - 600 ft. lb. | 3/4 | |
| 15005-F-MT2W | 150 - 1500 ft. lb. | 1 | |

Certificate of accuracy traceable to N.I.S. I. supplied with each transducer.

All components ordered separately.

















TORQUE COMPARATOR

Large dual scale. Perfect when a quick check of your wrench is required before usage. Compact design allows for mounting on any flat surface in either horizontal or vertical position. Torque Comparator is calibrated on torque testers which are certified using test bars and "F" weights traceable to NIST. +/- 2% accuracy from 20% of full scale to full scale. Calibration Compliance Certificate.

| Product Code | Square Drive | English Capacity | Inc. | Nm, Capacity | Inc. |
|--------------|--------------|------------------|------------|--------------|-------|
| 1753-TC | 1/2" | 175 ft. lbs. | 5 ft. lbs. | 230 Nm | 10 Nm |
| 6004-TC | 3/4" | 600 ft. lbs. | 5 ft. lbs. | 800 Nm | 20 Nm |





JHWDTC10M300-I

JHWDTC27M1500-F

DIGITAL TORQUE CHECKER

| Product Code | Torque Range | Maximum Torque (inoz.) | Input | Weight (lbs) |
|-----------------|--------------------|------------------------|--------------------|-----------------|
| JHWDTCMM240-0 | 5.0-240.0 in-oz | 288 | 1/4" Male Hex | 3.09 |
| JHWDTCMM100-I | 5.0-100.0 in-lbs | 120 | 1/4" Male Hex | 3.09 |
| JHWDTC10M300-I | 15.0-300.0 in-lbs | 360 | 10mm Male Hex | 3.09 |
| JHWDTCSF300-F | 7.5-300.0 ft-lbs | 360 | 1/2" Female Square | 5.95 |
| JHWDTC27M800-F | 40.0-800.0 ft-lbs | 960 | 27mm Male Hex | 7.72 |
| JHWDTC27M1500-F | 75.0-1500.0 ft-lbs | 1650 | 27mm Male Hex | 7.72 |

- Provides accurate torque reading to validate torque instrument calibration.
- Two Modes of Operation: Track and Click
- Includes N.I.S.T. Calibration Certificate
- Powered by Micro USB 2.0
- 1-button panel user interface
- Accuracy ±1%
- LCD Display
- · Compact form factor for convenient mounting locations
- · Adapters included for use with square drive torque instruments
- Operating Temperature Range: 32°F to 120°F
- Storage Temperature Range: -4°F to 155°F
- Power Consumption: 0.5W
- Environmental Protection: IP40





ELECTRONIC TORQUE WRENCH

TORQUE IN LESS TIME, WITH MORE ACCURACY AND CONTROL

Williams Electronic Torque Wrench are fully programmable for reliable, consistent, and repeatable torque applications. This electronic torque wrench is ideal for industrial working conditions and provides instant data on the exact torque actually applied.

| Product Code | Square Drive | Torque Range (inlb.) | Torque Range (ftlb.) | Range (Nm) | Head Depth (Inches) | Head Width (Inches) | Weight (lbs) | Overall Length (inches) |
|--------------|-----------------|-------------------------|-------------------------|---------------|------------------------|------------------------|-----------------|-------------------------------|
| 2401EFRMH | 1/4 | 12-240 | 1-20 | 1.36-27.12 | 1/2 | 7/8 | 0.93 | 11 % |
| 12002EFRMH | 3/8 | 60-1,200 | 5-100 | 7-135 | 3/4 | 11/8 | 1.60 | 15 ¾ |
| 1002EFRMH | 3/8 | 60-1,200 | 5-100 | 6.8-135.0 | 3/4 | 11/8 | 2.85 | 19 1/8 |
| 2503EFRMH | 1/2 | 150-3,000 | 12.5-250 | 16.9-339 | 7/8 | 1% | 4.35 | 26 ¾ |
| 6004ERMH | 3/4 | 360-7,200 | 30-600 | 40.7-813.5 | 2 % | 21/2 | 10.95 | 48 ¾ |


Features

Features a 36 tooth gear quick release ratchet head that provides good socket retention as well as easy socket removal

- Sealed head keep contamination out and lubrication in for better performance and longer tool life.
- Handles are durable with are lightly knurled for a tough, non slip grip
- Dual Progressive LEDs allows user to view active torque readings and to anticipate torque target for more accurate torque
- Automatically compensates for flex related torque variances
- Easy to read Large LCD Screen, LED indicator lights, audible beep and handle vibrations work together to signal when torque is within the targeted range
- Rugged all steel body is designed to stand up to industrial use and each wrench is backed by a 1 year warranty
- Torque measured in seven modes: ft-lb, in-lb, Nm, dNm, kg-cm, angle and torque then angle
- Fully programmable with 10 memory presets
- Conveniently switches to angle mode without removing the torque wrench from a fastener in torque then angle mode
- Angle Accuracy: (+/- 1% of reading) + (+/- 1 DEG @ Angle Velocity >10 DEG/SEC < 180 DEG/SEC) + (+/- 1 DEG for test fixture)
- Torque accuracy: +/- 2% CW, +/- 3% CCW indicated value, 20% to 100 % of full scale
- Torque accuracy: +/-4% CW, +/-6 CCW indicated value, 10% to 19% of full scale
- Torque accuracy: +/- 8% CW, +/- 10% CCW indicated value, 5% to 9% of full scale

Fully programmable - quickly change units of measure appropriate for specific applications


Low profile **buttons** protects against accidental activation



Head flexes ±15° to avoid obstructions.

Sealed head keeps contamination out and lubrication in for better performance and longer tool life

Quick release 36 tooth gear ratchet head





Easy-to-read LCD screen, LED indicator lights, audible beep and handle vibration work together to signal when torque is within the targeted range



LED indicator lights

Dual-side LED lights with configurable settings provide operational guidance
















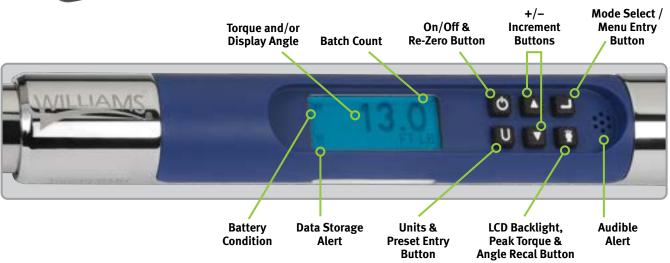



TORQUE LIMITING T-HANDLE - PRE-SET

| | | Pre Set Value | | |
|--------------|-----|---------------|---------|------|
| Product Code | Nm | Ft. Lb. | In. Lb. | Bit |
| TLPT4NMW | 4.0 | 2.9 | 35.4 | 4 mm |
| TLPT5NMW | 5.0 | 3.7 | 44.3 | 4 mm |
| TLPT6NMW | 6.0 | 4.4 | 53.1 | 4 mm |

Features

- Torque Limiting Technology to Prevent Over-Tightening
- Magnetic Shank to Interchange Bits as Needed
- Rounded T-Handle Grip for Added Comfort
- . Hi-Vis Color for Easy Identification
- Shaft accepts 1/4" hex shank bits, a 4 mm bit is included in each driver



TORQCONTROL ADJUSTABLE TORQUE TOOL

ACCURATE, FAST, EASY AND ERROR-PROOF

Applying just the right amount of torque in low-torque applications can be tricky at times. The new patent-pending TorqControl Torque Tool is an adjustable, torque limiting tool that applies torque in a range between 2 Newton Meters (Nm) and 8 Nm, indexing at every tenth Newton Meter.

| Product Code | Nm Range | Included Bits |
|--------------|----------|--|
| TLA28NMW | 2.0-8.0 | 4 mm, 5 mm, 6 mm, T25, 4" Long 4mm, 4" Long T25 Bits |

Features

- Perfect for applying torque to bicycle components
- . Magnetic tip holds, and allows for easy bit changes
- Standard 1/4" hex tip can utilize any standard hex bits
- Ergonomic L-shaped handle with rubberized cap for better grip
- Includes Certification of Accuracy
- TorgControl provides easy adjustability



PRESET DRIVE TOOLS - TORKY

TORKY is a right angle pre-set torque wrench. Torky is designed for production torque applications that require higher values than a torque screwdriver can deliver. The comfortable design eases the strain of repeated uses. Torque value may be ordered factory pre-set at an additional charge or it may be easily set by the operator with any quality torque calibration system. When the proper torque value is reached, a momentary release or "break" can be felt. Available in three drive styles to fit most needs.

- Factory Pre-Set models are set at the factory to the customer's specified torque setting and are furnished with a Certificate of Calibration
- · Please specify desired torque setting when order is placed
- Three models available
- Simple, easy to use design
- · Ruggedly built for years of reliable service
- . Operates bi-directionally
- Accuracy: ± 6% of indicated value, CW, from 20% to 100% of full scale

| Product Code Un-Set | Product Code Factory Pre-Set | Drive | Torque Range | W X L Length | Wt. Oz. |
|------------------------|---------------------------------|------------------|----------------|-----------------|------------|
| 1501TPA-1W | 1501TPA-1-SETW | 1/4" Female Hex | 20-170 in.lbs. | 1 x 5.25 | 8.3 |
| 1501TP-1W | 1501TP-1-SETW | 1/4" Male Square | 20-170 in.lbs. | 1 x 5.25 | 8.3 |
| 1502TP-1W | 1502TP-1-SETW | 3/8" Male Square | 20-170 in.lbs. | 1 x 5.25 | 8.3 |
| | | | | ** | ISA |
| | | | | Made in | U.S.A. |















61SMW

Industry standard 1/4" hex receiver allows use of all standard driver bits (Phillips, Torx, etc.)

Certified to the following industry specifications: ASME B107.300 - 2010 and ISO 6789

Cam-over torque limiting clutch for repeatability and accuracy

Automatic lock in counter-clockwise direction makes screw removal a snap

Comfortable, slip resistant finish

Permanently lubricated internal mechanism, never needs oil

Easy-to-read window scale and adjustment knob for precise settings

Lightweight yet rugged construction, built to last

TORQUE SCREWDRIVERS - MICRO-ADJUSTABLE

Adjustable models offer versatility for applications that require more than one torque value. These torque screwdrivers are particularly suited for the electronics industry and for instrument assembly work. A simple, cam-over design prevents over-tightening and possible damage to components.

Torque settings are easily and accurately changed with a unique adjusting knob and easy-to-read window scale. Adjusting the screwdriver is simple. Just pull out the adjusting knob to unlock, turn to the desired setting, then push the knob in until it clicks!

Positive locking knob makes accidental setting changes impossible. Automatic lock in counterclockwise direction makes fastener removal a snap. The Micro-Adjustable series includes six models with torque settings ranging from 20 in. ozs. to 40 in. lbs.

Features

- 6 models available
- Positive locking pull down adjustment knob
- Trilobular comfort grip
- Universal 1/4" hex bit holder with strong rare earth magnet
- Cam-over torque limiting clutch
- Slip resistant finish
- · Easy-to-read window scale
- · Light weight

- Automatic lock in CCW direction for removing screws
- Accuracy: ± 6% of indicated value, CW, from 20% to 100% of full scale
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.
- Meets or exceeds ASME B107.300 - 2010

| Product Code | Torque Range | Increments | W x L Inches | Wt. Oz. | |
|--------------|-------------------|-------------|-----------------|------------|----------------|
| 61SMW | 20 - 100 in. ozs. | 1 in. oz. | 1.1 x 5.5 | 6.8 | |
| 151SMW | 3 - 15 in. lbs. | .2 in. lbs. | 1.1 x 6.25 | 8.0 | USA |
| 401SMW | 5 - 40 in. lbs. | .5 in. lbs. | 1.2 x 6.75 | 10.8 | Made in U.S.A. |
| 61NSMW | 10 - 80 cNm | 1 cNm | 1.1 x 5.5 | 6.8 | |
| 151NSMW | 40 - 200 cNm | 2 cNm | 1.1 x 6.25 | 8.0 | |
| 401NSMW | 50 - 450 cNm | 5 cNm | 1.2 x 6.75 | 10.8 | |



| Product Code Un-Set | Product Code Factory Pre-Set | Torque Range | W X L Length | Wt. Oz. |
|------------------------|---------------------------------|------------------|--------------|---------|
| 21SPW | 21SP-SETW | 6-32 in.ozs | 1.1 x 4.5 | 5.3 |
| 61SPW | 61SP-SETW | 10 - 100 in.ozs. | 1.1 x 5.6 | 7.0 |
| 151SPW | 151SP-SETW | 1.5 - 15 in. lbs | 1.1 x 5.6 | 7.0 |
| 401SPW | 401SP-SETW | 4 - 40 in. lbs. | 1.2 x 6.3 | 9.6 |



TORQUE SCREWDRIVERS - SINGLE SETTING

The tamper resistant design of the **Single Setting** series is particularly suited for high-volume use in assembly operations. A simple, cam-over design prevents over-tightening and possible damage to components.

Torque screwdrivers may be ordered factory pre-set at an additional charge or they may be easily set by the operator with any quality torque calibration system. The end cap removes for easy access to the 1/8" hex adjustment screw. A hex adjustment key is included with each driver.

The Single Setting series includes four models with available torque settings from 6 in. ozs. up to 40 in.lbs. When precision and repeatability are a must, the choice is simple - Williams Torque Screwdrivers.

- Factory Pre-Set models are set at the factory to the customer's specified torque setting and are furnished with a Certificate of Calibration
- Please specify desired torque setting when order is placed
- · 4 models available
- · Trilobular comfort grip
- Universal 1/4" hex bit holder with strong rare earth magnet
- · Cam-over torque limiting clutch
- Rugged, light weight aluminum body
- Automatic lock in CCW direction
- Accuracy: ± 6% of indicated value, CW, from 20% to 100% of full scale
- Meets or exceeds ASME B107.300 2010



COMFORT GRIP MICROMETER ADJUSTABLE TORQUE WRENCHES - DUAL SCALE

Comfort-Grip Handle Dual Scale

| | Drive | English | | Nm | | Overall | Head | Head |
|--------------|------------|------------------|-------|-----------------|-------|---------------------------------------|-------------|-------------|
| Product Code | Size (In.) | Range | Incr. | Range | Incr. | Length (In.) | Width (In.) | Depth (In.) |
| 1501MRPHW | 1/4 | 20-150 in. lb. | 1 | 2.8 - 15.3 Nm | 0.12 | 9 3/4 | 7/8 | 4/8 |
| 2502MRPHW | 3/8 | 30-250 in. lb. | 1 | 4.0 - 27.7 Nm | 0.12 | 11 | 7/8 | 5/8 |
| 10002MRPHW | 3/8 | 150-1000 in. lb. | 5 | 19.8 - 110.2 Nm | 0.6 | 15 ³ / ₄ | 1 1/8 | 3/4 |
| 1002MFRPHW | 3/8 | 10-100 ft. lb. | 1 | 16.9 - 132.2 Nm | 0.7 | 15 ³ / ₄ | 1 1/8 | 3/4 |
| 2503MFRPHW | 1/2 | 30-250 ft. lb. | 1 | 47 - 332 Nm | 1.4 | 24 ¹ / ₂ | 1 5/8 | 7/8 |
| 6004MFRPHW | 3/4 | 100-600 ft. lb. | 5 | 169 - 779 Nm | 6.8 | 41 3/16 | 2 1/2 | 2 3/8 |

Features

- Dual scale, calibrated dual direction
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scale
- 1/4", 3/8", 1/2" Drive feature quick release buttons which provide good socket retention as well as easy socket removal
- Ergonomic comfort-grip
 Accuracy: ± 3% CW of indicated value CW from 20% to 100% of full scale
- Meets or exceeds ASME standards, ISO 6789 standards
- Individually serialized with ma hing certificate of calibration traceable to N.I.S.T.







Made in U.S.A.













MICROMETER ADJUSTABLE TORQUE WRENCHES - DUAL SCALE

| Metal Hand | le Dual | Scale | | | | | | |
|--------------|------------|------------------|-------|-----------------|-------|--|-------------------------------|-------------------------------|
| | Drive | English | | Nm | | Overall | Head | Head |
| Product Code | Size (In.) | Range | Incr. | Range | Incr. | Length (In.) | Width (In.) | Depth (In.) |
| 501MRMHW | 1/4 | 10-50 in. lb. | 0.50 | 1.4 - 5.4 Nm | 0.50 | 9 5/8 | 7/8 | 1/2 |
| 1501MRMHW | 1/4 | 20-150 in. lb. | 0.50 | 2.8-15.3 Nm | 0.120 | 9 3/4 | 7/8 | 1/2 |
| 1502MRMHW | 3/8 | 20-150 in. lb. | 1 | 2.8 - 15.3 Nm | 0.12 | 9 3/4 | 7/8 | 5/8 |
| 2002MRMHW | 3/8 | 30-200 in. lb. | 1 | 4.0 - 22.0 Nm | 0.12 | 10 | 7/8 | 5/8 |
| 2502MRMHW | 3/8 | 30-200 in. lb. | 1 | 4.0 - 27.7 Nm | 0.12 | 10 ⁷ /8 | 7/8 | 5/8 |
| 7502MRMHW | 3/8 | 100-750 in. lb. | 5 | 14.1 - 81.9 Nm | 0.60 | 15 ⁵ / ₁₆ | 7/8 | 5/8 |
| 10002MRMHW | 3/8 | 150-1000 in. lb. | 5 | 19.8 - 110.2 Nm | 0.60 | 15 ⁵ /8 | 7/8 | 5/8 |
| 25003MRMHW | 1/2 | 300-2500 in. lb. | 10 | 39.6 - 276.9 Nm | 1.2 | 19 ³ / ₁₆ | 1 5/8 | 7/8 |
| 752MFRMHW | 3/8 | 5-75 ft. lb. | 0.50 | 10.2 - 98.3 Nm | 0.70 | 15 ¹ / ₂ | 1 1/8 | 6/8 |
| 1002MFRMHW | 3/8 | 10-100 ft. lb. | 0.50 | 16.9 - 132.2 Nm | 0.70 | 15 ¹ / ₂ | 1 1/8 | 6/8 |
| 1503MFMHW | 1/2 | 20-150 ft lb. | 1 | 34 - 197 Nm | 1.4 | 18 ³ / ₄ | 1 5/8 | 7/8 |
| 1503MFRMHW | 1/2 | 20-150 ft lb. | 1 | 34 - 194 Nm | 1.4 | 18 ³ / ₄ | 1 5/8 | 7/8 |
| 2503MFRMHW | 1/2 | 30-250 ft. lb. | 1 | 47 - 332 Nm | 1.4 | 24 5/16 | 1 5/8 | 7/8 |
| 4004MFRMHW | 3/4 | 80-400 ft. lb. | 5 | 85 - 491 Nm | 3.4 | 34 ³ / ₁₆ | 2 1/2 | 2 ³ / ₈ |
| 6004MFRMHW | 3/4 | 100-500 ft. lb. | 5 | 169 - 779 Nm | 6.8 | 41 1/8 | 2 1/2 | 2 ³ / ₈ |
| 10005MFRMHW* | 1 | 200-1000 ft. lb. | 5 | 305 - 1322 Nm | 6.8 | 70 ³ / ₁₆ | 3 ¹ / ₈ | 2 7/8 |

- Knurled metal handle offers a tough, non-slip grip
- Dual scale, calibrated dual direction
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- 1/4", 3/8", 1/2" Drive feature quick release buttons which provide good socket retention as well as easy socket removal
- \bullet Accuracy: \pm 3% CW of indicated value CW from 20% to 100% of full scale
- Individually serialized with ma hing certificate of calibration traceable to N.I.S.T.
- *NOTE: 10005MFRMH supplied with one extension handle and is packed in a metal box.







INTERCHANGEABLE HEAD TORQUE WRENCHES


- Interchangeable heads permit ratcheting, fixed, or open end torquing capability with adjustable torque wrench bodies.
- A push of the locking pin provides quick-change action, with a wide range of head styles to choose from.
- Micrometer Type Adjustment-ensures fast, accurate settings and changes.
- *Part Number 800NMIMH has Dual Pin Release for added strength
- Accuracy: ± 3% of indicated value, in direction of torque indicator, from 20% to 100% of full scale

INTERCHANGEABLE HEAD TORQUE WRENCHES - DUAL SCALE

| Duadinat Cada | Charl Cina | N. Danas | la au | Fuultale Danna | O |
|---------------|------------|-----------|-------|----------------|----------------------|
| Product Code | Shank Size | Nm Range | Incr. | English Hange | Overall Length (ln.) |
| 50NMIMHW | J | 10 - 50 | 0.5 | 9.2 - 35 | 17 |
| 100NMIMHW | J | 20 - 100 | 0.5 | 16.5 - 71.9 | 20 |
| 200NMIMHW | Υ | 40 - 200 | 2 | 37 - 140 | 22 ½ |
| 350NMIMHW | X | 70 - 350 | 2 | 59 - 251 | 24 ½ |
| 800NMIMHW* | Z | 150 - 800 | 5 | 129 - 572 | 48 |

INTERCHANGEABLE HEAD TORQUE WRENCHES - SINGLE SCALE

| Product Code | Shank Size | English Range | Incr. | Overall Length (In.) |
|--------------|------------|---------------|-------|----------------------|
| 75MFIMHSSW | J | 5 - 75 | 0.5 | 16 |
| 150MFIMHSSW | Υ | 20 - 150 | 1 | 17 |
| 250MFIMHSSW | Υ | 30 - 250 | 1 | 23 |





Z Shank Dual Pins



150MFIMHSSW



Interchangeable heads sold separately on pages 68-73.











SINGLE SETTING TORQUE WRENCHES


| Product Code Un-Set | Product Code Factory Pre-Set | English Range | Nm Range | Shank Size | Overall Length (In.) | Head Width (In.) | Head Depth (In.) |
|------------------------|---------------------------------|-------------------|-------------|---------------|--------------------------------|---------------------|---------------------|
| 5T-IW | 5T-I-SETW | 10-50 in. lb. | 1.1 - 5.6 | J | 6 ¹ / ₂ | 5/8 | 5/8 |
| 10T-IW | 10T-I-SETW | 50 - 250 in. lb. | 5.6 - 28 | J | 10 | 5/8 | 5/8 |
| 10ST-IW | 10ST-I-SETW | 60 - 300 in. lb. | 6.8 - 34 | J | 6 | 5/8 | 1 |
| 50T-IW | 50T-I-SETW | 15 - 75 ft. lb. | 20 -102 | J | 11 | 5/8 | 1 |
| 100T-IW | 100T-I-SETW | 30 - 150 ft. lb. | 41 - 203 | Υ | 19 ¹ / ₂ | 1 | 1 |
| 200T-IW | 200T-I-SETW | 40 - 200 ft. lb. | 54 - 271 | Υ | 23 1/2 | 1 | 1 |
| 300T-IW | 300T-I-SETW | 100 - 300 ft. lb. | 135 - 406 | Χ | 27 1/2 | 1 | 1 |
| 600T-IW | 600T-I-SETW | 120 - 600 ft. lb. | 162 - 814 | Z | 55 | 1 1/2 | 1 1/4 |



- Designed for use on production lines and other applications where a specific torque
- is required for repetitive operations
 Factory Pre-Set models are set at the factory to the customer's specified torque setting, and are furnished with a Certificate of Calibration.
- Please specify desired torque setting when order is placed.
- Featuring a durable, non-slip cushion grip
- Uses universal round shank interchangeable heads
- Audible click and feel impulse torque control mechanism
- Tamper proof torque setting for production line use
- Accuracy: ± 3% CW of indicated value, in direction of torque indicator, from 20% to 100% of full scale
- Meets or exceeds ASME B107.300-2010



Z Shank Dual Pins









Z Shank Dual Pins

RATCHETING SQUARE DRIVE HEADS - SAE

| Square Drive | J (0.425") | Max Torque | Y (0.560") | Max Torque Ft. | X (0.735") | Max Torque | Z (0.990") | Max Torque | Z Dual Pins | Max Torque |
|-----------------|-------------|---------------|------------|-------------------|-------------|---------------|------------|---------------|-------------|---------------|
| (Inches) | | Ft. Lbs. | | Lbs. | | Ft. Lbs. | | Ft. Lbs. | | Ft. Lbs. |
| 1/4 | QJD8A-72 | 60 | | | | | | | | |
| 3/8 | QJD12A-80 | 60 | QYD12A-80 | 100 | | | | | | |
| 1/2 | QJD16A | 60 | QYD16A | 240 | QXD16A | 240 | | | | |
| 3/4 | | | | | QXD24A | 240 | QZD24B | 480 | QZD24BDP | 480 |
| 1 | | | | | QXD32A | 240 | QZD32B | 480 | QZD32BDP | 480 |



Z Shank Dual Pins

FIXED SQUARE DRIVE HEADS - SAE

| | | | | | | | | | 196 | |
|-----------------------------|-------------|---------------------------|------------|---------------------------|-------------|---------------------------|------------|---------------------------|-------------|---------------------------|
| Square Drive (Inches) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. | X (0.735") | Max Torque Ft. Lbs. | Z (0.990") | Max Torque Ft. Lbs. | Z Dual Pins | Max Torque Ft. Lbs. |
| 1/4 | QJSD8A | 60 | | | | | | | | |
| 3/8 | QJSD12A | 60 | QYSD12A | 100 | | | | | | |
| 1/2 | QJSD16A | 60 | QYSD16A | 160 | QXSD16A | 240 | | | | |
| 3/4 | | | | | QXSD24A | 240 | QZSD24A | 480 | QZSD24ADP | 480 |
| 1 | | | | | QXSD32A | 240 | QZSD32A | 480 | QZSD32ADP | 480 |



Z Shank Dual Pins

Dua

OPEN END HEADS - SAE

| J. — | CIAD UE | ADU | JAL | | | | | | | |
|----------|-------------|----------|------------|------------|-------------|----------|------------|----------|-------------|----------|
| Square | | Max | | Max | | Max | | Max | | Max |
| Drive | J (0.425") | Torque | Y (0.560") | Torque Ft. | X (0.735") | Torque | Z (0.990") | Torque | Z Dual Pins | Torque |
| (Inches) | | Ft. Lbs. | | Lbs. | | Ft. Lbs. | | Ft. Lbs. | | Ft. Lbs. |
| 1/4 | QJO8A | 5 | | | | ĺ | | | | |
| 9/32 | QJO9A | 7 | | | | | | | | |
| 5/16 | QJO10A | 9 | | | | | | | | |
| 3/8 | QJO12A | 18 | | | | | | | | |
| 7/16 | QJO14A | 26 | | | | | | | | |
| 1/2 | QJO16A | 34 | | | | | | | | |
| 9/16 | QJO18A | 58 | QYO18A | 58 | | | | | | |
| 5/8 | QJO20A | 60 | QYO20A | 70 | | | | | | |
| 11/16 | QJO22A | 60 | QYO22A | 99 | | | | | | |
| 3/4 | QJO24A | 60 | QYO24A | 125 | QXO24A | 125 | | | | |
| 13/16 | QJO26A | 60 | QYO26A | 160 | QXO26A | 164 | | | | |
| 7/8 | QJO28A | 60 | QYO28A | 160 | QXO28A | 193 | | | | |
| 15/16 | QJO30A | 60 | QYO30A | 160 | QXO30A | 200 | | | | |
| 1 | QJO32A | 60 | QYO32A | 160 | QXO32A | 240 | QZO32A | 298 | QZO32ADP | 298 |
| 1 1/16 | QJO34A | 60 | QYO34A | 160 | QXO34A | 240 | QZO34A | 321 | QZO34ADP | 321 |
| 1 1/8 | QJO36A | 60 | QYO36A | 160 | QXO36A | 240 | QZO36A | 367 | QZO36ADP | 367 |
| 1 3/16 | QJO38A | 60 | QYO38A | 160 | QXO38A | 240 | QZO38A | 433 | QZO38ADP | 433 |
| 1 1/4 | QJO40A | 60 | QYO40A | 160 | QXO40A | 240 | QZO40A | 480 | QZO40ADP | 480 |
| 1 5/16 | | | QYO42A | 160 | QXO42A | 240 | QZO42A | 480 | QZO42ADP | 480 |
| 1 3/8 | QJO44A | 60 | QYO44A | 160 | QXO44A | 240 | OZO44A | 480 | QZO44ADP | 480 |
| 1 7/16 | | | QYO46A | 160 | QXO46A | 240 | QZO46A | 480 | QZO46ADP | 480 |
| 1 1/2 | QJO48A | 60 | QYO48A | 160 | QXO48A | 240 | QZO48A | 480 | QZO48ADP | 480 |
| 1 9/16 | ĺ | | QYO50A | 160 | QXO50A | 240 | | | QZO50ADP | 480 |
| 1 5/8 | QJO52A | 60 | QYO52A | 160 | QXO52A | 240 | QZO52A | 480 | QZO52ADP | 480 |
| 1 11/16 | ĺ | | | | QXO54A | 240 | OZO54A | 480 | QZO54ADP | 480 |
| 1 3/4 | Ì | | QYO56A | 160 | QXO56A | 240 | OZO56A | 480 | QZO56ADP | 480 |
| 1 13/16 | Î | | | | QXO58A | 240 | OZO58A | 480 | QZO58ADP | 480 |
| 1 7/8 | Î | | QYO60A | 160 | QXO60A | 240 | OZO60A | 480 | QZO60ADP | 480 |
| 2 | ĺ | | | | QXO64A | 240 | QZO64A | 480 | QZO64ADP | 480 |
| 2 1/16 | | | | | QXO66A | 240 | QZO66A | 480 | QZO66ADP | 480 |
| 2 1/8 | | | | | QXO68A | 240 | QZO68A | 480 | QZO68ADP | 480 |
| 2 1/4 | | | QY072 | 160 | • | | QZO72A | 480 | QZO72ADP | 480 |
| 2 3/8 | | | | | | | · | | QZO76ADP | 480 |
| 2 1/2 | | | QY080 | 160 | | | QZO80A | 480 | QZO80ADP | 480 |
| 2 3/4 | İ | | | | | | QZO88A | 480 | | |
| 3 | 1 | | | | | Ì | OZO96A | 480 | | |





Center of fastener to retaining pin:

QJ Series - 2.50"

QY Series - 3.00"

QX Series - 4.50"

QZ Series - 5.75"














Dual Pins



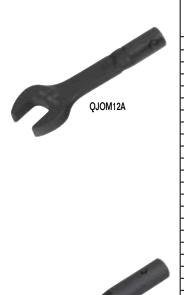



| PEN | END HE | ADS - | METRI | C | | | | | | |
|-------------------------|-------------|------------------------------|------------|---------------------------|-------------|---------------------------|------------|---------------------------|-------------|---------------------------|
| Square Drive (mm) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. | X (0.735") | Max Torque Ft. Lbs. | Z (0.990") | Max Torque Ft. Lbs. | Z Dual Pins | Max Torque Ft. Lbs. |
| 6 | QJOM6A | 5 | | | | | | | | |
| 7 | QJOM7A | 6 | | | | | İ | | İ | |
| 8 | QJOM8A | 10 | | | | | İ | | İ | |
| 9 | QJOM9A | 14 | | | | | ĺ | | | |
| 10 | QJOM10A | 22 | | | | | ĺ | | | |
| 11 | QJOM11A | 33 | | | | | Ì | | | |
| 12 | QJOM12A | 36 | | | | | Ì | | | |
| 13 | QJOM13A | 41 | | | | | i | | | |
| 14 | QJOM14A | 55 | QYOM14A | 55 | | | i | | | |
| 15 | QJOM15A | 60 | QYOM15A | 74 | | | i | | | |
| 16 | QJOM16A | 60 | QYOM16A | 88 | | | i | | | |
| 17 | QJOM17A | 60 | QYOM17A | 103 | QXOM17A | 103 | i | | | |
| 18 | QJOM18A | 60 | QYOM18A | 115 | QXOM18A | 115 | ĺ | | | |
| 19 | QJOM19A | 60 | QYOM19A | 138 | QXOM19A | 138 | ĺ | | | |
| 20 | QJOM20A | 60 | QYOM20A | 160 | QXOM20A | 160 | Ì | | | |
| 21 | QJOM21A | 60 | QYOM21A | 160 | QXOM21A | 180 | i | | | |
| 22 | OJOM22A | 60 | QYOM22A | 160 | QXOM22A | 206 | i | | | |
| 23 | OJOM23A | 60 | QYOM23A | 160 | QXOM23A | 229 | i | | | |
| 24 | QJOM24A | 60 | QYOM24A | 160 | QXOM24A | 240 | QZOM24A | 248 | QZOM24ADP | 250 |
| 25 | QJOM25A | 60 | QYOM25A | 160 | QXOM25A | 240 | i | | QZOM25ADP | 275 |
| 26 | QJOM26A | 60 | QYOM26A | 160 | QXOM26A | 240 | İ | | QZOM26ADP | 298 |
| 27 | QJOM27A | 60 | QYOM27A | 160 | QXOM27A | 240 | QZOM27A | 319 | QZOM27ADP | 319 |
| 29 | 1 | İ | QYOM29A | 160 | QXOM29A | 240 | i | | QZOM29ADP | 379 |
| 30 | QJOM30A | 60 | QYOM30A | 160 | QXOM30A | 240 | QZOM30A | 413 | QZOM30ADP | 413 |
| 32 | 1 | İ | QYOM32A | 160 | QXOM32A | 240 | QZOM32A | 480 | QZOM32ADP | 480 |
| 34 | 1 | İ | QYOM34A | 160 | QXOM34A | 240 | i - | | QZOM34ADP | 480 |
| 36 | QJOM36A | 60 | QYOM36A | 160 | QXOM36A | 240 | QZOM36A | 480 | QZOM36ADP | 480 |
| 37 | Ì | | QYOM37A | 160 | | | i - | | | |
| 38 | | | | | | | | | QZOM38ADP | 480 |
| 41 | | | QYOM41 | 160 | QXOM41A | 240 | | | QZOM41ADP | 480 |
| 46 | | | | | QXOM46A | 240 | QZOM46A | 480 | QZOM46ADP | 480 |
| 50 | | | QZOM50A | 180 | | | QZOM50A | 480 | QZOM50ADP | 480 |
| 55 | | | | | | 240 | QZOM55A | 480 | QZOM55ADP | 480 |
| 60 | | | QZOM60A | 180 | QXOM60A | 240 | QZOM60A | 480 | QZOM60ADP | 480 |
| 65 | | | | | | | QZOM65A | 480 | QZOM65ADP | 480 |
| 70 | Ì | Ì | | | | | | | QZOM70ADP | 480 |



OPEN END THIN HEADS - SAE

| Square Drive | | Max | | Max |
|--------------|-------------|----------|------------|----------|
| (Inches) | J (0.425") | Torque | Y (0.560") | Torque |
| (IIICHES) | | Ft. Lbs. | | Ft. Lbs. |
| 9/16 | QJO18ARTH | 58 | | |
| 7/8 | QJO28ARTH | 60 | | |
| 11/16 | QJO22ARTH60 | 60 | | |
| 15/16 | QJO30ARTH | 60 | QYO30ARTH | 160 |
| 1 | QJO32ARTH | 60 | | |
| 1 1/16 | QJO34ARTH | 60 | QYO34ARTH | 160 |
| 1 1/8 | QJO36ARTH | 60 | | |
| 1 3/16 | QJO38ARTH | 60 | | |
| 1 1/4 | QJO40ARTH | 60 | | |
| 1 3/8 | QJO44ARTH | 60 | QYO44ARTH | 160 |
| 1 1/2 | QJO48ARTH | 60 | QYO48ARTH | 160 |
| 1 9/16 | QJO50ARTH | 60 | | |
| 1 5/8 | QJO52ARTH | 60 | QYO52ARTH | 160 |
| 1 11/16 | QJO54ARTH | 60 | | |
| 1 3/4 | QJO56ARTH | 60 | QYO56ARTH | 160 |
| 1 7/8 | QJO60ARTH | 60 | QYO60ARTH | 160 |
| 2 | QJO64ARTH | 60 | QYO64ARTH | 160 |
| 2 1/16 | QJO66ARTH | 60 | | |
| 2 1/8 | QJ068ARTH | 60 | QYO68ARTH | 160 |
| 2 1/4 | | | QYO72ARTH | 160 |
| 2 11/16 | QJO86ARTH | 60 | | |





Z Shank Dual Pins

12-POINT BOX END 15° OFFSET HEADS - SAE

| Drive | _ | _ | | | _ | _ | _ | | | | |
|---|---------|-------------|------|------------|----------|-------------|----------|------------|----------|-------------|----------|
| Cinches Ft. Lbs. | | | | | - | | | | | | Max |
| 7/32 | | J (0.425") | | Y (0.560") | | X (0.735") | | Z (0.990") | | Z Dual Pins | Torque |
| 1/4 | | | | | Ft. Lbs. | | Ft. Lbs. | | Ft. Lbs. | | Ft. Lbs. |
| 9/32 Q,X/9A | | | | | | | | | | | |
| S/16 | | | | | | | | | | | |
| 3/8 | | | - '' | | | | | | | | |
| 7/16 | | | | | | | | | | | |
| 1/2 | | <u> </u> | | | | | | | | | |
| 9/16 QJX18A 60 QYX18A 112 | | <u> </u> | | • | | | | | | | |
| 5/8 | | | | | | | | | | | |
| 11/16 | | <u> </u> | 60 | <u> </u> | 112 | | | | | | |
| 3/4 | | ٠. | 60 | | 160 | | 171 | | | | |
| 13/16 | 11/16 | QJX22A | 60 | QYX22A | 160 | QXX22A | 200 | | | | |
| 7/8 QJX28A 60 QYX28A 160 QXX28A 240 15/16 QJX30A 60 QYX30A 160 QXX30A 240 QZX30A 300 QZX36ADP 30 1 QJX32A 60 QYX32A 160 QXX32A 240 QZX34A 480 QZX34ADP 30 11/16 QJX34A 60 QYX34A 160 QXX34A 240 QZX36A 480 QZX36ADP 48 11/8 QYX36A 160 QXX38A 240 QZX36A 480 QZX36ADP 48 13/16 QYX36A 160 QXX38A 240 QZX38A 480 QZX38ADP 48 11/4 QJX40A 60 QYX40A 160 QXX40A 240 QZX42A 480 QZX40ADP 48 15/16 QYX44A 160 QXX44A 240 QZX44A 480 QZX42ADP 48 15/16 QYX44A 160 QXX46A 240 QZX46 | 3/4 | QJX24A | 60 | QYX24A | 160 | QXX24A | 219 | | | | |
| 15/16 | 13/16 | QJX26A | 60 | QYX26A | 160 | QXX26A | 240 | QZX26A | 275 | QZX26ADP | 275 |
| 1 QJX32A 60 QYX32A 160 QXX32A 240 | 7/8 | QJX28A | 60 | QYX28A | 160 | QXX28A | 240 | | | | |
| 11/16 | 15/16 | QJX30A | 60 | QYX30A | 160 | QXX30A | 240 | QZX30A | 300 | QZX36ADP | 300 |
| 1 1/8 QYX36A 160 QXX36A 240 QZX36A 480 QZX36ADP 48 1 3/16 QYX38A 160 QXX38A 240 QZX38A 480 QZX38ADP 48 1 1/4 QJX40A 60 QYX40A 160 QXX40A 240 QZX42A 480 QZX42DP 48 1 5/16 QYX42A 160 QXX42A 240 QZX42A 480 QZX42DP 48 1 3/8 QYX44A 160 QXX44A 240 QZX44A 480 QZX46ADP 48 1 1/2 QYX46A 160 QXX46A 240 QZX46A 480 QZX46ADP 48 1 1/2 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 5/8 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 1/6 QXX50A 240 QZX50A 480 QZX50ADP 48 1 13/4 | 1 | QJX32A | 60 | QYX32A | 160 | QXX32A | 240 | | | | |
| 13/16 | 1 1/16 | QJX34A | 60 | QYX34A | 160 | QXX34A | 240 | QZX34A | 480 | QZX34ADP | 300 |
| 1 1/4 QJX40A 60 QYX40A 160 QXX40A 240 QZX42A 480 QZX42ADP 48 1 5/16 QYX42A 160 QXX42A 240 QZX42A 480 QZX42ADP 48 1 3/8 QYX44A 160 QXX44A 240 QZX44A 480 QZX44ADP 48 1 7/16 QYX46A 160 QXX46A 240 QZX46A 480 QZX46ADP 48 1 1/2 QYX48A 160 QXX48A 240 QZX48A 480 QZX50ADP 48 1 9/16 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 5/8 QYX52A 160 QXX52A 240 QZX52A 480 QZX52ADP 48 1 1/6 QXX52A 240 QZX56A 480 QZX56ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX56ADP 48 | 1 1/8 | | | QYX36A | 160 | QXX36A | 240 | QZX36A | 480 | QZX36ADP | 480 |
| 15/16 | 1 3/16 | | | QYX38A | 160 | QXX38A | 240 | QZX38A | 480 | QZX38ADP | 480 |
| 1 3/8 QYX44A 160 QXX44A 240 QZX44A 480 QZX44ADP 48 1 7/16 QYX46A 160 QXX46A 240 QZX46A 480 QZX46ADP 48 1 1/2 QYX48A 160 QXX48A 240 QZX4BA 480 QZX50ADP 48 1 9/16 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 5/8 QYX52A 160 QXX52A 240 QZX52A 480 QZX52ADP 48 1 11/16 QXX52A 240 QZX54A 480 QZX54ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX56A 240 QZX56A 480 QZX56ADP 48 1 7/8 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/16 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/8 | 1 1/4 | QJX40A | 60 | QYX40A | 160 | QXX40A | 240 | | | QZX40ADP | 480 |
| 17/16 QYX46A 160 QXX46A 240 QZX46A 480 QZX46ADP 48 1 1/2 QYX48A 160 QXX48A 240 QZX48A 480 QZX50ADP 48 1 9/16 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 5/8 QYX52A 160 QXX52A 240 QZX52A 480 QZX52ADP 48 1 11/16 QXX54A 240 QZX54A 480 QZX54ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX56A 240 QZX56A 480 QZX56ADP 48 1 7/8 QXX66A 240 QZX60A 480 QZX60ADP 48 2 1/16 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/8 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/8 QXX66A QXX66A <td>1 5/16</td> <td></td> <td>İ</td> <td>QYX42A</td> <td>160</td> <td>QXX42A</td> <td>240</td> <td>QZX42A</td> <td>480</td> <td>QZX42ADP</td> <td>480</td> | 1 5/16 | | İ | QYX42A | 160 | QXX42A | 240 | QZX42A | 480 | QZX42ADP | 480 |
| 1 1/2 QYX48A 160 QXX48A 240 QZX48A 480 QZX48ADP 48 1 9/16 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 5/8 QYX52A 160 QXX52A 240 QZX52A 480 QZX52ADP 48 1 11/16 QXX54A 240 QZX54A 480 QZX54ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX56A 240 QZX58A 480 QZX58ADP 48 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 1/16 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/8 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/8 QXX66A QXX66A QXX66A QXX66ADP 48 2 1/4 QXX72A QXX72A QXX72A 480 QXX7 | 1 3/8 | | İ | QYX44A | 160 | QXX44A | 240 | QZX44A | 480 | QZX44ADP | 480 |
| 1 9/16 QYX50A 160 QXX50A 240 QZX50A 480 QZX50ADP 48 1 5/8 QYX52A 160 QXX52A 240 QZX52A 480 QZX52ADP 48 1 11/16 QXX54A 240 QZX54A 480 QZX54ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX58A 240 QZX58A 480 QZX58ADP 48 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 QXX66A 240 QZX66A 480 QZX60ADP 48 2 1/16 QXX66A 240 QZX66A 480 QZX66ADP 48 2 1/8 QXX66A 480 QZX66ADP 48 2 1/8 QXX60ADP 48 QZX70ADP 48 2 1/4 QXX70ADP 48 QZX72A 480 QZX72ADP 48 2 1/2 QXX60ADP 48 | 1 7/16 | | | QYX46A | 160 | QXX46A | 240 | QZX46A | 480 | QZX46ADP | 480 |
| 1 5/8 QYX52A 160 QXX52A 240 QZX52A 480 QZX52ADP 48 1 11/16 QXX54A 240 QZX54A 480 QZX54ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX58A 240 QZX58A 480 QZX58ADP 48 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 QXX64A 240 QZX64A 480 QZX6ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX66A 480 QZX66ADP 48 2 1/8 QZX66A 480 QZX66ADP 48 2 1/4 QXX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 1/2 QXX60ADP 48 QXX76ADP 48 QXX76ADP 48 | 1 1/2 | | İ | QYX48A | 160 | QXX48A | 240 | QZX48A | 480 | QZX48ADP | 480 |
| 111/16 QXX54A 240 QZX54A 480 QZX54ADP 48 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX58A 240 QZX58A 480 QZX58ADP 48 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 QXX64A 240 QZX64A 480 QZX6ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX66A 480 QZX66ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 QZX76ADP 48 | 1 9/16 | | | QYX50A | 160 | QXX50A | 240 | QZX50A | 480 | QZX50ADP | 480 |
| 1 3/4 QXX56A 240 QZX56A 480 QZX56ADP 48 1 13/16 QXX58A 240 QZX58A 480 QZX58ADP 48 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 QXX64A 240 QZX64A 480 QZX6ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX66A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 QZX78ADP 48 | 1 5/8 | | | QYX52A | 160 | QXX52A | 240 | QZX52A | 480 | QZX52ADP | 480 |
| 1 13/16 QXX58A 240 QZX58ADP 48 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 QXX64A 240 QZX64A 480 QZX64ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX66A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | 1 11/16 | | | | | QXX54A | 240 | QZX54A | 480 | QZX54ADP | 480 |
| 1 7/8 QXX60A 240 QZX60A 480 QZX60ADP 48 2 QXX64A 240 QZX64A 480 QZX6ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX68A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 2 1/2 QZX80ADP 48 | 1 3/4 | | | | | QXX56A | 240 | QZX56A | 480 | QZX56ADP | 480 |
| 2 QXX64A 240 QZX64A 480 QZX64ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX68A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | 1 13/16 | | | | | QXX58A | 240 | QZX58A | 480 | QZX58ADP | 480 |
| 2 QXX64A 240 QZX64A 480 QZX64ADP 48 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX68A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | 1 7/8 | | | | | QXX60A | 240 | QZX60A | 480 | QZX60ADP | 480 |
| 2 1/16 QZX66A 480 QZX66ADP 48 2 1/8 QZX68A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | 2 | | | | | QXX64A | 240 | | 480 | QZX64ADP | 480 |
| 2 1/8 QZX68A 480 QZX68ADP 48 2 3/16 QZX70ADP 48 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | 2 1/16 | | | | | T . | | • | 480 | | 480 |
| 2 3/16 QZX70ADP 48 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | | | | | | | <u> </u> | • | | | 480 |
| 2 1/4 QXX72A 240 QZX72A 480 QZX72ADP 48 2 3/8 QZX76ADP 48 QZX76ADP 48 2 1/2 QZX80ADP 48 | 2 3/16 | | | | | | | • | | <u> </u> | 480 |
| 2 3/8 QZX76ADP 48 2 1/2 QZX80ADP 48 | | | | | | QXX72A | 240 | QZX72A | 480 | | 480 |
| 2 1/2 QZX80ADP 48 | 2 3/8 | | | | | T . | | • | | | 480 |
| | | | | | | | | | | <u> </u> | 480 |
| 2 3/10 1 1 1 1 1 1 0ZAOZA 1 400 1 1 | 2 9/16 | | | | | | | QZX82A | 480 | | |





12-POINT BOX END 0° OFFSET - SAE

| Square Drive (Inches) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. |
|-----------------------|-------------|------------------------|------------|------------------------|
| 3/8 | QJXD12A | 60 | | |
| 7/16 | QJXD14A | 60 | | |
| 1/2 | QJXD16A | 60 | | |
| 9/16 | QJXD18A | 60 | | |
| 5/8 | | | QYXD20A | 160 |
| 11/16 | QJXD22A | 60 | QYXD22A | 160 |
| 3/4 | QJXD24A | 60 | QYXD24A | 160 |
| 7/8 | QJXD28A | 60 | QYXD28A | 160 |
| 15/16 | QJXD30A | 60 | QYXD30A | 160 |
| 1 | QJXD32A | 60 | | |













Z Shank Dual Pins



12-POINT BOX END 15° OFFSET - METRIC



| C | | M | | M | | M | | M | | NA |
|-------------------------|-------------|---------------------------|------------|---------------------------|-------------|---------------------------|------------|---------------------------|-------------|------------------------|
| Square Drive (mm) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. | X (0.735") | Max Torque Ft. Lbs. | Z (0.990") | Max Torque Ft. Lbs. | Z Dual Pins | Max Torqu Ft. Lb |
| 6 | QJXM6A | 15 | | LUS. | | Tt. LUS. | | Tt. LUS. | | 11. LL |
| 7 | QJXM7A | 20 | | | | | | | | |
| 8 | QJXM8A | 22 | | | | | | | | |
| 9 | QJXM9A | 30 | | | | | | | | |
| 10 | QJXM10A | 53 | | | | | | | | |
| 11 | QJXM11A | 59 | | - | | | | | | |
| 12 | QJXM12A | 60 | | | | | | | | |
| 13 | QJXM13A | 60 | QYXM13A | 75 | | | | | | |
| 14 | QJXM14A | 60 | QYXM14A | 117 | | | | | | |
| 15 | QJXM15A | 60 | QYXM15A | 148 | QXXM14A | 117 | | | | |
| 16 | QJXM16A | 60 | QYXM16A | 160 | QXXM16A | 183 | | | | |
| 17 | QJXM17A | 60 | QYXM17A | 160 | QXXM17A | 197 | | | | |
| 18 | QJXM18A | 60 | QYXM18A | 160 | QXXM18A | 224 | | | | |
| 19 | QJXM19A | 60 | QYXM19A | 160 | QXXM19A | 238 | | | QZXM19ADP | 23 |
| 20 | QJXM20A | 60 | QYXM20A | 160 | QXXM20A | 240 | | | <u> </u> | |
| 21 | QJXM21A | 60 | QYXM21A | 160 | QXXM21A | 240 | | | | |
| 22 | QJXM22A | 60 | QYXM22A | 160 | QXXM22A | 240 | | | | |
| 23 | QJXM23A | 60 | QYXM23A | 160 | QXXM23A | 240 | | | | |
| 24 | QJXM24A | 60 | QYXM24A | 160 | QXXM24A | 240 | QZXM24A | 375 | QZXM24ADP | 37 |
| 25 | QJXM25A | 60 | QYXM25A | 160 | QXXM25A | 240 | QZXM25A | 413 | QZXM25ADP | 41 |
| 26 | QJXM26A | 60 | QYXM26A | 160 | QXXM26A | 240 | QZXM26A | 448 | QZXM26ADP | 44 |
| 27 | QJXM27A | 60 | QYXM27A | 160 | QXXM27A | 240 | QZXM27A | 480 | QZXM27ADP | 44 |
| 29 | | | QYXM29A | 160 | QXXM29A | 240 | QZXM29A | 480 | QZXM29ADP | 48 |
| 30 | | | QYXM30A | 160 | QXXM30A | 240 | QZXM30A | 480 | QZXM30ADP | 48 |
| 32 | | | QYXM32A | 160 | QXXM32A | 240 | QZXM32A | 480 | QZXM32ADP | 48 |
| 34 | | | QYXM34A | 160 | QXXM34A | 240 | QZXM34A | 480 | QZXM34ADP | 48 |
| 36 | | | QYXM36A | 160 | QXXM36A | 240 | QZXM36A | 480 | QZXM36ADP | 48 |
| 41 | | | | | QXXM41A | 240 | | | QZXM41ADP | 48 |
| 46 | | | | | QXXM46A | 240 | | | QZXM46ADP | 48 |
| 50 | | | | | | | | | QZXM50ADP | 48 |
| 55 | | | | | | | | | QZXM55ADP | 48 |
| 60 | | | | | | | | | QZXM60ADP | 48 |



12 POINT RATCHET WRENCH HEADS - METRIC

| Square Drive (mm) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. |
|-------------------|-------------|------------------------|------------|------------------------|
| 10 | QJBOERM10A | 60 | | |
| 13 | QJBOERM13A | 60 | | |
| 14 | QJBOERM14A | 60 | | |
| 15 | QJBOERM15A | 60 | | |
| 16 | QJBOERM16A | 60 | QYBOERM16A | 160 |
| 18 | QJBOERM18A | 60 | QYBOERM18A | 160 |
| 19 | QJBOERM19A | 60 | | |
| 22 | QJBOERM22A | 60 | QYBOERM22A | 160 |
| 24 | QJBOERM24A | 60 | QYBOERM24A | 160 |



12 POINT RATCHET WRENCH HEADS - SAE

| Square Drive (Inches) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. |
|-----------------------|-------------|------------------------|------------|------------------------|
| 3/8 | QJBOER12A | 60 | QYBOER12A | 60 |
| 7/16 | QJBOER14A | 60 | | |
| 1/2 | QJBOER16A | 60 | | |
| 9/16 | QJBOER18A | 60 | QYBOER18A | 112 |
| 5/8 | QJBOER20A | 60 | QYBOER20A | 160 |
| 11/16 | | | QYBOER22A | 160 |
| 3/4 | QJBOER24A | 60 | QYBOER24A | 160 |
| 15/16 | | | QJBOER30A | 160 |





12-POINT BOX END 10° OFFSET - SAE

| Square Drive (Inches) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. | X (0.735") | Max Torque Ft. Lbs. |
|--------------------------|-------------|------------------------|------------|------------------------|-------------|------------------------|
| 1/2 | QJXB16A | 60 | | | | |
| 9/16 | QJXB18A | 60 | | | | |
| 5/8 | QJXB20A | 60 | QYXB20A | 79 | | |
| 11/16 | QJXB22A | 60 | | | | |
| 3/4 | QJXB24A | 60 | QYXB24A | 160 | | |
| 7/8 | | | QYXB28A | 133 | | |
| 15/16 | | | QYXB30A | 160 | | |
| 1 | | | QYXB32A | 160 | | |
| 1 1/8 | | | QYXB36A | 160 | | |
| 1 3/8 | | | | | QXXB44A | 240 |
| 1 1/2 | | | | | QXXB48A | 240 |



12-POINT BOX END 10° OFFSET - METRIC

| Square Drive (mm) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. |
|----------------------|-------------|------------------------|------------|------------------------|
| 11mm | QJXBM11A | 59 | | |
| 12mm | QJXBM12A | 60 | | |
| 13mm | QJXBM13A | 60 | | |
| 14mm | QJXBM14A | 60 | | |
| 15mm | QJXBM15A | 60 | | |
| 16mm | QJXBM16A | 60 | | |
| 18mm | QJXBM18A | 60 | QYXBM18A | 160 |
| 19mm | QJXBM19A | 60 | | |
| 24mm | | | QYXBM24A | 160 |
| 28mm | | | QYXBM28A | 160 |



12-POINT BOX END 40° BEND - METRIC

| Square Drive (mm) | Y (0.560") | Max Torque Ft. Lbs. |
|-------------------|------------|---------------------|
| 16 | QYSBXM16A | 60 |
| 18 | QYSBXM18A | 160 |
| 24 | QYSBXM24A | 160 |



| Square Drive | J (0.425") | Max Torque | Y (0.560") | Max Torque |
|--------------|-------------|------------|------------|------------|
| (Inches) | J (0.425) | Ft. Lbs. | 1 (0.500) | Ft. Lbs. |
| 1/2 | QJRX16A | 60 | | |
| 9/16 | QJRX18A | 60 | QYRX18A | 67 |
| 5/8 | QJRX20A | 60 | QYRX20A | 79 |
| 11/16 | QJRX22A | 60 | QYRX22A | 92 |
| 3/4 | QJRX24A | 60 | QYRX24A | 104 |
| 13/16 | QJRX26A | 60 | QYRX26A | 117 |
| 7/8 | QJRX28A | 60 | QYRX28A | 133 |
| 15/16 | QJRX30A | 60 | QYRX30A | 146 |
| 1 | QJRX32A | 60 | QYRX32A | 158 |
| 1 1/16 | QJRX34A | 60 | QYRX34A | 160 |
| 1 1/8 | QJRX36A | 60 | QYRX36A | 160 |
| 1 3/16 | | | QYRX38A | 160 |
| 1 1/4 | | | QYRX40A | 160 |
| 1 3/8 | | | QYRX44A | 160 |
| 1 7/16 | | | QYRX46A | 160 |
| 1 1/2 | | | QYRX48A | 160 |
| 1 9/16 | | | QYRX50A | 160 |
| 1 5/8 | | | QYRX52A | 160 |
| 1 7/8 | | | QYRX60A | 160 |
| 2 | | | QYRX64A | 160 |
| 2 1/4 | | | QYRX72A | 160 |





















| Square | J (0.425") | Max Torque Ft. | Y (0.560") | Max Torque Ft. |
|------------|-------------|----------------|------------|----------------|
| Drive (mm) | J (0.425) | Lbs. | 1 (0.560) | Lbs. |
| 8 | QJRXSM8A | 17 | | |
| 9 | QJRXSM9A | 25 | | |
| 10 | QJRXSM10A | 33 | | |
| 11 | QJRXSM11A | 42 | | |
| 12 | QJRXSM12A | 50 | | |
| 13 | QJRXSM13A | 58 | QYRXSM13A | 58 |
| 14 | QJRXSM14A | 60 | | |
| 15 | QJRXSM15A | 60 | QYRXSM15A | 71 |
| 16 | QJRXSM16A | 60 | QYRXSM16A | 75 |
| 17 | QJRXSM17A | 60 | QYRXSM17A | 83 |
| 18 | QJRXSM18A | 60 | QYRXSM18A | 94 |
| 19 | QJRXSM19A | 60 | QYRXSM19A | 104 |
| 20 | QJRXSM20A | 60 | QYRXSM20A | 113 |
| 21 | | | QYRXSM21A | 113 |
| 28 | | | QYRXSM28A | 120 |



| Square Drive (Inches) | J (0.425") | Max Torque Ft. Lbs. | Y (0.560") | Max Torque Ft. Lbs. |
|--------------------------|-------------|------------------------|------------|------------------------|
| 1/4 | OJRXS8A | 6 | | |
| 5/16 | QJRXS10A | 17 | | |
| 3/8 | QJRXS12A | 29 | | |
| 7/16 | QJRXS14A | 42 | | |
| 1/2 | QJRXS16A | 54 | | |
| 9/16 | QJRXS18A | 60 | QYRXS18A | 74 |
| 5/8 | QJRXS20A | 60 | QYRXS20A | 74 |
| 11/16 | QJRXS22A | 60 | QYRXS22A | 92 |
| 3/4 | QJRXS24A | 60 | QYRXS24A | 104 |
| 13/16 | QJRXS26A | 60 | QYRXS26A | 117 |
| 7/8 | QJRXS28A | 60 | QYRXS28A | 133 |
| 15/16 | QJRXS30A | 60 | QYRXS30A | 146 |
| 1 | QJRXS32A | 60 | QYRXS32A | 158 |
| 1 1/8 | QJRXS36A | 60 | QYRXS36A | 160 |
| 1 1/4 | | | QYRXS40A | 160 |





RATCHETING FLARE NUT HEAD

| C D-i | I c | | 1 | 1 |
|--------------|------------|-------------|------------|-------------|
| Square Drive | Square | J (0.425") | Y (0.560") | X (0.735") |
| (Inches) | Drive (mm) | | | |
| 3/8 | | | RTWH24Y | |
| | 11mm | RTWHM11J | | |
| 1/2 | | RTWH32J | | |
| 9/16 | | RTWH36J | RTWH36Y | |
| 5/8 | | RTWH40J | RTWH40Y | |
| 11/16 | | RTWH44J | RTWH44Y | |
| 3/4 | | RTWH48J | RTWH48Y | |
| | | | | |
| 7/8 | | RTWH56J | RTWH56Y | |
| 15/16 | | RTWH60J | RTWH60Y | |
| 1 | | RTWH64J | RTWH64Y | |
| 1 1/8 | | | RTWH72Y | |
| 1 1/4 | | | RTWH80Y | RTWH80X |
| 1 3/8 | | | RTWH88Y | |
| 1 1/2 | | | RTWH96Y | RTWH96X |
| | 16mm | RTWHM16J | | |
| 1 5/8 | | | RTWH104Y | |
| 1 3/16 | | | | RTWH116X |
| 1 7/8 | | | RTWH120Y | RTWH120X |
| 2 1/8 | | | RTWH136Y | |
| 2 3/16 | 1 | | RTWH140Y | |





ADAPTORS

| Product Code | Descriptions |
|--------------|--------------------------|
| QJ-Y | J Male to Y Female |
| QXY | X Male to Y Female |
| QY-X | Y Male to X Female |
| QZ-X | Z Male to X Female |
| QZD32A-1 | Z Shank 1 Drive Ratchets |





TORQUE MULTIPLIERS WITH HANDLES

Features

- Provides the operator with nut-turning power that requires only a fraction of the force required when using conventional tools.
- Input and output rotation is in the same direction.
- Reaction bar rotation is opposite to input direction and must rest securely against a rigid object to withstand the generated reaction force.
- By removing 4 screws, heads may be easily disassembled for inspection, cleaning and lubrication.

| | Max | ** 10. 11. 0 | Approx. Ft. Lbs. | Input | Output | Head | | Oal. Lgth. |
|-----------------|--------------------|--------------------------|------------------------|---------------|-------------|------------------------|---------------|----------------------|
| Product Code | Output Ft. Lbs. | Multiplication Ratio* | Rq'd for Max Output | Female Sq. | Male Sq. | Thickness Inc. Tang | Head Diam. | Inc. Reaction Bar |
| TM-750LW | 1000 | 3.6 to 1 | 275 | 1/2 | 3/4 | 3 1/32 | 3 ½ | 22 ½ |
| TM-1000 | 2000 | 3.6 to 1 | 550 | 3/4 | 1 | 4 % | 3 17/32 | 24 |
| TM-1500 | 4000 | 3.9 to 1 | 1150 | 1 | 1 ½ | 6 1/8 | 5 1/16 | 28 % |
| TM-2000 | 8000 | 4.6 to 1 | 1915 | 1 | 1 ½ | 6 1/4 | 6 ½ | 31 |
| TM-2500 | 12000 | 5.4 to 1 | 2200 | 1 | 2 1/2 | 7 1/4 | 7 1/4 | 30 |

^{*} Multipliers are mechanical devices which have frictional losses. A 10% factor was included in the multiplication ratio. For higher accuracy of multiplication ratio, output of unit should be checked on torque tester.





TM-1000

TORQUE MULTIPLIERS WITH PLANETARY-GEAR MECHANISM

- Designed where high torques are necessary for fastening or breaking out stubborn fasteners.
- Allows operator safe and easy means of producing torque for job requirements.
- Precision planetary gear multiplies the operator's input from standard torque wrenches.
- Can also multiply the torque from air-driven (non-impact) wrenches.

| Product Code | Max Output Ft. Lbs. | Input Cap | Gear Ratio | Torque Ratio | Input Female Sq. | Output Sq. Size | Overall Length | Head Height Sq. to Top | Head Dia. |
|--------------|---------------------------|--------------|---------------|-----------------|------------------------|-----------------------|----------------------------------|------------------------------|--------------|
| TM-290 | 750 | 227 | 4:1 | 3:1 | 1/2 | 3/4 | 8 1/2 | 3 1/4 | 2 13/16 |
| TM-391 | 1200 | 200 | 6:3:1 | 6:0:1 | 1/2 | 3/4 | 19 39/64 | 4 | 3 15/16 |
| TM-392 | 2200 | 162 | 15:0:1 | 13:6:1 | 1/2 | 1 | 19 ³⁹ / ₆₄ | 5 ¾ | 4 1/16 |
| TM-393 | 3200 | 173 | 20:25:1 | 18:5:1 | 1/2 | 1 | 19 39/64 | 6 ½ | 4 1/16 |











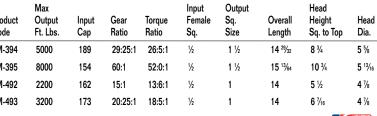


PLATE REACTION TORQUE MULTIPLIERS

Features

- Input torque holding ra het holds multiplier in place during torquing.
- Needle bearing construction for high efficiency.
- Standard reaction plate meets most job applications.
- Shearable output squares to protect tool during overload.









REPLACEMENT SQUARE DRIVES FOR TORQUE MULTIPLIERS

Replacement square drives for planetary-gear and plate reaction torque multipliers.

| Product Code | Description | |
|--------------|--------------------------------------|----------------|
| TM-391RSD | Repl. Sq Drive For TM-391 | |
| TM-392RSD | Repl. Sq Drive For TM-392 and TM-492 | |
| TM-393RSD | Repl. Sq Drive For TM-393 and TM-493 | |
| TM-394RSD | Repl. Sq Drive For TM-394 | |
| TM-395RSD | Repl. Sq Drive For TM-395 | Made in U.S.A. |



TORQUE PRODUCTS REPAIR AND CALIBRATION SERVICE

Trust the Williams Factory Service Center for all of your Williams torque product repair and calibration work. Use our convenient service website (**www.williamsfactoryservice.com**) to check services available, flat rate repair pricing, and to order and track your repair and calibration requests. The website enables you to order all regular paid repair and calibration services, as well as any warranty work needed.


The Williams torque tool factory and repair facility is located in City of Industry (Los Angeles), California. The factory has been ISO 9001 certified since 1998. The Williams Factory Service center repairs and calibrates with N.I.S.T. (National Institute of Standards and Technology) traceable calibration equipment, and Williams Torque Products meet or exceed ASME and ISO standards. Rely on the Williams Torque Products Factory Service Center to do the job right.

www.williamsfactoryservice.com

TORQUE 101

Need help educating your department or shop staff on why applying the correct torque is critical to proper assembly or maintenance operations?

The Williams **Torque Wrench 101** "textbook" is the perfect, simple and quick-read reference to train staff on what torque is. It explains why proper torque is important, torque wrench applications, proper torque wrench selection, and much more. Ask your Williams representative for your laminated copy today.

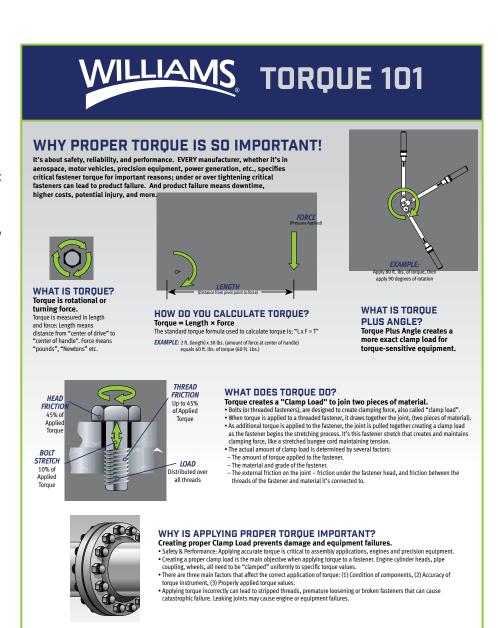





YOU DON'T HAVE TO CHOOSE BETWEEN SAFETY OR PRODUCTIVITY. YOU CAN HAVE BOTH!

Safety and productivity are critical to your company's efficiency and profitability and the loss of productivity can occur for a variety of reasons. That's why we designed the Tools@ Height™ system to provide effective, reliable drop prevention that keeps your workers safe…and working.



Minimize risk -

Independent tethering allows a tool to be removed and returned to its holster with one hand so the user can maintain the critical "three points of contact" when working at height.

exchanges and reducing the likelihood of drops.


TOOLSOHEIGHTTM

EFFECTIVE, RELIABLE DROP PREVENTION

WILLIAMS® OFFERS A FULL LINE OF TOOLS FOR **WORKING AT HEIGHT**

Rotating Screwdriver Tabs

- · Located for secure retention allowing full use of the screwdriver handle
- Stainless steel tab is corrosion resistant and rotates freely 360° so the lanyard does not wrap around the



Sliding Wrench Safety Coils

- · Superior design with high performance polished stainless steel for superior flexibility and shock-absorbing qualities plus no welds to fail
- Seven different sizes are utilized in the program to support wrenches up to 1-1/2" or 55mm (coils not sold separately)
- Slides out of the way along the wrenches handle to provide full use and achieve greatest leverage





TOOLS@HEIGHT™ MASTER MAINTENANCE TOOL SET

Contains the following tools:

| Product Category | Product Category |
|---------------------------------------|--|
| Adjustable & Miscellaneous Wrenches | Miscellaneous Tools |
| Combination, Box, & Open End Wrenches | Pliers |
| Hammers | Pry Bars, Punches & Chisels |
| Hand Sockets, Ratchets, & Accessories | Screwdrivers & Nut drivers |
| Hex Keys & Sockets | Tool Storage |
| Impact Sockets & Accessories | Tools@Height Tethers, Lanyards,& Specialties |

Set Configurations Available


| Product Code | Description |
|--------------|---|
| JHWSC409THTB | Complete Tools@Height Master Maintenance Tool Set With Tool Boxes |
| JHWWSC409TH | Complete Tools@Height Master Maintenance Tool Set Only |

Tool Boxes Included

| Product Code | Description |
|--------------|---|
| JHWW40TC4 | 40" Wide x 20" Deep 4 Drawer Top Chest |
| JHWW40RC7 | 40" Wide x 20" Deep 7 Drawer Tool Cabinet |

- The Tools@Height Master Maintenance set provides a great assortment of tools for all types of maintenance applications
- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- Productivity and safety right out of the box
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost
 production time
- High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- Set is available with foamed tool control drawers on a special order basis
- Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt such as the Comfort and Utility belts on page 96



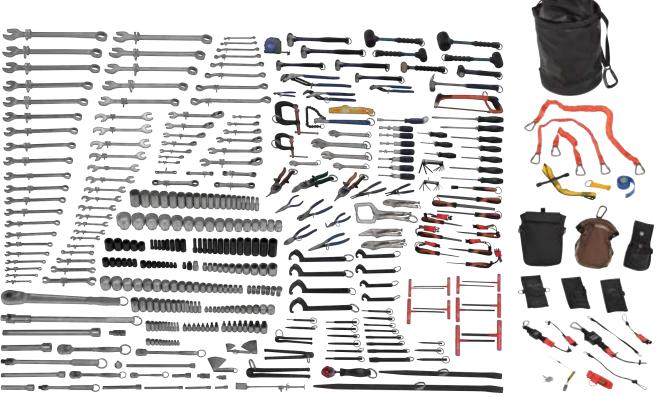
















TOOLS@HEIGHT™ INTERMEDIATE MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|---------------------------------------|--|
| Adjustable & Miscellaneous Wrenches | Miscellaneous Tools |
| Combination, Box, & Open End Wrenches | Pliers |
| Hammers | Pry Bars, Punches & Chisels |
| Hand Sockets, Ratchets, & Accessories | Screwdrivers & Nut drivers |
| Hex Keys & Sockets | Tool Storage |
| Impact Sockets & Accessories | Tools@Height Tethers, Lanyards,& Specialties |

Set Configurations Available

| Product Code | Description |
|--------------|---|
| JHWSC225THTB | Complete Tools@Height Intermediate Tool Set With Tool Boxes |
| JHWWSC225TH | Complete Tools@Height Intermediate Tool Set Only |

Tool Boxes Included

| Product Code | Description |
|--------------|---|
| JHWW26TC4 | 26" Wide x 20" Deep 4 Drawer Top Chest |
| JHWW26RC7 | 26" Wide x 20" Deep 7 Drawer Tool Cabinet |

- The Tools@Height Intermediate Maintenance set provides a full complement of tools
- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- · Productivity and safety right out of the box
- Many applications any industry where a dropped tool could harm personnel, damage machinery
 or cost production time
- High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- Set is available with foamed tool control drawers on a special order basis
- Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt such as the Comfort and Utility belts on page 96





TOOLS@HEIGHT™ GENERAL MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|---------------------------------------|--|
| Adjustable & Miscellaneous Wrenches | Pliers |
| Combination, Box, & Open End Wrenches | Pry Bars, Punches & Chisels |
| Hammers | Screwdrivers & Nut drivers |
| Hand Sockets, Ratchets, & Accessories | Tool Storage |
| Hex Keys & Sockets | Tools@Height Tethers, Lanyards,& Specialties |
| Miscellaneous Tools | |

Set Configurations Available

| Product Code | Description |
|--------------|---|
| JHWWSC116TH | Complete Tools@Height General Service Tool Set Only |

Tool Boxes Included

| Product Code | Description |
|--------------|----------------------------------|
| JHW50950B | 32" Wide x 19" Deep Job Site Box |

- The Tools@Height General Maintenance Service set provides a solid complement of tools
- All tools are designed to be used with our tethering and retention systems which maintain or enhance
 the tools' functionality when used at height or near critical assemblies
- · Productivity and Safety right out of the box
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost production time
- High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- · Set is available with foamed tool control drawers on a special order basis
- Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt such as the Comfort and Utility belts on page 96

















TOOLS@HEIGHT™ BASIC MAINTENANCE SERVICE SET

Contains the following tools:

| Product Category | Product Category |
|---------------------------------------|--|
| Adjustable & Miscellaneous Wrenches | Miscellaneous Tools |
| Combination, Box, & Open End Wrenches | Pliers |
| Hammers | Pry Bars, Punches & Chisels |
| Hand Sockets, Ratchets, & Accessories | Screwdrivers & Nut drivers |
| Hex Keys & Sockets | Tools@Height Tethers, Lanyards,& Specialties |

Set Configurations Available

| Product Code | Description |
|--------------|---|
| JHWWSC-72-TH | Complete Tools@Height Basic Maintenance Tool Set in Safe Bucket |

Features

- Furnished in Safe Bucket for easy portability
- · Safety right out of the box
- The Tools@Height Basic Maintenance set provides a good start to a Tools@Height tool program
- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- Many applications any industry where a dropped tool could harm personnel, damage machinery or cost production time
- High level uses drilling derricks, wind turbines, cranes, buildings, bridges, masts, powerlines, hangars, scaffold builders
- Low level uses stop tools dropping onto flight hardware, into engines, machinery, food production lines, vats, mine shafts, even under water uses
- Williams' Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt
- An assortment of Comfort and Utility belts can be found on page 96
- The full assortment of Tools@Height lanyards, tethers, and other accessories is on pages 91 through 97



JHWWSC-72-TH



TOOL@HEIGHT™ STARTER PLUS SET

Contains the following tools:

Product Category
Adjustable Wrenches

Combination Wrenches

File

Hammer

Hand Sockets, Ratchets & Accessories

Pick up Tool

Pliers

Screwdriver

Tape Measure

Tools@Height Tethers, Lanyards & Specialties

Grand Total

Set Configurations Available

| Product Code | Description |
|--------------|--|
| WSC-45-TH | Complete Tools@Height Starter Set in Safe Bucket |

Features

- . The ideal way to start a drop prevention program
- Use where dropped tools can harm personnel, damage components, or cause down time
- Excellent assortment of basic hand tools for most maintenance applications
- · Furnished in Safe Bucket for easy portability



WSC-45-TH









TOOL@HEIGHT™ STARTER SET

Contains the following tools:

Product Category

Adjustable Wrenches

File

Hammer

Pick up Tool

Pliers

Screwdriver

Tape Measure

Tools@Height Tethers, Lanyards & Specialties

Set Configurations Available

Product Code Description

JHWWSC-27-TH Complete Tools@Height Starter Set in Safe Bucket

- · Ideal for general maintenance work in the factory or job site
- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies.
- Includes tools and assortment of pouches and lanyards designed for use with a suitable belt.
- Williams' Tools@Height sets contain an assortment of pouches and lanyards designed for use with a suitable belt
- · An assortment of Comfort and Utility belts can be found on page 96
- The full assortment of Tools@Height lanyards, tethers, and other accessories is on pages 91 through 97



JHWWSC-27-TH





TOOLS@HEIGHT™ BOILMAKER'S TOOL KIT

Contains the following tools:

| Product Category | Product Category |
|--------------------------------|--|
| Pliers | Torpedo Level |
| Adjustable Construction Wrench | Hammer |
| Open End Structural Wrench | Measuring Tape |
| Bull Pin | Tools@Height Tethers, Lanyards & Specialties |

Set Configurations Available

| Product Code | Description |
|--------------|----------------------|
| KWTBM | Boilmaker's Tool Kit |

- All tools are designed to be used with our tethering and retention systems which maintain
 or enhance the tools' functionality when used at height or near critical assemblies
- Tool Kit includes the tools, tethers, lanyards needed to keep boilermakers safe and productive while working at height













TOOLS@HEIGHT™ HRSG HIGH RIGGING TOOLKIT

Contains the following tools:

| Product Category | Product Category |
|--------------------------------|--|
| Pliers | Hammer |
| Adjustable Construction Wrench | Measuring Tape |
| Open End Structural Wrench | Sleever Bar |
| Bull Pin | Tools@Height Tethers, Lanyards & Specialties |
| Torpedo Level | |

Set Configurations Available

| Product Code | Description |
|--------------|---------------------------|
| KWTHRSGHR | HRSG High Rigging Toolkit |

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- Tool kit includes bull pin, sleever bars, wrenches, hammer, torpedo level, measuring tape and many more tools with attachment points along with the tethers and lanyards for working at height



TOOLS@HEIGHT™ PIPEFITTER'S FOREMAN'S TOOLKIT

Contains the following tools:

| Product Category | Product Category |
|----------------------|------------------|
| Combination Wrenches | Pinch Bar |
| Sockets | Hex Keys |
| Drive Tools | Tape Measure |
| Screwdrivers | Tool Box |
| Files | Pin Release Tool |
| Hammer | Tool Pouch |

Set Configurations Available

| Product Code | Description |
|--------------|--------------------------------|
| KWTPFFOR | Pipefitter's Foreman's Toolkit |

Features

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- · Pipefitter's Foreman's Tool kit includes sockets, drive tools, combination wrenches, screwdrivers and many more tools with attachment points for working at height



KWTPFFOR

TOOLS@HEIGHT™ PIPEFITTER'S GANG BOX KIT

Contains the following tools:

| Product Category | Product Category |
|---------------------------|-------------------|
| Utility Superjoint Pliers | Chisels & Punches |
| Side Cutters | Ratchet |
| Adjustable Wrenches | Pipe Wrench |
| Measuring Tape | Plastic Tool Box |
| Hammers | |

Set Configurations Available

| Product Code | Description | |
|--------------|---------------------------|--|
| KWTPFBOX | Pipefitter's Gang Box Kit | |

- · All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- . Pipefitter's Gang Box Kit includes pliers, hammer, adjustable wrenches and many more tools with attachement points for working at height



KWTPFBOX









TOOLS@HEIGHT™ INDIVIDUAL ELECTRICIAN'S TOOLKIT

Contains the following tools:

| Product Category | Product Category |
|-------------------------------|--|
| Pliers, Side Cutter & Crimper | Files |
| Screwdrivers | Superjoint Pliers |
| Adjustable Wrenches | Hammers |
| Chisels & Punches | Hex Key |
| Hacksaw Frame | Measuring Tape |
| Torpedo Level | Tools@Height Tethers, Lanyards & Specialties |
| Miscellaneous Tools | |

Set Configurations Available

| Product Code | Description |
|--------------|--|
| KWTELEKITM | Individual Electrian's Toolkit with S/M Comfort Belt |
| KWTELEKITL | Individual Electrian's Toolkit with L/XL Comfort Belt |
| KWTELEKITXL | Individual Electrian's Toolkit with 2X/3X Comfort Belt |
| | |

Features

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- The Individual Electrician's Toolkit contains an assortment of tools with engineered attachment points, tethers and laynards designed to keep electrican's safe and productive while working at heights



KWTELEKITM



KWTELECWKT

TOOLS@HEIGHT™ ELECTRICIAN CREW KIT

Contains the following tools:

| 5 | |
|------------------|-------------------------------------|
| Product Category | Product Category |
| C-Clamps | Pin Release Tool |
| Pliers | Sockets |
| Pipe Wrenches | Combination Wrenches |
| Files | Level |
| Hammer | Lift Bucket & Hardhat Lanyard Strap |
| Drive Tools | , , |

Set Configurations Available

| Description |
|----------------------|
| Electrian's Crew Kit |
| |

- All tools are designed to be used with our tethering and retention systems which maintain or enhance the tools' functionality when used at height or near critical assemblies
- The Electrician's Crew Kit contains an assortment of tools with engineered attachment points, tethers and laynards designed to keep electrican's safe and productive while working at heights





TOOLS@HEIGHT™ SCAFFOLD BUILDING KITS

Kit comes assembled and includes tools shown above. Scaffold builders literally open the box, put on the belt, and go to work with a kit that keeps them safe and increases productivity. Since each tool is independently tethered, any tool can be used and returned to its' holster while still maintaining three points of contact as pictured below

| Product Code | Description | |
|--------------|-------------|---|
| JHWWTHSCAFM | Medium | _ |
| JHWWTHSCAFL | Large | |
| JHWWTHSCAFXL | X-Large | |

Contents of Scaffold Building Kits:

| Product Code | Description |
|--------------|---|
| THFSNE3-22SM | Hammer |
| THFSN25100 | Level |
| JHWBS-63B | Scaffold Ratchet |
| JHWTM25X1-TH | Tape Measure |
| JHW13625-TH | Construction Wrench |
| JHWPL204CTH | Linesman's Pliers |
| WTHHOLHAMMER | Hammer Holster with Coil Lanyard |
| PYT1500098 | Tape measure Holster |
| PYT1500096 | Scaffold Ratchet Holster w/Bungee Lanyard |
| PYT1500065 | Single Tool Holster |
| PYT1500107 | Dual Tool Holster |
| BELTCOMF | Belt (Small, Medium, Large or X-Large) |
| WTHPCHPRTSCO | Small Parts pouch w/ Self-closing system |

Features

- · Safety & Security
- · Holsters are designed with built-in attachment points or retractors
- . Tools are tethered to the holster at all times so the risk of dropping a tool while transferring from bag to lanyard is eliminated
- · Several holsters also feature hook and loop flaps that secure the tool while being transported
- Customizable
- · System is completely modular and can be arranged in any order on the tool belt based on the user's preference
- . All Tools @ Height holsters and pouches are also available for individual purchase for attachment to existing tool belts or harnesses





JHW13625-TH















LANYARDS AND ANCHOR STRAPS

| Product Code | Description | Load Rating (lbs) | Extension Length (Inches) | Retracted Length (Inches) | QTY | |
|--------------|---|-------------------|---------------------------|---------------------------|-----|--|
| THCARA25A | SST Carabiner to Carabiner Bungee Lanyard, Medium Duty | 25 | 124 | 37-45 | | |
| THCARA15SL | SST Carabiner to Carabiner Bungee Lanyard, Medium Buty SST Carabiner to Carabiner Bungee Lanyard, Standard Duty | 25 15 | 47 | 27 | 1 | |
| THUNI25A | SST Carabiner to Loop Bungee Lanyard, Standard Duty | 15 | 50 | 30 | 1 | |
| THL1A | Universal Tether with Carabiner and Loop | 5 | 14 | n/a | 1 | |
| THL2A | Universal Tether with 2 SST Carabiners | 5 | 14 | n/a | 1 | |

^{*} Tool Lanyards not included with Tool Holsters unless otherwise stated. Tools not included with Tool Holsters.





COIL TETHERS

| Product Code | Description | Load Rating (lbs) | Extension Length (Inches) | Retracted Length (Inches) | QTY |
|--------------|---|-------------------|---------------------------|---------------------------|-----|
| | | | | | |
| EXTC2LCO10PK | Clip to side release loop tether, Personal Duty 10 pack | 2 | 45 1/ ₄ | 10 | 10 |
| PYT1500062 | Clip to loop hard hat tether 100 pack | 2 | 44 ½ | 12 | 100 |



RETRACTABLE TETHERS

| | 211 1111110 | | | | |
|--------------|--|-------------------|---------------------------|---------------------------|-----|
| Product Code | Description | Load Rating (lbs) | Extension Length (Inches) | Retracted Length (Inches) | QTY |
| THUNIRET2A | 2 LB Retractable Lanyard | 2 | 42 | 17 | 1 |
| THRET2CLIPSA | Disconnectable Clips/Loop for THUNIRET2A, 10pk | 2 | N/A | 8 | 10 |
| THUNIRET1A | Self Flushing Retractable Tether with Disconnectable Loop | 1 | 36 | 14 | 1 |
| THRET1CLIPSA | Disconnectable Clips/Loop for THUNIRET1A and THWSRET1A, 10pk | 1 | N/A | 7-3/4 | 10 |
| THWSRET1A | Personal Duty Retractable Tether | 1 | 49 | 10 | 1 |
| THUNI5CLIPSA | Disconnectable Clips/Loop, 10 Pack | 5 | N/A | | 10 |
| THUNIRET3.5 | 3.5 LB Retractable Lanyard | 3.5 | 55 | 11.75 | 1 |















WB-L

PULLAWAY WRISTBANDS

| Product Code | Size | Load Rating (lbs) | QTY |
|--------------|---------------|-------------------|-----|
| WB-SLIMS10PK | Slim / Small | 5 | 10 |
| WB-SLIMM10PK | Slim / Medium | 5 | 10 |

Features

- Pullaway wristbands are designed so that they can be escaped from in emergency situations
- Pullaway Wristbands feature an elastic strap that conform to the users wrist size automatically



ADJUSTABLE WRISTBANDS

| Product Code | Load Rating (lbs) | QTY |
|--------------|-------------------|-----|
| THWSNC | 5 | 1 |
| THWS1A | 5 | 1 |
| THWSRET1A | 1 | 1 |

Features

Adjustable Wristbands can be sized to virtually any wrist size with Hook and Loop closure straps

Tools not included with Wristbands.



HARD HAT TETHERS

| Product Code | Weight Rating | Extension Length (Inches) |
|--------------|---------------|---------------------------|
| THHARDHAT1 | 1 lb 2 oz | 16 |
| THHARDHAT2 | 1 lb 2 oz | 14 |

- Retractor provides a lower-profile and more comfortable method of hard hat tethering
- Weight Rating: 1lb. 2oz.
- Looped end cinches around hard hat
- Spring clip attaches to clothing or vest to secure hat









TOOL HOLSTERS

| Product Code | Description | Product Code | Description |
|--------------|---|--------------|--|
| PYT1500089 | Adjustable Radio Holster Combo (includes EXT-C2LCOIL) | HOLBOXWHARR | Box Wrench Holster with Retractor (Harness) |
| | Bottle / Spray Can Holster | PYT1500090 | Cordless Tool Battery Holster (Shown with EXTH2LBUNGEE not included) |
| | | | |

^{*} Tool Lanyards not included with Tool Holsters unless otherwise stated. Tools not included with Tool Holsters. †Patent Pending













UTILITY POUCH

| Product Code | Description |
|--------------|---------------|
| PYT1500132 | Utility Pouch |

Features

- Two welded D-Rings on front of pouch to tie off tools
- One additional D-Ring inside pouch
- Two inner pouch pockets for storing tools
- Belt loop on back of pouch
- Two side ears are perfect for holding spud wrenches and sleever bars
- Drain vent on the bottom of the pouch



TOOL POUCHES

| Product Code | Description |
|--------------|------------------------|
| PCH-TOOL | Tool Pouch with D-Ring |

Tools not included with Tool Holsters.



UTILITY BELTS

| Product Code | Waist Size (Inches) |
|--------------|-----------------------------------|
| PYT1500113 | 28" - 46" |
| PYT1500114 | 40 ["] - 54 ["] |

Features

 Utility tool belt features a high strength grommet closure system with padding inside two layers of cordura that provides for durability and comfort



PYT1500113













PYTH1500139

SAFE BUCKETS

| Product Code | Closure System | Body Material | Load Rating (lbs) |
|--------------|----------------|---------------|-------------------|
| PYT1500140 | Hook and Loop | Vinyl | 250 |
| PYT1500139 | Drawstring ' | Vinyl | 250 |

- Every Safe Bucket is manufactured with either a hook and loop or drawstring closure system which helps prevent accidental drops
- All Safe Buckets are third-party load rated
- . Sewn into the bottom of every Safe Bucket is hard composite plating that protects the bucket from accidental punctures. A protective leather sleeve covers the inserts that is resilient to the elements and harsh work environments.
- The Safe Bucket was engineered to be used with tools at height, and includes multiple connection points that can be tethered to. Workers can tether their tools directly to the Safe Bucket when being used, and store their tools for transport when finished.
- · Instead of rope which is susceptible to fraying, a heavy-duty hoisting/shoulder strap is built into every Safe Bucket. Each bucket is also equipped with a high-quality and lightweight aluminum twist-lock carabiner load rated for 30 kN (6,700 lbs). There is no need to worry about a knot failing, or a nonlocking carabiner which may slip off a connection point.
- Safe Buckets are 15 inches tall and have a 12.5 inch Diameter







TOOLS@HEIGHT™ SUPERCOMBO® COMBINATION WRENCHES

High Polish Chrome and Satin Chrome Finish, 12 Point, SAE

| | | • | | | | | |
|------------------|--|---|--|-------------------------------|--|-----------|--------|
| | | Α | В | С | D | E | |
| | | Overall | Open End | Open End | Box End | Box End | |
| | Size | Length | Width | Thickness | Diameter | Thickness | Weight |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHW1208SC-TH + | 1/4 | 4 1/4 | 9/16 | 1/8 | 13/32 | 3/16 | 0.04 |
| JHW1210SC-TH + | 5/16 | 5 ³ / ₄ | 11/16 | 5/32 | 1/2 | 7/32 | 0.08 |
| JHW1212SC-TH ++ | 3/8 | 6 ½ | 13/16 | 3/16 | 9/16 | 1/4 | 0.12 |
| JHW1214SC-TH ++ | 7/16 | 7 1/4 | 15/16 | 7/32 | 11/16 | 9/32 | 0.17 |
| JHW1216SC-TH ++ | 1/2 | 8 | 1 1/16 | 1/4 | 3/4 | 11/32 | 0.23 |
| JHW1218SC -TH ++ | 9/16 | 8 3/4 | 1 1/4 | 1/4 | 7/8 | 3/8 | 0.31 |
| JHW1220SC -TH ++ | 5/8 | 9 1/2 | 1 % | 9/32 | 15/16 | 13/32 | 0.43 |
| JHW1222SC -TH ++ | 11/16 | 10 1/4 | 1 1/2 | 5/16 | 1 1/32 | 7/16 | 0.51 |
| JHW1224SC-TH ++ | 3/4 | 11 | 1 % | 5/16 | 1 1/8 | 1/2 | 0.62 |
| JHW1226SC-TH ++ | 13/16 | 11 ¾ | 1 3/4 | 3/8 | 1 7/32 | 17/32 | 0.79 |
| JHW1228SC-TH ++ | 7/8 | 12 ½ | 1 1/8 | 13/32 | 1 5/16 | 9/16 | 0.96 |
| JHW1230SC -TH ++ | 15/16 | 13 1/4 | 2 | 7/16 | 1 % | 19/32 | 1.20 |
| JHW1232SC-TH ++ | 1 | 14 | 2 1/8 | 15/32 | 1 ¹⁵ /32 | 5/8 | 1.48 |
| JHW1234SC -TH ++ | 1 1/16 | 14 ¾ | 2 1/4 | 1/2 | 1 %16 | 21/32 | 1.65 |
| JHW1236SC-TH ++ | 1 1/8 | 15 ½ | 2 13/32 | 17/32 | 1 ²¹ / ₃₂ | 11/16 | 1.94 |
| JHW1240SC -TH ++ | 1 1/4 | 17 | 2 ²¹ / ₃₂ | 9/16 | 1 ¹³ / ₁₆ | 3/4 | 2.58 |
| JHW1242-TH ** | 1 5/16 | 17 ¾ | 2 ¹³ / ₁₆ | 19/32 | 1 ²⁹ / ₃₂ | 3/4 | 2.96 |
| JHW1244 -TH ** | 1 ¾ | 18 ½ | 2 ¹⁵ /16 | 5/8 | 2 | 3/4 | 3.45 |
| JHW1246-TH ** | 1 1/16 | 19 1/4 | 3 1/16 | 5/8 | 2 3/32 | 7/8 | 3.85 |
| JHW1248-TH ** | 1 1/2 | 20 1/32 | 3 3/16 | 11/16 | 2 ¾16 | 7/8 | 4.29 |
| JHW1180-TH ** | 1 % | 21 ½ | 3 ⅓16 | 11/16 | 2 11/32 | 7/8 | 3.70 |
| JHW1182-TH ** | 1 11/16 | 22 1/32 | 3 1/16 | 23/32 | 2 1/16 | 7/8 | 5.22 |
| JHW1184-TH ** | 1 3/4 | 22 1/8 | 3 %16 | 23/32 | 2 ¹⁷ / ₃₂ | 1 1/32 | 5.62 |
| 1186-TH ** | 1 ¹³ / ₁₆ | 23 ¹⁵ / ₃₂ | 3 ¹¹ / ₁₆ | 3/4 | 2 % | 1 1/32 | 6.34 |
| 1188-TH ** | 1 1/8 | 24 1/32 | 3 ¹³ / ₁₆ | ²⁵ / ₃₂ | 2 ²³ / ₃₂ | 1 1/32 | 6.92 |
| 1190-TH ** | 2 | 25 1/4 | 4 1/16 | 27/32 | 2 1/8 | 1 1/32 | 8.20 |
| | | | | | | | |



WS-6-TH 6 Piece Supercombo Combination Wrench Set 2.27 LBS Contents Include:

| ••••••••••• | | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW1214SC-TH | 7/16 | JHW1218SC-TH | 9/16 | JHW1222SC-TH | 11/16 |
| IHW1216SC-TH | 1/2 | IHW1220SC-TH | 5/6 | IHW1224SC-TH | 3/4 |

- + High Polish Chrome Finish with SUPERTORQUE® Box End.
- ++ High Polish Chrome Finish with SUPERCOMBO® Open End and SUPERTORQUE® Box End.
- ** Satin Chrome Finish with SUPERTORQUE® Box End and Standard Open End.
- * Satin Chrome Finish with Standard Open and Box Ends.

Fed. Spec.: ANSI B107.6; SAE AS 954

Features


- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE® box opening design allows application of higher torque without rounding or deforming hex fastener points. No contact is made at the corners. Instead, wrenching forces are placed on the flat surfaces behind the points
- . Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to provide accurate torque/tension relationship for precision application
- . May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- · Box and open end openings are identical





Wrench with Safety Coil – Secure lanyard attachments need to withstand tough site use, including low temperature, so structural integrity is critical

- Superior Design No welds to fail High Performance Made from polished stainless steel, they have superior flexibility and shock-absorbing qualities over welded attachments
- Seven sizes available to support wrenches up to 1 ½" or 55mm
- Slides out of the way along the wrenches handle to provide full use of the handle and achieve greatest leverage

















TOOLS@HEIGHT™ SUPERCOMBO® COMBINATION WRENCHES

High Polish Chrome Finish, 12 Point, Metric




| riigii Polisii Cii | | Α | В | С | D | Ε . | |
|--------------------|----------------------|--|--|-------------------|---------------------------------|-----------------------------|--------|
| | | Overall | Open End | Open End | Box End | Box End | |
| | Size | Length | Width | Thickness | Diameter | Thickness | Weight |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHW1207MSCTH ++ | 7 | 5 %16 | 5/8 | 5/32 | 15/32 | 7/32 | 0.06 |
| JHW1208MSCTH ++ | 8 | 5 ²⁵ / ₃₂ | 23/32 | 5/32 | 1/2 | 7/32 | 0.08 |
| JHW1209MSCTH ++ | 9 | 6 %2 | ¹³ / ₁₆ | 3/16 | 9/16 | 1/4 | 0.10 |
| JHW1210MSCTH ++ | 10 | 6 ¾ | 7/8 | 3/16 | 5/8 | 9/32 | 0.13 |
| JHW1211MSCTH ++ | 11 | 7 1/4 | 31/32 | 7/32 | 11/16 | 5/16 | 0.18 |
| JHW1212MSCTH ++ | 12 | 7 11/16 | 1 1/32 | 7/32 | 3/4 | 5/16 | 0.20 |
| JHW1213MSCTH ++ | 13 | 8 1/32 | 1 1/8 | 1/4 | 25/32 | 11/32 | 0.23 |
| JHW1214MSCTH ++ | 14 | 8 % | 1 7/32 | 1/4 | 27/32 | 3/8 | 0.32 |
| JHW1215MSCTH ++ | 15 | 9 3/32 | 1 %2 | 9/32 | 29/32 | 13/32 | 0.35 |
| JHW1216MSCTH ++ | 16 | 9 1/2 | 1 % | 9/32 | ¹⁵ / ₁₆ | 13/32 | 0.41 |
| JHW1217MSCTH ++ | 17 | 10 1/16 | 1 15/32 | 5/16 | 1 | 7/16 | 0.47 |
| JHW1218MSCTH ++ | 18 | 10 ¹⁷ / ₃₂ | 1 17/32 | 5/16 | 1 1/16 | 15/32 | 0.56 |
| JHW1219MSCTH ++ | 19 | 11 1/32 | 1 % | 11/32 | 1 1/8 | 1/2 | 0.67 |
| JHW1220MSCTH ++ | 20 | 11 1/2 | 1 23/32 | 3/8 | 1 ³ / ₁₆ | 1/2 | 0.77 |
| JHW1221MSCTH ++ | 21 | 11 ²⁵ / ₃₂ | 1 3/4 | 3/8 | 1 7/32 | 17/32 | 0.82 |
| JHW1222MSCTH ++ | 22 | 12 ½ | 1 29/32 | 13/32 | 1 5/16 | 9/16 | 1.08 |
| JHW1223MSCTH ++ | 23 | 12 ½ | 1 31/32 | 7/16 | 1 11/32 | 9/16 | 1.08 |
| JHW1224MSCTH ++ | 24 | 13 %2 | 2 | 7/16 | 1 % | 19/32 | 1.20 |
| JHW1225MSCTH ++ | 25 | 14 1/32 | 2 5/32 | 15/32 | 1 15/32 | 5/8 | 1.49 |
| JHW1227MSCTH + | 27 | 14 ²⁵ / ₃₂ | 2 %2 | 1/2 | 1 %16 | 11/16 | 1.64 |
| JHW1229MSCTH + | 29 | 15 17/32 | 2 /32 2 ¹³ / ₃₂ | 17/ ₃₂ | 1 21/32 | 23/32 | 2.00 |
| JHW1230MSCTH + | 30 | 16 %2 | 2 17/32 2 17/32 | 17/32 | 1 3/4 | 3/ ₄ | 2.30 |
| JHW1232MSCTH + | 30 32 | 17 1/32 | 2 1/32 2 11/16 | 9/ ₁₆ | 1 74 1 13/16 | ³ / ₄ | 2.30 |
| JHW1234MSCTH + | 32 34 | 17 /32 17 ²⁵ / ₃₂ | 2 13/16 2 13/16 | 716 19/32 | 1 ²⁹ / ₃₂ | ³ / ₄ | 2.76 |
| JHW1236MSCTH + | 3 4 36 | , | | 21/32 | 2 ³ / ₃₂ | 7/8 | |
| JUAN 15201/190114 | 30 | 19 132 | 3 1/16 | - 1/32 | 2 %32 | '/8 | 3.86 |

⁺ High Polish Chrome Finish with SUPERTORQUE® Box End



- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE® box opening design allows application of higher torque without rounding or deforming hex fastener points
 - No contact is made at the corners. Instead, wrenching forces are placed on the flat surfaces behind the points
- . Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to provide accurate torque/tension relationship for precision application
- May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- Box and open end openings are identical





Wrench with Safety Coil -

ecure lanyard attachments need to withstand tough site use, cluding low temperature, so structural integrity is critical Superior Design - No welds to fail

- High Performance Made from polished stainless steel, they have superior flexibility and shock-absorbing qualities
- even sizes available to support wrenches up to 1 ½" or 55mm
- Slides out of the way along the wrenches handle to provide full use of the handle and achieve greatest leverage

⁺⁺ High Polish Chrome Finish with SUPERCOMBO® Open End and SUPERTORQUE® Box End Fed. Spec.: ANSI B107.6; SAE AS 954







TOOLS@HEIGHT™ REVERSIBLE RATCHETING COMBINATION WRENCHES

High Polish Chrome Finish, 12 Point, Metric

| • | | | | | | | | | |
|--------------|---------------|---------------------------------|-------------------------------|-----------------------------------|---------------------------------|----------------------------------|-----------------|--|--|
| | | Α | В | С | D | E | | | |
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Weight (lbs) | | |
| JHW1208MRCTH | 8 | 5 1/4 | 23/32 | 3/16 | 23/32 | 9/32 | 0.08 | | |
| JHW1209MRCTH | 9 | 5 1/8 | 13/16 | 5/32 | 25/32 | 5/16 | 0.14 | | |
| JHW1210MRCTH | 10 | 6 1/4 | 7/8 | 7/32 | 7/8 | 11/32 | 0.15 | | |
| JHW1211MRCTH | 11 | 6 % | 15/16 | 7/32 | 29/32 | 11/32 | 0.22 | | |
| JHW1212MRCTH | 12 | 6 ¹³ / ₁₆ | 1 | 7/32 | 31/32 | 3/8 | 0.00 | | |
| JHW1213MRCTH | 13 | 7 | 1 1/32 | 1/4 | 1 | 13/32 | 0.36 | | |
| JHW1214MRCTH | 14 | 7 % | 1 3/16 | 1/4 | 1 3/32 | 13/32 | 0.42 | | |
| JHW1215MRCTH | 15 | 7 ¾ | 1 1/4 | 9/32 | 1 5/32 | 7/16 | 0.56 | | |
| JHW1216MRCTH | 16 | 8 ³ / ₁₆ | 1 11/32 | 9/32 | 1 ⁷ /32 | ⁷ / ₁₆ | 0.77 | | |
| JHW1217MRCTH | 17 | 9 | 1 7/16 | 9/32 | 1 %2 | 1/2 | 0.93 | | |
| JHW1218MRCTH | 18 | 9 % | 1 17/32 | 5/16 | 1 3/8 | 15/32 | 1.15 | | |
| JHW1219MRCTH | 19 | 9 ¾ | 1 17/32 | 11/32 | 1 7/16 | 17/32 | 1.33 | | |



Features

- · High-polished chrome finish cleans easily
- · Ratchet lever is easily accessible for quick direction changes
- · Recessed corners in ends provide extra turning power





TOOLS@HEIGHT™ REVERSIBLE RATCHETING COMBINATION WRENCHES

High Polish Chrome Finish, 12 Point, SAE

| | | Α | В | С | D | E | |
|--------------|-------------------------------|----------------------------------|---------------------------------|-----------------------------------|---------------------------------|----------------------------------|-----------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Weight (lbs) |
| JHW1208RC-TH | 1/4 | 5 ¹ / ₄ | 23/32 | 3/16 | 23/32 | 9/32 | .06 |
| JHW1210RC-TH | 5/16 | 5 1/4 | 23/32 | 5/32 | 23/32 | 9/32 | 0.08 |
| JHW1212RC-TH | 3/8 | 6 1/4 | 7/8 | ³ /16 | 7/8 | ⁵ / ₁₆ | 0.10 |
| JHW1214RC-TH | 7/16 | 6 % | 15/16 | 7/32 | 29/32 | 11/32 | 0.13 |
| JHW1216RC-TH | 1/2 | 7 | 1 1/32 | 1/4 | 1 | 13/32 | 0.16 |
| JHW1218RC-TH | 9/16 | 7 % | 1 3/16 | 1/4 | 1 3/32 | 13/32 | 0.18 |
| HW1220RC-TH | 5/8 | 8 7/32 | 1 11/32 | 9/32 | 1 7/32 | 7/16 | 0.00 |
| JHW1222RC-TH | 11/16 | 9 | 1 7/16 | 9/32 | 1 11/16 | 1/2 | 0.27 |
| HW1224RC-TH | 3/4 | 9 3/4 | 1 17/32 | 11/32 | 1 ¹⁵ / ₃₂ | 17/32 | 0.00 |
| IHW1226RC-TH | ¹³ / ₁₆ | 10 ½ | 1 ²³ / ₃₂ | 3/8 | 1 %16 | 17/32 | 0.36 |
| HW1228RC-TH | 7/8 | 11 ¹³ / ₃₂ | 1 1/8 | 11/32 | 1 21/32 | 19/32 | 0.44 |
| JHW1230RC-TH | 15/16 | 12 | 1 31/32 | 15/32 | 1 27/32 | 5/8 | 0.50 |
| JHW1232RC-TH | 1 | 13 | 2 3/32 | 15/32 | 1 1/8 | 5/8 | 0.56 |




- · High-polished chrome finish cleans easily
- · Ratchet lever is easily accessible for quick direction changes
- · Recessed corners in ends provide extra turning power





Wrench with Safety Coil – Secure lanyard attachments need to withstand tough site use, including low temperature, so structural integrity is critical

- Superior Design No welds to fail
 High Performance Made from polished stainless steel,
 they have superior flexibility and shock-absorbing qualities
- Seven sizes available to support wrenches up to 1 ½" or 55mm Slides out of the way along the wrenches handle to provide full use of the handle and achieve greatest leverage















TOOLS@HEIGHT™ 15°-60° DOUBLE OPEN END **ANGLE-HEAD WRENCHES**

Chrome Satin Finish, SAE

| | | Α | В | С | |
|--------------|----------|---------------------------------|-----------|----------------|--------------|
| | Size | Head | Head | Overall Length | |
| Product Code | (Inches) | Diameter | Thickness | (Inches) | Weight (lbs) |
| JHW3716-TH | 1/2 | 1 | 7/32 | 5 ½ | 0.10 |
| JHW3724-TH | 3/4 | 1 7/16 | 9/32 | 7 1/4 | 0.28 |
| JHW3728-TH | 7/8 | 1 21/32 | 9/32 | 8 1/4 | 0.35 |
| JHW3732-TH | 1 | 1 ¹⁵ / ₁₆ | 5/16 | 9 ¾ | 0.41 |
| JHW3734-TH | 1 1/16 | 2 1/16 | 5/16 | 10 | 0.50 |
| JHW3736-TH | 1 1/8 | 2 1/4 | 5/16 | 11 | 0.61 |
| JHW3740-TH | 1 1/4 | 2 ¾ | 11/32 | 11 1/2 | 0.70 |
| JHW3744-TH | 1 % | 2 11/16 | 13/32 | 12 1/2 | 0.85 |
| JHW3746-TH | 1 7/16 | 2 11/16 | 13/32 | 12 ½ | 1.25 |

Fed. Spec. ANSI B107.39 Type 2 Class 3

Features

- Wrench heads are offset at 15° and 60° to the handle
- . Both ends are the same size to permit the wrench to be used in four different positions
- · 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- Continuous arc design minimizes spreading and is stronger than "V" design
- Thin head is perfect for tight clearances
- · Satin chrome finish provides good grip and cleans easily







Chrome Satin Finish, 12 Point, SAE


| | | Α | В | С | D | Ε | |
|--------------|---|----------------------------------|---------------------------------|----------------------------------|---------------------------------|----------------------------------|-----------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Weight (lbs) |
| JHW7723-TH | 3/8 × 7/16 | 7 % | 19/32 | 5/16 | 21/32 | 11/32 | 0.11 |
| JHW7725B-TH | $\frac{1}{2} \times \frac{9}{16}$ | 8 11/16 | 3/4 | 3/8 | 27/32 | 3/8 | 0.30 |
| JHW7727A-TH | 5/8 × 11/16 | 10 5/32 | 29/32 | 7/16 | 1 | 15/32 | 0.47 |
| JHW7029B-TH | $^{11}/_{16} \times ^{3}/_{4}$ | 10 ¹⁵ / ₁₆ | 1 | 15/32 | 1 3/32 | 1/2 | 0.53 |
| JHW7731A-TH | $\frac{3}{4} \times \frac{7}{8}$ | 12 1/32 | 1 3/32 | 1/2 | 1 1/4 | 9/16 | 0.73 |
| JHW7731B-TH | ¹³ / ₁₆ × ⁷ / ₈ | 12 ¹³ / ₃₂ | 1 3/16 | 17/32 | 1 1/4 | 9/16 | 0.80 |
| JHW7033C-TH | ¹⁵ / ₁₆ × 1 | 14 1/8 | 1 11/32 | 19/32 | 1 ⁷ / ₁₆ | 5/8 | 0.94 |
| JHW7038-TH | 1 1/8 × 1 3/16 | 16 ³ / ₃₂ | 1 19/32 | 11/16 | 1 11/16 | 11/16 | 1.66 |
| JHW7039B-TH | 1 ½ × 1 ½ 6 | 17 % | 1 ²⁵ / ₃₂ | 23/32 | 1 27/32 | 3/4 | 0.00 |

Fed. Spec. ANSI B107.6

Features



- SUPERTORQUE® box opening design allows application of higher torque without rounding or deforming hex fastener points. No contact is made at the corners. Instead, wrenching forces are placed on the flat surfaces behind the points
- 10° offset box end allows clearance in tight areas
- · Sizes are clearly marked on handle ends



JHW77731B-TH



Wrench with Safety Coil -

Secure lanyard attachments need to withstand tough site use, including low temperature, so structural integrity is critical

- Superior Design No welds to fail High Performance Made from polished stainless steel, they have superior flexibility and shock-absorbing qualities
- Seven sizes available to support wrenches up to 1 ½" or 55mm Slides out of the way along the wrenches handle to provide full use of the handle and achieve greatest leverage








TOOLS@HEIGHT™ DOUBLE HEAD 10° OFFSET **BOX END WRENCHES**

Chrome Satin Finish, 12 Point, Metric


| | | Α | В | C | D | E | |
|--------------|-----------|----------|----------|-----------|----------|-----------|--------|
| | | Overall | Box End | Box End | Box End | Box End | |
| | | Length | Diameter | Thickness | Diameter | Thickness | Weight |
| Product Code | Size (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHWBWM0810TH | 8 x 10 | 7 5/16 | 1/2 | 9/32 | 19/32 | 5/16 | 0.15 |

Fed. Spec. ANSI B107.9M

Features



- 10° offset box end allows clearance in tight areas
- · Sizes are clearly marked on handle ends









TOOLS@HEIGHT™ DOUBLE HEAD FLARE NUT WRENCHES

Chrome Satin Finish, 6 Point, SAE

| | | Α | В | С | D | E | |
|--------------|-----------------------------------|---------------------------------|-------------------------------|-----------------------|-----------------|-----------------------|--------|
| Product | Size | Overall Length | Open End Dia | Open End Thickness | Open End Dia | Open End Thickness | Weight |
| Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHWXFN0810TH | 1/4 × 5/16 | 4 27/32 | 18/32 | 1/4 | 5/8 | 8/32 | 0.12 |
| JHWXFN1214TH | $\frac{3}{8} \times \frac{7}{16}$ | 5 ¹³ / ₁₆ | 25/32 | 5/16 | 27/32 | 11/32 | 0.14 |
| JHWXFN1618TH | 1/2 × 9/16 | 6 ¹³ / ₁₆ | ¹⁵ / ₁₆ | 3/8 | 1 | 13/32 | 0.23 |
| JHWXFN2022TH | 5/8 × 11/16 | 7 3/4 | 1 3/32 | 7/16 | 3/16 | 15/32 | 0.38 |
| JHWXFN2432TH | $\frac{3}{4} \times 1$ | 9 1/2 | 1 1/4 | 1/2 | 19/32 | 5/8 | 0.70 |
| JHWXFN2836TH | ½ x 1 ⅓ | 10.5 | 1 7/16 | 9/16 | 1 3/4 | 11/16 | 0.99 |

Fed. Spec.: ANSI B107.6

JHWWS-14-TH 5 Piece Double Head Flare Nut Wrench Set, 6 Point, SAE, in Pouch - R-4 2.71 lbs

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-----------------------------------|--------------|-------------------------------------|--------------|---|
| JHWXFN1214TH | 3/8 × 7/16 | JHWXFN2022TH | 5/8 x ¹¹ / ₁₆ | JHWXFN2836TH | ⁷ / ₈ × 1 ¹ / ₈ |
| JHWXFN1618TH | $\frac{1}{2} \times \frac{9}{16}$ | JHWXFN2432TH | $\frac{3}{4} \times 1$ | | |

Features

- . Will not mar fittings on pipes and tubing.
- · Satin chrome textured finish provides great feel and extra gripping power
- · Recessed corners in ends provide extra turning power







Wrench with Safety Coil – Secure lanyard attachments need to withstand tough site use, including low temperature, so structural integrity is critical


- Superior Design No welds to fail High Performance Made from polished stainless steel, they have superior flexibility and shock-absorbing qualities
- n sizes available to support wrenches up to 1 12 or 55mm
- Slides out of the way along the wrenches handle to provide full use of the handle and achieve greatest leverage













JHWXFN2836TH









Chrome Satin Finish, 6 Point, Metric

| | | Α | В | С | D | E | |
|-------------|---------|-------------------------------|--------------------|-----------|--------------------------------|-----------|--------------|
| | | Overall | Open End | Open End | Open End | Open End | |
| Product | Size | Length | . Dia | Thickness | . Dia | Thickness | |
| Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Weight (lbs) |
| JHW10650-TH | 9 × 11 | 5 11/16 | 13/16 | 11/32 | 15/16 | 5/16 | 0.11 |
| JHW10652-TH | 10 × 12 | 6 ½ | 7/8 | 3/8 | ²⁹ / ₃₂ | 5/16 | 0.15 |
| JHW10654-TH | 13 × 14 | 6 ⁷ / ₈ | 1 | 3/8 | 1 ³ / ₃₂ | 3/8 | 0.20 |
| JHW10656-TH | 15 × 17 | 7 1/8 | 1 ¹ /16 | 7/16 | 1 7/32 | 1/2 | 0.28 |
| JHW10658-TH | 19 × 21 | 8 ⁷ /8 | 1 9/32 | 1/2 | 1 13/32 | 17/32 | 0.43 |

Fed. Spec.: ANSI B107.9M

JHW10658-TH

JHW11692-TH

JHWRB-810-TH

JHW11692-TH 5 Piece Double Head Flare Nut Wrench Set, 6 Point, Metric, in Pouch - 50001 1.43 lbs.

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW10650-TH | 9 x 11 | JHW10654-TH | 13 × 14 | JHW10658-TH | 19 × 21 |
| JHW10652-TH | 10 × 12 | JHW10656-TH | 15 × 17 | | |

Features

- . Will not damage fittings on pipes and tubing
- Satin chrome textured finish provides great feel and extra gripping power
- · Recessed corners in ends provide extra turning power











High Polish Chrome Finish, 6 & 12 Point, SAE

| | | | Α | В | С | D | E | |
|--------------|-----------|-----------------------------------|----------|-------------------------------|-----------|--------------------|-----------|--------|
| | | | Overall | Box End | Box End | Box End | Box End | |
| | Number | Size | Length | Diameter | Thickness | Diameter | Thickness | Weight |
| Product Code | of Points | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHWRB-810-TH | 6 | 1/4 x 5/16 | 4 1/4 | 19/32 | 3/8 | 11/16 | 3/8 | .12 |
| JHWRB1214TH | 6 | $\frac{3}{8} \times \frac{7}{16}$ | 5 ½ | ²⁵ / ₃₂ | 3/8 | 7/8 | 3/8 | .18 |
| JHWRB1618TH | 6 | $\frac{1}{2} \times \frac{9}{16}$ | 6 ¾ | 1 | 1/2 | 1 5/32 | 1/2 | .33 |
| JHWRB2022TH | 12 | 5/8 x 11/16 | 8 1/8 | 1 ⁵ /16 | 1/2 | 1 ⁷ /16 | 1/2 | .44 |
| JHWRB2428TH | 12 | 3/4 x 7/8 | 9 1/4 | 1 13/32 | 1/2 | 1 % | 1/2 | .48 |

Features

- . Allows fast removal of fasteners with a ratcheting action at each end
- Ideal for long "bolt-through" applications
- Flat handle allows access to tight clearance areas



* USA





Satin Chrome Finish, SAE

| Product Code | Size (Inches) | Overall Length (Inches) | Head Diameter | Head Thickness | Weight (lbs.) |
|--------------|---------------|-------------------------|-------------------|----------------|------------------|
| 3524-TH | 3/4 | 6 1/4 | 1 11/16 | 1/4 | .31 |
| 3526-TH | 13/16 | 6 1/4 | 1 11/16 | 1/4 | .28 |
| 3528-TH | 7/8 | 6 1/4 | 1 11/16 | 1/4 | .28 |
| 3532-TH | 1 | 6 % | 1 1/8 | 1/4 | .37 |
| 3534-TH | 1 1/16 | 6 % | 1 ⁷ /8 | 1/4 | .35 |
| 3536-TH | 1 1/8 | 7 | 2 1/16 | 1/4 | .37 |
| 3538-TH | 1 3/16 | 7 | 2 1/16 | 1/4 | .37 |
| 3540-TH | 1 1/4 | 7 | 2 1/16 | 1/4 | .36 |
| 3542-TH | 1 5/16 | 7 % | 2 1/2 | 9/32 | .51 |
| 3544-TH | 1 3/8 | 7 % | 2 1/2 | 9/32 | .49 |
| 3546-TH | 1 7/16 | 7 % | 2 1/2 | 9/32 | .45 |
| 3548-TH | 1 1/2 | 7 % | 2 1/2 | 9/32 | .48 |

- . Ultra thin pattern for use on jam nuts and access to confined areas
- 30° offset head
- · Satin chrome finish







BAHCO® TOOLS@HEIGHT™ ADJUSTABLE WRENCH



Industrial Grade Steel Handles

| Product Code | Length (Inches) | Maximum Jaw Opening (Inches) | Head Thickness (Inches) | Jaw Tip Thickness (Inches) | Weight (lbs.) |
|--------------|--------------------|---------------------------------|-------------------------------|-------------------------------|------------------|
| 8070RCUS-TH | 6 | 3/4 | 7/16 | 3/16 | .30 |
| 8071RCUS-TH | 8 | 1 1/16 | 1/2 | 1/4 | .96 |
| 8072RCUS-TH | 10 | 1 1/8 | 5/8 | 5/16 | .96 |
| 8073RCUS-TH | 12 | 1 5/16 | 11/16 | 7/16 | 1.47 |
| 8074RCUS-TH | 15 | 1 11/16 | ¹³ / ₁₆ | 9/16 | 2.44 |
| 8075RCUS-TH | 18 | 2 1/16 | 7/8 | 11/16 | 3.85 |

Features

- . Slim head with tapered jaws combine easy accessibility with extra turning strength
- . Measurement scale on head conveniently shows fastener size
- Precision hardened and anti-corrosion treated.



TOOLS@HEIGHT™ ADJUSTABLE CONSTRUCTION WRENCH

Heavy-Duty With Polished Head and Measurement Scales

| | Length | Maximum Jaw | Head Thickness | Weight |
|--------------|----------|------------------|----------------|--------|
| Product Code | (Inches) | Opening (Inches) | (Inches) | (lbs) |
| JHW13625-TH | 15 | 1 ½ | 23/32 | 2.24 |

Features

- Tapered spud handle locates and aligns bolts and rivets
- . Hole in handle permits tethering wrench for safety
- . Measurement scale on head conveniently shows fastener size
- . Economical black phosphate finish resists rust



JHW1910-TH

TOOLS@HEIGHT™ SINGLE HEAD OPEN END OFFSET STRUCTURAL WRENCHES



Industrial Black Finish, SAE

| | | Α | В | С | D | |
|--------------|------------------|---|--------------------------------|-------------------------------|------------------------|-----------------|
| | | Overall | Open End | Open End | Hardle Official | W I. I |
| Product Code | Size (Inches) | Length (Inches) | Width (Inches) | Thickness (Inches) | Handle Offset (Inches) | Weight (lbs) |
| JHW1905-TH | 7/8 | 14 5/16 | 2 | 9/16 | 1 | 1.42 |
| JHW1907-TH | 1 1/16 | 16 ¹³ ⁄ ₁₆ | 2 5/32 | 5/8 | 1 1/8 | 1.85 |
| JHW1909-TH | 1 7/16 | 19 ¾ | 3 ⁵ / ₃₂ | ²⁵ / ₃₂ | 1 1/4 | 3.68 |
| JHW1910-TH | 1 % | 21 1/16 | 3 7/32 | 7/8 | 1 1/2 | 4.26 |



- · Long offset handle is designed for clearance of obstructions while providing greater leverage
- · Tapered spud handle locates and aligns bolt and rivet holes















Industrial Black Finish, SAE

| Product Code | Span Diameter (Inches) | Pin Diameter (Inches) | Pin Length (Inches) | Overall Length (Inches) | Weight (lbs.) |
|--------------|------------------------|-----------------------|------------------------|-------------------------|------------------|
| JHWO-471-TH | 3/4 to 2 | 1/8 | 1/8 | 5 % | .27 |
| JHWO-472-TH | 1 1/4 to 3 | 3/16 | 3/16 | 6 % | .48 |
| JHWO-474-TH | 2 to 4 ¾ | 1/4 | 1/4 | 9 1/2 | .93 |
| JHWO-474A-TH | 4 ½ to 6 ¼ | 3/8 | 1/4 | 9 1/8 | 1.10 |

Features

- Ideal for adjusting collars, lock nut rings, and bearings
- . Specifically engineered to hold up under the most rigorous industrial use





JHWO-472-TH

JHWO-474-TH



Industrial Black Finish, SAE

| Product Code | Span Diameter (Inches) | Hook Depth (Inches) | Hook Thickness (Inches) | Overall Length (Inches) | Weight (lbs.) |
|-------------------------|------------------------|---|--|-------------------------|------------------|
| JHW471-TH | 3/4 to 2 | 1/8 | 11/32 | 5 ¾ | .26 |
| JHW472-TH | 11/4 to 3 | 5/32 | 13/32 | 7 1/4 | .49 |
| JHW474-TH JHW474A-TH | 2 to 4 ¾ 4 ½ to 6 ¼ | ³ / ₁₆ ¹ / ₄ | 15/ ₃₂ 15/ ₃₂ | 11 ½ 17 ½ | .97 1.05 |

Features

- Ideal for adjusting collars, lock nut rings, and bearings
- . Specifically engineered to hold up under the most rigorous industrial use







TOOLS@HEIGHT™ ADJUSTABLE FACE SPANNER WRENCHES

Industrial Black Finish, SAE

| Product Code | Span Diameter (Inches) | Pin Diameter (Inches) | Pin Length (Inches) | Overall Length (Inches) | Weight (lbs.) | |
|--------------|------------------------|--------------------------|------------------------|-------------------------|------------------|--|
| JHW482-TH | 2 | 3/16 | 1/4 | 6 1/4 | .31 | |
| JHW483-TH | 3 | 1/4 | 1/4 | 8 ½ | .63 | |
| JHW484-TH | 4 | 5/16 | 1/2 | 10 ¾ | 1.01 | |

- · Ideal for adjusting collars, lock nut rings, and bearings
- . Specifically engineered to hold up under the most rigorous industrial use












TOOLS@HEIGHT™ OFFSET PATTERN BOX END STRIKING WRENCHES

Industrial Black Finish, 12 Point, SAE / Metric

| | | | Α | В | С | |
|--------------|---------------------------------|-----------|----------------------------------|--|-------------------------------|--------------|
| | | | Overall | Box End | Box End | |
| | | | Length | Diameter | Thickness | |
| Product Code | Size (Inches) | Size (MM) | (Inches) | (Inches) | (Inches) | Weight (lbs) |
| JHW8807W-TH | 1 1/16 | 27 | 9 31/32 | 1 21/32 | 23/32 | 2.36 |
| JHW8807AW-TH | 1 1/8 | - | 10 ³¹ / ₃₂ | 1 15/16 | 3/4 | 2.71 |
| JHW8808BW-TH | 1 3/16 | 30 | 10 ³¹ / ₃₂ | 1 ¹⁵ / ₁₆ | 3/4 | 2.85 |
| JHW8808W-TH | 1 1/4 | 32 | 10 ³¹ / ₃₂ | 1 ¹⁵ /16 | 3/4 | 2.84 |
| JHW8808AW-TH | 1 5/16 | 33 | 10 ³¹ / ₃₂ | 1 ¹⁵ /16 | 3/4 | 2.7 |
| JHW8808CW-TH | 1 3/8 | 35 | 11 ½ | 2 5/32 | ²⁹ / ₃₂ | 3.43 |
| JHW8809W-TH | 1 7/16 | | 11 ½ | 2 5/32 | 29/32 | 3.21 |
| JHW8809BW-TH | - | 36 | 11 ½ | 2 5/32 | 29/32 | 3.46 |
| JHW8809AW-TH | 1 ½ | 38 | 12 | 2 ½16 | 1 | 4.29 |
| JHW8810W-TH | 1 5/8 | 41 | 12 | 2 7/16 | 1 | 4.10 |
| JHW8810AW-TH | 1 11/16 | 43 | 12 % 16 | 2 11/16 | 1 1/8 | 5.22 |
| JHW8811BW-TH | 1 3/4 | 44 | 12 % 16 | 2 11/16 | 1 1/8 | 5.14 |
| JHW8811W-TH | 1 13/16 | 46 | 12 %6 | 2 11/16 | 1 1/8 | 5.11 |
| JHW8811AW-TH | 1 % | - | 13 | 2 1/8 | 1 1/4 | 5.18 |
| JHW8812AW-TH | 1 15/16 | 49 | 13 | 2 % | 1 1/4 | 5.26 |
| JHW8812BW-TH | - | 50 | 13 | 2 ⁷ /8 | 1 1/4 | 5.40 |
| JHW8812W-TH | 2 | 51 | 13 | 2 ⁷ /8 | 1 1/4 | 5.53 |
| JHW8813BW-TH | 2 1/8 | 54 | 13 % | 3 1/4 | 1 13/32 | 7.4 |
| JHW8813W-TH | 2 3/16 | 55 | 13 % 16 | 3 1/4 | 1 13/32 | 7.05 |
| JHW8813AW-TH | 2 1/4 | 57 | 13 % 16 | 3 1/4 | 1 13/32 | 7.41 |
| JHW8814AW-TH | 2 5/16 | 59 | 13 %6 | 3 1/4 | 1 13/32 | 7.35 |
| JHW8814W-TH | 2 ¾ | 60 | 14 1/8 | 3 ¹¹ / ₁₆ | 1 ½ | 8.20 |
| JHW8815BW-TH | 2 1/2 | 64 | 14 1/8 | 3 ¹¹ / ₁₆ | 1 ½ | 8.07 |
| JHW8815W-TH | 2 %16 | 65 | 14 1/8 | 3 11/16 | 1 ½ | 7.82 |
| JHW8815AW-TH | 2 % | 67 | 15 | 3 ¹⁵ / ₁₆ | 1 % | 9.53 |
| JHW8816W-TH | 2 3/4 | 70 | 15 | 3 ¹⁵ / ₁₆ | 1 % | 9.40 |
| JHW8816CW-TH | 2 % | 73 | 16 | 4 7/16 | 1 3/4 | 12.50 |
| JHW8816BW-TH | 2 ¹⁵ / ₁₆ | 75 | 16 | 4 1/16 | 1 3/4 | 12.12 |
| JHW8817AW-TH | 3 | 76 | 16 | 4 ½16 | 1 3/4 | 12.34 |
| JHW8817W-TH | 3 1/8 | 80 | 16 | 4 ½16 | 1 3/4 | 11.62 |
| JHW8818AW-TH | 3 % | 85 | 18 %2 | 6 | 2 | 28.59 |
| JHW8818W-TH | 3 ½ | 89 | 18 %2 | 6 | 2 | 28.54 |
| JHW8819BW-TH | 3 3/4 | 95 | 18 1/32 | 6 | 2 | 27.86 |
| JHW8819W-TH | 3 % | 98 | 18 %2 | 6 | 2 | 27.34 |
| JHW8819CW-TH | 4 1/8 | 105 | 18 %2 | 6 | 2 | 25.72 |
| JHW8819AW-TH | 4 1/4 | 108 | 18 %2 | 6 | 2 | 26.82 |







- Anvils are proportional to opening sizes. Special heat treating provides maximum durability for long life
- Offset handle is close to head to provide clearance in confined areas
- Williams' expanded line of offset striking face wrenches, up to 4 1/4", provides the most extensive line on the market
- Specifically engineered to hold up under the most rigorous industrial use

JHW88SET-TH 36 Piece Set Offset Pattern Box End Striking Wrenches

Contents Include: One of each Offset Pattern Box End Striking Wrench

• Weight - 355 lbs.











TOOLS@HEIGHT™ METAL HANDLE CLICK TYPE **TORQUE WRENCHES - DUAL SCALE**

Metal Handle Dual Scale. The metal handle series offers the user a rugged, industrial strength torque wrench able to withstand the rigors of professional use. Handles are lightly knurled for a tough, non-slip grip. There are 21 models of metal handle micrometer adjustable torque wrenches available.

| Product Code | Drive Size | English Range | Incr. | Num Range | Incr. | A in. | B in. | C in. | D in. | Wt. Lbs. |
|--------------|------------|-----------------|-------|------------|-------|-------|-------|-------|-------|----------|
| 2503MFRMH-TH | 1/2" | 30-250 ft. lb. | 1 | 47-332 Nm | 1.4 | 24.40 | 1.70 | 1.40 | 1.40 | 4.73 |
| 6004MFRMH-TH | 3/4" | 100-600 ft. lb. | 5 | 169-779 Nm | 6.8 | 42.00 | 2.50 | 2.00 | 1.15 | 7.85 |

Features

- Dual scale, calibrated dual direction
- · Positive lock with spring loaded pull down lock ring
- · Fast, accurate and easy to set
- · Easy-to-read laser marked scales
- Accuracy: \pm 3% CW \pm 4% CCW of indicated value, CW, from 20% to 100% of full scale
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.







Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.







TOOLS@HEIGHT™ FOLDING HEX KEY SETS





SAE and Metric

| Product Code | JHWWS-45-TH | | JHW\ | NS-46-TH | JHWMWS-47-TH | | |
|------------------|----------------------|------------------------|----------------------|------------------------|---------------------------|------------------------|--|
| Number of Pieces | 8 | | | 9 | | 7 | |
| | Hex Size (Inches) | Key Length (Inches) | Hex Size (Inches) | Key Length (Inches) | Includes Hex Size (MM) | Key Length (Inches) | |
| | .050 | 1 1/4 | 5/64 | 1 1/2 | 1.5 | 1 % | |
| | 1/16 | 1 3/8 | 3/32 | 1 %16 | 2 | 1 1/2 | |
| | 5/64 | 1 7/16 | 7/64 | 1 11/16 | 2.5 | 1 % | |
| | 3/32 | 1 %16 | 1/8 | 1 ¹⁵ /16 | 3 | 1 3/4 | |
| | 7/64 | 1 % | 9/64 | 2 | 4 | 2 | |
| | 1/8 | 1 11/16 | 5/32 | 2 1/4 | 5 | 2 1/4 | |
| | 9/64 | 1 13/16 | 3/16 | 2 1/2 | 6 | 2 1/2 | |
| | 5/32 | 2 | 7/32 | 2 ⁵ /8 | | | |
| | | | 1/4 | 2 7/g | 1 | | |

- Steel case is chrome plated to resist corrosion
- Keys are black oxide finish
- Convenient item for pocket or tool box
 Modified to prevent disassembly during use

















TOOLS@HEIGHT™ 1/4" DRIVE ENCLOSED HEAD RATCHETS


Sealed Narrow Head Design, Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth | Weight (lbs) |
|--------------|---|-------------------------------|-----------------|--------------|
| JHWM52EHATH | Chrome Finish Enclosed Head Ratchet | 5 ¹ / ₄ | 36 | 0.00 |
| JHWMB52EHATH | Black Industrial Finish Enclosed Head Ratchet | 5 ¹ / ₄ | 36 | 0.21 |

Fed. Spec: ANSI B107.10M

Features

- Enclosed head is sealed to prevent dust, dirt, and liquids from entering head, preserving internal
- Forged one-piece ratchet provide strength and safety for industrial applications
- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- Nickel/Chrome plating provides increase protection from rust and corrosion
- Chrome finish models feature mirror-like exterior that can be easily cleaned after each use
- Single Pawl ratchet design:
 - 1) Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage
- 2) Does not require as many working parts, reducing possible breakage and parts to repair
- · Easy access reverse lever allows user to change working direction quickly and easily with only one hand



High-Polished Chrome Finish

| Product Code | Description | Length (Inches) | Weight (lbs.) |
|--------------|-------------|-----------------|---------------|
| JHWM-102-TH | Extension | 2 | .06 |
| JHWM-104-TH | Extension | 4 | .11 |
| JHWM-115-TH | Extension | 6 | .15 |
| JHWM-140A-TH | U-Joint | 1 7/16 | .11 |

Fed. Spec: ANSI B107.10M

Features

- · Chrome plating provides increased protection from rust and corrosion
- · Flexible extension is designed for low torque applications in limited access areas







High-Polished Chrome Finish

| | | Α | B | С | D | E | | F | |
|-------------|----------|----------|----------|----------|------------------|-----------|-----------|----------|--------|
| | | | Drive | Working | | Bolt | Bolt | | |
| | | | End | End | Broach | Clearance | Clearance | Nose | |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | Weight |
| Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHW30206-TH | 3/16 | 1 | 15/32 | 5/16 | 9/32 | 19/32 | 3/16 | 1/2 | 0.03 |
| JHW30207-TH | 7/32 | 1 | 15/32 | 11/32 | 5/16 | 19/32 | 7/32 | 1/2 | 0.03 |
| JHW30208-TH | 1/4 | 1 | 15/32 | 3/8 | 5/16 | 19/32 | 7/32 | 1/2 | 0.03 |
| JHW30209-TH | 9/32 | 1 | 15/32 | 7/16 | 5/16 | 19/32 | 1/4 | 1/2 | 0.03 |
| JHW30210-TH | 5/16 | 1 | 15/32 | 15/32 | ⁵ /16 | 19/32 | 1/4 | - | 0.03 |
| JHW30211-TH | 11/32 | 1 | 1/2 | 1/2 | 5/16 | 19/32 | 11/32 | • | 0.04 |
| JHW30212-TH | 3/8 | 1 | 9/16 | 9/16 | 11/32 | 19/32 | 3/8 | - | 0.04 |
| JHW30214-TH | 7/16 | 1 | 5/8 | 5/8 | 7/16 | 19/32 | 7/16 | | 0.05 |
| JHW30216-TH | 1/2 | 1 | 11/16 | 11/16 | 7/16 | 19/32 | 1/2 | | 0.06 |
| JHW30218-TH | 9/16 | 1 | 3/4 | 3/4 | 7/16 | 19/32 | 17/32 | - | 0.07 |

Fed. Spec: ANSI B107.1

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on both 6 and 12 point fasteners






Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.



can be disengaged inadvertently.





JHWM-115-TH

JHW30210-TH JHW30206-TH





Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.







TOOLS@HEIGHT™ 1/4" DRIVE DEEP SOCKETS, 12 POINT, SAE


High-Polished Chrome Finish

| | | Α | В | С | D | E | | F | |
|--------------|------------------|---------------------------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|--|-------------------------|-----------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Weight (lbs) |
| JHW30406-TH | 3/16 | 1 31/32 | 15/32 | 5/16 | 5/16 | 1 5/16 | 1/8 | 1 1/32 | 0.04 |
| JHW30407-TH | 7/32 | 1 31/32 | 15/32 | 11/32 | 3/8 | 1 ⁵ /16 | 3/16 | ¹⁵ /16 | 0.05 |
| JHW30408-TH | 1/4 | 1 31/32 | 15/32 | 7/16 | 13/16 | 1 11/32 | 7/32 | 1 1/32 | 0.05 |
| JHW30409-TH | 9/32 | 1 31/32 | 15/32 | 7/16 | 25/32 | 1 11/32 | 1/4 | 31/32 | 0.05 |
| JHW30410-TH | ⁵ /16 | 1 31/32 | 15/32 | 15/32 | ¹³ / ₁₆ | 1 5/16 | 9/32 | - | 0.05 |
| JHW30411-TH | 11/32 | 1 31/32 | 1/2 | 1/2 | 23/32 | 1 5/16 | 9/32 | | 0.07 |
| JHW30412-TH | 3/8 | 1 31/32 | 9/16 | 9/16 | 7/8 | 1 11/32 | 5/16 | - | 0.09 |
| JHW30414-TH | 7/16 | 1 31/32 | 5/8 | 5/8 | 7/8 | 1 ½ | 13/32 | - | 0.10 |
| JHW30416-TH | 1/2 | 1 31/32 | 11/16 | 11/16 | 27/32 | 1 17/32 | 7/16 | - | 0.11 |
| JHW30418-TH | 9/16 | 1 ³¹ / ₃₂ | 3/4 | 3/4 | 29/32 | 1 %16 | 17/32 | - | 0.14 |

Fed. Spec: ANSI B107.1

Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 12 point fasteners

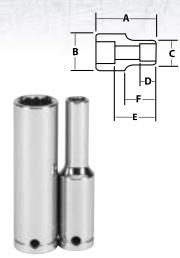

JHW30410-TH JHW30406-TH



TOOLS@HEIGHT™ 1/4" DRIVE STANDARD LENGTH HEX BIT SOCKETS, SAE

High-Polished Chrome Finish

| Product Code | Size (Inches) | Socket Length (Inches) | Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | Weight (lbs) |
|--------------|------------------|-------------------------------|----------------------|----------------------------|------------------------|--------------|
| JHW35000-TH | 1/8 | 13/16 | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35001-TH | 5/32 | ¹³ /16 | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35002-TH | 3/16 | ¹³ /16 | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35003-TH | 7/32 | ¹³ / ₁₆ | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35004-TH | 1/4 | 13/16 | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35005-TH | 5/16 | ¹³ / ₁₆ | 15/32 | 1 13/32 | 5/8 | 0.04 |



| Ountents i | iiciaaci | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW35000-TH | 1/8 | JHW35002-TH | 3/16 | JHW35004-TH | 1/4 |
| JHW35001-TH | 5/32 | JHW35003-TH | 7/32 | JHW35005-TH | 5/16 |



JHW30902-TH

· High-polished chrome finish socket cleans easily



TOOLS@HEIGHT™ 1/4" DRIVE STANDARD LENGTH HEX BIT SOCKETS, METRIC

High-Polished Chrome Finish

| | Size | Socket Length | Diameter | Overall Length | Bit Length | |
|--------------|------|-------------------------------|----------|---------------------------------|------------|--------------|
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | Weight (lbs) |
| JHW35070-TH | 3 | 13/16 | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35071-TH | 4 | ¹³ / ₁₆ | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35072-TH | 5 | ¹³ / ₁₆ | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35073-TH | 6 | ¹³ / ₁₆ | 15/32 | 1 ¹³ / ₃₂ | 5/8 | 0.04 |
| JHW35074-TH | 7 | 13/16 | 15/32 | 1 13/32 | 5/8 | 0.04 |
| JHW35075-TH | 8 | 13/16 | 15/32 | 1 13/32 | 5/8 | 0.04 |



JHW35072-TH

30904-TH 6 Piece Hex Bit Socket Set on Clip Rail .51 lbs **Contents Include:**


| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW35070-TH | 3 | JHW35072-TH | 5 | JHW35074-TH | 7 |
| JHW35071-TH | 4 | JHW35073-TH | 6 | JHW35075-TH | 8 |



. High-polished chrome finish socket cleans easily



Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.























JHWB-140A-TH

JHWB-40A-TH



TOOLS@HEIGHT™ 3/8" DRIVE

| | | Length | Number of | Weight |
|--------------|---|--------------------------------|-----------|--------|
| Product Code | Description | (Inches) | Teeth | (lbs) |
| JHWBB52EHATH | Black Industrial Finish Enclosed Head Ratchet | 8 | 36 | .76 |
| JHWB52EHATH | Chrome Finish Enclosed Head Ratchet | 8 | 36 | .76 |
| JHWB52EHLATH | Chrome Finish Enclosed Head Ratchet, Long | 10 ¹ / ₄ | 36 | .87 |

Fed. Spec: ANSI B107.10M

Features

- Enclosed head is sealed to prevent dust, dirt, and liquids from entering head preserving internal lubrication Forged one-piece ratchet provide strength and safety for industrial applications
- Smooth comfort-grip handle permits all-day use without gloves
- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- Nickel/Chrome plating provides increase protection from rust and corrosion
- Chrome finish models feature mirror-like exterior that can be easily cleaned after each use
- Single Pawl ratchet design:
- 1) Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load
- 2) Does not require as many working parts, reducing possible breakage and parts to repair
- Easy access reverse lever allows user to change working direction quickly and easily with only

TOOLS@HEIGHT™ 3/8" DRIVE EXTENSIONS **AND ACCESSORIES**


High-Polished Chrome Finish

| Product Code | Description | Length (Inches) | Weight (lbs) |
|--------------|----------------------|-----------------|--------------|
| JHWB-108-TH | Extension | 3 | .19 |
| JHWB-110-TH | Extension | 6 | .34 |
| JHWB-115-TH | Extension | 11 | .61 |
| JHWB-118-TH | Extension | 18 | .93 |
| JHWB-140A-TH | Universal Joint | 2 | .15 |
| JHWB-70-TH | Ratchet Spinner Disk | 1 1/4 | .14 |


Fed. Spec: ANSI B107.10M

Features





· Spinner disk is ideal for fast turn down of fasteners



Knurled Handle, High-Polished Chrome Finish

| Tallulica Hallaic, High-Lollstica Officiale Lillian | | | | | | | | |
|---|-------------|--------------------------------|--------------|--|--|--|--|--|
| Product Code | Description | Length (Inches) | Weight (lbs) | | | | | |
| JHWB-40A-TH | Flex Handle | 8 ⁹ / ₁₆ | .67 | | | | | |
| | | | | | | | | |

Fed. Spec: ANSI B107.10M

Features



· Drive handles provide extra leverage with greater strength than ratchets









Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.











TOOLS@HEIGHT™ 3/8" DRIVE SHALLOW SOCKETS, 12 POINT, SAE


| Hiak | Dali | chod | Chrome | Einich |
|------|---------|------|--------|--------|
| nıar | I-PUII: | snea | Chrome | FINISH |

| | | Α | В | С | D | E | | F | |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Weight (lbs.) |
| JHW31208-TH | 1/4 | 1 | 11/16 | 7/16 | 11/32 | 9/16 | 7/32 | 17/32 | 0.04 |
| JHW31210-TH | 5/16 | 1 | 11/16 | 15/32 | 3/8 | 17/32 | 1/4 | 17/32 | 0.05 |
| JHW31212-TH | 3/8 | 1 | 11/16 | 9/16 | 3/8 | 1/2 | 9/32 | 17/32 | 0.05 |
| JHW31214-TH | 7/16 | 1 | 11/16 | 5/8 | 11/32 | 17/32 | 13/32 | 17/32 | 0.05 |
| JHW31216-TH | 1/2 | 1 | 3/4 | 3/4 | 13/32 | 19/32 | 7/16 | - | 0.07 |
| JHW31218-TH | 9/16 | 1 1/16 | ²⁵ / ₃₂ | 25/32 | 17/32 | 5/8 | 17/32 | - | 0.08 |
| JHW31220-TH | 5/8 | 1 1/16 | 7/8 | 7/8 | 19/32 | 11/16 | 19/32 | | 0.09 |
| JHW31222-TH | 11/16 | 1 1/16 | ¹⁵ / ₁₆ | ¹⁵ / ₁₆ | 1/2 | 11/16 | 21/32 | - | 0.11 |
| JHW31224-TH | 3/4 | 1 1/8 | 1 | 1 | 9/16 | 23/32 | 23/32 | - | 0.15 |
| JHW31226-TH | ¹³ / ₁₆ | 1 1/8 | 1 1/8 | 1 1/8 | 9/16 | 23/32 | 25/32 | - | 0.17 |
| JHW31228-TH | 7/8 | 1 7/32 | 1 3/16 | 1 ³ / ₁₆ | 21/32 | ¹³ / ₁₆ | 27/32 | - | 0.21 |
| JHW31230-TH | 15/16 | 1 7/32 | 1 1/4 | 1 1/4 | 21/32 | 13/16 | 27/32 | - | 0.23 |
| JHW31232-TH | 1 | 1 7/32 | 1 ½16 | 1 5/16 | 11/16 | 13/16 | 31/32 | • | 0.26 |

Fed. Spec: ANSI B107.1

Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 12 point fasteners





JHW31216-TH

JHW31208-TH






TOOLS@HEIGHT™ 3/8" DRIVE DEEP SOCKETS, 12 POINT, SAE

| High-Polis | hed Cl | rome A | Finish B | С | D | E | | F | |
|-----------------|------------------|-----------------|--------------------------------------|--|-----------------------------|-------------------------------------|---|----------------------------|-----------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Weight (lbs) |
| JHW31408-TH | 1/4 | 2 ½ | 11/16 | 7/16 | 11/32 | 1 11/16 | 7/32 | 1 1/16 | 0.11 |
| JHW31410-TH | 5/16 | 2 1/2 | 11/16 | 15/32 | 3/8 | 1 11/16 | 5/16 | 1 1/16 | 0.11 |
| JHW31412-TH | 3/8 | 2 1/2 | 11/16 | 9/16 | 3/8 | 1 11/16 | 3/8 | 1 1/16 | 0.12 |
| JHW31414-TH | 7/16 | 2 1/2 | 11/16 | 5/8 | 11/32 | 1 11/16 | 7/16 | 1 1/16 | 0.12 |
| JHW31416-TH | 1/2 | 2 1/2 | 3/4 | 3/4 | 13/32 | 1 11/32 | 15/32 | | 0.15 |
| JHW31418-TH | 9/16 | 2 1/2 | 25/32 | 25/32 | 17/32 | 1 %16 | 17/32 | | 0.18 |
| JHW31420-TH | 5/8 | 2 1/2 | 7/8 | 7/8 | 19/32 | 1 %16 | 19/32 | | 0.21 |
| JHW31422-TH | 11/16 | 2 1/2 | 15/16 | 15/16 | 1/2 | 1 11/16 | 21/32 | | 0.25 |
| JHW31424-TH | 3/4 | 2 1/2 | 1 | 1 | 9/16 | 1 11/16 | 23/32 | | 0.27 |
| JHW31426-TH | 13/16 | 2 1/2 | 1 1/8 | 1 1/8 | 9/16 | 2 1/32 | 25/32 | | 0.34 |
| JHW31428-TH | 7/8 | 2 1/2 | 1 3/16 | 1 3/16 | 21/32 | 2 1/32 | 27/32 | | 0.38 |
| JHW31430-TH | 15/16 | 2 1/2 | 1 1/4 | 1 1/4 | 21/32 | 2 1/32 | 27/32 | | 0.44 |
| JHW31432-TH | 1 | 2 1/2 | 1 5/16 | 1 5/16 | 11/16 | 2 | 31/32 | | 0.49 |

Fed. Spec: ANSI B107.1

Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- · Designed for quick engagement on both 6 and 12 point fasteners

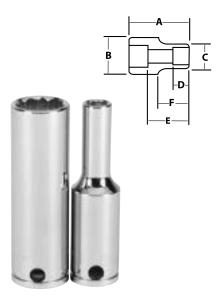

JHW31416-TH JHW31408-TH







Williams® Tools®Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools®Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools

Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.


















JHW35100-TH

TOOLS@HEIGHT™ 3/8" DRIVE STANDARD **LENGTH HEX BIT SOCKETS, SAE**



High-Polished Chrome Finish

| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | Weight (lbs.) |
|-----------------|------------------|--------------------------------|--|---------------------------------|-------------------------------|------------------|
| JHW35100-TH | 1/8 | 1 ³ / ₁₆ | 3/4 | 1 27/32 | 21/32 | 0.09 |
| JHW35101-TH | 9/64 | 1 ³ / ₁₆ | 3/4 | 1 ²⁷ / ₃₂ | 21/32 | 0.09 |
| JHW35102-TH | 5/32 | 1 ³ / ₁₆ | 3/4 | 1 27/32 | 21/32 | 0.10 |
| JHW35103-TH | 3/16 | 1 ³ / ₁₆ | 3/4 | 1 27/32 | 21/32 | 0.09 |
| JHW35104-TH | 7/32 | 1 3/16 | 3/4 | 1 27/32 | 21/32 | 0.10 |
| JHW35105-TH | 1/4 | 1 3/16 | 3/4 | 1 27/32 | 21/32 | 0.09 |
| JHW35106-TH | ⁵ /16 | 1 ³ / ₁₆ | 3/4 | 1 ³¹ / ₃₂ | ¹³ / ₁₆ | 0.11 |
| JHW35107-TH | 3/8 | 1 ³ / ₁₆ | 3/4 | 1 31/32 | ¹³ / ₁₆ | 0.12 |

Features

· High-polished chrome finish socket cleans easily.





TOOLS@HEIGHT™ 3/8" DRIVE UNIVERSAL SOCKETS, 6 POINT, SAE

High-Polished Chrome Finish

| | | Α | В | С | D | E | | F | |
|-----------------|------------------|---------------------------------|-----------------------------------|----------------------------------|-----------------------------|--|---|----------------------------|------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Open End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Weight (lbs.) |
| JHW31142-TH | 3/8 | 1 ⁵³ / ₆₄ | 3/4 | 9/16 | 3/8 | 35/64 | 21/64 | 5/16 | 0.11 |
| JHW31144-TH | 7/16 | 1 53/64 | 3/4 | 5/8 | 3/8 | 35/64 | 21/64 | 5/16 | 0.11 |
| JHW31146-TH | 1/2 | 1 57/64 | 3/4 | 45/64 | 13/32 | 37/64 | 21/64 | 13/32 | 0.12 |
| JHW31148-TH | 9/16 | 1 ⁵⁷ / ₆₄ | 3/4 | 25/32 | 7/16 | 43/64 | 21/64 | 33/64 | 0.13 |
| JHW31150-TH | 5/8 | 2 | 3/4 | 55/64 | 7/16 | 45/64 | 21/64 | 33/64 | 0.14 |
| JHW31152-TH | 11/16 | 2 3/64 | 3/4 | 15/16 | 31/64 | 3/4 | 21/64 | 17/32 | 0.15 |
| JHW31154-TH | 3/4 | 2 ³ / ₆₄ | 3/4 | 1 1/64 | 1/2 | 51/64 | 21/64 | 17/32 | 0.16 |

Fed. Spec: ANSI B107.1

Features

· Ideal for work in confined areas where fastener is inaccessible to standard sockets



JHW31154-TH

JHW31142-TH







Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.



THPRTA



TOOLS@HEIGHT™ 1/2" DRIVE SCAFFOLDING RATCHET

| Product Code | Description | Product Code | Description |
|--------------|---|--------------|-------------|
| BS-63A | Scaffolding Ratchet with reversed pry bar | JHWBS-63BRK | Repair Kit |
| JHWBS-62 | Scaffolding Ratchet with out pry bar | JHWBS-63BTIP | Hammer Tip |
| JHWBS-63B | Scaffolding Ratchet with pry bar | JHWBS-63BBAR | Pry Bar |

Features

- 1/2" Drive with pinned 7/8" 6-point socket, 2-1/4" length
- · 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- Bronze hammer head reduces rebound
- . Pry bar handle provide alignment option
- . Socket feature SUPERTORQUE lobular opening for greater turning power without deforming the fastener
- · Easy access reversing lever allows user to change working direction quickly and easily with only one hand
- · Tethering device attached to handle



TOOLS@HEIGHT™ 1/2" DRIVE ENCLOSED HEAD RATCHETS

Williams® Sealed Narrow Head Design, Chrome and Black Industrial Finish

| | 3 ' | | | | |
|------------------------|---|-----------------|-----------------|--------------|---|
| Product Code | Description | Length (Inches) | Number of Teeth | Weight (lbs) | |
| JHWS52EHATH | Chrome Finish Enclosed Head Ratchet | 10 1/4 | 36 | 1.61 | |
| JHWS52EHLATH | Chrome Finish Enclosed Head Ratchet, Long | 15 | 36 | 1.94 | |
| JHWSB52EHATH | Black Industrial Finish Enclosed Head Ratchet | 10 1/4 | 36 | 1.61 | |
| Fed. Spec: ANSI B107.1 | OM | | | N/AIR* | 2 |

Features

- · Enclosed head is sealed to prevent dust, dirt, and liquids from entering head, preserving internal lubrication
- Forged one-piece ratchet provide strength and safety for industrial applications
- Smooth comfort-grip handle permits all-day use without gloves
- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- Nickel/Chrome plating provides increase protection from rust and corrosion
- · Chrome finish models feature mirror-like exterior that can be easily cleaned after each use



JHWS-40AA-TH

TOOLS@HEIGHT™ 1/2" DRIVE HANDLES

Knurled Handle. Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Weight (lbs) |
|----------------------|-------------------------------------|----------------------------------|--------------|
| JHWS-40AA-TH | Chrome Flex Handle | 10 ¹³ / ₁₆ | 1.34 |
| JHWS-41AA-TH | Chrome Flex Handle | 15 ½ | 2.07 |
| JHWBS41AATH | Black Industrial Finish Flex Handle | 15 ½ | 2.06 |
| Fed. Spec: ANSI B107 | 7.10M | | N/IIe- |


Features

- Chrome plating provides increased protection from rust and corrosion.
- Drive handles provide extra leverage with greater strength than ratchets.
- · Speeder handle is ideal for fast turn down of fasteners.









Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA - Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools




















JHWS-140A-TH

JHW32220-TH

JHW32212-TH

TOOLS@HEIGHT™ 1/2" DRIVE EXTENSIONS AND ACCESSORIES

High-Polished Chrome Finish

| Product Code | Description | Length (Inches) | Weight (lbs.) |
|--------------|-----------------|---------------------------------|---------------|
| JHWS-102P-TH | Extension | 2 | .38 |
| JHWS-110P-TH | Extension | 5 | .50 |
| JHWS-115P-TH | Extension | 10 | .93 |
| JHWS-121P-TH | Extension | 20 | 1.76 |
| JHWS-140A-TH | Universal Joint | 2 ¹¹ / ₁₆ | .29 |

Fed. Spec: ANSI B107.10M

Features

Chrome plating provides increased protection from rust and corrosion










TOOLS@HEIGHT™ 1/2" DRIVE SHALLOW 12 POINT SOCKETS, SAE

JHWS-121P-TH

High-Polished Chrome Finish

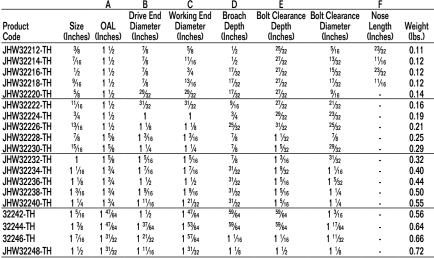

Fed. Spec: ANSI B107.1

Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners



Competitor's socket Williams® socket





Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.



Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.







TOOLS@HEIGHT™ 1/2" DRIVE DEEP SOCKETS, 12 POINT, SAE


High-Polished Chrome Finish

| | | Α | В | С | D | Ε | | F | |
|--------------|--------------------|----------|---------------------------------|---------------------------------|---------------------------------|--|---------------------------------|---------------------------------|--------|
| D 1 1 | ٥. | 041 | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose | |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | Weight |
| Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs.) |
| JHW32412-TH | 3/8 | 3 | 7/8 | 5/8 | 1 | 2 7/32 | 11/32 | 1 ¹⁵ / ₃₂ | 0.23 |
| JHW32414-TH | 7/16 | 3 1/32 | 7/8 | 11/16 | 1 1/8 | 2 %32 | 13/32 | 1 ¹⁵ / ₃₂ | 0.24 |
| JHW32416-TH | 1/2 | 3 1/32 | 7/8 | 3/4 | 31/32 | 2 ⁷ / ₃₂ | 7/16 | 1 ¹⁵ / ₃₂ | 0.24 |
| JHW32418-TH | 9/16 | 3 1/32 | 7/8 | 13/16 | 1 3/32 | 2 7/32 | 1/2 | 1 ¹⁵ / ₃₂ | 0.26 |
| JHW32420-TH | 5/8 | 3 1/32 | 29/32 | 29/32 | 1 ³ / ₁₆ | 2 ³ / ₁₆ | 9/16 | - | 0.27 |
| JHW32422-TH | 11/16 | 3 1/32 | 15/16 | ¹⁵ / ₁₆ | 1 3/8 | 2 ³ ⁄ ₁₆ | 21/32 | | 0.27 |
| JHW32424-TH | 3/4 | 3 ½2 | 1 1/16 | 1 1/16 | 1 1/4 | 2 ¹¹ / ₃₂ | 23/32 | - | 0.27 |
| JHW32426-TH | 13/16 | 3 1/32 | 1 1/8 | 1 1/8 | 1 ¹⁵ / ₃₂ | 2 3/16 | 3/4 | - | 0.41 |
| JHW32428-TH | 7/8 | 3 1/32 | 1 3/16 | 1 ³ / ₁₆ | 1 13/32 | 2 1/4 | ²⁷ / ₃₂ | - | 0.45 |
| JHW32430-TH | 15/16 | 3 1/32 | 1 1/4 | 1 1/4 | 1 13/32 | 2 5/32 | 29/32 | - | 0.50 |
| JHW32432-TH | 1 | 3 1/32 | 1 11/32 | 1 11/32 | 1 13/32 | 2 5/32 | 15/16 | - | 0.58 |
| JHW32434-TH | 1 1/16 | 3 ½2 | 1 ¹³ / ₃₂ | 1 13/32 | 1 3/8 | 2 ¹¹ / ₃₂ | 1 1/32 | - | 0.64 |
| JHW32436-TH | 1 1/8 | 3 1/32 | 1 1/2 | 1 ½ | 1 1/16 | 2 ¾ | 1 1/16 | - | 0.75 |
| JHW32438-TH | 1 ³ /16 | 3 1/32 | 1 %16 | 1 %16 | 1 1/16 | 2 3/16 | 1 1/16 | - | 0.81 |
| JHW32440-TH | 1 1/4 | 3 1/32 | 1 21/32 | 1 21/32 | 1 1/16 | 2 ³ ⁄ ₁₆ | 1 1/16 | - | 0.88 |
| 32442-TH | 1 ⁵ /16 | 3 1/32 | 1 47/64 | 1 ⁴⁷ / ₆₄ | 1 3/8 | 2 11/64 | 1 3/16 | - | 0.98 |
| 32444-TH | 1 % | 3 1/32 | 1 53/64 | 1 53/64 | 1 ¾ | 2 11/64 | 1 ¹⁷ / ₆₄ | - | 1.12 |
| 32446-TH | 1 7/16 | 3 1/32 | 1 57/64 | 1 57/64 | 1 ¾ | 2 11/64 | 1 11/32 | - | 1.19 |
| JHW32448-TH | 1 1/2 | 3 1/32 | 1 ¹⁵ / ₁₆ | 1 31/32 | 1 7/16 | 2 3/16 | 1 1/16 | - | 1.38 |



Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners

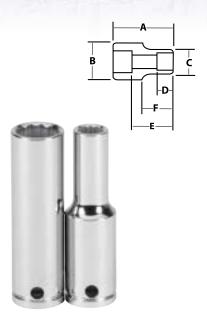

JHW32420-TH JHW32412-TH





TOOLS@HEIGHT™ 1/2" DRIVE SHALLOW SOCKETS, 8 POINT, SAE

High-Polished Chrome Finish

| | | Α | В | С | D | E | | F | |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|---------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Weight (lbs.) |
| JHWST-812-TH | 3/8 | 1 1/2 | 7/8 | 23/32 | 5/16 | ²⁷ / ₃₂ | 5/16 | 7/8 | 0.14 |
| JHWST-814-TH | 7/16 | 1 1/2 | 7/8 | ¹³ / ₁₆ | 3/8 | ²⁷ / ₃₂ | 5/16 | 7/8 | 0.13 |
| JHWST-816-TH | 1/2 | 1 1/2 | 29/32 | 29/32 | 13/32 | ²⁷ / ₃₂ | 11/32 | | 0.16 |
| JHWST-818-TH | 9/16 | 1 1/2 | 31/32 | 31/32 | 7/16 | ²⁷ / ₃₂ | 7/16 | | 0.18 |
| JHWST-820-TH | 5/8 | 1 1/2 | 1 1/16 | 1 1/16 | 1/2 | 27/32 | 7/16 | | 0.24 |
| JHWST-822-TH | 11/16 | 1 1/2 | 1 3/16 | 1 3/16 | 1/2 | 27/32 | 17/32 | | 0.37 |
| JHWST-824-TH | 3/4 | 1 1/2 | 1 %32 | 1 1 1/32 | 9/16 | ¹³ / ₁₆ | ²³ / ₃₂ | | 0.37 |
| JHWST-826-TH | ¹³ / ₁₆ | 1 1/8 | 1 1/16 | 17/16 | 9/16 | 31/32 | ²⁷ / ₃₂ | | 0.49 |
| JHWST-828-TH | 7/8 | 1 3/4 | 1 1/2 | 1 1/2 | 5/8 | 1 1/16 | ¹⁵ / ₁₆ | | 0.53 |
| JHWST-830-TH | 15/16 | 1 13/16 | 1 1/8 | 1 5/8 | 11/16 | 1 1/8 | 1 1/32 | | 0.63 |
| JHWST-832-TH | 1 | 1 15/16 | 1 11/16 | 1 11/16 | 11/16 | 1 1/4 | 1 1/32 | | 0.78 |

Fed. Spec: ANSI B107.1

Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- 8 point sockets are designed for quick engagement on 4 point fasteners





JHWST-812-TH





Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA - Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.

























High-Polished Chrome Finish

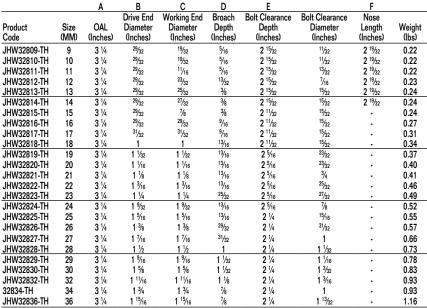



JHW32949-TH - 24 Piece 1/2" Drive Deep 12 Point Socket Set on Clip Rail 12.02 lbs.

Features

- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners



TOOLS@HEIGHT™ 1/2" DRIVE STANDARD LENGTH HEX BIT SOCKETS, SAE



High-Polished Chrome Finish


| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | Weight (lbs) |
|--------------|------------------|---------------------------------|-------------------------------------|--|------------------------|-----------------|
| JHW35208-TH | 1/4 | 1 7/16 | ²⁹ /32 | 2 13/32 | 27/32 | 0.17 |
| JHW35210-TH | ⁵ /16 | 1 ⁷ /16 | ²⁹ / ₃₂ | 2 ¹³ / ₃₂ | 27/32 | 0.17 |
| JHW35212-TH | 3/8 | 1 7/16 | ²⁹ / ₃₂ | 2 ¹³ / ₃₂ | 27/32 | 0.19 |
| JHW35214-TH | 7/16 | 1 ⁷ / ₁₆ | ²⁹ / ₃₂ | 2 ¹³ / ₃₂ | 27/32 | 0.22 |
| JHW35202-TH | 1/2 | 1 19/32 | 7/8 | 2 ¹³ / ₃₂ | 27/32 | 0.26 |
| JHW35203-TH | 9/16 | 1 ¹⁹ / ₃₂ | 1 | 2 ¹³ / ₃₂ | 27/32 | 0.33 |
| JHW35204-TH | 5/8 | 1 ¹⁹ / ₃₂ | 1 1/16 | 2 ¹³ / ₃₂ | 27/32 | 0.39 |
| JHW35206-TH | 3/4 | 1 19/32 | 1 3/16 | 2 ¹³ / ₃₂ | 27/32 | 0.51 |

TOOLS@HEIGHT™ 1/2" DRIVE STANDARD LENGTH HEX BIT SOCKETS, METRIC



High-Polished Chrome Finish

| Product Code | Size (MM) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | Weight (lbs) |
|--------------|--------------|---------------------------------|-------------------------------------|-------------------------|-------------------------------|-----------------|
| JHW35274-TH | 8 | 1 19/32 | 29/32 | 2 13/32 | 27/32 | 0.17 |
| JHW35275-TH | 10 | 1 ¹⁹ / ₃₂ | 29/32 | 2 7/16 | 27/32 | 0.19 |
| JHW35276-TH | 12 | 1 ¹⁹ / ₃₂ | 29/32 | 2 7/16 | ²⁷ / ₃₂ | 0.22 |
| JHW35277-TH | 14 | 1 ¹⁹ / ₃₂ | 1 | 2 7/16 | ²⁷ / ₃₂ | 0.32 |
| JHW35278-TH | 17 | 1 ¹⁹ / ₃₂ | 1 3/32 | 2 7/16 | ²⁷ / ₃₂ | 0.43 |
| JHW35279-TH | 19 | 1 19/32 | 1 3/16 | 2 7/16 | 27/32 | 0.51 |



Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side

Tool for Williams® Square Drive Tools
Do not use quick release tools with locking
collars or push button release. These tools
can be disengaged inadvertently.





JHW32820-TH

Fea

Features

. High-polished chrome finish socket cleans easily



TOOLS@HEIGHT™ 3/4" DRIVE INTEGRATED HANDLE RATCHETS

Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth | Weight (lbs) |
|--------------|---------------------------------|-----------------|-----------------|--------------|
| JHWH-51B-TH | Chrome Finish Ratchet | 20 ½ | 24 | 6.04 |
| JHWHB-51B-TH | Black Industrial Finish Ratchet | 20 ½ | 24 | 6.04 |
| | | | | |

Fed. Spec: ANSI B107.10M

Features

- . Forged one-piece ratchet provide strength and safety for industrial applications
- . Smooth comfort-grip handle permits all-day use without gloves



JHWH-110-TH

JHWH-104B-TH

TOOLS@HEIGHT™ 3/4" DRIVE EXTENSIONS

Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Weight (lbs) |
|--------------|---|-----------------|--------------|
| JHWH-104B-TH | Black Industrial Finish Drive Extension | 3 | 0.73 |
| JHWH-110B-TH | Black Industrial Finish Drive Extension | 8 | 1.70 |
| JHWH-110-TH | Chrome Finish Drive Extension | 8 | 1.72 |
| JHWH-115-TH | Chrome Finish Drive Extension | 16 | 3.25 |

Fed. Spec: ANSI B107.10M

Features

. Chrome plating provides increased protection from rust and corrosion



TOOLS@HEIGHT™ 3/4" DRIVE HANDLE

Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Finish |
|---------------------|---------------------------------------|-----------------|---------|
| JHWH-41AA-TH | Flex Handle Breaker Bar, Knurled Grip | 22 1/8 | Chrome |
| Fed. Spec: ANSI B10 | 7.10M | | N/ 112- |

Features

- . Chrome plating provides increased protection from rust and corrosion
- Drive handles provide extra leverage with greater strength than ratchets
- Square drive slides on T-Handles for versatility
- Flex handle flex drive swivels 110° in either direction







Competitor's socket Williams® socket





Williams® Tools@Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools@Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools














* JSA

* USA





TOOLS@HEIGHT™ 3/4" DRIVE SHALLOW **12 POINT SOCKETS, SAE**







High-Polished Chrome Finish

| | | Α | В | С | F | |
|--------------|---------------------------------|-----------------|-----------------------------|---------------------------------|-------------------------|-----------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Nose Length (Inches) | Weight (lbs) |
| JHW33228-TH | 7/8 | 1 15/16 | 1 7/16 | 1 1/4 | 35/64 | 0.46 |
| JHW33230-TH | 15/16 | 2 | 1 7/16 | 1 % | 5/8 | 0.49 |
| JHW33232-TH | 1 | 2 1/16 | 1 7/16 | 1 7/16 | 5/8 | 0.49 |
| JHW33234-TH | 1 1/16 | 2 1/16 | 1 7/16 | 1 1/2 | 7/8 | 0.49 |
| JHW33236-TH | 1 1/8 | 2 1/16 | 1 1/2 | 1 %16 | 7/8 | 0.54 |
| JHW33238-TH | 1 3/16 | 2 1/8 | 1 1/2 | 1 11/16 | 15/16 | 0.60 |
| JHW33240-TH | 1 1/4 | 2 3/16 | 1 1/2 | 1 3/4 | 15/16 | 0.64 |
| JHW33242-TH | 1 5/16 | 2 3/16 | 1 1/2 | 1 ¹³ / ₁₆ | 1 | 0.69 |
| JHW33244-TH | 1 % | 2 1/4 | 1 % | 1 1/8 | 1 | 0.83 |
| JHW33246-TH | 1 7/16 | 2 1/4 | 1 % | 1 ³¹ / ₃₂ | 1 7/64 | 0.90 |
| JHW33248-TH | 1 ½ | 2 % | 1 3/4 | 2 1/16 | 1 7/64 | 1.01 |
| JHW33252-TH | 1 % | 2 1/2 | 1 3/4 | 2 ³ / ₁₆ | 1 3/16 | 1.17 |
| JHW33256-TH | 1 3/4 | 2 1/16 | 1 13/16 | 2 5/16 | 1 1/4 | 1.37 |
| JHW33258-TH | 1 ¹³ / ₁₆ | 2 11/16 | 1 13/16 | 2 ¾ | 1 1/4 | 1.37 |
| JHW33260-TH | 1 1/8 | 2 3/4 | 1 1/4 | 2 1/2 | 1 11/32 | 1.57 |
| JHW33264-TH | 2 | 2 13/16 | 1 1/8 | 2 11/16 | 1 13/32 | 1.64 |

Fed. Spec: ANSI B107.1







Fed. Spec: ANSI B107.10M

Features

- · Chrome plating provides increased protection from rust and corrosion
- . Drive handles provide extra leverage with greater strength than ratchets
- . Square drive slides on T-Handles for versatility
- Flex handle flex drive swivels 110° in either direction
- · Spring and plunger socket retention



JHWX-41C-TH

TOOLS@HEIGHT™ 1" DRIVE RATCHET

Integrated Handle, Chrome Finish

| Product Code | Description | Length (Inches) | Number of Teeth | Weight (lbs) |
|--------------|----------------|-----------------|-----------------|--------------|
| JHWX-51B-TH | Chrome Ratchet | 20 1/8 | 24 | 6.25 |

Fed. Spec: ANSI B107.10M

Features

- · Forged one-piece ratchet provide strength and safety for industrial applications
- . Smooth comfort-grip handle permits all-day use without gloves
- · 24 tooth gear with 15 degree of engagement allows engagement in tight working areas
- Chrome finish with mirror-like exterior can be easily cleaned after each use







Williams® Tools®Height™ sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Williams® Tools®Height™ ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRTA – Pin Release Tool for Williams® Square Drive Tools Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.





TOOLS@HEIGHT™ 5 PIECE PREMIUM MIXED **SCREWDRIVER SET**


Premium Comfort Grip Handles and Blades

| Product Code | Description | | | | |
|---------------|--|-----------------------|----------------------|--|--|
| 100P-5MD-TH | 5 Piece Premium Screwdriver Set Phillips/Slotted | | | | |
| Contents Incl | ude: | | | | |
| Product Code | Overall length (Inches) | Blade Length (Inches) | Tip Width/Point Size | | |
| JHWSDR-22-TH | 6 1/8 | 3 | 3/16 | | |
| JHWSDR-24-TH | 7 7/8 | 4 | 1/4 | | |
| JHWSDR-26-TH | 10 11/16 | 6 | 5/16 | | |
| JHWSDP13TH | 6 1/4 | 3 | #1 Phillips | | |


#2 Phillips

* JUSA

TOOLS@HEIGHT™ SLOTTED SCREWDRIVERS



7 15/16

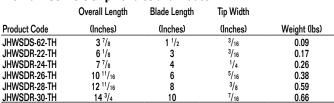

Features

JHWSDP24TH

- · Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage.
- · Hi-polish chrome blades prevent corrosion and can be easily cleaned.
- · Vapor-blasted tips grip fasteners and prevent chipping, extending tool life.
- Blades are made from special alloy steel for extra strength.



Rotating screwdriver tabs - tab is located for

- secure retention and allow full use of the screwdriver handle

 Stainless steel tab is corrosion resistant
- Tab rotates freely 360° so the lanyard does not wrap around
- native received the table that the users hand Nylon bushing has a shoulder so the tab will not bind between the handle and shank bolster



















Premium Comfort Grip Handles and Blades

| | Overall Length | Blade Length | Point | Weight |
|--------------|--------------------------------|--------------|-------|--------|
| Product Code | (Inches) | (Inches) | Size | (lbs) |
| JHWSDP2STTH | 3 7/8 | 1 1/2 | 2 | 0.10 |
| JHWSDP13TH | 6 1/4 | 3 | 1 | 0.15 |
| JHWSDP24TH | 7 15/16 | 4 | 2 | 0.25 |
| JHWSDP28TH* | 12 | 8 | 2 | 0.30 |
| JHWSDP36TH | 10 ¹ / ₂ | 6 | 3 | 0.39 |
| JHWSDP46TH | 10 ³ / ₄ | 6 | 4 | 0.53 |

^{*} Does not have Bolster

Features

- Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage
- Hi-polish chrome blades prevent corrosion and can be easily cleaned
- · Vapor-blasted tips grip fasteners and prevent chipping, extending tool life
- Blades are made from special alloy steel for extra strength.

TOOLS@HEIGHT™ WEDGE WIDTH POSITION ADJUSTABLE SHACKLE

Durable Shackle with Wave Washers

| | Overall Length | Overall Length | Overall Width | Width Wedge | | |
|--------------|--|-------------------|-------------------|--------------|---------------|--------|
| | Wedge Only | Including Shackle | Including Shackle | Working Area | Tip Thickness | Weight |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHWWG6412TH | 12 | 14 | 2.3 | 2 | 0.1 | 6.9 |
| JHWWG2408TH | 8 | 9 | 1.82 | 1.5 | 0.1 | 1.5 |
| THCARA257FTB | SST Carabiner to carabiner bungee lanyard, medium duty | | | | | |

Features

- Wedge features a durable shackle with wave washers that allow the shackle to be positioned out of the
 way while being struckPrecision machined socket end
- Useful for most separating and positioning tasks
- Designed to allow the shackle to swivel fully from one side to the other
- Made from heat treated alloy steel; Stainless steel shackle is durable and will not corrode in harsh environments
- Shackle has position adjustment feature to keep the shackle out of the hammer path, even when used upside down
- Shackle pin is locked in place to prevent it from "walking out" during use

TOOLS@HEIGHT™ BULL PINS WIDTH POSITION ADJUSTABLE SHACKLE

Durable Shackle with Wave Washers

| | Overall Length | Overall Length | Overall Width | Diameter Bull Pir | 1 | |
|--------------|----------------|-----------------------|----------------------|--------------------------------|----------------|--------|
| | Bull Pin Only | Including Shackle | Including Shackle | Working Area | Point Diameter | Weight |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (lbs) |
| JHWBP4014TH | 14 | 16 | 2 5/16 | 1 1/4 | 5/16 | 3.5 |
| JHWBP3410TH | 10 | 11 | 1 13/16 | 1 ¹ / ₁₆ | 1/4 | 3 |
| THCARA257FTB | SST Cara | biner to carabiner bu | ingee lanyard, mediu | ım duty | | |
| KLE5417T | Bull Pin I | Holder - Leather | | | | |

Features

JHWBP4014TH

- Bull Pins feature a durable shackle with wave washers that allow the shackle to be positioned out of the way while being struck
- Broad head bull pin for most alignment tasks
- Head of bull pin designed to allow the shackle to swivel fully from one side to the other
- Bull Pin made from heat treated alloy steel; Stainless steel shackle is durable and will not corrode in harsh environments
- Shackle has position adjustment feature to keep the shackle out of the hammer path, even when used upside down
- . Shackle pin is locked in place to prevent it from "walking out" during use
- Broad head angle allows shackle to pass from side to side, even as head mushrooms from being struck





TOOLS@HEIGHT™ UTILITY SUPERJOINT PLIERS

Double-Dipped Plastic Handles

| Features | Overall Length (Inches) | Maximum Opening (Inches) | Tip Width (Inches) | Weight (lbs) |
|--------------|-------------------------|-------------------------------|-----------------------|-----------------|
| JHWPL1519CTH | 5 | 1/2 | 3/16 | 0.22 |
| JHWPL1520CTH | 10 | 1 1/2 | 5/16 | 0.92 |
| JHWPL1523CTH | 12 | 2 ⁵ / ₈ | 1/2 | 1.50 |
| JHWPL1524CTH | 16 | 4 | 1/2 | 2.78 |

Features

- Multiple parallel jaw positions are locked in to proper groove for superior non-slip performance
- Serrated jaws for maximum gripping power
- · Polished heads resist rust and corrosion, extending the tool life



Made in U.S.A.

* USA

TOOLS@HEIGHT™ COMBINATION SLIP-JOINT PLIERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Tip Width (Inches) | Weight (lbs) |
|--------------|-------------------------|------------------------|--------------------|-----------------|
| JHWPL-8C-TH | 8 | 1 13/32 | 3/8 | 0.73 |
| JHWPL-10C-TH | 10 | 1 13/32 | 1/2 | 1.04 |

Features

- Multiple parallel jaw positions are locked in to proper groove for superior non-slip performance
- Serrated jaws for maximum gripping power
- · Polished heads resist rust and corrosion, extending the tool life
- Shear type wire cutter extends tool use



TOOLS@HEIGHT™ INDUSTRIAL GRADE LINESMAN'S PLIERS

Double-Dipped Plastic Handles

| Product Code | Description | Overall Length (Inches) | Jaw Length (Inches) | Weight (lbs) |
|--------------|---------------|-------------------------|------------------------|-----------------|
| Floudel Code | Description | (IIICIIES) | (IIICIICS) | เมอา |
| JHWPL204CTH | Electrician's | 7 | 1/2 | .62 |

- Designed for wiring, electrical equipment installation and maintenance for utility linemen
- · Polished faces look good and resist corrosion
- Induction hardened cutting edges stay sharp longer
- Diamond serrated jaws provide solid grip on wire
- Double-dipped plastic handle grips are comfortable yet durable















TOOLS@HEIGHT™ HIGH LEVERAGE DIAGONAL CUTTING PLIERS

Double-Dipped Plastic Handles

| 5 1 . 6 . | 5 | Overall Length | Cutting Blade Length | Weight |
|--------------|--------------------|----------------|----------------------|--------|
| Product Code | Description | (Inches) | (Inches) | (lbs) |
| JHWPL-57C-TH | High Leverage Head | 7 1/4 | 15/16 | 0.50 |

Features

- · Handles are designed to cut wire with ease
- · Polished heads resist rust and corrosion, extending the tool life
- · Induction hardened cutting edges





JHWPL-76C-TH

JHWPL149CTH

TOOLS@HEIGHT™ INDUSTRIAL GRADE DIAGONAL CUTTING PLIERS

Double-Dipped Plastic Handles

| | Overall Length | Cutting Blade Length | Weight |
|--------------|----------------|----------------------|--------|
| Product Code | (Inches) | (Inches) | (lbs) |
| JHWPL-46C-TH | 6 | 3/4 | .37 |
| JHWPL-47C-TH | 7 | 11/16 | .50 |

Features

- Handles are designed to cut wire with ease
- · Polished heads resist rust and corrosion, extending the tool life
- Induction hardened cutting edges
- · Regular flush cutters are used for cutting hard wire



TOOLS@HEIGHT™ CHAIN NOSE PLIERS

Double-Dipped Plastic Handles

| | | Overall Length | Jaw Length | Weight |
|--------------|--------------------|-------------------------------|------------|--------|
| Product Code | Description | (Inches) | (Inches) | (lbs) |
| JHWPL-76C-TH | Long Nose w/cutter | 6 ¹ / ₂ | 1 5/16 | .38 |

Features

- · Polished heads resist rust and corrosion, extending the tool life
- . Diamond serrated jaws with industrial hardened cutting edges





Double-Dipped Plastic Handles

| Durahuat Cada | | Overall Length | Jaw Length | Weight |
|---------------|---------------|----------------|------------|--------|
| Product Code | Description | (Inches) | (Inches) | (lbs) |
| JHWPL149CTH | High Leverage | 8 | 1 1/4 | .44 |

- · Jaws are polished with rust-protective coating
- Flat wide nose provides a better grip than the regular needle nose models







TOOLS@HEIGHT™ THIN BENT CHAIN NOSE PLIERS

Double-Dipped Plastic Handles

| Product Code | Description | Overall Length (Inches) | Jaw Length (Inches) | Weight (lbs) |
|--------------|--------------------|-------------------------|---------------------|--------------|
| JHWPL126CTH | 73° Bent Thin Nose | 6 1/4 | 1 1/4 | 0.33 |

Features

- · Polished heads resist rust and corrosion, extending the tool life
- · Serrated jaws for extra gripping power
- 73° bent nose model featured thin jaws angled to reach around obstacles and hard-to-reach spaces



TOOLS@HEIGHT™ HEAVY DUTY FRONT END WIRE STRIPPERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Capacity (AWG-solid wire) | Capacity (stranded wire) | Weight (lbs) |
|--------------|-------------------------|------------------------------|-----------------------------|--------------|
| JHW23506-TH | 6 1/4 | 10-20 | 12-20 | .24 |

Features

- Double-dipped handles with air cushion pockets provide comfortable grip, reducing hand fatigue
- Spring-loaded handles speed work and reduce hand effort
- · Serrated gripping jaws in nose for use as pliers
- 2-piece hardened steel pivot for long life service
- Lock protects cutting edges in storage



TOOLS@HEIGHT™ MULTI-PURPOSE COMBINATION WIRE TOOLS

Double-Dipped Plastic Handles with Curved Wire Cutter

| | | | Overall Length | Nose | Weight |
|-----|-----------|--------------------|-------------------------------|-----------------|--------|
| Pro | duct Code | Description | (Inches) | Style | (lbs) |
| JH | W23503-TH | Front-end Stripper | 8 ¹ / ₄ | Serrated Pliers | 0.45 |

Features

- Crimp and strip wire sizes 10-22 AWG
- Double-dipped handles with air cushion pockets provide comfortable grip, reducing hand fatigue
- 23503 cuts 6 bolt sizes: 4-40 / 5-40 / 6-32 / 8-32 / 10-32 / 10-24



TOOLS@HEIGHT™ WIRE TWISTER / CUTTER

Produces Right Hand (clockwise) Twists

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Cutting Blade Length (Inches) | Weight (lbs) | |
|--------------|-------------------------|------------------------|----------------------------------|-----------------|--|
| JHWWTC-11-TH | 8.5 | 1 1/16 | 1/4 | .53 | |


- Diamond-shaped, flat top jaw serrations hold wire firmly and resist nicking material being worked on
- Diagonal nose configurations & "mini" frame allows access in tight quarters
- · Automatic return feature retracts automatically, speeding up operation use and reducing operator fatigue
- · Heat-treated cutting edge holds it edge for cutting tough (up to .041) stainless steel and safety wire
- . One hand operation allows for operator closing and locking with minimum of handle force
- . High carbon alloy steel forging are used for maximum durability and long life

















TOOLS@HEIGHT™ CABLE CUTTER FOR FERROUS MATERIALS

Locking Pliers

| Product Code | Overall Length (Inches) | Weight (lbs) |
|--------------|-------------------------|--------------|
| JHW23302A-TH | 7 | 0.71 |
| JHW23303A-TH | 10 | 1.15 |

Features

- · Convenient one-hand release lever
- · Heavy-duty jaw surfaces provide extra gripping power



TOOLS@HEIGHT™ LOCKING PLIERS

| Long Nose with Wir | e Cutter Locking Pliers | |
|--------------------|-------------------------|--------------|
| Product Code | Overall Length (Inches) | Weight (lbs) |
| JHW23310A-TH | 9 | 0.80 |

Locking C-Clamps

| Produc | t Code | Overall Length (Inches) | Throat Depth | Capacity (Lbs.) | Weight (lbs) |
|--------|----------|-------------------------|--------------|-----------------|--------------|
| JHW2 | 3321A-TH | 11 | 21/4" | 900 | 1.65 |

Features

- Convenient one-hand release lever
- · Heavy-duty jaw surfaces provide extra gripping power



TOOLS@HEIGHT™ DROP FORGED C-CLAMPS

Deep Throat Design, Copper Plated Screw

| Product Code | Capacity (Inches) | Throat Depth (Inches) | Screw Diameter (Inches) | Min Test Load (lbs) | Weight (lbs) |
|--------------|-------------------|--------------------------|----------------------------|------------------------|--------------|
| JHWCC404CTH | 4 | 3 3/16 | 3/4 | 6500 | 3.15 |
| JHWCC406CTH | 6 | 4 1/8 | 3/4 | 6900 | 5.24 |
| JHWCC408CTH | 8 | 5 ³ ⁄16 | 3/4 | 6900 | 7.5 |
| | | | | | |

- Copper plated screw resists weld splatter
- Drop-forged and heat treated for maximum strength and greater rigidity
 I-Beam design for extra strength
- Highly resistant to "springing"






TOOLS@HEIGHT™ PIPE WRENCHES

Aluminum, Heavy Duty

| Product Code | Overall Capacity (Inches) | Maximum jaw Opening | Weight (lbs) |
|--------------|---------------------------|---------------------|--------------|
| R31090-TH | 10 | 1 1/2 | 1 |
| R47057-TH | 12 | 2 | 2.5 |
| R31095-TH | 14 | 2 | 2.5 |
| R31100-TH | 18 | 2 1/2 | 3.75 |
| R31105-TH* | 24 | 3 | 6.5 |
| R31110-TH* | 36 | 5 | 11.2 |
| R31115-TH* | 48 | 6 | 19.5 |

Features

- · Professional strength in lightweight aluminum
- Offers the durability and ease-of-use





We pin the tang of the removable pipe wrench jaw so it cannot become separated from the handle

TOOLS@HEIGHT™ PIPE WRENCHES

Cast Iron, Heavy Duty

| Product Code | Overall Capacity (Inches) | Maximum jaw Opening | Weight (lbs) | |
|--------------|---------------------------|---------------------------------------|--------------|---|
| R31000-TH | 6 | 3/ ₄ | 0.5 | _ |
| R31005-TH | 8 | 1 | 0.75 | |
| R31010-TH | 10 | 1 1/2 | 1.75 | |
| R31015-TH | 12 | 2 | 2.75 | |
| R31020-TH | 14 | 2 | 3.5 | |
| R31025-TH* | 18 | 2 ⁹ / ₁₆ | 5.8 | |
| R31030-TH* | 24 | 3 | 9.5 | |
| R31035-TH* | 36 | 5 | 19.5 | |
| R31040-TH* | 48 | 6 | 32 | |

Features

- Sturdy, cast-iron housing and I-beam handle with full floating forged hook jaw, featuring self-cleaning threads with replaceable hook and heel jaws
- . Heavy-duty pipe wrenches comply with federal specifications GGG-W65IE, Type II, Class A

^{*}Tools@Height Tools Over 5 lbs. with Engineered Attachment Point. Three-foot-long web strap/carabiner system designed for use with "master ring" systems.



Tools@Height Tools Over 5 lbs. with Engineered Attachment Point. Three-foot-long web strap/carabiner system designed for use with "master ring" systems.

TOOLS@HEIGHT™ PIPE CHAIN WRENCH

Heat Treated

 Product Code
 Pipe Diameter Minimum - Maximum (Pipe Size)
 Handle Length (Inches)
 Chain Length (Inches)
 Weight (Ibs)

 JHWCW-4-TH
 3/s - 4
 11
 15
 1.80

Features

- Forged handle is fully heat-treated
- · Ideal for use in close quarters and where space is at a premium
- . Successive "bites" can be taken without removal of wrench from the work piece
- Fully adjustable to fit any shape pipe














* USA

Made in U.S.A.





TOOLS@HEIGHT™ CLAW HAMMER

Solid steel hammer with Cushion Grip

| Product Code | Head Weight (ozs.) | Handle Length (Inches) | Overall Length (Inches) | Weight (lbs.) |
|--------------|--------------------|---------------------------|--------------------------------|---------------|
| THFSNE3-22SM | 22 | 7 1/4 | 15 ³ / ₄ | 2.13 |
| MOIE3-16C-TH | 16 | 11 | 13 | 1.5 |

Features

- · Cushion grip handle provides greater comfort and safety
- Durable design for a long lasting hammer





TOOLS@HEIGHT™ BALL PEIN HAMMERS

Fiberglass Handles with Cushion Grip

| Product Code | Handle Length (Inches) | Overall Length (Inches) | Face Diameter (Inches) | Weight (lbs.) |
|--------------|------------------------|-------------------------|------------------------|---------------|
| JHW20542-TH | 9 1/2 | 10 ¾ | 7/8 | 1.84 |
| JHW20543-TH | 10 1/4 | 11 ¾ | 7/8 | 1.23 |
| JHW20544-TH | 11 1/4 | 13 | 1 % | 1.67 |
| JHW20545-TH | 13 | 15 | 1 1/4 | 2.31 |
| JHW20546-TH | 12 ¾ | 15 | 1 1/4 | 2.69 |

Features

- Ideal for driving punches, chisels and other metal work
- · Fiberglass handle has a cushion grip for greater comfort and safety
- · Hammer heads are drop-forged from specially selected steel and carefully heat treated for dependable strength, hardness and uniformity



TOOLS@HEIGHT™ BRONZE HAMMER

Fiberglass Handles with Cushion Grip

| - | | | • | |
|--------------|------------------------|-------------------------|------------------------|--------------------|
| Product Code | Handle Length (Inches) | Overall Length (Inches) | Face Diameter (Inches) | Weight Class (lbs) |
| HSB-1.5A-TH | 10 % | 12 | 1 | 1.91 |

- · Ideal for applications which require non-sparking conditions
- . The flat surface brass head absorbs impact blows, reduces rebound and helps eliminate marred work surfaces
- . Non-slip cushion grip provides greater comfort and safety





TOOLS@HEIGHT™ DRILLING HAMMER

Fiberglass Handles with Cushion Grip

| Product Code | Handle Length (Inches) | Overall Length (Inches) | Weight (lbs.) |
|--------------|------------------------|-------------------------|---------------|
| JHW20678-TH | 8 1/2 | 10 1/4 | 2.55 |

Features

- · Handles are durable and comfortable
- Heavy duty construction for strength and durability



TOOLS@HEIGHT™ CROSS PEIN HAMMER

Fiberglass Handles with Cushion Grip

| Product Code | Weight (ozs.) | Handle Length (Inches) | Overall Length (Inches) | Weight (lbs.) | |
|--------------|---------------|------------------------|-------------------------|---------------|--|
| 20651-TH | 48 | 13 | 15 ¾ | 4.96 | |

Features

- Handles are durable and comfortable
- · Heavy duty construction for strength and durability



Fiberglass Handles

| Product Code | Weight Class (lbs.) | Handle Length (Inches) | Overall Length (Inches) | Face Diameter (Inches) | Weight (lbs.) |
|----------------|---------------------|------------------------|-------------------------|------------------------|---------------|
| SHF-4SA-TH ** | 4 | 14 | 14 | 1 1/4 | 4.93 |
| SHF-8SA-TH ** | 8 | 32 | 32 | 2 | 10.34 |
| SHF-12SA-TH ** | 12 | 32 | 32 | 2 ½ | 14.45 |
| SHF-4A-TH | 4 | 14 | 14 | 1 % | 4.78 |
| SHF-6A-TH | 6 | 32 | 32 | 1 3/4 | 7.74 |
| SHF-8A-TH | 8 | 32 | 32 | 2 | 9.89 |
| SHF-10A-TH | 10 | 16 | 16 | 2 ½ | 11.34 |
| SHF-10LA-TH | 10 | 32 | 32 | 2 ½ | 12.18 |
| | | | | | |
| SHF-16A-TH | 16 | 24 | 24 | 2 % | 18.43 |

Features

- ** Soft steel safety head is similar in hardness to brass
- ** Ideal replacement for Brass Head where non-sparking is not required
- . Double faced head is hardened and tempered forged for maximum strength and durability




20651-TH















TOOLS@HEIGHT™ PRY BARS - SCREWDRIVER TYPE

Comfort Grip Handles

| Product Code | Size | Overall Length (inches) | Weight (lbs) |
|--------------|------|-------------------------|--------------|
| C-807-TH | 3/8 | 12 | 0.67 |
| C-812-TH | 3/8 | 17 | 0.86 |
| C-818-TH | 1/2 | 25 | 1.9491 |

Features

- Blade is heat-treated the entire length
- Handle is ergonomically designed to provide a more comfortable and secure grip
- Curved blade style gives extra leverage
- Capped end allows for striking without damage to handl.



TOOLS@HEIGHT™ 17 PIECE PUNCH & CHISEL SET

Packed in a Roll Pouch

| Product Code | Description | Weight (lbs) |
|--------------|-----------------------------|--------------|
| JHWPC-17-TH | 17 Piece Punch & Chisel Set | 4.93 |

Contents Include:

| | | Point | | | Blade |
|------------|------------------|------------------------------|---------|---------------|----------|
| Product | | Diameter | Product | | Width |
| Code | Description | (Inches) | Code | Description | (Inches) |
| JHWP-4-TH | Pin Punch | 1/8 | C-10-TH | Cold Chisel | 5/16 |
| JHWP-6-TH | Pin Punch | ³ / ₁₆ | C-12-TH | Cold Chisel | 3/8 |
| JHWP-8-TH | Pin Punch | 1/4 | C-16-TH | Cold Chisel | 1/2 |
| JHWP-14-TH | Solid Punch | 1/8 | C-20-TH | Cold Chisel | 5/8 |
| JHWP-15-TH | Solid Punch | 5/32 | C-24-TH | Cold Chisel | 3/4 |
| JHWP-16-TH | Solid Punch | 3/16 | C-42-TH | Cape Chisel | 1/4 |
| JHWP-25-TH | Long Taper Punch | 5/32 | C-62-TH | Diamond Point | 3/8 |
| JHWP-28-TH | Long Taper Punch | 1/4 | | Chisel | |
| JHWP-32-TH | Prick Punch | - | | | |
| JHWP-40-TH | Center Punch | - | | | |

Features

Heavy duty construction for strength and durability.





TOOLS@HEIGHT™ COLD CHISELS

Heavy Duty Industrial Grade

| Product Code | Stock Size | Blade Width (Inches) | Length (Inches) | Weight (lbs) |
|--------------|------------|------------------------------|-----------------|--------------|
| JHWC-10-TH | 1/4 | 5/16 | 5 | 0.07 |
| JHWC-12-TH | 5/16 | 3/8 | 5 ½ | 0.13 |
| JHWC-15-TH | 3/8 | ⁷ / ₁₆ | 6 | 0.20 |
| JHWC-16-TH | 7/16 | 1/2 | 6 | 0.26 |
| JHWC-20-TH | 1/2 | 5/8 | 6 ½ | 0.33 |
| JHWC-24-TH | 5/8 | 3/4 | 7 | 0.59 |
| JHWC-32-TH | 7/8 | 1 | 8 | 1.28 |

Features

- The most commonly used chisels in the chisel line
- For cutting, shaping and removing metal softer than the cutting edge of the chisel



JHWC-42-TH

TOOLS@HEIGHT™ CAPE CHISELS

| Heavy Duty | Industrial | Grade | | |
|-------------------|------------|----------------------|-----------------|--------------|
| Product Code | Stock Size | Blade Width (Inches) | Length (Inches) | Weight (lbs) |
| JHWC-42-TH | 3/8 | 1/4 | 5 | 0.15 |
| | | | | |

Features

· Designed for cutting or grooving keyholes or slots



TOOLS@HEIGHT™ DIAMOND POINT CHISELS

Heavy Duty Industrial Grade

| ilcuty Duty | , iliaastiiai C | ai uuc | | | |
|--------------|-----------------|------------|-----------------|--------------|--|
| Product Code | Stock Size | Square Cut | Length (Inches) | Weight (lbs) | |
| JHWC-62-TH | 5/8 | 3/8 | 7 | .56 | |

Features

• Designed for making a V-groove in metal and to clean out inside corners

















TOOLS@HEIGHT™ PIN PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Point Diameter | Length (Inches) | Weight (lbs) |
|--------------|------------|------------------------------|-----------------|--------------|
| JHWP-4-TH | 5/16 | 1/8 | 4 3/4 | 0.09 |
| P-5-TH | 5/16 | 5/32 | 5 | 0.10 |
| JHWP-6-TH | 5/16 | ³ / ₁₆ | 5 ½ | 0.15 |
| JHWP-8-TH | 3/8 | 1/4 | 5 ¾ | 0.17 |
| JHWP-10-TH | 7/16 | 5/16 | 6 | 0.24 |

Features

· For driving out and removing already loosened pins and keys after initial movement by a solid or starter punch





TOOLS@HEIGHT™ SOLID PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Point Diameter | Length (Inches) | Weight (lbs) |
|--------------|------------|----------------|-----------------|--------------|
| JHWP-14-TH | 3/8 | 1/8 | 5 | 0.15 |
| JHWP-15-TH | 3/8 | 5/32 | 5 | 0.15 |
| JHWP-16-TH | 3/8 | 3/16 | 5 | 0.16 |
| JHWP-17-TH | 1/2 | 1/4 | 5 | 0.16 |
| JHWP-18-TH | 3/8 | 7/32 | 5 | 0.15 |

Features

- · For loosening frozen or tight pins and keys or knocking out rivets
- · Also called starter punches because they are ideal for loosening frozen pins





Heavy Duty Industrial Grade

| Product Code | Stock Size | Length (Inches) | Weight (lbs) |
|--------------|------------|-----------------|--------------|
| JHWP-32-TH | 1/2 | 6 | .28 |

Features

JHWP-32-TH

- For scribing lines into metal before cutting or riveting, and for punching starting holes for short metal screws
- · Point is more tapered than center punch





TOOLS@HEIGHT™ CENTER PUNCHES

Heavy Duty Industrial Grade

| , , | | | | |
|--------------|------------|----------------------|--------------|--|
| Product Code | Stock Size | Blade Width (Inches) | Weight (lbs) | |
| JHWP-38-TH | 1/4 | 4 | .05 | |
| JHWP-39-TH | 5/6 | 4 1/2 | .08 | |
| JHWP-40-TH | 3/8 | 5 | .09 | |
| JHWP-42-TH | 1/2 | 6 | .07 | |

Features

· Pierces or marks work by indentation for starting pilot drills in metal or other materials





TOOLS@HEIGHT™ LONG TAPER PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Point Diameter | Length (Inches) | Weight (lbs) |
|--------------|------------|----------------|-----------------|--------------|
| JHWP-25-TH | 3/8 | 5/32 | 9 | 0.25 |
| JHWP-28-TH | 5/8 | 1/4 | 12 | 0.82 |
| JHWP-28A-TH | 3/4 | 1/4 | 15 | 1.50 |

Features

- . Designed for aligning the holes in metal pieces through which rivets, bolts, or screws will be inserted
- · Not intended for driving pins as punch may become stuck in work
- · Also called line-up aligning or drift punches



TOOLS@HEIGHT™ PUNCH AND CHISEL HOLDER

Comfort Grip Handle

| Product Code | Description | Weight (lbs) |
|--------------|-------------|--------------|
| 28449-TH | 7/8 | 0.50 |

Features

- · Holds chisel and punch securely
- · Protect user from hand injury



TOOLS@HEIGHT™ PINCH BARS

Heavy Duty Industrial Grade

| Product Code | Overall Length (Inches) | Stock Size | Width of Flat (Inches) | Weight (lbs) |
|--------------|-------------------------|------------|------------------------|--------------|
| JHWC-83-TH | 19 5% | 3/4 | 7/8 | 2.32 |
| JHWC-84-TH | 30 | 7/8 | 1 | 5.0 |

Features

• Used for aligning, prying and positioning



TOOLS@HEIGHT™ SUPERIOR HANDSAWS **WITH XT TOOTHING**

ERGO® handle - Unique XT toothing - Low Friction Coating

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) | Type of cut | Weight (lbs) |
|-------------------|---------------------|----------------------|-------------|--------------|
| 2700-24-XT7-HP-TH | 24 | 7 | Aggressive | 1.24 |

Features

- · Hard point saw with substantially thicker blade which results in less power-consuming side vibrations
- . Bevel ground teeth on thick blade for height precision and straight cutting with exceptionally good stability
- Screwed, one piece two-component Ergo® handle
- · Handle placement provides even distribution of power along the tooth line
- . Comes with reusable plastic patented tooth protector



JHWC-83-TH













TOOLS@HEIGHT™ PROFESSIONAL HAND HACKSAW

Non-Slip Handles Ensures a Solid and Secure Grip.

| Product Code | Description | Blade Length (Inches) | Weight (lbs) |
|--------------|---------------------------|-----------------------|--------------|
| 319-TH | Professional Hand Hacksaw | 12 | 1.26 |

Features

- Alternative 55° blade mounting for flush cutting
- Offers a strong steel frame that is covered with a protective dual component plastic
- · Comfortable, non-slip back handle and front grip ensures a solid, secure grip
- . Tension mechanism is fully integrated into the handles so there is no obstruction during use
- . Supplied with reliable and shatterproof 12 inch bi-metal blade, 24 TPI.



TOOLS@HEIGHT™ TRADITIONAL HAND HACKSAW

Heavy Duty Frame with Blade Storage

| Product Code | Description | Blade Length (Inches) | Weight (lbs) |
|------------------|------------------|-----------------------|--------------|
| | Traditional Hand | | |
| 225-PLUS-3906-TH | Hacksaw | 12 | 1.48 |

Features

- · Allows very high blade tension for accurate and fast cuts
- Strong rectangular back section for blade storage with easy-to-handle retaining screws
- Can also be used as a compass saw
- Alternative 55° blade mounting for flush cutting
- . Supplied with reliable and shatterproof 12 inch bi-metal blade, 24 TPI.



TOOLS@HEIGHT™ GASKET SCRAPER

Bi-Mold Comfort Grip Handle

| | • | | | |
|--------------|---------------------|----------------|-------------|--------------|
| Product Code | Blade Length (Inch) | Overall Length | Blade Width | Weight (lbs) |
| JHW40000-TH | 6 | 9 3/4 | 7/8 | .32 |

- . Bi-mold handle provides comfortable grip, reducing hand fatigue
- Ideal for gasket removal and cleaning rust and corrosion.



TOOLS@HEIGHT™ 6 PIECE ENGINEERING FILE SET

| Product Code | Description | |
|-------------------|----------------------------|--|
| 1-476-04-3-2-TH 6 | Piece Engineering File Set | |

Plastic Handled Files Contents Include:

| Description | Length (Inch) | Type of Cut | Weight (lbs) |
|---------------------|---------------|-------------|--------------|
| Hand Smooth | 4 | Smooth | .15 |
| Warding Smooth | 4 | Smooth | .15 |
| Square Smooth | 4 | Smooth | .15 |
| Three Square Smooth | 4 | Smooth | .15 |
| Half Round Smooth | 4 | Smooth | .15 |
| Round Smooth | 4 | Smooth | .15 |

Features

- Files are smooth, double cut and designed for the fine filing and polishing applications
- · Supplied with pouch
- For use with optional THUNIRET1A Retractable Lanyard



1-476-04-3-2

TOOLS@HEIGHT™ MILL FILE (USA TYPE)-TWO FLAT EDGES

Engineering File With Bi-Molded ERGO® Handle

| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut | Weight (lbs) | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|--------------|---|
| 1-143-08-1-2-TH | 8 | 25/32 | 1/8 | 44 | Bastard | .31 | _ |

Features

- · Surfaces and edges are single cut
- Suitable for engineering and sharpening file applications
- . Can be used for polishing and deburring work in lathes
- Widely used for sharpening tools and implements such as spades, shovels, hoes, scrapers, etc.



TOOLS@HEIGHT™ ROUND FILE

Engineering File With Bi-Molded ERGO® Handle

| Product | Length | Width | Height | Teeth Per Inch | | |
|-----------------|--------|--------|--------|----------------|-------------|--------------|
| Code | (Inch) | (Inch) | (Inch) | (TPI) | Type of Cut | Weight (lbs) |
| 1-230-08-2-2-TH | 8 | 5/16 | - | 36 | Second | .25 |

Features


Regularly used for filing holes, large fillets and concave surfaces.
 File is tapered to a point and has a double cut.


















| Product Code | Description | Extended Length (Inches) | Weight (lbs) |
|--------------|----------------------------------|--------------------------|--------------|
| 2535L-TH | Magnetic Pick-up Tool with Light | 30 | .23 |

Features

- · Wide area lighting
- Soft grip handle
- Powerful magnetic tip
- Pick-up weight is 11/4 pounds

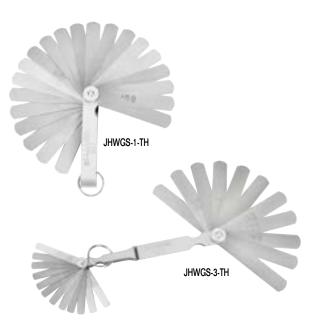

TOOLS@HEIGHT™ FEELER GAUGE SET

| Heavy Duty Machine Shop Tools | | | | | | | | | | |
|-------------------------------|-------------------------|--------------------------|------------------|--------------|--|--|--|--|--|--|
| Product Code | Description | Thickness | Number of Blades | Weight (lbs) | | | | | | |
| JHWGS-1-TH | Master Feeler Gauge Set | .0015 - ¹ /32 | 25 | .19 | | | | | | |

Features

- 25 blades 3-5/16" x 1/2" in the following thicknesses: .0015, .002, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .018, .020, .022, .024, .025, .028, .030, .032, and .035.
- · Both decimal and equivalent metric size etched in each blade
- Gauges supplied in holder with knurled lock-nut which allows the user to select the required blade size and lock it into position

| Product Code | Description | Thickness | Number of Blades | Weight (lbs) |
|--------------|------------------------------|-----------|------------------|--------------|
| JHWGS-3-TH | Combination Feeler Gauge Set | .002025 | 22 | .11 |

Features

- · Contains total of 22 blades
- 10 blades 3" x 1/2" in the following thicknesses: .002, .003, .004, .005, .006, .007, .008, .010, .013, .015.
- 12 blades 1-3/4" x 1/4" in the following thicknesses:
- .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .022, .025.
- Overall length 5"
- Both decimal and equivalent metric size etched in each blade
- Gauges supplied in holder with knurled lock-nut which allows the user to select the required blade size and lock it into position



TOOLS@HEIGHT™ AVIATION SNIPS

Bi-Mold Comfort Grip Handles

| | Product Code | Cutting Direction | Overall Length (Inches) | Cut Length (Inches) | Cutting Capacity (cold-rolled/stainless) | Weight (lbs) |
|---|--------------|----------------------|-------------------------|------------------------|--|-----------------|
| , | JHW28201-TH | Left | 9 3/4 | 1 3/8 | 18 ga.CR / 22 ga.SS | .93 |
| , | JHW28203-TH | Right | 9 3/4 | 1 3/8 | 18 ga.CR / 22 ga.SS | .93 |
| | JHW28205-TH | Straight | 9 13/16 | 1 1/2 | 18 ga.CR / 22 ga.SS | .96 |

- Color-coded handles help quickly identify the cutting direction
- Bi-mold handles provide comfortable grip, reduces hand fatigue
- Meet ANSI and DIN standards



TOOLS@HEIGHT™ TORPEDO LEVEL

| Product Code | Description |
|--------------|---------------------------|
| THF\$N25100 | 10" Magnetic Torped Level |

Features

- . Big, bright easy to read vials
- · Heavy-duty, die-cast frame
- Certified Level accuracy; in top read position: (1/32" over 72")
- · Level accuracy guaranteed for life; vials will never fog, leak or require adjustment
- · Ideal for scaffolding as well as general construction and maintenance



TOOLS@HEIGHT™ TAPE MEASURE

Construction Grade Tape Rule

| Product Code | Blade Length (Width and Length Inch) | Weight (lbs.) |
|--------------|--------------------------------------|---------------|
| JHWTM25X1-TH | 1 x 25 | 0.85 |
| JHWTM16X1-TH | 1 x 16 | 1.00 |

Features

- . Measurements on both sides of the blade
- Auto lock feature
- . Triple riveted stainless steel magnetic hook on the end of the blade

Measurements on both sides of the blade



| 1 | 2 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 112 | 13 | 14 | 3 15 | SECS. | 17 | тор |
|---|-----|---|---|---|---|---|---|----|----|-----|----|----|---------|-------|----|--------|
| | N W | 4 | Ŋ | 9 | 7 | œ | 6 | 10 | F | 申 | 13 | 14 | 15 | ġ. | 17 | воттом |

TOOLS@HEIGHT™ INSPECTION MIRROR

| Product Code | Description |
|--------------|---|
| IM1-TH | Tools@Height Tether-Ready Inspection Mirror |

Features

- Installed safety-coil can be tethered to prevent dropping
- · Hinged rectangular glass mirror
- Mirror is 1-3/16" x 1-1/2"



TOOLS@HEIGHT™ GREASE GUN

| Product Code | Description |
|--------------|--------------------------------------|
| THYA728A | Tools@Height Tether-Ready Grease Gun |

- Lever-operated large capacity gun develops 6,000 PSI
- Accepts 16 oz. bulk or 14-1/4 oz. cartridge grease
- Includes 18" flexible whip hose with coupler and 6" rigid extension




THYA728A













QUICK SPINS

| Product Code | Diameter (Inches) | Load Rating (Pounds) | Quantity |
|--------------|-------------------|----------------------|----------|
| QS-XL-10PK | 1.2 | 1 | 10 |

- The unique, patented Quick Spins accommodate a wide selection of tools, making them tether-ready in seconds
- Reusable, and suitable for non-conductive use, the tangle-resistant spin tops make Quick Spins an outstanding drop prevention solution that doesn't deface tools
- Body is made from a Thermoplastic Rubber and Polyester material (TPU), while the spin tops are made of polyacetal and black carbon (POM)



QUICK WRAP TAPE

| Product Code | Length (Inches) | Width (Inches) | Color | Quantity |
|--------------|-----------------|----------------|--------|----------|
| QWHDYLW110PK | 108 | 1 | Yellow | 10 |

Features

- Quick Wrap Tape is made from a self-fusing silicone rubber, and features inner fiberglass webbing reinforcement.
- . Quick Wrap Tape is intended to be used with D-Rings and Tool Cinch Attachment Points.



HEAT SHRINK

| Product Code | Length (Inches) | Diameter (Inches) | Quantity |
|--------------|-----------------|-------------------|----------|
| PYT1500019 | 1.75 | 0.75 | 25 |

Features

- Heat Shrink is used to create an even stronger connection that is more resistant to abrasives and harsh environments
- . Links shrink 300% in size, while an inner adhesive securely fastens itself to whatever is being wrapped.

Tools not included



Heat Shrink is added to make a more durable surface

D-RING CORD

| Product Code | Load Rating (Pounds) | Quantity |
|--------------|----------------------|----------|
| DR-CORD-10PK | 5 | 10 |

Features

. The D-Ring cord (patent pending) easily cinches to tools weighing under 5 pounds, creating an instant attachment point for many tools

Tools not included

MICRO D-RING

| Product Code | Quantity |
|--------------|----------|
| DR-MICRO10PK | 10 |

Features

- The Micro D-Ring is an attachment point that can be used on small tools and equipment that are otherwise not possible to tether.
- The DR-MICRO is a flexible piece of ballistic plastic that can conform to the shape of many objects. A piece of industrial grade double-sided adhesive tape sticks to the bottom of the Micro D-Ring, allowing it to be attached to a clean surface.




DR-MICRO









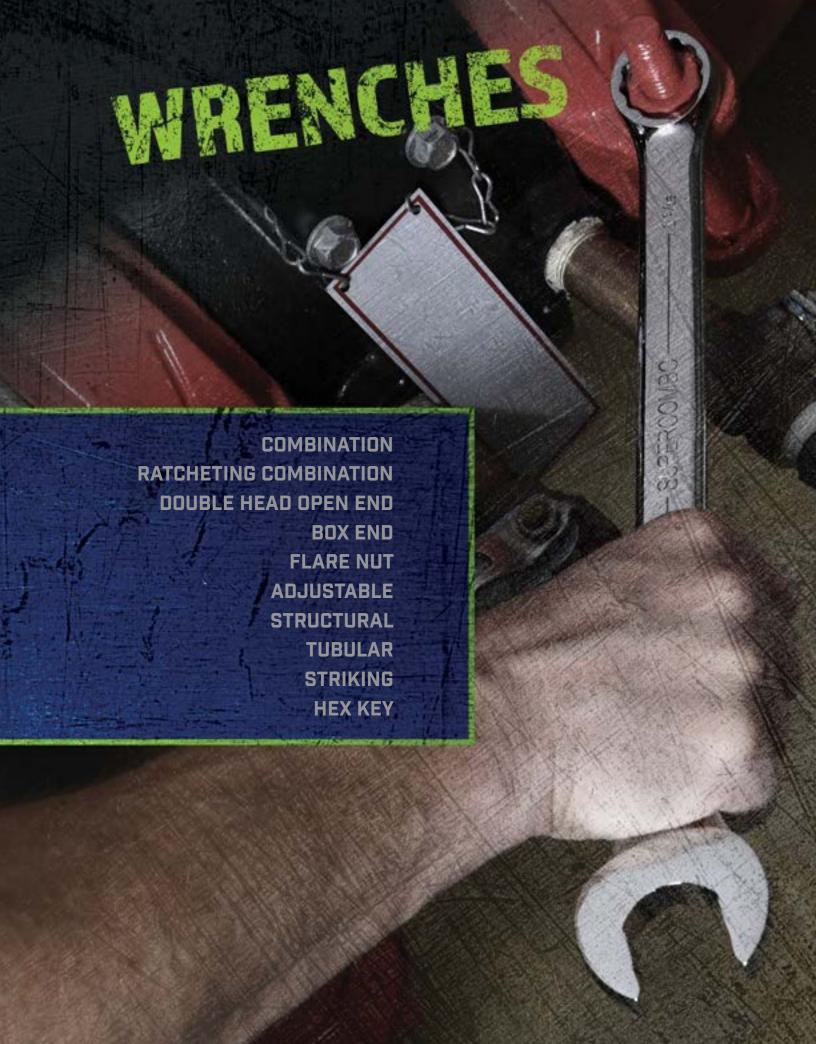



ADJUSTABLE WRENCHES



combine easy accessibility with

extra turning strength


TUBULAR WRENCHES

Unique, versatile design allows wrench to be used with or without optional handles to quickly run down nuts

Handle can be attached to provide maximum turning power for final tightening or to reach otherwise inaccessible fasteners

A detent on the wrench shaft helps to align locking button with handle hole

Offset box wrench head provides turning clearance





RATCHETING COMBINATION WRENCHES

Ratcheting gear up to 80 teeth that minimizes the swing arc in tight spaces

Low profile, easy action, reverse lever won't get in your way



SUPERCOMBO® COMBINATION WRENCHES





High Polish Chrome and Satin Chrome Finish, 12 Point, SAE

| nigii Polisi | | Α | В | (11511, 12 Pu | D D | Е |
|--------------------------|--|--|---------------------------------|--|--|-----------------------------|
| | | Overall | Open End | Open End | Box End | Box End |
| | | Length | Width | Thickness | Diameter | Thickness |
| Product Code | Size (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW1208SC + | 1/4 | 4 1/4 | ⁹ /16 | 1/8 | 13/32 | 3/16 |
| JHW1210SC + | 5/16 | 5 ¾ | 11/16 | 5/32 | 1/2 | 7/32 |
| JHW1211SC + | 11/32 | 6 1/4 | 3/4 | 3/16 | 9/16 | 1/4 |
| JHW1212SC++ | 3/8 | 6 ½ | 13/16 | 3/16 | 9/16 | 1/4 |
| JHW1214SC++ | 7/16 | 7 1/4 | ¹⁵ / ₁₆ | 7/32 | 11/16 | 9/32 |
| JHW1216SC++ | 1/2 | 8 | 1 1/16 | 1/4 | 3/4 | 11/32 |
| JHW1218SC++ | 9/16 | 8 ¾ | 1 1/4 | 1/4 | 7/8 | 3/8 |
| JHW1220SC++ | 5/8 | 9 ½ | 1 % | 9/32 | ¹⁵ / ₁₆ | 13/32 |
| JHW1222SC++ | 11/16 | 10 1/4 | 1 1/2 | 5/16 | 1 1/32 | 7/16 |
| JHW1224SC++ | 3/4 | 11 | 1 % | 5/16 | 1 1/8 | 1/2 |
| JHW1226SC++ | 13/16 | 11 ¾ | 1 3/4 | 3/8 | 1 7/32 | 17/32 |
| JHW1228SC++ | 7/8 | 12 ½ | 1 1/8 | 13/32 | 1 5/16 | 9/16 |
| JHW1230SC++ | ¹⁵ / ₁₆ | 13 ¼ | 2 | 7/16 | 1 3/8 | 19/32 |
| JHW1232SC++ | 1 | 14 | 2 1/8 | 15/32 | 1 ¹⁵ / ₃₂ | 5/8 |
| JHW1234SC++ | 1 1/16 | 14 3/4 | 2 1/4 | 1/2 | 1 %16 | 21/32 |
| JHW1236SC++ | 1 1/8 | 15 ½ | 2 13/32 | 17/32 | 1 21/32 | 11/16 |
| JHW1238SC++ | 1 3/16 | 16 1/4 | 2 17/32 | 17/32 | 1 23/32 | 3/4 |
| JHW1240SC++ | 1 1/4 | 17 | 2 21/32 | 9/16 | 1 13/16 | 3/4 |
| JHW1242 ** | 1 5/16 | 17 3/4 | 2 13/16 | 19/32 | 1 29/32 | 3/4 |
| JHW1244 ** | 1 3/8 | 18 ½ | 2 ¹⁵ / ₁₆ | 5/8 | 2 | 3/4 |
| JHW1246 ** | 1 7/16 | 19 1/4 | 3 ½16 | 5/8 | 2 3/32 | ⁷ /8 |
| JHW1248 ** | 1 1/2 | 20 1/32 | 3 3/16 | 11/16 | 2 3/16 | 7/8 |
| JHW1178A ** | 1 %6 | 20 25/32 | 3 3/16 | 21/32 | 2 1/4 | 7/8 |
| JHW1180 ** | 1 % | 21 ½ | 3 5/16 | 11/16 | 2 11/32 | 7/8 |
| JHW1182 ** | 1 11/16 | 22 ⁹ / ₃₂ | 3 7/16 | ²³ / ₃₂ | 2 ⁷ /16 | ⁷ / ₈ |
| JHW1184 ** | 1 3/4 | 22 7/8 | 3 %6 | ²³ / ₃₂ | 2 17/32 | 1 1/32 |
| JHW1186 ** | 1 ¹³ / ₁₆ | 23 15/32 | 3 11/16 | 3/ ₄ | 2 5% | 1 1/32 |
| JHW1188 ** | 1 ⁷ / ₈ | 24 1/32 | 3 13/16 | ²⁵ / ₃₂ | 2 ²³ / ₃₂ 2 ⁷ / ₈ | 1 1/32 |
| JHW1190 ** JHW1191 ** | 2 2 ½6 | 25 ½ 25 ¹³ / ₁₆ | 4 ½6 4 ¾6 | ²⁷ / ₃₂ ²⁷ / ₃₂ | 2 1/8 2 31/ ₃₂ | 1 ½2 1 ½2 |
| | 2 1/8 | 26 3/8 | 4 %16 4 %16 | 7/8 | 3 ½16 | 1 5/32 |
| JHW1192 ** JHW1193 ** | 2 1/8 2 3/16 | 26 % 26 ³¹ / ₃₂ | 4 %16 4 %16 | '/8 ²⁹ /32 | 3 ¹ /16 3 ⁵ /32 | 1 %2 1 5/32 |
| | 2 %16 2 1/4 | 20 °/32 27 %16 | 4 7/16 4 9/16 | 15/ ₁₆ | 3 %32 3 7/32 | 1 732 |
| JHW1194 ** JHW1195 ** | 2 ⁷ / ₄ 2 ³ / ₈ | 27 %16 28 % | 4 %16 4 ¹³ /16 | ³¹ / ₃₂ | 3 ⁷ /32 3 ¹³ /32 | 1 %2 |
| JHW1195 ** | 2 % 2 ½ | 28 % 29 ²⁹ / ₃₂ | 5 ½16 | 1 1/32 | 3 19/32 3 19/32 | 1 %2 |
| JHW1197 * | 2 ½ 2 % | 32 | 5 716 6 5% | 1 7/32 | 3 ·932 4 7/8 | 1 % |
| JHW1198A * | 2 3/4 | 32 | 6 % | 1 7/32 | 4 7/8 | 1 % |
| JHW1198B * | 2 ⁷ / ₈ | 32 32 | 6 % | 1 7/32 | 4 78 4 7/8 | 1 5/8 |
| JHW1198C * | 2 ¹ /8 2 ¹⁵ / ₁₆ | 32 32 | 6 % | 1 ⁷ /32 1 ⁷ /32 | 4 7/8 4 7/8 | 1 % |
| JHW1196C JHW1199 * | 3 | 32 32 | 6 % | 1 7/32 | 4 78 4 7/8 | 1 78 |
| JHW1199 * | 3 3 1/8 | 32 32 | 6 % | 1 7/32 | 4 7/8 4 7/8 | 1 % |
| JHW1199A * | 3 % 3 % | 32 31 ¾ | 6 % | 1 7/32 | 4 7/8 4 7/8 | 1 % |
| JHW1199D * | 3 1/2 | 31 ²⁹ / ₃₂ | 6 % | 1 7/32 | 4 7/8 | 1 % |
| JUM 11990 | J 72 | J1 ~732 | 0 78 | I '/32 | 4 78 | I 7/8 |

- + High Polish Chrome Finish with SUPERTORQUETM Box End.
- ++ High Polish Chrome Finish with SUPERCOMBO® Open End and SUPERTORQUE™ Box End.
- ** Satin Chrome Finish with SUPERTORQUE™ Box End and Standard Open End.
- * Satin Chrome Finish with Standard Open and Box Ends.
- Fed. Spec.: ANSI B107.6; SAE AS 954

Features


- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- No contact is made at the corners
- . Instead, wrenching forces are placed on the flat surfaces behind the points
- Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to provide accurate torque/tension relationship for precision application
- . May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- · Box and open end openings are identical










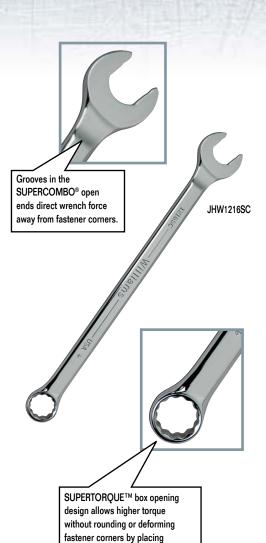

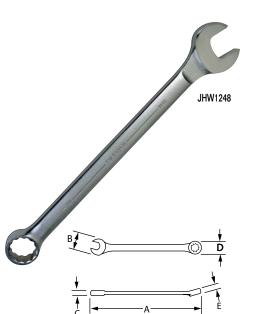

wrenching forces on the flat surfaces rather than the points.

JHWWS1172SCA









SUPERCOMBO® WRENCH SETS





High Polish Chrome and Satin Chrome Finish, 12 Point, SAE

| Contents | | | , ₁₀ SCA | 1719CA | AJESCA | AJeno, | 174TA | . 175 | .176 |
|--------------|----------|-------------|-----------------------------|-------------------------------|----------|-----------------|------------------|----------------------------|------------------|
| Include: | | NHMM2. | _{1170SCA} JHWWS | ₁₁₇₁ 5CA JHWWS1 | "IHMMS | 1190SCA JHWW | 3-1174TA JHWW | 5.11 ⁷⁵ JHWW | 3.1176 3.1176 |
| D 1 10 1 | Size | 7-Piece Set | 11-Piece Set | 15-Piece Set | 26-Piece | 10-Piece | 6-Piece | 16-Piece | 32-Piece |
| Product Code | (Inches) | in Pouch | in Pouch | in Pouch | Set | Set | Set | Set | Set |
| JHW1208SC | 1/4 | | | | X | | | | Χ |
| JHW1210SC | 5/16 | | | X | X | | | | X |
| JHW1212SC | 3/8 | Χ | Χ | Χ | Χ | | | | X |
| JHW1214SC | 7/16 | X | Χ | X | X | | | | X |
| JHW1216SC | 1/2 | Χ | Χ | Χ | Χ | | | | Х |
| JHW1218SC | 9/16 | X | X | X | X | | | | X |
| JHW1220SC | 5/8 | Χ | Х | Χ | Х | | | | Χ |
| JHW1222SC | 11/16 | X | χχ | X | X | | | | X |
| JHW1224SC | 3/4 | Х | Х | Х | Χ | | | | Х |
| JHW1226SC | 13/16 | | X | X | X | | | | X |
| JHW1228SC | 7/8 | | Χ | Χ | Χ | | | | Χ |
| JHW1230SC | 15/16 | | X | Х | X | | | | X |
| JHW1232SC | 1 | | Х | Χ | Х | | | | Х |
| JHW1234SC | 1 1/16 | | | X | X | | | | X |
| JHW1236SC | 1 1/8 | | | Х | Х | | | | Х |
| JHW1240SC | 1 1/4 | | | Χ | Χ | | | | χ |
| JHW1242 | 1 5/16 | | | | Х | X | | Х | X |
| JHW1244 | 1 3/8 | | | | Χ | Χ | | Χ | Χ |
| JHW1246 | 1 7/16 | | | | X | х | | X | X |
| JHW1248 | 1 1/2 | | | | Χ | Χ | | Χ | Χ |
| JHW1180 | 1 5/8 | | | | Х | | | Х | X |
| JHW1182 | 1 11/16 | | | | Χ | Χ | | Χ | Х |
| JHW1184 | 1 3/4 | | | | X | X | | X | X |
| JHW1186 | 1 13/16 | | | | Χ | Χ | | Χ | Χ |
| JHW1188 | 1 7/8 | | | | X | X | | X | X |
| JHW1190 | 2 | | | | X | X | | X | X |
| JHW1191 | 2 1/16 | | | | | | Х | X | X |
| JHW1192 | 2 1/8 | | | | | | X | X | X |
| JHW1193 | 2 3/16 | | | | | | X | X | X |
| JHW1194 | 2 1/4 | | | | | | X | X | X |
| JHW1195 | 2 3/8 | | | | | | X | X | <u> X</u> |
| JHW1197 | 2 1/2 | | | | | | X | X | X |











SUPERCOMBO® COMBINATION WRENCHES





High Polished Chrome Finish, 6 Point, SAE

| | | Α | В | С | D | E |
|--------------|------------------|-------------------------------|-------------------------------|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW608SC | 1/4 | 4 1/4 | 9/16 | 1/8 | 13/32 | 3/16 |
| JHW612SC | 3/8 | 6 1/2 | 13/16 | 3/16 | 9/16 | 1/4 |
| JHW614SC | 7/16 | 7 1/4 | 15/16 | 7/32 | 11/16 | 9/32 |
| JHW616SC | 1/2 | 8 | 1 1/16 | 1/4 | 3/4 | 11/32 |
| JHW618SC | 9/16 | 8 3/4 | 1 1/4 | 1/4 | 7/8 | 3/8 |
| JHW620SC | 5/8 | 9 1/2 | 1 % | 9/32 | 15/16 | 13/32 |
| JHW622SC | 11/16 | 10 1/4 | 1 1/2 | 5/16 | 1 1/32 | 7/16 |
| JHW624SC | 3/4 | 11 | 1 % | 5/16 | 1 1/8 | 1/2 |
| JHW626SC | 13/16 | 11 ¾ | 1 3/4 | 3/8 | 1 7/32 | 17/32 |
| JHW628SC | 7/8 | 12 1/2 | 1 1/8 | 13/32 | 1 5/16 | 9/16 |
| JHW630SC | 15/16 | 13 1/4 | 2 | 7/16 | 1 % | 19/32 |
| JHW632SC | 1 | 14 | 2 1/8 | 15/32 | 1 15/32 | 5/8 |
| JHW640SC | 1 1/4 | 17 | 2 21/32 | 9/16 | 1 13/16 | 3/4 |

JHWWS-SC11 11 Piece SUPERCOMBO® Wrench Set, SAE


Contents Include:

| Product Code: | Size (Inches) | Product Code: | Size (Inches) | Product Code: | Size (Inches) |
|---------------|-------------------------------|---------------|---------------|---------------|---------------|
| JHW612SC | 3/8 | JHW614SC | 7/16 | JHW616SC | 1/2 |
| JHW618SC | 9/16 | JHW620SC | 5/8 | JHW622SC | 11/16 |
| JHW624SC | 3/4 | JHW626SC | 13/16 | JHW628SC | 7/8 |
| JHW630SC | ¹⁵ / ₁₆ | JHW632SC | 1 | | |

- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUETM box opening design allows application of higher torque without rounding or deforming hex fastener points
- No contact is made at the corners, instead wrenching forces are placed on the flat surfaces behind the points
- High polish chrome textured finish provides great feel and wipes clean easily
























High Polish Chrome Finish, 12 Point Offset Box End, SAE

| | | A Overall | B Open End | C Open End | D Box End | E Box End |
|--------------|---------------|--------------------|---------------------------------------|-----------------------|-------------------|-----------------------|
| Product Code | Size (Inches) | Length (Inches) | Width (Inches) | Thickness (Inches) | Diameter (Inches) | Thickness (Inches) |
| JHW11950 | 1/4 | 3 3/4 | 9/16 | 5/32 | 13/32 | 5/32 |
| JHW11952 | 3/8 | 5 | ²⁵ / ₃₂ | 3/16 | 9/16 | 1/4 |
| JHW11953 | 7/16 | 5 ¾ | 15/16 | 3/16 | 5/8 | 1/4 |
| JHW11954 | 1/2 | 6 ¾ | 1 1/8 | 7/32 | 23/32 | 5/16 |
| JHW11956 | 5/8 | 8 1/8 | 1 3/8 | 1/4 | 29/32 | 3/8 |
| JHW11957 | 11/16 | 8 3/4 | 1 7/16 | 9/32 | 31/32 | 13/32 |
| JHW11959 | 13/16 | 10 ½ | 1 21/32 | 5/16 | 1 5/32 | 15/32 |
| JHW11960 | 7/8 | 10 ½ | 1 7/8 | 11/32 | 1 %32 | 1/2 |
| JHW11961 | 15/16 | 11 ¾ | 2 1/32 | 11/32 | 1 11/32 | 9/16 |
| JHW11962 | 1 | 13 | 2 ⁵ / ₃₂ | 11/32 | 1 7/16 | 19/32 |
| JHW11965 | 1 1/4 | 15 1/4 | 2 ²¹ / ₃₂ | 7/16 | 1 25/32 | 23/32 |
| JHW11966 | 1 5/16 | 16 1/4 | 2 ¹³ / ₁₆ | 15/32 | 1 1/8 | 25/32 |
| JHW11967 | 1 3/8 | 16 % | 2 ¹³ / ₁₆ | 15/32 | 1 7/8 | 25/32 |







SUPERCOMBO® COMBINATION WRENCHES





Grooves in the

Black Industrial Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|---------------|---------------|----------------------------------|---------------------------------|-----------|----------|-----------|
| | | Overall | Open End | Open End | Box End | Box End |
| | | Length | Width | Thickness | Diameter | Thickness |
| Product Code | Size (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW1210BSC + | 5/16 | 5 3/4 | 11/16 | 5/32 | 1/2 | 7/32 |
| JHW1212BSC ++ | 3/8 | 6 1/2 | 13/16 | 3/16 | 9/16 | 1/4 |
| JHW1214BSC ++ | 7/16 | 7 1/4 | 15/16 | 7/32 | 11/16 | 9/32 |
| JHW1216BSC ++ | 1/2 | 8 | 1 1/16 | 1/4 | 3/4 | 11/32 |
| JHW1218BSC ++ | 9/16 | 8 3/4 | 1 1/4 | 1/4 | 7/8 | 3/8 |
| JHW1220BSC ++ | 5/8 | 9 1/2 | 1 3/8 | 9/32 | 15/16 | 13/32 |
| JHW1222BSC ++ | 11/16 | 10 1/4 | 1 1/2 | 5/16 | 1 1/32 | 7/16 |
| JHW1224BSC ++ | 3/4 | 11 | 1 5/8 | 5/16 | 1 1/8 | 1/2 |
| JHW1226BSC ++ | 13/16 | 11 3/4 | 1 3/4 | 3/8 | 1 7/32 | 17/32 |
| JHW1228BSC ++ | 7/8 | 12 1/2 | 1 7/8 | 13/32 | 1 5/16 | 9/16 |
| JHW1230BSC ++ | 15/16 | 13 1/4 | 2 | 7/16 | 1 3/8 | 19/32 |
| JHW1232BSC ++ | 1 | 14 | 2 1/8 | 15/32 | 1 15/32 | 5/8 |
| JHW1234BSC ++ | 1 1/16 | 14 ¾ | 2 1/4 | 1/2 | 1 %16 | 21/32 |
| JHW1236BSC ++ | 1 1/8 | 15 ½ | 2 13/32 | 17/32 | 1 21/32 | 11/16 |
| JHW1240BSC ++ | 1 1/4 | 17 | 2 21/32 | 9/16 | 1 13/16 | 3/4 |
| JHW1242B ** | 1 5/16 | 17 3/4 | 2 13/16 | 19/32 | 1 29/32 | 3/4 |
| JHW1244B ** | 1 3/8 | 18 1/2 | 2 15/16 | 5/8 | 2 | 3/4 |
| JHW1246B ** | 1 7/16 | 19 1/4 | 3 1/16 | 5/8 | 2 3/32 | 7/8 |
| JHW1248B ** | 1 ½ | 20 1/32 | 3 3/16 | 11/16 | 2 3/16 | 7/8 |
| JHW1178AB ** | 1 %16 | 20 ²⁵ / ₃₂ | 3 3/16 | 21/32 | 2 1/4 | 7/8 |
| JHW1180B ** | 1 % | 21 1/2 | 3 5/16 | 11/16 | 2 11/32 | 7/8 |
| JHW1182B ** | 1 11/16 | 22 ⁹ / ₃₂ | 3 7/16 | 23/32 | 2 7/16 | 7/8 |
| JHW1184B ** | 1 3/4 | 22 7/8 | 3 %16 | 23/32 | 2 17/32 | 1 1/32 |
| JHW1186B ** | 1 13/16 | 23 15/32 | 3 11/16 | 3/4 | 2 % | 1 1/32 |
| JHW1188B ** | 1 1/8 | 24 1/32 | 3 ¹³ / ₁₆ | 25/32 | 2 23/32 | 1 1/32 |
| JHW1190B ** | 2 | 25 1/4 | 4 1/16 | 27/32 | 2 1/8 | 1 1/32 |
| JHW1191B ** | 2 1/16 | 25 ¹³ / ₁₆ | 4 3/16 | 27/32 | 2 31/32 | 1 5/32 |
| JHW1192B ** | 2 1/8 | 26 ³ / ₈ | 4 5/16 | 7/8 | 3 1/16 | 1 5/32 |
| JHW1193B ** | 2 3/16 | 26 ³¹ / ₃₂ | 4 7/16 | 29/32 | 3 5/32 | 1 5/32 |
| JHW1194B ** | 2 1/4 | 27 %16 | 4 %16 | 15/16 | 3 7/32 | 1 5/32 |
| JHW1195B ** | 2 3/8 | 28 3/4 | 4 13/16 | 31/32 | 3 13/32 | 1 %32 |
| JHW1197B ** | 2 1/2 | 29 29/32 | 5 1/16 | 1 1/32 | 3 19/32 | 1 %2 |
| JHW1198BL * | 2 % | 32 | 6 % | 1 7/32 | 4 1/8 | 1 5/8 |
| JHW1198ABL * | 2 3/4 | 32 | 6 % | 1 7/32 | 4 1/8 | 1 5/8 |
| JHW1198BBL * | 2 1/8 | 32 | 6 % | 1 7/32 | 4 1/8 | 1 5/8 |
| JHW1198CBL * | 2 15/16 | 32 | 6 % | 1 7/32 | 4 1/8 | 1 5/8 |
| JHW1199BL * | 3 | 32 | 6 ⁵ /8 | 1 7/32 | 4 % | 1 % |
| JHW1199ABL * | 3 1/8 | 32 | 6 ⁵ % | 1 7/32 | 4 1/8 | 1 % |
| JHW1199BBL * | 3 % | 31 ²⁹ / ₃₂ | 6 ⁵ % | 1 7/32 | 4 1/8 | 1 % |
| JHW1199CBL * | 3 ½ | 31 ²⁹ / ₃₂ | 6 % | 1 7/32 | 4 1/8 | 1 5/8 |

- + Black Industrial Finish with SUPERTORQUE™ Box End
- ++ Black Industrial Finish with SUPERCOMBO® Open End and SUPERTORQUE™ Box End
- ** Black Industrial Finish with SUPERTORQUE™ Box End and standard open end

Fed. Spec.: ANSI B107.6; SAE AS 954

- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- . No contact is made at the corners
- Instead, wrenching forces are placed on the flat surfaces behind the points
- Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to provide accurate torque/tension relationship for precision application
- May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- Box and open end openings are identical


















HWWS1171BSC

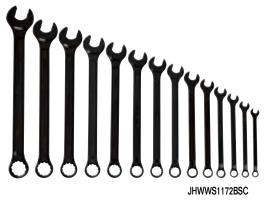







| Black Industrial Finish | , 12 Point, | SAE | | | |
|--------------------------------|-------------|----------|----------|--------------|-------------|
| Set Contents | JOBSC. | 11BSC | ,72BSC | , angesc | TABTA |
| | "AMMS111" | "HMM211, | "HWN211" | "HWW51190BSC | HWWS1174BTA |

| | Size | 7-Piece Set | 11-Piece Set | 15-Piece Set | 26-Piece | 11- Piece |
|--------------|-------------------------------|-------------|--------------|--------------|----------|-----------|
| Product Code | (Inches) | in Pouch | in Pouch | in Pouch | Set | Set |
| JHW1210BSC | 5/16 | | | Χ | Х | |
| JHW1212BSC | 3/8 | Χ | Χ | Χ | Χ | |
| JHW1214BSC | 7/16 | Χ | Χ | Χ | Χ | |
| JHW1216BSC | 1/2 | X | X | X | Χ | |
| JHW1218BSC | 9/16 | Χ | Х | Х | Х | |
| JHW1220BSC | 5/8 | X | X | X | Х | |
| JHW1222BSC | 11/16 | Χ | Х | Χ | Χ | |
| JHW1224BSC | 3/4 | Χ | Х | Χ | Х | |
| JHW1226BSC | ¹³ / ₁₆ | | X | Χ | Х | |
| JHW1228BSC | 7/8 | | X | X | Х | |
| JHW1230BSC | 15/16 | | Χ | Χ | Χ | |
| JHW1232BSC | 1 | | X | X | Х | |
| JHW1234BSC | 1 1/16 | | | Χ | Х | |
| JHW1236BSC | 1 1/8 | | | Χ | Х | |
| JHW1240BSC | 1 1/4 | | | Χ | Χ | |
| JHW1242B | 1 5/16 | | | | Х | Х |
| JHW1244B | 1 % | | | | Х | χ |
| JHW1246B | 1 7/16 | | | | Х | Х |
| JHW1248B | 1 ½ | | | | Х | Х |
| JHW1178AB | 1 %16 | | | | Х | Χ |
| JHW1180B | 1 % | | | | Χ | Χ |
| JHW1182B | 1 11/16 | | | | Х | X X |
| JHW1184B | 1 ¾ | | | | Х | |
| JHW1186B | 1 13/16 | | | | Х | X |
| JHW1188B | 1 % | | | | Х | Х |
| JHW1190B | 2 | | | | Χ | X |









SUPERCOMBO® COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, Metric

| • | | | | _ | _ | _ |
|---------------|------|----------------------------------|--|-----------|---------------------------------|-----------|
| | | A | B | C | <u>D</u> | <u>E</u> |
| | 0. | Overall | Open End | Open End | Box End | Box End |
| D 1 10 1 | Size | Length | Width | Thickness | Diameter | Thickness |
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW1206MSC + | 6 | 4 27/32 | 9/16 | 1/8 | 13/32 | 3/16 |
| JHW1207MSC ++ | 7 | 5 ½16 | 5/8 | 5/32 | 15/32 | 7/32 |
| JHW1208MSC ++ | 8 | 5 ²⁵ / ₃₂ | 23/32 | 5/32 | 1/2 | 7/32 |
| JHW1209MSC ++ | 9 | 6 %2 | 13/16 | 3/16 | 9/16 | 1/4 |
| JHW1210MSC ++ | 10 | 6 ¾ | 7/8 | 3/16 | 5/8 | 9/32 |
| JHW1211MSC ++ | 11 | 7 1/4 | 31/32 | 7/32 | 11/16 | 5/16 |
| JHW1212MSC ++ | 12 | 7 11/16 | 1 1/32 | 7/32 | 3/4 | 5/16 |
| JHW1213MSC ++ | 13 | 8 1/32 | 1 1/8 | 1/4 | 25/32 | 11/32 |
| JHW1214MSC ++ | 14 | 8 % | 1 7/32 | 1/4 | 27/32 | 3/8 |
| JHW1215MSC ++ | 15 | 9 3/32 | 1 %32 | 9/32 | 29/32 | 13/32 |
| JHW1216MSC ++ | 16 | 9 1/2 | 1 ¾ | 9/32 | ¹⁵ / ₁₆ | 13/32 |
| JHW1217MSC ++ | 17 | 10 1/16 | 1 15/32 | 5/16 | 1 | 7/16 |
| JHW1218MSC ++ | 18 | 10 ¹⁷ / ₃₂ | 1 17/32 | 5/16 | 1 ½16 | 15/32 |
| JHW1219MSC ++ | 19 | 11 ½2 | 1 % | 11/32 | 1 1/8 | 1/2 |
| JHW1220MSC ++ | 20 | 11 ½ | 1 23/32 | 3/8 | 1 3/16 | 1/2 |
| JHW1221MSC ++ | 21 | 11 ²⁵ / ₃₂ | 1 3/4 | 3/8 | 1 7/32 | 17/32 |
| JHW1222MSC ++ | 22 | 12 1/2 | 1 29/32 | 13/32 | 1 5/16 | 9/16 |
| JHW1223MSC ++ | 23 | 12 1/8 | 1 31/32 | 7/16 | 1 11/32 | 9/16 |
| JHW1224MSC ++ | 24 | 13 1/32 | 2 | 7/16 | 1 ¾ | 19/32 |
| JHW1225MSC ++ | 25 | 14 ¹ / ₃₂ | 2 5/32 | 15/32 | 1 ¹⁵ /32 | 5/8 |
| JHW1226MSC + | 26 | 14 5/16 | 2 ³ / ₁₆ | 1/2 | 1 ½ | 21/32 |
| JHW1227MSC + | 27 | 14 ²⁵ / ₃₂ | 2 %32 | 1/2 | 1 %16 | 11/16 |
| JHW1229MSC + | 29 | 15 ¹⁷ / ₃₂ | 2 ¹³ / ₃₂ | 17/32 | 1 21/32 | 23/32 |
| JHW1230MSC + | 30 | 16 %2 | 2 17/32 | 17/32 | 1 3/4 | 3/4 |
| JHW1232MSC + | 32 | 17 1/32 | 2 11/16 | 9/16 | 1 ¹³ / ₁₆ | 3/4 |
| JHW1234MSC + | 34 | 17 ²⁵ / ₃₂ | 2 ¹³ / ₁₆ | 19/32 | 1 ²⁹ / ₃₂ | 3/4 |
| JHW1236MSC + | 36 | 19 %2 | 3 1/16 | 21/32 | 2 3/32 | 7/8 |


- + High Polish Chrome Finish with SUPERTORQUETM Box End
- ++ High Polish Chrome Finish with SUPERCOMBO® Open End and SUPERTORQUE™ Box End

Fed. Spec.: ANSI B107.6; SAE AS 954

- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- No contact is made at the corners
- Instead, wrenching forces are placed on the flat surfaces behind the points
- Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to
 provide accurate torque/tension relationship for precision application
- May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- Box and open end openings are identical



















SUPERCOMBO® WRENCH SETS

High Polish Chrome Finish, 12 Point, Metric Set Contents:

| | | | ^ | | 40 | 45 | Ap | 40 | |
|--------------|------|--------------|----------------|--------------|-----------------|--------------|--------------|--------------|---------------|
| | | JHWWW | i.18 IHWWW. | JHWNWE | 5-10A JHWMWS | HWWW. | HWWW. | 14WWW5.6 | oa Hwwws.? |
| | | 14pr. | 14pm. | 14pm. | 14pm. | 14pm. | 14par. | 14pm. | 14pm. |
| | Size | 8-Piece | 10-Piece | 10-Piece | 15-Piece | 15-Piece | 18-Piece | 10-Piece | 27-Piece |
| Product Code | (MM) | Set in Pouch | Set in Pouch | Set in Pouch | Set in Pouch | Set in Pouch | Set in Pouch | Set in Pouch | Set |
| JHW1206MSC | 6 | Χ | | | | | | | Х |
| JHW1207MSC | 7 | Χ | Χ | | Х | Х | Х | | Χ |
| JHW1208MSC | 8 | Х | Χ | | Х | Х | Х | | Х |
| JHW1209MSC | 9 | Х | Х | | Х | | Х | | Х |
| JHW1210MSC | 10 | Χ | Χ | Χ | Х | Х | Χ | | Х |
| JHW1211MSC | 11 | Х | Х | X | X | | X | | X |
| JHW1212MSC | 12 | Χ | Х | Х | Χ | Χ | Χ | | Х |
| JHW1213MSC | 13 | Х | X | X | X | | X | | Χ |
| JHW1214MSC | 14 | | Х | Χ | Х | Х | Χ | | Х |
| JHW1215MSC | 15 | | Х | X | Χ | | Х | | Χ |
| JHW1216MSC | 16 | | | Χ | Χ | Х | Χ | | Х |
| JHW1217MSC | 17 | | Х | X | X | | Χ | | X |
| JHW1218MSC | 18 | | | Χ | Х | Х | Х | Х | Х |
| JHW1219MSC | 19 | | | Χ | X | - | X | X | X |
| JHW1220MSC | 20 | | | | Х | Х | Х | | Х |
| JHW1221MSC | 21 | | | | Χ | | Χ | Χ | Χ |
| JHW1222MSC | 22 | | | | | Х | Х | Χ | Х |
| JHW1223MSC | 23 | | | | | | X | | Χ |
| JHW1224MSC | 24 | | | | | Х | Χ | Х | Х |
| JHW1225MSC | 25 | | | | | | | | X |
| JHW1226MSC | 26 | | | | | Х | | | Х |
| JHW1227MSC | 27 | | | | | Х | | X | Х |
| JHW1229MSC | 29 | | | | | Χ | | | Х |
| JHW1230MSC | 30 | | | | | X | | X | Χ |
| JHW1232MSC | 32 | | | | | Χ | | Х | Х |
| JHW1234MSC | 34 | | | | | | | Х | Х |
| JHW1236MSC | 36 | | | | | | | Χ | Х |











JHWMWS-10A



JHWMWS-15A



JHWMWS-18A



JHWMWS-6A



SUPERCOMBO® COMBINATION WRENCHES





High Visibility Red Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|---------------|-------------------------------|-------------------------------|-------------------------------|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1212RSC ++ | 3/8 | 6 1/2 | 13/16 | 3/16 | 9/16 | 1/4 |
| JHW1214RSC ++ | 7/16 | 7 1/4 | 15/16 | 7/32 | 11/16 | 9/32 |
| JHW1216RSC ++ | 1/2 | 8 | 1 1/16 | 1/4 | 3/4 | 11/32 |
| JHW1218RSC ++ | 9/16 | 8 3/4 | 1 1/4 | 1/4 | 7/8 | 3/8 |
| JHW1220RSC ++ | 5/8 | 9 1/2 | 1 3/8 | 9/32 | ¹⁵ / ₁₆ | 13/32 |
| JHW1222RSC ++ | 11/16 | 10 ½ | 1 1/2 | ⁵ / ₁₆ | 1 1/32 | 7/16 |
| JHW1224RSC ++ | 3/4 | 11 | 1 % | 5/16 | 1 1/8 | 1/2 |
| JHW1226RSC ++ | 13/16 | 11 ¾ | 1 3/4 | 3/8 | 1 7/32 | 17/32 |
| JHW1228RSC ++ | 7/8 | 12 ½ | 1 1/8 | 13/32 | 1 5/16 | 9/16 |
| JHW1230RSC ++ | ¹⁵ / ₁₆ | 13 ¼ | 2 | 7/16 | 1 % | 19/32 |
| JHW1232RSC ++ | 1 | 14 | 2 ½ | 15/32 | 1 15/32 | 5/8 |
| JHW1234RSC ++ | 1 1/16 | 14 ¾ | 2 ½ | 1/2 | 1 %16 | 21/32 |
| JHW1236RSC ++ | 1 1/8 | 15 ½ | 2 13/32 | 17/32 | 1 21/32 | 11/16 |
| JHW1240RSC ++ | 1 1/4 | 17 | 2 21/32 | 9/16 | 1 ¹³ / ₁₆ | 3/4 |

++ Hi-Vis Red Finish with SUPERCOMBO® Open End and SUPERTORQUE™ Box End

Fed. Spec.: ANSI B107.6

JHWWS1170RSC

7 Piece Hi-Vis Red Combination Wrench Set, 12 Point, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW1212RSC | 3/8 | JHW1218RSC | 9/16 | JHW1224RSC | 3/4 |
| JHW1214RSC | 7/16 | JHW1220RSC | 5/8 | Pouch | |
| IHW1216BSC | 1/2 | IHW1222BSC | 11/16 | | |

JHWWS1171RSC

11 Piece Hi-Vis Red Combination Wrench Set, 12 Point, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|-------------------------------|
| JHW1212RSC | 3/8 | JHW1220RSC | 5/8 | JHW1228RSC | 7/8 |
| JHW1214RSC | 7/16 | JHW1222RSC | 11/16 | JHW1230RSC | ¹⁵ / ₁₆ |
| JHW1216RSC | 1/2 | JHW1224RSC | 3/4 | JHW1232RSC | 1 |
| JHW1218RSC | %16 | JHW1226RSC | ¹³ / ₁₆ | Pouch | |

JHWWS1172RSC

14 Piece Hi-Vis Red Combination Wrench Set, 12 Point, SAE, in Pouch Contents Include:

| •••••••••• | | | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|--|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | |
| JHW1212RSC | 3/8 | JHW1222RSC | 11/16 | JHW1232RSC | 1 | |
| JHW1214RSC | 7/16 | JHW1224RSC | 3/4 | JHW1234RSC | 11/16 | |
| JHW1216RSC | 1/2 | JHW1226RSC | 13/16 | JHW1236RSC | 11/8 | |
| JHW1218RSC | 9/16 | JHW1228RSC | 7/8 | JHW1240RSC | 11/4 | |
| JHW1220RSC | 5/2 | JHW1230BSC | 15/16 | Pouch | | |


- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- . No contact is made at the corners
- Instead, wrenching forces are placed on the flat surfaces behind the points
- Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to provide accurate torque/tension relationship for precision application
- May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- · Box and open end openings are identical









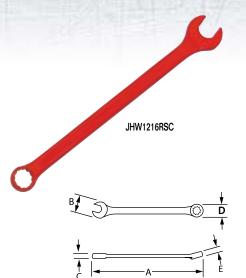








JHWWS1172RSC



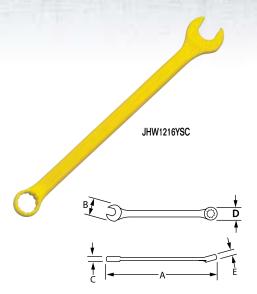







JHWWS1172YSC

SUPERCOMBO® COMBINATION WRENCHES





High Visibility Yellow Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|---------------|-------------------------------|------------------------------|--|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1212YSC ++ | 3/8 | 6 1/2 | 13/16 | 3/16 | 9/16 | 1/4 |
| JHW1214YSC ++ | 7/16 | 7 1/4 | 15/16 | 7/32 | 11/16 | 9/32 |
| JHW1216YSC ++ | 1/2 | 8 | 1 1/16 | 1/4 | 3/4 | 11/32 |
| JHW1218YSC ++ | 9/16 | 8 3/4 | 1 ½ | 1/4 | 7/8 | 3/8 |
| JHW1220YSC ++ | 5/8 | 9 1/2 | 1 3/8 | 9/32 | ¹⁵ / ₁₆ | 13/32 |
| JHW1222YSC ++ | 11/16 | 10 1/4 | 1 1/2 | 5/16 | 1 1/32 | 7/16 |
| JHW1224YSC ++ | 3/4 | 11 | 1 5/8 | 5/16 | 1 1/8 | 1/2 |
| JHW1226YSC ++ | 13/16 | 11 ¾ | 1 3/4 | 3/8 | 1 7/32 | 17/32 |
| JHW1228YSC ++ | 7/8 | 12 ½ | 1 1/8 | 13/32 | 1 5/16 | 9/16 |
| JHW1230YSC ++ | ¹⁵ / ₁₆ | 13 1/4 | 2 | 7/16 | 1 % | 19/32 |
| JHW1232YSC ++ | 1 | 14 | 2 ½ | 15/32 | 1 ¹⁵ / ₃₂ | 5/8 |
| JHW1234YSC ++ | 1 1/16 | 14 ¾ | 2 ¹ / ₄ | 1/2 | 1 %16 | 21/32 |
| JHW1236YSC ++ | 1 1/8 | 15 ½ | 2 ¹³ / ₃₂ | 17/32 | 1 21/32 | 11/16 |
| JHW1240YSC ++ | 1 1/4 | 17 | 2 ²¹ / ₃₂ | 9/16 | 1 ¹³ / ₁₆ | 3/4 |

++ Hi-Vis Yellow Finish with SUPERCOMBO® Open End and SUPERTORQUE™ Box End

Fed. Spec.: ANSI B107.6

JHWWS1170YSC

7 Piece Hi-Vis Yellow Combination Wrench Set, 12 Point, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|---------------|--------------|---------------|
| JHW1212YSC | 3/8 | JHW1218YSC | 9/16 | JHW1224YSC | 3/4 |
| JHW1214YSC | ⁷ / ₁₆ | JHW1220YSC | 5/8 | Pouch | |
| JHW1216YSC | 1/2 | JHW1222YSC | 11/16 | | |

JHWWS1171YSC

11 Piece Hi-Vis Yellow Combination Wrench Set, 12 Point, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|-------------------|
| JHW1212YSC | 3/8 | JHW1220YSC | 5/8 | JHW1228YSC | 7/8 |
| JHW1214YSC | 7/16 | JHW1222YSC | 11/16 | JHW1230YSC | ¹⁵ /16 |
| JHW1216YSC | 1/2 | JHW1224YSC | 3/4 | JHW1232YSC | 1 |
| JHW1218YSC | 9/16 | JHW1226YSC | 13/16 | Pouch | |

JHWWS1172YSC

14 Piece Hi-Vis Yellow Combination Wrench Set, 12 Point, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHW1212YSC | 3/8 | JHW1222YSC | 11/16 | JHW1232YSC | 1 |
| JHW1214YSC | 7/16 | JHW1224YSC | 3/4 | JHW1234YSC | 11/16 |
| JHW1216YSC | 1/2 | JHW1226YSC | ¹³ / ₁₆ | JHW1236YSC | 11//8 |
| JHW1218YSC | 9/16 | JHW1228YSC | 7/8 | JHW1240YSC | 11/4 |
| JHW1220YSC | 5/8 | JHW1230YSC | 15/16 | Pouch | |

- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- No contact is made at the corners
- Instead, wrenching forces are placed on the flat surfaces behind the points
- Meets or exceeds aerospace specification AS 954 for 12 point fasteners (as defined by AS 870) to provide accurate torque/tension relationship for precision application
- May be used on all common hex (6 point) fasteners with considerable advantage over conventional box end wrenches to increase both hand tool flexibility and economy
- Box and open end openings are identical





MINIATURE COMBINATION WRENCH







High Polished Chrome Finish, 6 & 12 Point, SAE

| | | | Α | В | С | D | E |
|--------------|------------------|-------|---------------------------------|-------------------------------|----------------------------------|-----------------------------------|--|
| Product Code | Size (Inches) | Point | Box End Diameter (Inches) | Open End Width (Inches) | Box End Thickness (Inches) | Open End Thickness (Inches) | Overall Length (Inches) |
| JHWMIDS4A | 1/8 | 6 | 7/32 | 11/32 | 1/8 | 1/8 | 2 11/16 |
| JHWMIDS5A | 5/32 | 6 | 9/32 | 13/32 | 5/32 | 1/8 | 2 ²⁷ / ₃₂ |
| JHWMIDS6A | 3/16 | 6 | 5/16 | 7/16 | 5/32 | 1/8 | 2 31/32 |
| JHWMID65A | 13/64 | 12 | 3/8 | 1/2 | 1/8 | 1/8 | 3 1/8 |
| JHWMID7A | 7/32 | 12 | 3/8 | 1/2 | 3/16 | 1/8 | 3 3/32 |
| JHWMID75A | 15/64 | 12 | 3/8 | 1/2 | 2/8 | 1/8 | 3 1/4 |
| JHWMID8A | 1/4 | 12 | 13/32 | 17/32 | 3/16 | 5/32 | 3 7/32 |
| JHWMID9A | 9/32 | 12 | 7/16 | 19/32 | 7/32 | 5/32 | 3 11/32 |
| JHWMID10A | 5/16 | 12 | 1/2 | 21/32 | 7/32 | 5/32 | 3 1/2 |
| JHWMID12A | 3/8 | 12 | 19/32 | 25/32 | 1/4 | 3/16 | 3 3/4 |
| JHWMID14A | 7/16 | 12 | 21/32 | 29/32 | 5/16 | 7/32 | 4 1/32 |

JHWWS-MID10 10 Piece Miniature Combination Wrench Set in Pouch Contents Include:

| Product Code: | Size (Inches) | Product Code: | Size (Inches) | Product Code: | Size (Inches) |
|---------------|---------------|---------------|---------------|---------------|---------------|
| JHWMIDS5A | 5/32 | JHWMIDS6A | 3/16 | JHWMID65A | 13/64 |
| JHWMID7A | 7/32 | JHWMID75A | 15/64 | JHWMID8A | 1/4 |
| JHWMID9A | 9/32 | JHWMID10A | 5/16 | JHWMID12A | 3/8 |
| JHWMID14A | 7/16 | | | | |







SHORT COMBINATION WRENCH

High Polish Chrome Finish, 12 Point, Metric

| | | Α | В | С | D | E |
|--------------|--------------|---------------------------------|-------------------------------|----------------------------------|-----------------------------------|---------------------------------|
| Product Code | Size (MM) | Box End Diameter (Inches) | Open End Width (Inches) | Box End Thickness (Inches) | Open End Thickness (Inches) | Overall Length (Inches) |
| JHW1208M | 8 | 1/2 | 5/8 | 1/4 | 3/16 | 4 13/16 |
| JHW1209M | 9 | 1/2 | 3/4 | 1/4 | 3/16 | 5 |
| JHW1210M | 10 | 9/16 | 3/4 | 1/4 | 3/16 | 5 1/4 |
| JHW1211M | 11 | 11/16 | 1 | 5/16 | 1/4 | 5 7/16 |
| JHW1212M | 12 | 11/16 | 1 | 5/16 | 1/4 | 5 %16 |
| JHW1213M | 13 | 13/16 | 1 | 3/8 | 1/4 | 5 ¹³ / ₁₆ |
| JHW1214M | 14 | 13/16 | 1 1/8 | 3/8 | 1/4 | 6 |
| JHW1215M | 15 | 7/8 | 1 1/4 | 3/8 | 1/4 | 6 1/6 |
| JHW1216M | 16 | 1 | 1 1/4 | 3/8 | 1/4 | 6 ¾ |
| JHW1217M | 17 | 1 | 1 3/8 | 7/16 | 5/16 | 6 % |
| JHW1218M | 18 | 1 1/16 | 1 1/2 | 1 | 5/16 | 6 ³ ⁄ ₄ |
| JHW1219M | 19 | 1 2/16 | 1 1/2 | 1 | 3/8 | 7 |

MWS-MS-10 10 Piece Short Combination Wrench Set in Pouch Contents Include:

| Product Code: | Sizes (mm) | Product Code: | Sizes (mm) | Product Code: | Sizes (mm) |
|---------------|------------|---------------|------------|---------------|------------|
| JHW1208M | 8 | JHW1209M | 9 | JHW1210M | 10 |
| JHW1211M | 11 | JHW1212M | 12 | JHW1213M | 13 |
| JHW1214M | 14 | JHW1215M | 15 | JHW1217M | 17 |
| JHW1219M | 19 | | | | |











Features


Excellent wrench for fast turning of fasteners in limited clearance areas

JHWWS-MID10

- Box and open end openings are identical size
- High polish chrome textured finish provides great feel and wipes clean easily



- Excellent wrench for fast turning of fasteners in limited clearance areas
- Box and open end openings are identical size
- High polish chrome textured finish provides great feel and wipes clean easily











SEMI DEEP, FLEX-HEAD COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|--------------|---------------|----------------------------|--|-----------------------------------|--------------------------------|-------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Socket Diameter (Inches) | Hex Depth (Inches) |
| JHW11900 | 3/8 | 7 | 15/16 | 7/32 | 9/16 | 1/2 |
| JHW11902 | 1/2 | 8 | 1 ¹⁵ / ₁₆ | 1/4 | ²⁵ / ₃₂ | 19/32 |
| JHW11904 | 5/8 | 9 3/4 | 1 15/32 | 9/32 | 14/16 | 3/4 |
| JHW11906 | 3/4 | 10 3/4 | 1 19/32 | 1/4 | 1 | ²⁵ / ₃₂ |





JHW11030

Features

- Extra short handle for access where clearance is limited
- High-polished chrome finish cleans easily
- 12 point box end provides maximum versatility
- · Recessed corners in box end provide extra turning power

STUBBY COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, SAE


| | | Α | В | С | D | Е |
|--------------|------------------------------|---------------------------------------|-------------------|-----------------------|---------------------|------------------------------|
| D 1 10 1 | 0: 4) | Overall Length | Open End Width | Open End Thickness | Box End Diameter | Box End Thickness |
| Product Code | Size (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW11310 | ⁵ /16 | 3 %16 | 11/16 | 5/32 | 1/2 | ⁷ / ₁₆ |
| JHW11312 | 3/8 | 3¾ | 13/16 | 3/16 | 19/32 | 1/2 |
| JHW11314 | ⁷ / ₁₆ | 3 ¹⁵ / ₁₆ | 15/16 | 7/32 | 21/32 | 9/16 |
| JHW11316 | 1/2 | 41/4 | 11/16 | 1/4 | 3/4 | 11/16 |
| JHW11318 | 9/16 | 41/2 | 13/16 | 9/32 | 27/32 | 3/4 |
| JHW11320 | 5/8 | 43/4 | 1 5/16 | 9/32 | 15/16 | 13/16 |
| JHW11322 | 11/16 | 5 | 17/16 | 5/16 | 11/32 | 7/8 |
| JHW11324 | 3/4 | 5 ⁷ / ₁₆ | 1 %16 | 11/32 | 11/8 | 15/16 |

Fed. Spec.: ANSI B107.6

JHW11030 7 Piece Stubby Combination Wrench Set, 12 Point, SAE, in Pouch **Contents Include:**

| •••••••••• | 0.00. | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW11312 | 3/8 | JHW11318 | 9/16 | JHW11324 | 3/4 |
| JHW11314 | 7/16 | JHW11320 | 5/8 | | |
| .IHW11316 | 1/2 | JHW11322 | 11/16 | | |





STANDARD RATCHETING COMBINATION WRENCHES

- Nickel-chrome plating helps protect against corrosion and makes cleaning easy
- Sized for optimum comfort and balance
- Ratcheting gear features up to 80 teeth, minimizing swing arc in tight spaces
- · Manufactured from special alloy steel, precision-forged and heat treated for optimum strength and durability
- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows the application of higher torque without rounding or deforming hex fastener points. No contact is made at the corners. Instead, wrenching forces are placed on the flat surfaces behind the points.

High Polish Chrome Finish, 12 Point, SAE





| | Size | A Overall Length | B Open End Width | C Open End Thickness | D Box End Width | E Box End Thickness |
|--------------|------------------|---------------------------------|------------------------|----------------------------|-----------------------|---------------------------|
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW1208RS | 1/4 | 4 ¹⁵ / ₁₆ | 9/16 | 1/8 | 21/32 | 1/4 |
| JHW1210RS | ⁵ /16 | 5 ⁷ / ₈ | 11/16 | 5/32 | 11/16 | 9/32 |
| JHW1211RS | 11/32 | 6 15/32 | 25/32 | 3/16 | 25/32 | 5/16 |
| JHW1212RS | 3/8 | 7 1/32 | 7/8 | 3/16 | 27/32 | 5/16 |
| JHW1214RS | 7/16 | 7 % | 31/32 | 7/32 | 7/8 | 11/32 |
| JHW1216RS | 1/2 | 8 11/16 | 1 3/32 | 7/32 | 31/32 | 13/32 |
| JHW1218RS | 9/16 | 9 1/4 | 1 7/32 | 1/4 | 1 1/16 | 13/32 |
| JHW1220RS | 5/8 | 10 %2 | 1 11/32 | 9/32 | 1 ³ /16 | 7/16 |
| JHW1222RS | 11/16 | 10 29/32 | 1 7/16 | 1/2 | 1 1/4 | 15/32 |
| JHW1224RS | 3/4 | 12 | 1 % | 11/32 | 1 7/16 | 1/2 |

JHWWS1170RS 7 Piece Standard Ratcheting Combination Wrench Set, SAE, in Pouch

Contents Include:


| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW1212RS | 3/8 | JHW1220RS | 5/8 |
| JHW1214RS | 7/16 | JHW1222RS | 11/16 |
| JHW1216RS | 1/2 | JHW1224RS | 3/4 |
| JHW1218RS | 9/16 | | |

JHWWS1180RS 10 Piece Standard Ratcheting Combination Wrench Set, SAE, in Pouch

Contents Include:


| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW1208RS | 1/4 | JHW1216RS | 1/2 |
| JHW1210RS | 5/16 | JHW1218RS | 9/16 |
| JHW1211RS | 11/32 | JHW1220RS | 5/8 |
| JHW1212RS | 3/8 | JHW1222RS | 11/16 |
| JHW1214RS | 7/16 | JHW1224RS | 3/4 |











High Polish Chrome Finish, 12 Point, Metric





| | | Α | В | С | D | Ε |
|--------------|--------------|---------------------------|---------------------------|-------------------------------|--------------------------|------------------------------|
| Product Code | Size (MM) | Overall Length (MM) | Open End Width (MM) | Open End Thickness (MM) | Box End Width (MM) | Box End Thickness (MM) |
| JHW1210MRS | | | | | | |
| • | 10 | 179 | 22 | 5 | 22 | 8 |
| JHW1211MRS | 11 | 194 | 24 | 5 | 22 | 9 |
| JHW1212MRS | 12 | 207 | 26 | 6 | 24 | 9 |
| JHW1213MRS | 13 | 221 | 28 | 6 | 25 | 10 |
| JHW1214MRS | 14 | 235 | 31 | 7 | 27 | 10 |
| JHW1215MRS | 15 | 250 | 33 | 5 | 28 | 11 |
| JHW1216MRS | 16 | 261 | 34 | 7 | 31 | 11 |
| JHW1217MRS | 17 | 277 | 37 | 8 | 32 | 12 |
| JHW1218MRS | 18 | 291 | 39 | 8 | 35 | 12 |
| JHW1219MRS | 19 | 305 | 41 | 8 | 37 | 13 |

JHWMWS10RS 10 Piece Standard Ratcheting Combination Wrench Set, Metric, in Pouch

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|
| JHW1210MRS | 10 | JHW1215MRS | 15 |
| JHW1211MRS | 11 | JHW1216MRS | 16 |
| JHW1212MRS | 12 | JHW1217MRS | 17 |
| JHW1213MRS | 13 | JHW1218MRS | 18 |
| JHW1214MRS | 14 | JHW1219MRS | 19 |











REVERSIBLE RATCHETING COMBINATION WRENCHES

- Box ends are offset 15-degrees for knuckle clearance
- Sized for optimum comfort and balance
- Ratcheting gear features up to 80 teeth, minimizing swing arc in tight spaces
- Low-profile, easy-action, reverse lever won't get in your way
- Manufactured from special alloy steel, precision-forged and heat-treated for optimum strength and durability
- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- SUPERTORQUE™ box opening design allows the application of higher torque without rounding or deforming hex fastener points. No contact is made at the corners. Instead, wrenching forces are placed on the flat surfaces behind the points

High Polish Chrome Finish, 12 Point, SAE





| | | Α | В | С | D | E |
|--------------|------------------|----------------------------------|-------------------------------|-----------------------------------|------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Width (Inches) | Box End Thickness (Inches) |
| | | | | | | |
| JHW1210RCU | 5/16 | 5 ⁷ / ₈ | 11/16 | 5/32 | 11/16 | 9/32 |
| JHW1212RCU | 3/8 | 7 1/32 | 7/8 | ³ / ₁₆ | 27/32 | ⁵ ⁄16 |
| JHW1214RCU | 7/16 | 7 % | 31/32 | 7/32 | 7/8 | 11/32 |
| JHW1216RCU | 1/2 | 8 11/16 | 1 3/32 | 7/32 | 31/32 | 13/32 |
| JHW1218RCU | 9/16 | 9 1/4 | 1 7/32 | 1/4 | 1 1/16 | 13/32 |
| JHW1220RCU | 5/8 | 10 %2 | 1 11/32 | 9/32 | 1 3/16 | 7/16 |
| JHW1222RCU | 11/16 | 10 ²⁹ / ₃₂ | 1 7/16 | 1/2 | 1 1/4 | 15/32 |
| JHW1224RCU | 3/4 | 12 | 1 % | 11/32 | 1 7/16 | 1/2 |

JHWWS1170RCU 7 Piece Reversible Ratcheting Combination Wrench Set, SAE, in Pouch

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW1212RCU | 3/8 | JHW1220RCU | 5/8 |
| JHW1214RCU | 7/16 | JHW1222RCU | 11/16 |
| JHW1216RCU | 1/2 | JHW1224RCU | 3/4 |
| JHW1218RCU | 9/16 | | |



High Polish Chrome Finish, 12 Point, Metric





| | | Α | В | С | D | E |
|----------------------------|--------------|---------------------------|---------------------------|-------------------------------|--------------------------|------------------------------|
| Product Code | Size (MM) | Overall Length (MM) | Open End Width (MM) | Open End Thickness (MM) | Box End Width (MM) | Box End Thickness (MM) |
| JHW1208MRCU JHW1209MRCU | 8 | 149 164 | 18 20 | 4 | 18 20 | 7 8 |
| JHW1210MRCU JHW1211MRCU | 10 11 | 179 194 | 22 24 | 5 5 | 22 22 | 8 |
| JHW1212MRCU JHW1213MRCU | 12 13 | 207 221 | 26 28 | 6 | 24 25 | 9 |
| JHW1214MRCU | 14 | 235 | 31 | 7 | 27 | 10 |
| JHW1215MRCU JHW1216MRCU | 15 16 | 250 261 | 33 34 | 7 7 | 28 31 | 11 11 |
| JHW1217MRCU JHW1218MRCU | 17 18 | 277 291 | 37 39 | 8 8 | 32 35 | 12 12 |
| JHW1219MRCU | 19 | 305 | 41 | 8 | 37 | 13 |

JHWMWS10RCU 10 Piece Reversible Ratcheting Combination Wrench Set, Metric, in Pouch **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|
| JHW1210MRCU | 10 | JHW1215MRCU | 15 |
| JHW1211MRCU | 11 | JHW1216MRCU | 16 |
| JHW1212MRCU | 12 | JHW1217MRCU | 17 |
| JHW1213MRCU | 13 | JHW1218MRCU | 18 |
| JHW1214MRCU | 14 | JHW1219MRCU | 19 |



STUBBY REVERSIBLE RATCHETING COMBINATION WRENCHES

- SUPERCOMBO® open end has specially designed grooves that direct wrench force away from fastener corners
- Manufactured from special alloy steel, precision forged and head treated for optimum strength and durability
- Nickel-chrome plating helps protect against corrosion and makes cleaning easy
- Ratcheting gear features up to 80 teeth, minimizing swing arc in tight places
- Sized for optimum comfort and balance
- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fasteners points. No contact is made at the corners. Instead, wrenching forces area placed on the flat surfaces behind the points

High Polish Chrome Finish, 12 Point, SAE





| - | | | | | | |
|--------------|----------|---------------------------------|----------|------------------------------|----------|-----------|
| | | Α | В | С | D | E |
| | | Overall | Open End | Open End | Box End | Box End |
| | Size | Length | Width | Thickness | Width | Thickness |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW1210RSS | 5/16 | 3 1/2 | 11/16 | 5/32 | 11/16 | 9/32 |
| JHW1212RSS | 3/8 | 3 ²⁷ / ₃₂ | 7/8 | ³ / ₁₆ | 27/32 | 5/16 |
| JHW1214RSS | 7/16 | 4 | 31/32 | 7/32 | 7/8 | 11/32 |
| JHW1216RSS | 1/2 | 4 11/32 | 1 3/32 | 7/32 | 31/32 | 13/32 |
| JHW1218RSS | 9/16 | 4 1/2 | 1 7/32 | 1/4 | 1 1/16 | 13/32 |
| JHW1220RSS | 5/8 | 4 27/32 | 1 11/32 | 9/32 | 1 3/16 | 7/16 |
| JHW1222RSS | 11/16 | 5 | 1 7/16 | 1/2 | 1 1/4 | 15/32 |
| JHW1224RSS | 3/4 | 5 ¹¹ / ₃₂ | 1 % | 11/32 | 1 7/16 | 1/2 |

JHWWS1170RSS 7 Piece Stubby Reversible Ratcheting Combination Wrench Set, SAE, in Pouch

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW1212RSS | 3/8 | JHW1220RSS | 5/8 |
| JHW1214RSS | 7/16 | JHW1222RSS | 11/16 |
| JHW1216RSS | 1/2 | JHW1224RSS | 3/4 |
| JHW1218RSS | 9/16 | | |



High Polish Chrome Finish, 12 Point, Metric





| | | Α | В | C | D | E |
|--------------|------|---------|----------|-----------|---------|-----------|
| | | Overall | Open End | Open End | Box End | Box End |
| | Size | Length | Width | Thickness | Width | Thickness |
| Product Code | (MM) | (MM) | (MM) | (MM) | (MM) | (MM) |
| JHW1208MRSS | 8 | 89 | 18 | 4 | 18 | 7 |
| JHW1209MRSS | 9 | 93 | 20 | 4 | 20 | 8 |
| JHW1210MRSS | 10 | 98 | 22 | 5 | 22 | 8 |
| JHW1211MRSS | 11 | 102 | 24 | 5 | 22 | 9 |
| JHW1212MRSS | 12 | 106 | 26 | 6 | 24 | 9 |
| JHW1213MRSS | 13 | 110 | 28 | 6 | 25 | 10 |
| JHW1214MRSS | 14 | 114 | 31 | 7 | 27 | 10 |
| JHW1215MRSS | 15 | 119 | 33 | 5 | 28 | 11 |
| JHW1216MRSS | 16 | 123 | 34 | 7 | 31 | 11 |
| JHW1217MRSS | 17 | 127 | 37 | 8 | 32 | 12 |
| JHW1218MRSS | 18 | 135 | 39 | 8 | 35 | 12 |
| JHW1219MRSS | 19 | 135 | 41 | 8 | 37 | 13 |

JHWMWS10RSS 10 Piece Stubby Reversible Ratcheting Combination Wrench Set, Metric, in Pouch **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|
| JHW1210MRSS | 10 | JHW1215MRSS | 15 |
| JHW1211MRSS | 11 | JHW1216MRSS | 16 |
| JHW1212MRSS | 12 | JHW1217MRSS | 17 |
| JHW1213MRSS | 13 | JHW1218MRSS | 18 |
| IHW1214MRSS | 14 | IHW1210MRSS | 10 |





REVERSIBLE RATCHETING COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, SAE

| | | Α | В | С | D | Ε |
|--------------|------------------------------|----------------------------------|---------------------------------|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1208RC | 1/4 | 4 1/2 | 21/32 | 5/32 | 21/32 | 9/32 |
| JHW1210RC | 5/16 | 5 1/4 | 23/32 | 5/32 | 23/32 | 9/32 |
| JHW1212RC | 3/8 | 6 1/4 | 7/8 | 3/16 | 7/8 | 5/16 |
| JHW1214RC | ⁷ / ₁₆ | 6 5/8 | ¹⁵ / ₁₆ | 7/32 | 29/32 | 11/32 |
| JHW1216RC | 1/2 | 7 | 1 1/32 | 1/4 | 1 | 13/32 |
| JHW1218RC | 9/16 | 7 % | 1 3/16 | 1/4 | 1 3/32 | 13/32 |
| JHW1220RC | 5/8 | 8 7/32 | 1 11/32 | 9/32 | 1 7/32 | 7/16 |
| JHW1222RC | 11/16 | 9 | 1 7/16 | 9/32 | 1 11/16 | 1/2 |
| JHW1224RC | 3/4 | 9 3/4 | 1 ¹⁷ / ₃₂ | 11/32 | 1 ¹⁵ / ₃₂ | 17/32 |
| JHW1226RC | 13/16 | 10 ½ | 1 23/32 | 3/8 | 1 %16 | 17/32 |
| JHW1228RC | 7/8 | 11 ¹³ / ₃₂ | 1 1/8 | 11/32 | 1 ²¹ / ₃₂ | 19/32 |
| JHW1230RC | 15/16 | 12 | 1 ³¹ / ₃₂ | 15/32 | 1 27/32 | 5/8 |
| JHW1232RC | 1 | 13 | 2 ³ / ₃₂ | 15/32 | 1 1/8 | 5/8 |



JHWWS-1168RC 8 Piece Reversible Ratcheting Combination Wrench Set, SAE, in Plastic Tray

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW1210RC | 5/16 | JHW1216RC | 1/2 | JHW1222RC | 11/16 |
| JHW1212RC | 3/8 | JHW1218RC | 9/16 | JHW1224RC | 3/4 |
| JHW1214RC | 7/16 | JHW1220RC | 5/8 | | |


JHWWS-1164RC

4 Piece Reversible Ratcheting Combination Wrench Set, SAE, in Plastic Tray

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW1226RC | 13/16 | JHW1230RC | 15/16 |
| JHW1228RC | 7/8 | JHW1232RC | 1 |

- High-polished chrome finish cleans easily
- Ratchet lever is easily accessible for quick direction changes
- · Recessed corners in ends provide extra turning power







JHWWS-1168RC



JHWWS-1164RC












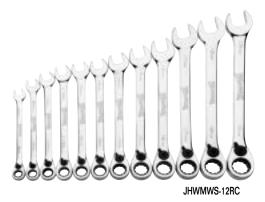





REVERSIBLE RATCHETING COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, Metric

| | | Α | В | С | D | E |
|--------------|-----------|----------------------------------|-------------------------------|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (MM) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1206MRC | 6 | 4 1/2 | 21/32 | 5/32 | 21/32 | 1/4 |
| JHW1208MRC | 8 | 5 ½ | 23/32 | 3/16 | 23/32 | 9/32 |
| JHW1209MRC | 9 | 5 ⁷ /8 | 13/16 | 5/32 | 25/32 | 5/16 |
| JHW1210MRC | 10 | 6 1/4 | 7/8 | 7/32 | 7/8 | 11/32 |
| JHW1211MRC | 11 | 6 % | 15/16 | 7/32 | 29/32 | 11/32 |
| JHW1212MRC | 12 | 6 ¹³ / ₁₆ | 1 | 7/32 | 31/32 | 3/8 |
| JHW1213MRC | 13 | 7 | 1 1/32 | 1/4 | 1 | 13/32 |
| JHW1214MRC | 14 | 7 ¾ | 1 3/16 | 1/4 | 1 ³ / ₃₂ | 13/32 |
| JHW1215MRC | 15 | 7 3/4 | 1 1/4 | 9/32 | 1 5/32 | 7/16 |
| JHW1216MRC | 16 | 8 3/16 | 1 11/32 | 9/32 | 1 7/32 | 7/16 |
| JHW1217MRC | 17 | 9 | 1 7/16 | 9/32 | 1 %2 | 1/2 |
| JHW1218MRC | 18 | 9 % | 1 17/32 | 5/16 | 1 % | 15/32 |
| JHW1219MRC | 19 | 9 ¾ | 1 17/32 | 11/32 | 1 7/16 | 17/32 |
| JHW1221MRC | 21 | 10 ¾ | 1 23/32 | 3/8 | 1 %16 | 9/16 |
| JHW1222MRC | 22 | 11 ½ | 1 27/32 | 3/8 | 1 21/32 | 19/32 |
| JHW1224MRC | 24 | 12 | 1 31/32 | 15/32 | 1 27/32 | 5/8 |
| JHW1225MRC | 25 | 12 ³¹ / ₃₂ | 2 3/32 | 15/32 | 1 1/8 | 5/8 |

JHWMWS-12RC

12 Piece Reversible Ratcheting Combination Wrench Set, Metric, in Plastic Tray

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW1208MRC | 8 | JHW1212MRC | 12 | JHW1216MRC | 16 |
| JHW1209MRC | 9 | JHW1213MRC | 13 | JHW1217MRC | 17 |
| JHW1210MRC | 10 | JHW1214MRC | 14 | JHW1218MRC | 18 |
| JHW1211MRC | 11 | JHW1215MRC | 15 | JHW1219MRC | 19 |

JHWMWS-4RC

4 Piece Reversible Ratcheting Combination Wrench Set, Metric, in Pouch

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|
| JHW1221MRC | 21 | JHW1224MRC | 24 |
| JHW1222MRC | 22 | JHW1225MRC | 25 |

Features

- High-polished chrome finish cleans easily
- · Ratchet lever is easily accessible for quick direction changes
- Recessed corners in ends provide extra turning power

4 PIECE RATCHETING ADAPTOR SET

| Product Code | Description | | | | |
|-------------------------|--------------------------------|--|--|--|--|
| JHWWS4RWA | 4 Piece Ratcheting Adaptor Set | | | | |
| Contents Include: | | | | | |
| Description | Description | | | | |
| 1/4" Drive male Adaptor | 3/8" Drive Male Adaptor | | | | |
| 1/4" Hex Shank Coupler | 1/2" Drive Male Adaptor | | | | |

- Converts a ratcheting wrench into a ratchet
- To be used with Ratcheting Combination Wrenches
- Allows the use of hex bits, 1/4", 3/8", 1/2" Drive Sockets
- Adaptor locks into the wrench by twisting the top cap
- Push-button socket release



RATCHETING COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|--------------|-------------------------------|--------------------------------|-------------------------------|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1208NRC | 1/4 | 5 ½ | 3/4 | 1/4 | 3/4 | 1/4 |
| JHW1210NRC | 5/ ₁₆ | 5 ½ | 3/4 | 1/4 | 3/4 | 1/4 |
| JHW1212NRC | 3/8 | 6 1/3 | 3/4 | 1/4 | 3/4 | 1/4 |
| JHW1214NRC | 7/16 | 6 1/2 | ï | 1/4 | 3/4 | 1/4 |
| JHW1216NRC | 1/2 | 7 | 1 | 1/4 | 1 | 1/4 |
| JHW1218NRC | ⁹ / ₁₆ | 7 1/2 | 1 1/4 | 1/3 | 1 | 1/4 |
| JHW1220NRC | 5/8 | 8 1/2 | 1 5/16 | 1/3 | 1 1/4 | 3/8 |
| JHW1222NRC | 11/16 | 9 | 1 1/2 | 1/3 | 1 5/16 | 3/8 |
| JHW1224NRC | 3/4 | 10 | 1 1/2 | 5/8 | 1 5/16 | 3/8 |
| JHW1226NRC | ¹³ / ₁₆ | 11 1/4 | 1 3/4 | 5/8 | 1 % | 1/2 |
| JHW1228NRC | 7/8 | 11 1/4 | 1 3/4 | 5/8 | 1 % | 1/2 |
| JHW1230NRC | ¹⁵ / ₁₆ | 13 | 2 | 5/8 | 1 3/4 | 1/2 |
| JHW1232NRC | 1 | 13 | 2 | 5/8 | 1 3/4 | 1/2 |
| JHW1234NRC | 1 1/16 | 14 | 2 1/8 | 1/2 | 2 | 1/2 |
| JHW1236NRC | 1 1/8 | 16 ¾ | 2 1/2 | 1/2 | 2 5/16 | 5/8 |
| JHW1238NRC | 1 1/4 | 16 ³ / ₄ | 2 1/2 | 1/2 | 2 5/16 | 5/8 |

JHWWS-1120NRC 9 Piece Combination Wrench Set, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW1208NRC | 1/4 | JHW1218NRC | 9/16 |
| JHW1210NRC | 5/16 | JHW1220NRC | 5/8 |
| JHW1212NRC | 3/8 | JHW1222NRC | 11/16 |
| JHW1214NRC | 7/16 | JHW1224NRC | 3/4 |
| JHW1216NRC | 1/2 | | |

JHWWS-1121NRC 11 Piece Combination Wrench Set, in Pouch

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|---------------|--------------|---------------|
| JHW1212NRC | 3/8 | JHW1220NRC | 5/8 | JHW1228NRC | 7/8 |
| JHW1214NRC | ⁷ / ₁₆ | JHW1222NRC | 11/16 | JHW1230NRC | 15/16 |
| JHW1216NRC | 1/2 | JHW1224NRC | 3/4 | JHW1232NRC | 1 |
| JHW1218NRC | 9/16 | JHW1226NRC | 13/16 | | |

JHWWS-1122NRC 16 Piece Combination Wrench Set, in Pouch

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------|--------------|---------------|--------------|---------------|
| JHW1208NRC | 1/4 | JHW1220NRC | 5/8 | JHW1232NRC | 1 |
| JHW1210NRC | 5/16 | JHW1222NRC | 11/16 | JHW1234NRC | 1 1/16 |
| JHW1212NRC | 3/8 | JHW1224NRC | 3/4 | JHW1236NRC | 1 1/8 |
| JHW1214NRC | ⁷ /16 | JHW1226NRC | 13/16 | JHW1238NRC | 1 1/4 |
| JHW1216NRC | 1/2 | JHW1228NRC | 7/8 | | |
| JHW1218NRC | ⁹ ⁄16 | JHW1230NRC | 15/16 | | |

- 72-tooth gear requires only 5° of ratcheting arc to engage next gear High polish satin-chrome finish cleans easily & protects against corrosion
- Thin profile is perfect for tight clearances where accessibility is critical
 12-point ratcheting box end allows for superior fastener engagement



























JHMWS1126NRC

RATCHETING COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, Metric

| Product Code | Size (MM) | A Overall Length (Inches) | B Open End Width (Inches) | Open End Thickness (Inches) | D Box End Diameter (Inches) | E Box End Thickness (Inches) |
|--------------|-----------|------------------------------------|------------------------------------|-----------------------------------|--------------------------------------|---------------------------------------|
| JHW1206MNRC | 6 | 5 ³ / ₈ | 3/4 | 1/4 | 1/4 | 1/4 |
| JHW1207MNRC | 7 | 5 ³ / ₈ | 3/4 | 1/4 | 1/4 | 1/4 |
| JHW1208MNRC | 8 | 5 ³ / ₈ | 3/4 | 1/4 | 1/4 | 1/4 |
| JHW1209MNRC | 9 | 5 ⁵ /8 | 3/4 | 1/4 | 1/4 | 1/4 |
| JHW1210MNRC | 10 | 6 1/2 | 7/8 | 1/4 | 7/8 | 1/4 |
| JHW1211MNRC | 11 | 6 ⁵ /8 | ĩ | 1/4 | 7/8 | 3/8 |
| JHW1212MNRC | 12 | 6 ⁷ /8 | 1 | 1/4 | 1 | 3/8 |
| JHW1213MNRC | 13 | 7 1/8 | 1 | 1/4 | 1 | 3/8 |
| JHW1214MNRC | 14 | 7 ⁵ /8 | 1 1/4 | 3/8 | 1 | 3/8 |
| JHW1215MNRC | 15 | 7 ⁷ /8 | 1 1/3 | 3/8 | 1 | 3/8 |
| JHW1216MNRC | 16 | 8 ¹ / ₂ | 1 1/3 | 3/8 | 1 1/4 | 3/8 |
| JHW1217MNRC | 17 | 9 ¹ /8 | 1 ½ | 3/8 | 1 1/4 | 3/8 |
| JHW1218MNRC | 18 | 9 ³ / ₈ | 1 1/2 | 3/8 | 1 1/4 | 1/2 |
| JHW1219MNRC | 19 | 9 ⁷ /8 | 1 % | 3/8 | 1 1/4 | 1/2 |
| JHW1220MNRC | 20 | 11 | 1 1/8 | 3/8 | 1 % | 1/2 |
| JHW1221MNRC | 21 | 11 | 1 1/8 | 3/8 | 1 1/8 | 1/2 |
| JHW1222MNRC | 22 | 11 | 1 1/8 | 3/8 | 1 % | 1/2 |
| JHW1223MNRC | 23 | 11 | 1 1/8 | 3/8 | 1 % | 1/2 |
| JHW1224MNRC | 24 | 12 ³ / ₄ | 2 | 3/8 | 1 1/8 | 1/2 |
| JHW1225MNRC | 25 | 12 ³ / ₄ | 2 | 3/8 | 1 1/8 | 1/2 |
| JHW1226MNRC | 26 | 12 ³ / ₄ | 2 | 3/8 | 1 1/8 | 1/2 |
| JHW1227MNRC | 27 | 14 ¹/s | 2 1/8 | 1/2 | 2 | 1/2 |
| JHW1228MNRC | 28 | 14 ¹ /8 | 2 1/8 | 1/2 | 2 | 1/2 |
| JHW1230MNRC | 30 | 16 ³ / ₄ | 2 ½ | 1/2 | 2 3/8 | 5/8 |
| JHW1232MNRC | 32 | 16 ³ / ₄ | 2 1/2 | 1/2 | 2 ¾ | 5/8 |

JHMWS1123NRC 9 Piece Combination Wrench, in Pouch Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|--------------|--------------|--------------|--------------|--------------|
| JHW1206MNRC | 6 | JHW1209MNRC | 9 | JHW1212MNRC | 12 |
| JHW1207MNRC | 7 | JHW1210MNRC | 10 | JHW1213MNRC | 13 |
| IHW1208MNRC | 2 | IHW1211MNRC | 11 | IHW1214MNRC | 14 |

JHMWS1124NRC 14 Piece Combination Wrench, in Pouch Contents Include:

| | Size | | Size | | Size | | Size |
|--------------|------|--------------|------|--------------|------|--------------|------|
| Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | Product Code | (MM) |
| JHW1206MNRC | 6 | JHW1210MNRC | 10 | JHW1214MNRC | 14 | JHW1218MNRC | 18 |
| JHW1207MNRC | 7 | JHW1211MNRC | 11 | JHW1215MNRC | 15 | JHW1219MNRC | 19 |
| JHW1208MNRC | 8 | JHW1212MNRC | 12 | JHW1216MNRC | 16 | | |
| JHW1209MNRC | 9 | JHW1213MNRC | 13 | JHW1217MNRC | 17 | | |

JHMWS1125NRC 19 Piece Combination Wrench, in Pouch Contents Include:

| | Size | | Size | | Size | | Size |
|--------------|------|--------------|------|--------------|------|--------------|------|
| Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | Product Code | (MM) |
| JHW1206MNRC | 6 | JHW1211MNRC | 11 | JHW1216MNRC | 16 | JHW1221MNRC | 21 |
| JHW1207MNRC | 7 | JHW1212MNRC | 12 | JHW1217MNRC | 17 | JHW1222MNRC | 22 |
| JHW1208MNRC | 8 | JHW1213MNRC | 13 | JHW1218MNRC | 18 | JHW1223MNRC | 23 |
| JHW1209MNRC | 9 | JHW1214MNRC | 14 | JHW1219MNRC | 19 | JHW1224MNRC | 24 |
| JHW1210MNRC | 10 | JHW1215MNRC | 15 | JHW1220MNRC | 20 | | |

JHMWS1126NRC 25 Piece Combination Wrench, in Pouch Contents Include:

| | Size | | Size | | Size | | Size | | |
|--------------|------|--------------|------|--------------|------|--------------|------|--|--|
| Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | | |
| JHW1206MNRC | 6 | JHW1213MNRC | 13 | JHW1220MNRC | 20 | JHW1227MNRC | 27 | | |
| JHW1207MNRC | 7 | JHW1214MNRC | 14 | JHW1221MNRC | 21 | JHW1228MNRC | 28 | | |
| JHW1208MNRC | 8 | JHW1215MNRC | 15 | JHW1222MNRC | 22 | JHW1230MNRC | 30 | | |
| JHW1209MNRC | 9 | JHW1216MNRC | 16 | JHW1223MNRC | 23 | JHW1232MNRC | 32 | | |
| JHW1210MNRC | 10 | JHW1217MNRC | 17 | JHW1224MNRC | 24 | | | | |
| JHW1211MNRC | 11 | JHW1218MNRC | 18 | JHW1225MNRC | 25 | | | | |
| JHW1212MNRC | 12 | JHW1219MNRC | 19 | JHW1226MNRC | 26 | | | | |

- Features
 72-tooth gear requires only 5° of ratcheting arc to engage next gear
 High polish satin-chrome finish cleans easily & protects against corrosion
 Thin profile is perfect for tight clearances where accessibility is critical
 12-point ratcheting box end allows for superior fastener engagement



STUBBY REVERSIBLE RATCHETING COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|--------------------------|-------------------------|--|--------------------------------|--|--|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1210RCS JHW1212RCS | ⁵ /16 3/8 | 3 ½ 3 ²⁹ / ₃₂ | ²³ / ₃₂ | ⁵ / ₃₂ ³ / ₁₆ | ²³ / ₃₂ ⁷ / ₈ | 9/32 11/32 |
| JHW1214RCS | 7/16 | 4 | 31/32 | 7/32 | 7/8 | 11/32 |
| JHW1216RCS | 1/2 | 4 1/2 | 1 1/16 | 1/4 | 1 | 13/32 |
| JHW1218RCS | 9/16 | 4 11/16 | 1 ³ / ₁₆ | 1/4 | 1 3/32 | 13/32 |
| JHW1220RCS | 5/8 | 5 | 1 11/32 | 9/32 | 1 7/32 | 15/32 |
| JHW1222RCS | 11/16 | 5 1/4 | 1 ½ | 9/32 | 1 5/16 | 1/2 |
| JHW1224RCS | 3/4 | 5 ½ | 1 19/32 | 11/32 | 1 ¹⁵ / ₃₂ | 17/32 |

JHWWS1168RCS 8 Piece Reversible Stubby Ratcheting Combination Wrench Set, SAE, in Plastic Tray

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW1210RCS | 5/16 | JHW1216RCS | | JHW1222RCS | 11/16 |
| JHW1212RCS | 3/8 | JHW1218RCS | | JHW1224RCS | 3/4 |
| JHW1214RCS | 7/16 | JHW1220RCS | 5/8 | | |

Features

- · Fine tooth design with dual-pawl mechanism for extra strength
- High-polished chrome finish cleans easily

COMBINATION WRENCHES

- · Ratchet lever is easily accessible for quick direction changes
- · Recessed corners in ends provide extra turning power





High Polish Chrome Finish, 12 Point, Metric

STUBBY REVERSIBLE RATCHETING

| | | Α | В | С | D | Ε |
|--------------|--------------|---------------------------------|-------------------------------|-----------------------------------|---------------------------------|--|
| Product Code | Size (MM) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1208MRCS | 8 | 3 1/2 | 23/32 | 5/32 | 23/32 | 9/32 |
| JHW1209MRCS | 9 | 3 3/4 | 13/16 | 5/32 | 3/ ₄ | ⁷³² ⁵ / ₁₆ |
| JHW1210MRCS | 10 | 3 ²⁷ / ₃₂ | 7/8 | 3/16 | 7/8 | 11/32 |
| JHW1211MRCS | 11 | 4 1/8 | 31/32 | 7/32 | 29/32 | 11/32 |
| JHW1212MRCS | 12 | 4 1/4 | 1 | 7/32 | ¹⁵ /16 | 3/8 |
| JHW1213MRCS | 13 | 4 1/2 | 1 | 1/4 | 1 | 13/32 |
| JHW1214MRCS | 14 | 4 11/16 | 1 5/32 | 1/4 | 1 3/32 | 13/32 |
| JHW1215MRCS | 15 | 4 29/32 | 1 1/4 | 9/32 | 1 5/32 | 7/16 |
| JHW1216MRCS | 16 | 5 | 1 3/8 | 9/32 | 1 1/4 | 15/32 |
| JHW1217MRCS | 17 | 5 1/32 | 1 1/16 | 9/32 | 1 %2 | 1/2 |
| JHW1218MRCS | 18 | 5 1/4 | 1 1/2 | 5/16 | 1 3/8 | 1/2 |
| JHW1219MRCS | 19 | 5 ½ | 1 %16 | 11/32 | 1 ¹⁵ / ₃₂ | 17/32 |

JHWMWS-12RCS 12 Piece Reversible Stubby Ratcheting Combination Wrench Set, Metric, in Plastic Tray

Contents Include:


| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW1208MRCS | 8 | JHW1212MRCS | 12 | JHW1216MRCS | 16 |
| JHW1209MRCS | 9 | JHW1213MRCS | 13 | JHW1217MRCS | 17 |
| JHW1210MRCS | 10 | JHW1214MRCS | 14 | JHW1218MRCS | 18 |
| JHW1211MRCS | 11 | JHW1215MRCS | 15 | JHW1219MRCS | 19 |

- · Fine tooth design with dual-pawl mechanism for extra strength
- · High-polished chrome finish cleans easily
- Ratchet lever is easily accessible for quick direction changes
- Recessed corners in ends provide extra turning power





JHWWS1168RCS



















FLEX-HEAD REVERSIBLE RATCHETING COMBINATION WRENCHES





High Polish Chrome Finish, 12 Point, SAE

| | | Α | В | С | D | Ε |
|--------------|------------------|-------------------------------|-------------------------------|-----------------------------------|---|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1210RCF | 5/16 | 5 ½ | 23/32 | 5/32 | 23/32 | 1/4 |
| JHW1212RCF | 3/8 | 6 5/16 | 29/32 | 7/32 | 7/8 | 5/16 |
| JHW1214RCF | 7/16 | 6 11/16 | 31/32 | 7/32 | 29/32 | 11/32 |
| JHW1216RCF | 1/2 | 7 1/4 | 1 1/32 | 1/4 | 1 | 13/32 |
| JHW1218RCF | 9/16 | 7 19/32 | 1 3/16 | 1/4 | 1 3/32 | 13/32 |
| JHW1220RCF | 5/8 | 8 13/32 | 1 3/8 | 9/32 | 1 1/4 | 7/16 |
| JHW1222RCF | 11/16 | 9 | 1 15/32 | 9/32 | 1 | 1/2 |
| JHW1224RCF | 3/4 | 10 | 1 %16 | 11/32 | 1 15/32 | 1/2 |

JHWWS1168RCF 8 Piece Reversible Flex-Head Ratcheting Combination Wrench Set, SAE, in Plastic Tray

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW1210RCF | 5/16 | JHW1216RCF | 1/2 | JHW1222RCF | 11/16 |
| JHW1212RCF | 3/8 | JHW1218RCF | 9/16 | JHW1224RCF | 3/4 |
| JHW1214RCF | 7/16 | JHW1220RCF | 5/8 | | |

Features

- Flex-Head pivots 90° in either direction for access in tight areas
- Fine tooth design with dual-pawl mechanism for extra strength
- High-polished chrome finish cleans easily
- Ratchet lever is easily accessible for quick direction changes
- Recessed corners in ends provide extra turning power

FLEX-HEAD REVERSIBLE RATCHETING COMBINATION WRENCHES







| | | Α | В | С | D | E |
|--------------|--------------|--|---------------------------------|-----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (MM) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW1208MRCF | 8 | 5 %16 | 23/32 | 5/32 | 23/32 | 9/32 |
| JHW1209MRCF | 9 | 6 | ¹³ / ₁₆ | 5/32 | 25/32 | ⁵ /16 |
| JHW1210MRCF | 10 | 6 ⁵ /16 | 29/32 | 7/32 | 27/32 | ⁵ /16 |
| JHW1211MRCF | 11 | 6¾ | 31/32 | 7/32 | 29/32 | 11/32 |
| JHW1212MRCF | 12 | 7 | 1 1/32 | 7/32 | 31/32 | 3/8 |
| JHW1213MRCF | 13 | 7 ¹¹ / ₁₆ | 1 1/16 | 1/4 | 1 | 13/32 |
| JHW1214MRCF | 14 | 7 19/32 | 1 3/16 | 1/4 | 1 3/32 | 13/32 |
| JHW1215MRCF | 15 | 8 | 1 1/4 | 9/32 | 1 5/32 | 7/16 |
| JHW1216MRCF | 16 | 8 5/16 | 1 ¾ | 9/32 | 1 7/32 | 7/16 |
| JHW1217MRCF | 17 | 9 | 1 ¹⁵ / ₃₂ | 9/32 | 1 %32 | 1/2 |
| JHW1218MRCF | 18 | 9 1/2 | 1 %16 | 5/16 | 1 ¾ | 1/2 |
| JHW1219MRCF | 19 | 10 | 1 %16 | 11/32 | 1 15/32 | 17/32 |

JHWMWS-12RCF 12 Piece Reversible Flex-Head Ratcheting Combination Wrench Set, Metric, in Plastic Tray

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | |
|--------------|-----------|--------------|-----------|--------------|-----------|--|
| JHW1208MRCF | 8 | JHW1212MRCF | 12 | JHW1216MRCF | 16 | |
| JHW1209MRCF | 9 | JHW1213MRCF | 13 | JHW1217MRCF | 17 | |
| JHW1210MRCF | 10 | JHW1214MRCF | 14 | JHW1218MRCF | 18 | |
| JHW1211MRCF | 11 | JHW1215MRCF | 15 | JHW1219MRCF | 19 | |

- Flex-Head pivots 90° in either direction for access in tight areas
- Fine tooth design with dual-pawl mechanism for extra strength
- High-polished chrome finish cleans easily
- Ratchet lever is easily accessible for quick direction changes
- · Recessed corners in ends provide extra turning power





DOUBLE HEAD OPEN END WRENCHES



Chrome Satin Finish, SAE

| | | Α | В | С | D | E |
|--------------|---|--|--|-----------------------------------|--|-----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Open End Width (Inches) | Open End Thickness (Inches) |
| | | | | | | |
| JHW1020 | ¹∕4 X ⁵∕16 | 4 1/16 | 9/16 | 5/32 | 11/16 | 3/16 |
| JHW1721 | 5∕16 x 3⁄8 | 4 11/16 | 11/16 | 5/32 | ¹³ / ₁₆ | 3/16 |
| JHW1723 | 3⁄8 x ⁷ ∕₁6 | 5 ½6 | 13/16 | ³ / ₁₆ | ¹⁵ / ₁₆ | 7/32 |
| JHW1725 | ⁷ /₁6 x ¹ /₂ | 5 ³¹ / ₃₂ | 3/32 | 7/32 | 1 1/16 | 1/4 |
| JHW1725B | ¹⁄2 x ⁹ ∕16 | 6 ¹⁹ / ₃₂ | 1 1/16 | 1/4 | 1 ³ / ₁₆ | 9/32 |
| JHW1727 | % x 5/8 | 7 %2 | 1 3/16 | 9/32 | 1 5/16 | 9/32 |
| JHW1027B | 5/8 x 11/16 | 7 31/32 | 1 5/16 | 5/16 | 1 7/16 | 5/16 |
| JHW1729 | 5/8 x 3/4 | 8 1/32 | 1 5/16 | 9/32 | 1 %16 | 11/32 |
| JHW1729B | 11/16 x 3/4 | 8 21/32 | 1 ⁷ / ₁₆ | 5/16 | 1 %16 | 11/32 |
| JHW1731 | 3/4 x ¹³ /16 | 9 11/32 | 1 %16 | 11/32 | 1 ¹¹ / ₁₆ | 3/8 |
| JHW1731A | 3⁄4 x ⁷ ∕8 | 9 11/16 | 1 ¹⁹ /32 | 11/32 | 1 27/32 | 3/8 |
| JHW1731B | ¹³ / ₁₆ x ⁷ / ₈ | 10 1/32 | 1 ¹¹ /16 | 3/8 | 1 ¹³ / ₁₆ | 3/8 |
| JHW1033A | 7⁄8 x 15∕16 | 10 ¾ | 1 ¹³ / ₁₆ | 3/8 | 1 ¹⁵ / ₁₆ | 13/32 |
| JHW1033C | ¹⁵ / ₁₆ x 1 | 11 1/2 | 1 ¹⁵ / ₁₆ | 13/32 | 2 1/32 | 13/32 |
| JHW1037 | 1 1/16 x 1 1/4 | 12 ¹⁵ / ₁₆ | 2 3/16 | 7/16 | 2 ¹⁷ / ₃₂ | 1/2 |
| JHW1037B | 1 1/8 x 1 3/16 | 13 ²³ / ₃₂ | 2 ⁵ ⁄16 | 15/32 | 2 7/16 | 15/32 |
| JHW1038 | 1 1/4 x 1 5/16 | 15 1 32 | 2 %16 | 1/2 | 2 ¹¹ / ₁₆ | 17/32 |
| JHW1038A | 1 % x 1 1/16 | 16 ⁷ / ₈ | 2 ¹³ / ₁₆ | 17/32 | 2 ¹⁵ / ₁₆ | 17/32 |
| JHW1039B | 1 ½ x 1 5/8 | 18 ²⁹ / ₃₂ | 3 1/16 | 9/16 | 3 1/16 | 19/32 |

Fed. Spec. ANSI B107.6

JHWWS-1705A

5 Piece Double Head Open End Wrench Set, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------|--------------|--------------------|--------------|---------------|
| JHW1723 | 3/8 x 7/16 | JHW1727 | % x 5/8 | JHW1731B | 13/16 X 7/8 |
| JHW1725B | 1/2 x 9/16 | JHW1729B | 11/16 x 3/4 | | |

JHWWS-1710A

10 Piece Double Head Open End Wrench Set, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---|--------------|---|--------------|----------------|
| JHW1020 | ¹⁄4 x ⁵∕₁6 | JHW1727 | %16 x 5 √8 | JHW1037 | 1 1/16 x 1 1/4 |
| JHW1723 | 3/8 x ⁷ / ₁₆ | JHW1729B | 11/ ₁₆ x 3/ ₄ | JHW1037B | 1 1/8 x 1 3/16 |
| JHW1725 | ⁷ / ₁₆ x ¹ / ₂ | JHW1731B | ¹³ / ₁₆ x ⁷ / ₈ | | |
| JHW1725B | ¹⁄2 x ⁴⁄16 | JHW1033C | ¹⁵ / ₁₆ x 1 | | |

- Two openings in each wrench with 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- Continuous arc design minimizes spreading and is stronger than "V" design
- Satin chrome finish provides good grip and cleans easily







JHWWS-1710A





















DOUBLE HEAD OPEN END WRENCHES



Chrome Satin Finish, Metric

| | | Α | В | С | D | E |
|--------------|-----------|----------------------------------|---------------------------------|-----------------------------------|-------------------------------|-----------------------------------|
| Product Code | Size (MM) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Open End Width (Inches) | Open End Thickness (Inches) |
| JHWEWM-0607 | 6 x 7 | 3 ¹³ / ₁₆ | 17/32 | 5/32 | 19/32 | 5/32 |
| JHWEWM-0708 | 7 x 8 | 4 3/ ₁₆ | 19/32 | 5/32 | 11/16 | 3/16 |
| JHWEWM-0910 | 9 x 10 | 5 | 3/4 | 3/16 | 27/32 | 7/32 |
| JHWEWM-1011 | 10 x 11 | 5 ¾ | 27/32 | 7/32 | ¹⁵ /16 | 7/32 |
| JHWEWM-1213 | 12 x 13 | 6 ³ /16 | 1 | 1/4 | 1 3/32 | 1/4 |
| JHWEWM-1415 | 14 x 15 | 7 1/32 | 1 1/32 | 9/32 | 1 1/4 | 9/32 |
| JHWEWM-1618 | 16 x 18 | 8 3/32 | 1 5/16 | 5/16 | 1 15/32 | 11/32 |
| JHWEWM-1719 | 17 x 19 | 8 17/32 | 1 13/32 | 5/16 | 1 %16 | 11/32 |
| JHWEWM-2124 | 21 x 24 | 10 ¹⁷ / ₃₂ | 1 23/32 | 3/8 | 1 15/16 | 13/32 |
| JHWEWM-2224 | 22 x 24 | 10 ¾ | 1 ¹³ / ₁₆ | 3/8 | 1 15/16 | 13/32 |
| JHWEWM-2427 | 24 x 27 | 11 ²⁹ / ₃₂ | 1 ¹⁵ / ₁₆ | 13/32 | 2 3/16 | 7/16 |
| JHWEWM-2730 | 27 x 30 | 13 ⁵ ⁄16 | 2 3/16 | 7/16 | 2 7/16 | 15/32 |
| JHWEWM3032 | 30 x 32 | 14 1/2 | 2 ½16 | 15/32 | 2 %16 | 1/2 |

Fed. Spec. ANSI B107.9M

JHWMWS-26 6 Piece Double Head Open End Wrench Set, Metric, in Pouch **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|---------------|---------------|---------------|---------------|---------------|---------------|
| 1 TOUUCE OOUE | OIZE (IVIIVI) | i iouuci ooue | OIZE (IVIIVI) | i ioduct oode | OIZE (IVIIVI) |
| JHWEWM-0708 | 7 x 8 | JHWEWM-1213 | 12 x 13 | JHWEWM-1618 | 16 x 18 |
| .IHWFWM-1011 | 10 x 11 | JHWFWM-1415 | 14 x 15 | .IHWFWM-1719 | 17 x 19 |

JHWMWS-31 10 Piece Double Head Open End Wrench Set, Metric, in Pouch **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | |
|--------------|-----------|--------------|-----------|--------------|-----------|--|
| JHWEWM-0607 | 6 x 7 | JHWEWM-1415 | 14 x 15 | JHWEWM-2427 | 24 x 27 | |
| JHWEWM-0708 | 7 x 8 | JHWEWM-1618 | 16 x 18 | JHWEWM-2730 | 27 x 30 | |
| JHWEWM-1011 | 10 x 11 | JHWEWM-1719 | 17 x 19 | | | |
| JHWEWM-1213 | 12 x 13 | JHWEWM-2124 | 21 x 24 | | | |

Features

- Two openings in each wrench with 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- Continuous arc design minimizes spreading and is stronger than "V" design
- · Satin chrome finish provides good grip and cleans easily



SHORT DOUBLE HEAD OPEN END WRENCHES



Chrome Satin Finish, SAE

| | | Α | В | С | D | E |
|--------------|--------------------------------|--|-------------------|-----------------------|-------------------------------|-----------------------|
| | | Overall Length | Open End Width | Open End Thickness | Open End Width | Open End Thickness |
| Product Code | Size (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWOES-0607 | 3∕16 x ⁷ ∕32 | 2 ²⁷ / ₃₂ | 13/32 | 1/8 | 15/32 | 1/8 |
| JHWOES-0809 | ¹⁄4 x ⁹ ∕32 | 3 1/32 | 1/2 | 1/8 | 9/16 | 1/8 |
| JHWOES-1011 | 5/16 X 11/32 | 3 ⁷ ⁄16 | 5/8 | 5/32 | 11/16 | 1/8 |
| JHWOES-1214 | 3⁄8 x ⁷ ∕16 | 3 ¾ | 3/4 | 5/32 | ²⁹ / ₃₂ | 1/8 |
| JHWOES-1618 | ¹⁄2 x ⁹ ∕16 | 4 11/32 | 1 | 3/16 | 1 1/8 | 3/16 |

Fed. Spec. ANSI B107.6

JHWWS-1605 5 Piece Short Double Head Open End Wrench Set, SAE, in Pouch

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|----------------------------|---|----------------------------|---|--------------|----------------|
| JHWOES-0607 JHWOES-0809 | ³ / ₁₆ x ⁷ / ₃₂ ¹ / ₄ x ⁹ / ₃₂ | JHWOES-1011 JHWOES-1214 | ⁵ /16 X ¹¹ //32 ³ /8 X ⁷ /16 | JHWOES-1618 | ½ x %16 |

- Two openings in each wrench with 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- . Continuous arc design minimizes spreading and is stronger than "V" design
- · Satin chrome finish provides good grip and cleans easily





MINIATURE $15^{\circ} \times 80^{\circ}$ DOUBLE HEAD OPEN END WRENCHES

Satin Chrome Finish, SAE

| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Open End Width (Inches) | Open End Thickness (Inches) |
|--------------|------------------|----------------------------|----------------------------|-----------------------------------|----------------------------|-----------------------------------|
| JHW1113A | 13/64 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1114A | 7/32 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1115A | 15/64 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1116A | 1/4 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1118A | 9/32 | 3 1/2 | 5/8 | 9/64 | 5/8 | 9/64 |
| JHW1132A | 1/2 | 4 7/16 | 7/16 | 11/64 | 7/16 | 11/64 |
| JHW1136A | 9/16 | 5 ¾ | 1 5/32 | 13/64 | 1 5/32 | 13/64 |
| JHW1140A | 5/8 | 5 ¾ | 1 5/32 | 13/64 | 1 5/32 | 13/64 |

Features

- $\bullet~$ Wrench heads are offset at 15° and 80° to the handle
- Both ends are the same size to permit the wrench to be used in four different positions
- 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- Continuous arc design minimizes spreading and is stronger than "V" design
- Thin head is perfect for tight clearances
- · Satin finish provides corrosion resistance and slip resistant grip
- Excellent for fast turning of fasteners in limited clearance areas
- Each wrench has the same size opening at both ends

JHWWS-1108SP 8 Piece Mini Double Open End Wrench & Plier Set, SAE, in Pouch Contents Include:

| | Size | | Size | I | |
|--------------|----------|--------------|----------|--------------|------------------------------|
| Product Code | (Inches) | Product Code | (Inches) | Product Code | Size (Inches) |
| JHW1114A | 7/32 | JHW1118A | 9/32 | JHW1124A | 3/8 |
| JHW1115A | 15/64 | JHW1120A | 5/16 | JHW1128A | ⁷ / ₁₆ |
| JHW1116A | 1/4 | JHW1122A | 11/32 | | |















Satin Chrome Finish, Metric

| Product Code | Size (MM) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Open End Width (Inches) | Open End Thickness (Inches) |
|--------------|--------------|-------------------------------|----------------------------|-----------------------------------|----------------------------|-----------------------------------|
| JHW1104MM | 4 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1105MM | 5 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1105.5MM | 5.5 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1106MM | 6 | 3 | 1/2 | 7/64 | 1/2 | 7/64 |
| JHW1107MM | 7 | 3 ½ | 5/8 | 9/64 | 5/8 | 9/64 |
| JHW1108MM | 8 | 3 ½ | 5/8 | 9/64 | 5/8 | 9/64 |
| JHW1109MM | 9 | 3 3/4 | 3/4 | 9/64 | 3/4 | 9/64 |
| JHW1110MM | 10 | 4 7/16 | 7/16 | 11/64 | 7/16 | 11/64 |
| JHW1111MM | 11 | 4 7/16 | 7/16 | 11/64 | 7/16 | 11/64 |
| JHW1112MM | 12 | 4 7/16 | 7/16 | 11/64 | 7/16 | 11/64 |
| JHW1113MM | 13 | 4 7/16 | 7/16 | 11/64 | 7/16 | 11/64 |
| JHW1114MM | 14 | 5 ¾ | 1 5/32 | 13/64 | 1 5/32 | 13/64 |
| JHW1115MM | 15 | 5 ³ / ₄ | 1 5/32 | 13/64 | 1 5/32 | 13/64 |
| JHW1116MM | 16 | 5 ³ / ₄ | 1 5/32 | 13/64 | 1 5/32 | 13/64 |



- Wrench heads are offset at 15° and 80° to the handle
- Both ends are the same size to permit the wrench to be used in four different positions
- 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- · Continuous arc design minimizes spreading and is stronger than "V" design
- Thin head is perfect for tight clearances
- Satin finish provides corrosion resistance and slip resistant grip

JHWMWS-1110 10 Piece Mini Double Open End Wrench & Plier Set, Metric, in Pouch Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|----------------|
| JHW1104MM | 4 | JHW1107MM | 7 | JHW1111MM | 11 |
| JHW1105MM | 5 | JHW1108MM | 8 | JHWPL-1519C | 5" SUPERJOINT |
| JHW1105.5MM | 5.5 | JHW1109MM | 9 | | Utility Pliers |
| JHW1106MM | 6 | JHW1110MM | 10 | | |

JHWMWS-1115 15 Piece Mini Double Open End Wrench & Plier Set, Metric, in Pouch Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|---------------------------------|
| JHW1104MM | 4 | JHW1108MM | 8 | JHW1113MM | 13 |
| JHW1105MM | 5 | JHW1109MM | 9 | JHW1114MM | 14 |
| JHW1105.5MM | 5.5 | JHW1110MM | 10 | JHW1115MM | 15 |
| JHW1106MM | 6 | JHW1111MM | 11 | JHW1116MM | 16 |
| JHW1107MM | 7 | JHW1112MM | 12 | JHWPL-1519C | 5" SUPERJOINT Utility Pliers |





JHWMWS-1110



JHWMWS-1115



15°-60° DOUBLE OPEN END ANGLE-HEAD WRENCHES

Chrome Satin Finish, SAE

| | | Α | В | С |
|--------------|---------------------------------|--|------------------------------|----------------|
| | | Head | Head | |
| | Size | Diameter | Thickness | Overall Length |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW3712 | 3/8 | 25/32 | 7/32 | 4 3/4 |
| JHW3714 | 7/16 | 7/8 | 7/32 | 5 |
| JHW3716 | 1/2 | 1 | 7/32 | 5 ½ |
| JHW3724 | 3/4 | 1 7/16 | 9/32 | 7 1/4 |
| JHW3728 | 7/8 | 1 21/32 | 9/32 | 8 1/4 |
| JHW3730 | ¹⁵ / ₁₆ | 1 ²⁵ / ₃₂ | ⁵ ⁄ ₁₆ | 9 1/16 |
| JHW3732 | 1 | 1 ¹⁵ / ₁₆ | 5/16 | 9 3/4 |
| JHW3734 | 1 1/16 | 2 ½16 | 5/16 | 10 |
| JHW3736 | 1 1/8 | 2 1/4 | 5/16 | 11 |
| JHW3740 | 1 1/4 | 2 ¾ | 11/32 | 11 ½ |
| JHW3744 | 1 3/8 | 2 11/16 | 13/32 | 12 ½ |
| JHW3748 | 1 1/2 | 2 11/16 | 13/32 | 12 ½ |
| JHW3754 | 1 11/16 | 3 11/32 | 1/2 | 16 1/2 |
| JHW3756 | 1 3/4 | 3 ½16 | 17/32 | 17 |
| JHW3758 | 1 ¹³ / ₁₆ | 3 %6 | 17/32 | 17 ¾ |
| JHW3760 | 1 7/8 | 3 11/16 | ⁹ ⁄16 | 18 ½ |
| JHW3764 | 2 | 3 ¹⁵ / ₁₆ | 19/32 | 19 1/4 |

Fed. Spec. ANSI B107.39 Type 2 Class 3



JHW3782 10 Piece Double Open End Wrench Set, SAE, in Pouch Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|---------------|
| JHW3712 | 3/8 | | |
| JHW3714 | ⁷ / ₁₆ | JHW3724 | 3/4 |
| JHW3716 | 1/2 | | |
| JHW3718 | ⁹ / ₁₆ | JHW3728 | 7/8 |
| JHW3720 | 5/8 | JHW3732 | 1 |

- $\bullet~$ Wrench heads are offset at 15° and 60° to the handle
- Both ends are the same size to permit the wrench to be used in four different positions
- 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- Continuous arc design minimizes spreading and is stronger than "V" design
- Thin head is perfect for tight clearances
- · Satin chrome finish provides good grip and cleans easily

















DOUBLE HEAD FLARE NUT WRENCHES





Chrome Satin Finish, 6 Point, SAE

| | | Α | В | С | D | E |
|----------------------|---|--|---|---------------------------------------|-------------------------------------|--|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Dia (Inches) | Open End Thickness (Inches) | Open End Dia (Inches) | Open End Thickness (Inches) |
| JHW10600 | 3/8 x 7/16 | 6 | ²⁷ / ₃₂ | 11/32 | 15/16 | 11/32 |
| JHW10602 JHW10604 | 1/2 X 9/16 5/8 X 11/16 | 6 ³ / ₄ 7 ³ / ₄ | 15/ ₁₆ 1 3/ ₃₂ | 13/ ₃₂ 7/ ₁₆ | 1 1 ³ / ₁₆ | 13/ ₃₂ 15/ ₃₂ |
| JHW10606 | 3/4 x 7/8 | 8 ⁵ / ₈ | 1 9/32 | 1/2 | 1 13/32 | 17/32 |



30° SERVICE WRENCHES



Satin Chrome Finish, SAE

| Product Code | Size (Inches) | Overall Length (Inches) | Head Diameter (Inches) | Head Thickness (Inches) |
|--------------------------------|---------------|-------------------------------|------------------------|----------------------------|
| JHW3526 | 13/16 | 6 ¹ / ₄ | 1 ¹¹ /16 | 1/4 |
| JHW3542 | 1 % | 7 % | 2 ½ | 9/32 |
| JHW3546 | 1 7/16 | 7 | 2 ½ | 732 9/32 |
| 011110370 | 1 /10 | 1 /6 | L //2 | 732 |
| JHW3554 | 1 11/16 | 7 % | 2 % | 9/32 |
| JHW3562 | 1 15/16 | 8 ½ | 3 1/8 | 5/16 |
| JHW3576 Fed. Spec: GGG-W-63 | 2 ¾ | 9 ½ | 3 ½ | 5/16 |



| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------------|--|--------------|---------------|--------------|---------------|
| JHW3526 JHW3528 | ¹³ / ₁₆ ⁷ / ₈ | JHW3532 | 1 | JHW3540 | 1 1/4 |



30° SERVICE WRENCHES



| Product Code | Size (MM) | Overall Length (Inches) | Head Diameter (Inches) | Head Thickness (Inches) |
|--------------|-----------|----------------------------|---------------------------|----------------------------|
| JHW3519M | 19 | 6 1/4 | 1 11/16 | 1/4 |
| JHW3521M | 21 | 6 1/4 | 1 11/16 | 1/4 |
| JHW3522M | 22 | 6 1/4 | 1 11/16 | 1/4 |
| JHW3524M | 24 | 6 7/8 | 1 1/8 | 1/4 |
| JHW3532M | 32 | 7 | 2 1/16 | 1/4 |
| JHW3537M | 37 | 7 % | 2 1/2 | 9/32 |
| JHW3538M | 38 | 7 5/8 | 2 1/2 | 9/32 |
| JHW3540M | 40 | 7 5/8 | 2 5/8 | 9/32 |
| JHW3542M | 42 | 7 5/8 | 2 5/8 | 9/32 |
| JHW3544M | 44 | 7 % | 2 5/8 | 9/32 |
| JHW3552M | 52 | 8 1/2 | 3 1/2 | 5/16 |
| JHW3560M | 60 | 9 1/2 | 3 1/2 | 5/16 |
| | | | | |





















D



DOUBLE HEAD 10° OFFSET BOX END WRENCHES





Chrome Satin Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|--------------|--|---|---------------------------------|-----------|---------------------------------|-----------|
| | | Overall | Box End | Box End | Box End | Box End |
| | | Length | Diameter | Thickness | Diameter | Thickness |
| Product Code | Size (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW7723 | 3/8 x 7/16 | 7 % | 19/32 | 5/16 | 21/32 | 11/32 |
| JHW7725B | ¹⁄2 x ⁹ ∕16 | 8 ¹¹ / ₁₆ | 3/4 | 3/8 | ²⁷ / ₃₂ | 3/8 |
| JHW7727A | 5/8 x 11/16 | 10 ⁵ / ₃₂ | 29/32 | 7/16 | 1 | 15/32 |
| JHW7029B | ¹¹ / ₁₆ x ³ / ₄ | 10 ¹⁵ / ₁₆ | 1 | 15/32 | 1 ³ / ₃₂ | 1/2 |
| JHW7731A | 3/4 x 7/8 | 12 ¹ / ₃₂ | 1 ³ / ₃₂ | 1/2 | 1 1/4 | 9/16 |
| JHW7731B | ¹³ / ₁₆ x ⁷ / ₈ | 12 ¹³ / ₃₂ | 1 ³ / ₁₆ | 17/32 | 1 1/4 | 9/16 |
| JHW7033C | 15/16 x 1 | 14 1/8 | 1 11/32 | 19/32 | 1 ⁷ / ₁₆ | 5/8 |
| JHW7038 | 1 1/8 x 1 3/16 | 16 ¾32 | 1 19/32 | 11/16 | 1 11/16 | 11/16 |
| JHW7039B | 1 1/4 x 1 5/16 | 17 % | 1 ²⁵ / ₃₂ | 23/32 | 1 ²⁷ / ₃₂ | 3/4 |

Fed. Spec. ANSI B107.6

JHWWS-7707 7 Piece Double Head 10 $^\circ$ Offset Box End Wrench Set, SAE, in Pouch **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|--------------------------------|--------------|---|--------------|---------------|
| JHW7723 | 3/8 x 7/16 | JHW7029B | 11/16 x 3/4 | JHW7033C | 15/16 x 1 |
| JHW7725B | ¹⁄2 x ⁹ ∕16 | JHW7731A | 3⁄4 x ⁷ ∕8 | | |
| JHW7727A | 5⁄8 x ¹¹ ∕₁6 | JHW7731B | ¹³ / ₁₆ x ⁷ / ₈ | | |

- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- . No contact is made at the corners
- Instead, wrenching forces are placed on the flat surfaces behind the points
- 10° offset box end allows clearance in tight areas
- Sizes are clearly marked on handle ends





JHWWS-7707



DOUBLE HEAD 10° OFFSET BOX END WRENCHES





Chrome Satin Finish, 12 Point, Metric

| | | Α | В | С | D | E |
|--------------|-----------|----------------------------------|--|-----------|---------------------------------|-----------|
| | | Overall | Box End | Box End | Box End | Box End |
| | | Length | Diameter | Thickness | Diameter | Thickness |
| Product Code | Size (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWBWM-0810 | 8 x 10 | 7 5/16 | 1/2 | 9/32 | 19/32 | 5/16 |
| JHWBWM-1011 | 10 x 11 | 7 ³¹ / ₃₂ | 19/32 | 5/16 | 21/32 | 11/32 |
| JHWBWM-1012 | 10 x 12 | 8 3/16 | 19/32 | 5/16 | 23/32 | 11/32 |
| JHWBWM-1113 | 11 x 13 | 8 % | 21/32 | 11/32 | 25/32 | 3/8 |
| JHWBWM-1213 | 12 x 13 | 8 ²⁷ / ₃₂ | 25/32 | 11/32 | 25/32 | 3/8 |
| JHWBWM-1214 | 12 x 14 | 9 1/16 | 23/32 | 11/32 | ¹³ / ₁₆ | 13/32 |
| JHWBWM-1315 | 13 x 15 | 9 1/2 | 25/32 | 3/8 | 7/8 | 13/32 |
| JHWBWM-1415 | 14 x 15 | 9 3/4 | 13/16 | 13/32 | 7/8 | 13/32 |
| JHWBWM-1417 | 14 x 17 | 9 ²⁵ / ₃₂ | 13/16 | 13/32 | 31/32 | 15/32 |
| JHWBWM-1618 | 16 x 18 | 10 ²⁷ / ₃₂ | ¹⁵ / ₁₆ | 7/16 | 1 1/32 | 15/32 |
| JHWBWM-1719 | 17 x 19 | 11 %32 | 31/32 | 15/32 | 1 3/32 | 1/2 |
| JHWBWM-1821 | 18 x 21 | 11 ¹⁵ / ₁₆ | 1 3/32 | 15/32 | 1 ³ /16 | 17/32 |
| JHWBWM-1922 | 19 x 22 | 12 % | 1 3/32 | 1/2 | 1 1/4 | 9/16 |
| JHWBWM-2124 | 21 x 24 | 13 1/4 | 1 3/16 | 17/32 | 1 11/32 | 19/32 |
| JHWBWM-2224 | 22 x 24 | 13 ¹⁵ / ₃₂ | 1 1/4 | 9/16 | 1 11/32 | 19/32 |
| JHWBWM-2427 | 24 x 27 | 14 ¹⁹ / ₃₂ | 1 11/32 | 19/32 | 1 ¹⁷ /32 | 21/32 |
| JHWBWM-2730 | 27 x 30 | 15 ²⁹ / ₃₂ | 1 ¹⁷ /32 | 21/32 | 1 11/16 | 11/16 |
| JHWBWM-3032 | 30 x 32 | 17 1/32 | 1 ¹¹ / ₁₆ | 11/16 | 1 ²⁵ / ₃₂ | 23/32 |



JHWMWS-BWM10 10 Piece Double Head 10° Offset Box End Wrench Set, Metric, in Pouch

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWBWM-0810 | 8 x 10 | JHWBWM-1618 | 16 x 18 | JHWBWM-2730 | 27 x 30 |
| JHWBWM-1113 | 11 x 13 | JHWBWM-1719 | 17 x 19 | JHWBWM-3032 | 30 x 32 |
| JHWBWM-1214 | 12 x 14 | JHWBWM-1922 | 19 x 22 | | |
| JHWBWM-1415 | 14 x 15 | JHWBWM-2124 | 21 x 24 | | |


JHWMWS-BWM12 12 Piece Double Head 10° Offset Box End Wrench Set, Metric, in Pouch

Contents Include:

| ••••••••• | | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
| JHWBMW-1011 | 10 x 11 | JHWBWM-1417 | 14 x17 | JHWBWM-1922 | 19 x 22 |
| JHWBWM-1214 | 12 x 14 | JHWBWM-1618 | 16 x 18 | JHWBWM-2224 | 22 x 24 |
| JHWBWM-1315 | 13 x 15 | JHWBWM-1719 | 17 x 19 | JHWBWM-2730 | 27 x 30 |
| JHWBWM-1415 | 14 x 15 | JHWBWM-1821 | 18 x 21 | JHWBWM-3032 | 30 x 32 |

- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- . No contact is made at the corners
- Instead, wrenching forces are placed on the flat surfaces behind the points
- 10° offset box end allows clearance in tight areas
- · Sizes are clearly marked on handle ends



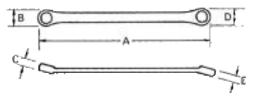





















Chrome Satin Finish, 12 Point, SAE

| | | Α | В | С | D | E |
|--------------|--|----------------------------------|---------------------------------|----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHW8720 | 1/4 x 5/16 | 6 7/16 | 13/32 | 1/4 | 15/32 | 9/32 |
| JHW8723 | 3/8 x 7/16 | 7 % | 9/16 | 5/16 | 21/32 | 5/16 |
| JHW8725 | 7/ ₁₆ x 1/ ₂ | 8 3/16 | 21/32 | 11/32 | 3/4 | 11/32 |
| JHW8725B | ½ x %16 | 8 25/32 | 3/4 | 3/8 | 27/32 | 3/8 |
| JHW8727 | 9∕16 x 5∕8 | 9 % | 27/32 | 13/32 | 29/32 | 13/32 |
| JHW8727A | 5/8 x 11/16 | 9 31/32 | 29/32 | 7/16 | 1 | 7/16 |
| JHW8729 | 5/8 x 3/4 | 10 ½ | 15/16 | 7/16 | 1 3/32 | 7/16 |
| JHW8729A | 11/16 x 13/16 | 10 ²⁷ / ₃₂ | 1 | 15/32 | 1 3/16 | 15/32 |
| JHW8731A | 3/4 x 7/8 | 11 7/16 | 1 3/32 | 17/32 | 1 %32 | 17/32 |
| JHW8033A | 7⁄8 x 15∕16 | 13 | 1 %2 | 9/16 | 1 3/8 | 9/16 |
| JHW8033C | ¹⁵ / ₁₆ x 1 | 13 ³¹ / ₃₂ | 1 3/8 | 19/32 | 1 7/16 | 19/32 |

Fed. Spec. ANSI B107.6

JHWWS-8707

7 Piece Double Head 60° Offset Box End Wrench Set, SAE, in Pouch **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------------------|--------------|------------------------------|--------------|---------------|
| JHW8720 | ¹⁄4 x ⁵∕16 | JHW8729 | 5⁄8 x 3∕4 | JHW8033C | 15/16 x 1 |
| JHW8723 | 3⁄8 x ⁷ ∕₁6 | JHW8729A | 11/16 x 13/16 | | |
| JHW8725B | ½ x %16 | JHW8731A | 3⁄4 x ⁷ ∕8 | | |

Features

- SUPERTORQUE™ box opening design allows application of higher torque without rounding or deforming hex fastener points
- · No contact is made at the corners
- . Instead, wrenching forces are placed on the flat surfaces behind the points
- 60° offset box end allows extra knuckle and bolt clearance in tight areas
- · Sizes are clearly marked on handle ends





SINGLE HEAD RATCHETING BOX WRENCHES







| | | A | | | A |
|--------------|---------------|-------------------------|--------------|---------------------------------|-------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Product Code | Size (Inches) | Overall Length (Inches) |
| JHWRB-42 | 1 5/16 | 15 ½ | JHWRB-54 | 1 11/16 | 19 |
| JHWRB-44 | 1 3/8 | 15 ½ | JHWRB-56 | 1 3/4 | 19 |
| JHWRB-46 | 1 7/16 | 15 ½ | JHWRB-58 | 1 ¹³ / ₁₆ | 19 |
| JHWRB-48 | 1 1/2 | 15 ½ | JHWRB-60 | 1 1/8 | 19 |
| JHWRB-50 | 1 %16 | 15 ½ | JHWRB-64 | 2 | 19 |
| JHWRB-52 | 1 5/8 | 15 ½ | JHWRB-68 | 2 1/8 | 19 |

Features

- . Combines the quick ratcheting action with opening sizes large enough to handle most industrial applications
- Requires less effort than a conventional combination wrench
- All wrenches contain 12-point Torque Grip® wheels
- · Ideal for long "bolt-through" applications
- · Turn wrench over to change direction





JHWWS-8707



SINGLE HEAD RATCHETING BOX WRENCHES





High Polish Chrome Finish, 12 Point, Metric

| | | Α | | | Α |
|--------------|-----------|----------------|--------------|-----------|----------------|
| | | Overall Length | | | Overall Length |
| Product Code | Size (MM) | (Inches) | Product Code | Size (MM) | (Inches) |
| JHWRBM-22 | 22 | 12 | JHWRBM-27 | 27 | 12 |
| JHWRBM-23 | 23 | 12 | JHWRBM-29 | 29 | 12 |
| JHWRBM-24 | 24 | 12 | JHWRBM-30 | 30 | 12 |
| JHWRBM-25 | 25 | 12 | JHWRBM-32 | 32 | 15 ½ |
| JHWRBM-26 | 26 | 12 | JHWRBM-36 | 36 | 15 ½ |

Features

- Combines the quick ratcheting action with opening sizes large enough to handle most industrial applications
- Requires less effort than a conventional combination wrench
- All wrenches contain 12-point Torque Grip® wheels
- Ideal for long "bolt-through" applications
- . Turn wrench over to change direction





DOUBLE HEAD RATCHETING BOX WRENCHES







High Polish Chrome Finish, 6 & 12 Point, SAE

| • | | • | | • | | | |
|--------------|------------------|---|-------------------------------|---------------------------------|----------------------------------|---------------------------------|----------------------------------|
| | | | Α | В | С | D | E |
| Product Code | Number of Points | Size (Inches) | Overall Length (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHWRB-810 | 6 | 1/4 x 5/16 | 4 1/4 | 19/32 | 3/8 | 11/16 | 3/8 |
| JHWRB-1214 | 6 | 3/8 x 7/16 | 5 ½ | 25/32 | 3/8 | 7/8 | 3/8 |
| JHWRB-1618 | 6 | ½ x %16 | 6 ³ / ₄ | 1 | 1/2 | 1 5/32 | 1/2 |
| JHWRB-1820 | 12 | %16 x 5/8 | 8 1/8 | 1 5/16 | 1/2 | 1 7/16 | 1/2 |
| JHWRB-2022 | 12 | 5/8 x 11/16 | 8 1/8 | 1 5/16 | 1/2 | 1 ⁷ /16 | 1/2 |
| JHWRB-2024 | 12 | 5⁄8 x 3∕4 | 8 1/8 | 1 5/16 | 1/2 | 1 7/16 | 1/2 |
| JHWRB-2428 | 12 | 3/4 x 7/8 | 9 1/4 | 1 13/32 | 1/2 | 1 %16 | 1/2 |
| JHWRB-3036 | 12 | ¹⁵ / ₁₆ x 1 ¹ / ₈ | 15 1/8 | 1 ²¹ / ₃₂ | 9/16 | 2 %32 | ⁹ /16 |
| JHWRB-3440 | 12 | 1 ½6 x 1 ¼ | 15 ½ | 1 ²⁹ /32 | 9/16 | 2 %32 | 9/16 |



JHWWS-12


5 Piece Ratcheting Box Wrench Set, 6 & 12 Point, SAE, in Pouch Contents Include:

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|--------------------|--------------|---------------|
| JHWRB-810 | ¹⁄4 x ⁵∕16 | JHWRB-1618 | ½ x %16 | JHWRB-2428 | 3/4 x 7/8 |
| JHWRB-1214 | 3% x ⁷ ∕16 | JHWRB-2022 | 5⁄8 x 11∕16 | | |

- · Allows fast removal of fasteners with a ratcheting action at each end
- Ideal for long "bolt-through" applications
- · Flat handle allows access to tight clearance areas
- . Turn wrench over to change direction





















DOUBLE HEAD RATCHETING BOX WRENCHES







High Polish Chrome Finish, 6 & 12 Point, Metric

| | | | Α | В | С | D | E |
|--------------|------------------|--------------|-------------------------------|---------------------------------|----------------------------------|---------------------------------|----------------------------------|
| Product Code | Number of Points | Size (MM) | Overall Length (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHWRBM-0708 | 6 | 7 x 8 | 4 1/2 | 11/16 | 3/8 | 11/32 | 3/8 |
| JHWRBM-0910 | 6 | 9 x 10 | 5 1/2 | 7/8 | 3/8 | 7/8 | 3/8 |
| JHWRBM-1112 | 6 | 11 x 12 | 6 ⁷ /8 | 1 ³ /16 | 1/2 | 1 1/8 | 1/2 |
| JHWRBM-1314 | 6 | 13 x 14 | 6 ⁷ /8 | 1 ³ /16 | 1/2 | 1 1/8 | 1/2 |
| JHWRBM-1517 | 12 | 15 x 17 | 8 1/8 | 1 ⁷ /16 | 1/2 | 1 7/16 | 1/2 |
| JHWRBM-1618 | 12 | 16 x 18 | 8 1/8 | 1 7/16 | 1/2 | 1 7/16 | 1/2 |
| JHWRBM-1921 | 12 | 19 x 21 | 9 1/4 | 1 %16 | 1/2 | 1 %16 | 1/2 |

JHWMWS-30

5 Piece Ratcheting Box Wrench Set, 6 & 12 Point, Metric, in Pouch Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWRBM-0708 | 7 x 8 | JHWRBM-1112 | 11 x 12 | JHWRBM-1517 | 15 x 17 |
| JHWRBM-0910 | 9 x 10 | JHWRBM-1314 | 13 x 14 | | |

Features

- Allows fast removal of fasteners with a ratcheting action at each end
- Ideal for long "bolt-through" applications
- Flat handle allows access to tight clearance areas
- Turn wrench over to change direction



DOUBLE HEAD 25° REVERSIBLE OFFSET RATCHETING BOX WRENCHES







| | | Α | В | С | D | E |
|--------------|--|---------------------------------------|---------------------------------|----------------------------------|---------------------------------|----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) | Box End Diameter (Inches) | Box End Thickness (Inches) |
| JHWRBO-810 | ¹⁄4 x ⁵∕16 | 41/4 | 19/32 | 3/8 | 21/32 | 3/8 |
| JHWRBO-1214 | 3⁄8 x ⁷ ∕16 | 5 ⁷ / ₁₆ | ²⁵ / ₃₂ | 3/8 | 7/8 | 3/8 |
| JHWRBO-1618 | ¹⁄2 x ⁹ ∕16 | 63/4 | 1 | 1/2 | 15/32 | 1/2 |
| JHWRBO-2022 | 5/8 x 11/16 | 8 | 1 5/16 | 1/2 | 17/16 | 1/2 |
| JHWRBO-2024 | 5⁄8 x 3∕4 | 8 | 15/16 | 1/2 | 17/16 | 1/2 |
| JHWRBO-2226 | ¹¹ / ₁₆ x ¹³ / ₁₆ | 91/8 | 1 13/32 | 1/2 | 1 %16 | 1/2 |
| JHWRBO-2428 | 3⁄4 x ⁷ ∕8 | 91/8 | 1 13/32 | 1/2 | 1%16 | 1/2 |
| JHWRBO-2630 | ¹³ / ₁₆ x ¹⁵ / ₁₆ | 91//8 | 1 13/32 | 1/2 | 1%16 | 1/2 |

JHWWS-5


5 Piece Reversible Offset Ratcheting Box Wrench Set, 12 Point, SAE, in Pouch

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------|--------------|--------------------|--------------|---------------|
| JHWRBO-810 | 1/4 x 5/16 | JHWRBO-1618 | ½ x %16 | JHWRBO-2428 | 3/4 x 7/8 |
| JHWRBO-1214 | 3/8 x 7/16 | JHWRBO-2022 | 5/8 x 11/16 | | |

- 25° offset handle clears obstructions that flat handle wrenches cannot
- Allows fast removal of fasteners with a ratcheting action at each end
- Ideal for long "bolt-through" applications











RATCHETING FLARE NUT WRENCHES





Black Industrial Finish, 12 Point, SAE

| Product Code | Size (Inches) | Overall Length (Inches) | Head Diameter (Inches) | Head Thickness (Inches) |
|--------------|-------------------------------|-------------------------------|------------------------------|-------------------------------|
| JHWRFW-12 | 3/8 | 5 ¾ | 1 | 5/16 |
| JHWRFW-14 | 7/16 | 5 ¾ | 1 | 5/16 |
| JHWRFW-16 | 1/2 | 5 ¾ | 1 | 5/16 |
| JHWRFW-18 | 9/16 | 7 1/4 | 1 1/32 | 3/8 |
| JHWRFW-20 | 5/8 | 7 1/4 | 1 1/32 | 3/8 |
| JHWRFW-22 | 11/16 | 7 1/4 | 1 1/32 | 3/8 |
| JHWRFW-24 | 3/4 | 7 1/4 | 1 1/32 | 3/8 |
| JHWRFW-26 | ¹³ / ₁₆ | 9 5/16 | 1 ⁵ /8 | 1/2 |
| JHWRFW-28 | 7/8 | 9 5/16 | 1 ⁵ /8 | 1/2 |
| JHWRFW-30 | ¹⁵ /16 | 9 5/16 | 1 ⁵ /8 | 1/2 |
| JHWRFW-32 | 1 | 9 5/16 | 1 5/8 | 1/2 |

Features

- · Designed for use on 6 and 12 point tube fittings, fasteners, valves and compression fittings
- Unique design requires only 30° rotation for ratcheting action
- · High carbon steel jaws snap open, then close around fastener with 6 point contact
- · Prevents distortion of thin-walled fitting
- · Allow easy access to tight locations







DOUBLE HEAD FLARE NUT WRENCHES

| Chrome | Satin | Finish, | 6 P | oint, | SAE |
|--------|-------|---------|--------|-------|--------|
| | | | Α | | В |
| | | | vorall | | on End |

| | | Α | В | С | D | E |
|-----------------|--------------------|---------------------------------|-------------------------------|-----------------------------------|-------------------------------|-----------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Dia (Inches) | Open End Thickness (Inches) | Open End Dia (Inches) | Open End Thickness (Inches) |
| JHWXFN-0810 | ¹⁄4 x ⁵⁄₁6 | 4 27/32 | 19/32 | 1/4 | 5/8 | 9/32 |
| JHWXFN-1214 | 3/8 x 7/16 | 5 ¹³ / ₁₆ | 25/32 | 5/16 | ²⁷ / ₃₂ | 11/32 |
| JHWXFN-1618 | ½ x %16 | 6 13/16 | ¹⁵ / ₁₆ | 3/8 | 1 | 13/32 |
| JHWXFN-2022 | 5/8 x 11/16 | 7 3/4 | 1 3/32 | 7/16 | 3/16 | 15/32 |
| JHWXFN-2432 | 3/4 x 1 | 9 1/2 | 1 1/4 | 1/2 | 19/32 | 5/8 |
| JHWXFN-2836 | ½ x 1 ⅓ | 10.5 | 1 7/16 | 9/16 | 1 ³ / ₄ | 11/16 |

Fed. Spec.: ANSI B107.6

JHWWS-14 5 Piece Double Head Flare Nut Wrench Set, 6 Point, SAE, in Pouch **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------------------|--------------|--------------------------------|--------------|--------------------|
| JHWXFN-1214 | 3/8 x 7/16 | JHWXFN-2022 | 5⁄8 x ¹¹ ∕16 | JHWXFN-2836 | 7/8 x 1 1/8 |
| JHWXFN-1618 | ¹⁄2 x ⁹ ∕16 | JHWXFN-2432 | 3/4 x 1 | | |

Features

- · Will not mar fittings on pipes and tubing
- · Satin chrome textured finish provides great feel and extra gripping power
- · Recessed corners in ends provide extra turning power















JHWXFN-1618







| Product Code | Length (Inches) | Maximum Jaw Opening (Inches) | Valve Wheel Wrench Opening |
|--------------|-----------------|---------------------------------|-------------------------------|
| 33HRUS | 10 | 1 3/4 | 3/4 |

Features

- Two tools combined into one convenient operator's tool that can be used wherever valves are adjusted for flow and pressure
- 10" overall length supplies leverage while being compact enough to be easily carried.
- Big-mouth adjustable wrench has large, 1 3/4" capacity
- ¾" valve wheel wrench opening.
- Precision hardened and anti-corrosion treated
- Easy to read size measurement scale: fractional on one side, metric on the other
- Rounded hook-end doesn't leave marks or scratches on the valve
- Head combines slimness for accessibility with strength for performance

BAHCO® ALLIGATOR ADJUSTABLE WRENCH

Industrial Grade Steel Handle, Black Phosphate Finish

| Product Code | Length (Inches) | Maximum Jaw Opening (Inches) | Head Thickness (Inches) | Jaw Tip Thickness (Inches) |
|--------------|--------------------|------------------------------|----------------------------|-------------------------------|
| 31 R US | 8 | 1 1/4 | 1/2 | 3/16 |

Features

- V-jaw on wrench has aggressively angled teeth for sure grip on pipes and rounded fasteners
- . Measurement scale on head conveniently shows fastener size
- · Slim head with tapered jaws combine easy accessibility with extra turning strength
- · Precision hardened and anti-corrosion treated

BAHCO® SIDE NUT ADJUSTABLE WRENCHES

Comfortable Bigger and Rounded Handles, Chrome Finish

| Product Code | Length (Inches) | Maximum Jaw Opening (Inches) | Head Thickness (Inches) | Jaw Tip Thickness (Inches) |
|--------------|--------------------|---------------------------------|----------------------------|-------------------------------|
| 91CUS | 6 | 3/4 | 1/2 | 1/4 |
| 92CUS | 8 | 1 1/4 | 1/2 | 5/16 |
| 93CUS | 10 | 1 3/8 | 5/8 | 5/16 |
| 94CUS | 12 | 1 1/2 | 3/4 | 3/8 |
| 95CUS | 15 | 2 | 1 | 1/2 |
| 96CUS | 21 | 2 1/2 | 1 1/6 | 5/8 |

Features

- Side nut adjustable wrenches for heavy duty applications
- Forged in one piece for better performance
- Head angle 15° provides better accessibility
- Measurement scale on head conveniently shows fastener size



31 R US



BAHCO® ERGO™ BIG-MOUTH ADJUSTABLE WRENCHES

Designed According to BAHCO®'s Scientific 11-Step Ergonomic Design Program

| | Length | Maximum Jaw | Head | Jaw Tip |
|-----------------------|-----------|------------------|--------------------|------------------------------|
| Product Code | (Inches) | Opening (Inches) | Thickness (Inches) | Thickness (Inches) |
| Chrome Finish: | | | | |
| 9031 RC US | 8 | 1 ½ | 1/2 | 1/4 |
| Black Phosphat | e Finish: | | | |
| 9029 R US | 6 | 1 1/4 | 1/2 | ³ / ₁₆ |
| 9031 R US | 8 | 1 1/2 | 1/2 | 1/4 |
| 9033 R US | 10 | 1 3/4 | 5/16 | 3/4 |
| 9035 R US | 12 | 2 3/16 | 3/8 | 7/8 |
| Thin Jaw Wide | Mouth: | | | • |
| 9029 RT US | 6 | 1 1/4 | 11/64 | 1/4 |
| 9031 RT US | 8 | 1 ½ | 11/64 | 1/4 |

Features

- . Extra-wide opening jaws with shorter handle for maximum access in confined areas
- True ERGO™ design, with thermoplastic handle and larger grip width
- · Ideal for plumbers, electricians, and maintenance workers
- . Slim head with tapered jaws combine easy accessibility with extra turning strength
- Perfect for working under the sink, within enclosures, or anywhere that a short handle is needed
- Thin Jaw Wide Mouth 45% wider opening and 45% thinner jaw

BAHCO® ERGO™ COMBINATION ADJUSTABLE/PIPE WRENCHES

Designed According to BAHCO®'s Scientific 11-Step Ergonomic Design Program

| Product Code | Length (Inches) | Maximum Jaw Opening (Inches) | Head Thickness (Inches) | Max Pipe Diameter (Inches) |
|------------------------|--------------------|---------------------------------|----------------------------|-------------------------------|
| Chrome Finish: | 411011007 | Opening unenco | THORITOGO UNONGO | Diamotor anonco |
| 9070 RPC US | 6 | 13/16 | 7/16 | 3/8 |
| 9071 RPC US | 8 | 1 1/16 | 1/2 | 1/2 |
| 9072 RPC US | 10 | 1 ⁵ /16 | 5/8 | 5/8 |
| 9073 RPC US | 12 | 1 5/16 | 11/16 | 11/16 |
| Black Phosphate | Finish: | | | |
| 9070 RP US | 6 | 13/16 | 7/16 | 3/8 |
| 9071 RP US | 8 | 1 1/16 | 1/2 | 1/2 |
| 9072 RP US | 10 | 1 5/16 | 5/8 | 5/8 |
| 9073 RP US | 12 | 1 5/16 | 11/16 | 11/16 |
| Wide Mouth: | | | | |
| 9031 RP US | 8 | 1 1/2 | 1/2 | 1 1/2 |

- Unique reversible jaw combines the functions of an adjustable and pipe wrenches
- Simply reverse the jaw to change the grip
- Teeth are aggressively angled to provide maximum gripping power
- True ERGO™ design, with thermoplastic handle and larger grip width
- · Ideal for plumbers, electricians, and maintenance workers
- Slim head with tapered jaws combine easy accessibility with extra turning strength



















BAHCO® ERGO™ ADJUSTABLE WRENCHES

Designed According to BAHCO®'s Scientific 11-Step Ergonomic Design Program

| Product Code | Length (Inches) | Maximum Jaw Opening (Inches) | Head Thickness (Inches) | Jaw Tip Thickness (Inches) |
|-----------------------|--------------------|------------------------------------|-------------------------------|----------------------------------|
| Chrome Finish: | | | | - |
| 9070 RC US | 6 | 3/4 | 7/16 | ³ / ₁₆ |
| 9071 RC US | 8 | 1 1/16 | 1/2 | 1/4 |
| 9072 RC US | 10 | 1 3/16 | 5/8 | 5/16 |
| 9073 RC US | 12 | 1 5/16 | 11/16 | 7/16 |
| Black Phospha | te Finish: | | | |
| 9070 R US | 6 | 3/4 | 7/16 | ³ / ₁₆ |
| 9071 R US | 8 | 1 1/16 | 1/2 | 1/4 |
| 9072 R US | 10 | 1 3/16 | 5/8 | 5/16 |
| 9073 R US | 12 | 1 5/16 | 11/16 | 7/16 |

Feature

- True ERGO™ design, with thermoplastic handle and larger grip width
- Ideal for plumbers, electricians, and maintenance workers
- Slim head with tapered jaws combine easy accessibility with extra turning strength
- · Precision hardened and anti-corrosion treated
- . Measurement scale on head conveniently shows fastener size

BAHCO® ADJUSTABLE WRENCHES

Industrial Grade Steel Handles

| | 11 | Maximum | Head | Jaw Tip |
|---------------|--------------------|-------------------------|-----------------------|------------------------------|
| Product Code | Length (Inches) | Jaw Opening (Inches) | Thickness (Inches) | Thickness (Inches) |
| Chrome Finish | | | | 411011005 |
| 8069 RC US | 4 | 1/2 | 3/8 | 1/8 |
| 8070 RC US | 6 | 3/ ₄ | 7/16 | ³ / ₁₆ |
| 8071 RC US | 8 | 1 1/16 | 1/2 | 1/4 |
| 8072 RC US | 10 | 1 1/8 | 5/8 | 5/16 |
| 8073 RC US | 12 | 1 5/16 | 11/16 | 7/16 |
| 8074 RC US | 15 | 1 11/16 | 13/16 | 9/16 |
| 8075 RC US | 18 | 2 1/16 | 7/8 | 11/16 |
| Black Phospha | ate Finish: | | | |
| 8069 R US | 4 | 1/2 | 3/8 | 1/8 |
| 8070 R US | 6 | 3/4 | 7/16 | 3/16 |
| 8071 R US | 8 | 1 1/16 | 1/2 | 1/4 |
| 8072 R US | 10 | 1 1/8 | 5/8 | 5/16 |
| 8073 R US | 12 | 1 5/16 | 11/16 | 7/16 |
| 8074 R US | 15 | 1 11/16 | 13/16 | 9/16 |
| 8075 R US | 18 | 2 ½16 | 7/8 | 11/16 |
| 86 | 24 | 2 7/16 | 1 1/16 | 1 1/16 |
| 87 | 30 | 3 5/16 | 1 3/16 | 1 ¾6 |

80RCUS3

3 Piece Chrome Finish Adjustable Wrench Set, in Pouch

Contents Include:

| Product Code | Size | Product Code | Size | Product Code | Size |
|--------------|------|--------------|------|--------------|------|
| 8070 RC US | 6 | 8071 RC US | 8 | 8072 RC US | 10 |

80RUS3

3 Piece Black Phosphate Finish Adjustable Wrench Set, in Pouch

Contents Include:

| Product Code | Size | Product Code | Size | Product Code | Size |
|--------------|------|--------------|------|--------------|------|
| 8070 R US | 6 | 8071 R US | 8 | 8072 R US | 10 |

- Slim head with tapered jaws combine easy accessibility with extra turning strength
- Measurement scale on head conveniently shows fastener size (except for 24" and 30" wrenches)
- · Precision hardened and anti-corrosion treated



ADJUSTABLE CONSTRUCTION WRENCH

Heavy-Duty With Polished Head and Measurement Scales

| Product Code | Length | Maximum Jaw | Head Thickness |
|--------------|----------|------------------|-------------------------------|
| | (Inches) | Opening (Inches) | (Inches) |
| JHW13625A | 15 | 1 1/2 | ²³ / ₃₂ |

Features

- Tapered spud handle locates and aligns bolts and rivets
- . Hole in handle permits tethering wrench for safety
- . Measurement scale on head conveniently shows fastener size
- · Economical black phosphate finish resists rust

SINGLE HEAD OPEN END OFFSET STRUCTURAL WRENCHES





Industrial Black Finish, SAE

| | | Α | В | С | D |
|--------------|----------|---|---------------|-----------|----------|
| | | Overall | Open End | Open End | Handle |
| | Size | Length | Width | Thickness | Offset |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW1904A | 3/4 | 11 %16 | 1 19/32 | 15/32 | 7/8 |
| JHW1905 | 7/8 | 14 ½16 | 2 | 9/16 | 1 |
| | | | | 40.4 | |
| JHW1906B | 1 | 14 1/4 | 2 | 19/32 | . 1 |
| JHW1907 | 1 1/16 | 16 ¹³ / ₁₆ | 2 5/32 | 5/8 | 1 1/8 |
| | | | | | |
| JHW1909 | 1 7/16 | 19 ¾ | 3 5/32 | 25/32 | 1 1/4 |
| | | | | | |
| JHW1910 | 1 % | 21 1/16 | 3 1/32 | 7/8 | 1 ½ |
| JHW1911A | 1 1/8 | 22 ¹³ / ₁₆ | 3 25/32 | 31/32 | 1 % |
| 0 | . /0 | /10 | → /32 | , 32 | 1 /0 |

- . Long offset handle is designed for clearance of obstructions while providing greater leverage





















Industrial Black Finish, SAE

| | | Α | В | С |
|-------------------|---------------|-------------------------|---|--|
| Product Code | Size (Inches) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) |
| JHW204A JHW205 | 3/4 7/8 | 12 14 ½ | 1 ²³ / ₃₂ 2 ¹ / ₁₆ | 15/ ₃₂ 19/ ₃₂ |
| JHW206B JHW207 | 1 1 ½16 | 13 ½ 16 % | 2 ³ / ₃₂ 2 ⁷ / ₁₆ | 1/2 21/ ₃₂ |
| JHW211 | 1 13/16 | 25 | 4 1/2 | 1 1/32 |

- 15° open end provides two gripping angles when wrench is turned over
 Tapered spud handle locates and aligns bolt and rivet holes





OFFSET STRUCTURAL BOX WRENCHES



Industrial Black Finish, SAE

| | | Α | В | С |
|---------------------|--------------------------------|-------------------------|---|--|
| Product Code | Size (Inches) | Overall Length (Inches) | Head Diameter (Inches) | Offset at End |
| JHW8905 | 7/8 | 12 | 1 15/32 | 1 25/32 |
| JHW8906B | 1 | 12 | 1 % | 1 61/64 |
| JHW8907A | 1 1/8 | 15 | 1 53/64 | 2 %4 |
| JHW8908A JHW8909 | 1 ⁵ / ₁₆ | 17 21 | 2 ⁵ / ₆₄ 2 ³ / ₈ | 2 ²¹ / ₆₄ 2 ³ / ₄ |
| 311110303 | 1 /10 | 21 | 2 /0 | 2 /4 |
| JHW8910A | 1 11/16 | 22 | 2 % | 2 % |
| JHW8911A JHW8912 | 1 | 23 24 ½ | 2 ²⁹ / ₃₂ 3 ⁵ / ₃₂ | 3 3 ⁵ / ₃₂ |

Fed. Spec: GGG-W-636E Type 9 Class 2

- Offset from handle to permit clearance of obstructions
- Handles are tapered for insertion into bolt holes
- Industrial Black Finish







TUBULAR WRENCH HANDLES

| Industrial Black Finish | | | | | | | | |
|-------------------------|-----------------|---------------------------------|--|--|--|--|--|--|
| Product Code | Length (Inches) | Inside Handle Diameter (Inches) | | | | | | |
| JHW13TH | 13 ½ | 7/8 | | | | | | |
| JHW24TH | 24 | 7/8 | | | | | | |
| JHW36TH | 36 | 1 1/8 | | | | | | |

Features

- For use with all Williams Tubular Handle Wrenches
- . A detent on the wrench shaft helps to align locking button with handle hole
- Tubular wrenches may be used without the handle to quickly run down nuts







OPEN END TUBULAR HANDLE WRENCHES


Industrial Black Finish, SAE / Metric

| | | | В | С | | | |
|--------------|-------------------------------|--------------|--|---------------------------|--|--|-----------------------|
| Product Code | Size (Inches) | Size (MM) | Outside Head Diameter (Inches) | Head Depth (Inches) | Assembled Length From Bolt Center (Inches) 13TH | Assembled Length From Bolt Center (Inches) 24TH | Fits Handle No. |
| JHW1228TOE | 7/8 | - | 1 ¹⁵ / ₁₆ | 1/2 | 19 % | 29 1/8 | JHW13TH - JHW24TH |
| JHW1230TOE | ¹⁵ / ₁₆ | - | 1 ¹⁵ / ₁₆ | 1/2 | 19 ¾ | 29 1/8 | JHW13TH - JHW24TH |
| JHW1232TOE | 1 | - | 2 5/16 | 9/16 | 20 5/32 | 30 ²¹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1234TOE | 1 1/16 | - | 2 5/16 | 9/16 | 20 5/32 | 30 ²¹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1236TOE | 1 1/8 | - | 2 5/16 | 9/16 | 20 5/32 | 30 21/32 | JHW13TH - JHW24TH |
| JHW1240TOE | 1 1/4 | 32 | 2 11/16 | 5/8 | 21 5/32 | 31 ²¹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1242TOE | 1 5/16 | 33 | 2 ¹¹ / ₁₆ | 5/8 | 21 5/32 | 31 ²¹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1244TOE | 1 3/8 | 35 | 2 ¹¹ / ₁₆ | 5/8 | 22 | 32 ½ | JHW13TH - JHW24TH |
| JHW1246TOE | 1 7/16 | 36 | 3 1/8 | 11/16 | 22 ½16 | 32 %16 | JHW13TH - JHW24TH |
| JHW1248TOE | 1 1/2 | 38 | 3 1/8 | 11/16 | 22 ½16 | 33 %16 | JHW13TH - JHW24TH |

Features

- Unique, versatile design allows wrench to be used with or without optional handles
- . Tubular wrenches may be used without the handle to quickly run down nuts
- The handle can then be attached to provide maximum turning power for final tightening or to reach otherwise inaccessible fasteners
- A detent on the wrench shaft helps to align locking button with handle hole
- Open end wrench head provides access in tight areas
- Sizes of both SAE and corresponding metric fasteners are shown





B = Outside Dia. C = Head Depth













OFFSET BOX END TUBULAR HANDLE WRENCHES







Industrial Black Finish, 12 Point, SAE / Metric

| | | | Α | С | F | | | |
|--------------|--|------|--|---------------------------------|-------------------------------|----------------------------------|---|-------------------|
| | | | Outside | | | Assembled | Assembled | |
| | | | Head | Head | Height of | Length From | Length From Bolt | Fits |
| | Size | Size | Diameter | Depth | Offset | Bolt Center | Center (Inches) | Handle |
| Product Code | (Inches) | (MM) | (Inches) | (Inches) | (Inches) | (Inches) 13TH | 24TH/36TH | No. |
| JHW1234TOB | 1 1/16 | - | 1 21/32 | 5/8 | 15/16 | 9 3/32 | 30 3/32 | JHW13TH - JHW24TH |
| JHW1236TOB | 1 1/8 | - | 1 1/8 | 23/32 | 1 1/16 | 9 7/32 | 30 7/32 | JHW13TH - 24TH |
| JHW1240TOB | 1 1/4 | 32 | 1 ²⁹ / ₃₂ | 23/32 | 1 1/16 | 9 7/32 | 30 7/32 | JHW13TH - 24TH |
| JHW1242TOB | 1 5/16 | 33 | 2 | 27/32 | 1 1/8 | 11 ½ | 32 ½ | JHW13TH - 24TH |
| JHW1244TOB | 1 3/8 | 35 | 2 1/16 | 7/8 | 1 3/16 | 11 ¹⁹ / ₃₂ | 32 ¹⁹ / ₃₂ | JHW13TH - 24TH |
| JHW1246TOB | 1 7/16 | 36 | 2 5/32 | 7/8 | 1 1/4 | 11 19/32 | 32 19/32 | JHW13TH - 24TH |
| JHW1248TOB | 1 1/2 | 38 | 2 1/4 | ¹⁵ / ₁₆ | 1 5/16 | 11 19/32 | 32 19/32 | JHW13TH - 24TH |
| JHW1250TOB | 1 %16 | 40 | 2 1/16 | ¹⁵ / ₁₆ | 1 5/16 | 11 ¹⁹ / ₃₂ | 32 19/32 | JHW13TH - 24TH |
| JHW1252TOB | 1 % | 41 | 2 ¾ | 31/32 | 1 ¾ | 11 ²³ / ₃₂ | 32 ²³ / ₃₂ | JHW13TH - 24TH |
| JHW1254TOB | 1 11/16 | 43 | 2 19/32 | 1 1/16 | 1 7/16 | | 43 %2 | JHW36TH |
| JHW1256TOB | 1 3/4 | 44 | 2 % | 1 1/16 | 1 1/2 | | 43 %2 | JHW36TH |
| JHW1258TOB | 1 13/16 | 46 | 2 ²³ / ₃₂ | 1 1/8 | 1 %16 | | 43 ¹³ / ₃₂ | JHW36TH |
| JHW1260TOB | 1 1/8 | 47 | 2 3/4 | 1 1/8 | 1 % | | 43 13/32 | JHW36TH |
| JHW1264TOB | 2 | 51 | 2 31/32 | 1 1/4 | 1 3/4 | | 43 1/2 | JHW36TH |
| JHW1266TOB | 2 ½16 | 52 | 2 ³¹ / ₃₂ | 1 1/4 | 1 3/4 | | 43 1/2 | JHW36TH |
| JHW1270TOB | 2 3/16 | 55 | 3 ¾16 | 1 5/16 | 1 1/8 | | 43 ¹⁹ / ₃₂ | JHW36TH |
| JHW1272TOB | 2 1/4 | 57 | 3 1/4 | 1 5/16 | 1 1/8 | | 43 ¹⁹ / ₃₂ | JHW36TH |
| JHW1276TOB | 2 % | 60 | 3 ¹³ / ₃₂ | 1 13/32 | 2 | | 43 11/16 | JHW36TH |
| JHW1282TOB | 2 %16 | 65 | 3 ²¹ / ₃₂ | 1 1/2 | 2 1/4 | | 43 ¹³ / ₁₆ | JHW36TH |
| JHW1284TOB | 2 % | 67 | 3 ¹¹ / ₁₆ | 1 1/2 | 2 1/4 | | 44 7/32 | JHW36TH |
| JHW1288TOB | 2 3/4 | 70 | 3 ¹⁵ / ₁₆ | 1 19/32 | 2 1/2 | | 44 | JHW36TH |
| JHW1294TOB | 2 ¹⁵ / ₁₆ | 75 | 4 5/32 | 1 ¹¹ /16 | 2 ⁵ / ₈ | | 44 3/32 | JHW36TH |
| JHW12100TOB | 3 1/8 | 79 | 4 ¾ | 1 ¹¹ / ₁₆ | 2 ¾ | | 44 ¹⁹ / ₃₂ | JHW36TH |

Features

- Unique, versatile design allows wrench to be used with or without optional handles
- . Tubular Wrenches may be used without the handle to quickly run down nuts
- The handle can then be attached to provide maximum turning power for final tightening or to reach otherwise inaccessible fasteners
- A detent on the wrench shaft helps to align locking button with handle hole
- · Offset box wrench head provides turning clearance
- Sizes of both SAE and corresponding metric fasteners are shown



STRAIGHT BOX END TUBULAR HANDLE WRENCHES









| | | | A | U | | | |
|--------------|----------|------|---------------------------------|-------------------------------|---|---|-------------------|
| | | | Outside Head | Head | Assembled Length | Assembled Length | Fits |
| | Size | Size | Diameter | Depth | From Bolt Center | From Bolt Center | Handle |
| Product Code | (Inches) | (MM) | (Inches) | (Inches) | (Inches) 13TH | (Inches) 24TH/36TH | No. |
| JHW1224TSB | 3/4 | | 1 1/4 | 17/32 | 19 1/32 | 29 17/32 | JHW13TH - JHW24TH |
| JHW1226TSB | 13/16 | | 1 1/4 | 17/32 | 19 1/32 | 29 17/32 | JHW13TH - JHW24TH |
| JHW1228TSB | 7/8 | | 1 13/32 | 19/32 | 19 ½32 | 29 ¹⁷ / ₃₂ | JHW13TH - JHW24TH |
| JHW1230TSB | 15/16 | | 1 13/32 | 19/32 | 19 1/32 | 29 17/32 | JHW13TH - JHW24TH |
| JHW1232TSB | 1 | | 1 %16 | 21/32 | 19 ³ / ₃₂ | 29 19/32 | JHW13TH - JHW24TH |
| JHW1234TSB | 1 1/16 | | 1 %16 | 21/32 | 19 3/32 | 29 19/32 | JHW13TH - JHW24TH |
| JHW1236TSB | 1 1/8 | | 1 5/16 | 11/16 | 19 3/32 | 29 19/32 | JHW13TH - JHW24TH |
| JHW1240TSB | 1 1/4 | 32 | 1 ²⁹ / ₃₂ | ²⁷ / ₃₂ | 21 ¹³ / ₃₂ | 31 ²⁹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1242TSB | 1 5/16 | 33 | 1 ²⁹ / ₃₂ | ²⁷ / ₃₂ | 21 13/32 | 31 ²⁹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1246TSB | 1 7/16 | 36 | 2 5/32 | 7/8 | 21 ¹³ / ₃₂ | 31 ²⁹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1248TSB | 1 1/2 | 38 | 2 5/32 | 7/8 | 21 ¹³ / ₃₂ | 31 ²⁹ / ₃₂ | JHW13TH - JHW24TH |
| JHW1252TSB | 1 % | 41 | 2 5/16 | 15/16 | 22 7/32 | 32 ²³ / ₃₂ | JHW13TH - JHW24TH |
| JHW12100TSB | 3 1/8 | 79 | 4 %32 | 1 3/4 | | 42 5/32 | JHW36TH |

Features

A = Outside Dia. C = Head Depth F = Height of Offset

JHW1224TSB

- . Unique, versatile design allows wrench to be used with or without optional handles
- Tubular wrenches may be used without the handle to quickly run down nuts
- The handle can then be attached to provide maximum turning power for final tightening or to reach otherwise inaccessible fasteners
- A detent on the wrench shaft helps to align locking button with handle hole
- Straight box wrench head provides access when clearance is limited
- Sizes of both SAE and corresponding metric fasteners are shown





STRAIGHT PATTERN BOX END STRIKING WRENCHES








Industrial Black Finish, 12 Point, SAE / Metric

| | | | Α | В | С |
|---------------|---------------------------------|------|--|--|--|
| | , | | Overall | Box End | Box End |
| | Size | Size | Length | Diameter | Thickness |
| Product Code | (Inches) | (MM) | (Inches) | (Inches) | (Inches) |
| JHWSFH1808BW | 1 3/16 | 30 | 7 %16 | 2 3/32 | 7/8 |
| JHWSFH-1808W | 1 1/4 | 32 | 7 %16 | 2 3/32 | 7/8 |
| JHWSFH1808AW | 1 5/16 | 33 | 7 %16 | 2 3/32 | 7/8 |
| JHWSFH1808CW | 1 ¾ | 35 | 7 ²¹ / ₃₂ | 2 1/32 | 31/32 |
| JHWSFH-1809W | 1 7/16 | - | 7 ²¹ / ₃₂ | 2 1/32 | 31/32 |
| JHWSFH1809BW | - | 36 | 7 21/32 | 2 1/32 | 31/32 |
| JHWSFH1809AW | 1 ½ | 38 | 7 21/32 | 2 1/32 | 31/32 |
| JHWSFH-1810W | 1 ⁵ / ₈ | 41 | 7 ²⁷ / ₃₂ | 2 ²¹ / ₃₂ | 1 5/32 |
| JHWSFH1810AW | 1 11/16 | 43 | 7 ¹³ / ₁₆ | 2 21/32 | 1 5/32 |
| JHWSFH1810BW | 1 3/4 | 44 | 7 ¹⁵ / ₁₆ | 2 ¹³ / ₁₆ | 1 1/4 |
| JHWSFH-1811W | 1 ¹³ / ₁₆ | 46 | 7 ¹⁵ / ₁₆ | 2 ¹³ / ₁₆ | 1 1/4 |
| JHWSFH1811AW | 1 1/8 | - | 7 15/16 | 2 ¹³ / ₁₆ | 1 1/4 |
| JHWSFH1812BW | - | 50 | 11 ¹⁹ / ₃₂ | 3 ¾6 | 1 13/32 |
| JHWSFH-1812W | 2 | 51 | 11 ¹⁹ / ₃₂ | 3 ¾6 | 1 ¹³ / ₃₂ |
| JHWSFH1812AW | 2 1/16 | 52 | 11 19/32 | 3 3/16 | 1 ¹³ / ₃₂ |
| JHWSFH-1813W | 2 3/16 | 55 | 11 ¾ | 2 %6 | 1 ¹⁷ / ₃₂ |
| JHWSFH1813AW | 2 1/4 | 57 | 11 ¾ | 2 %6 | 1 ¹⁷ / ₃₂ |
| JHWSFH-1814W | 2 % | 60 | 11 % | 3 ¾ | 1 11/16 |
| JHWSFH1814AW | 2 7/16 | 62 | 11 ¾ | 3 3/4 | 1 11/16 |
| JHWSFH1814BW | 2 ½ | 64 | 11 ¾ | 3 ¾ | 1 11/16 |
| JHWSFH-1815W | 2 %16 | 65 | 13 | 4 | 1 ¹³ / ₁₆ |
| JHWSFH1815AW | 2 % | 67 | 13 | 4 | 1 ¹³ / ₁₆ |
| JHWSFH-1816W | 2 ¾ | 70 | 14 1/32 | 4 %2 | 1 ¹⁵ / ₁₆ |
| JHWSFH1816AW | 2 ¹³ / ₁₆ | 71 | 14 1/32 | 4 %2 | 1 ¹⁵ / ₁₆ |
| JHWSFH1816BW | 2 ¹⁵ / ₁₆ | 75 | 14 ¹³ / ₃₂ | 4 ¹⁷ / ₃₂ | 2 1/16 |
| JHWSFH1817AW | 3 | 76 | 14 ¹³ / ₃₂ | 4 ¹⁷ / ₃₂ | 2 1/16 |
| JHWSFH-1817W | 3 1/8 | 80 | 17 ¹⁹ / ₃₂ | 4 ²⁹ / ₃₂ | 2 %32 |
| JHWSFH1818AW | 3 % | 85 | 17 ¹⁹ / ₃₂ | 4 29/32 | 2 1/32 |
| JHWSFH-1818W | 3 ½ | 89 | 17 ¹³ / ₁₆ | 5 ½16 | 2 ¹⁵ / ₃₂ |
| JHWSFH1819BW | 3 3/4 | 95 | 17 ²⁹ / ₃₂ | 5 ¹⁷ / ₃₂ | 2 ²¹ / ₃₂ |
| JHWSFH1819WA | 3 % | 98 | 17 ²⁹ / ₃₂ | 5 ¹⁷ / ₃₂ | 2 ²¹ / ₃₂ |
| JHWSFH1819CWA | 4 1/8 | 105 | 18 5/32 | 6 1/32 | 2 ¹⁵ / ₁₆ |
| JHWSFH1819AW | 4 1/4 | 108 | 18 5/32 | 6 1/32 | 2 ¹⁵ / ₁₆ |
| JHWSFH1820BWA | 4 1/2 | 114 | 20 1/32 | 6 ²⁵ / ₃₂ | 3 ¾16 |
| JHWSFH1820WA | 4 % | 117 | 20 1/32 | 6 ²⁵ / ₃₂ | 3 3/16 |

- Striking face wrenches are designed to be struck by a hammer on the anvil area in order to loosen frozen fasteners or to set and tighten fasteners
- Anvils are proportional to opening sizes
- Special heat treating provides maximum durability for long life
- · Straight handle design resists springing while allowing the fastener to turn more easily
- Williams' expanded line of offset striking face wrenches, up to 4 %", provides the most extensive line on the market
- . Specifically engineered to hold up under the most rigorous industrial use


























| Product Code Size (Inches) Size (IMM) Cinches Diameter (Inches) Thickness (Inches) JHW8807W 1 1/6 27 9 31/52 1 1/5/6 3/4 JHW8808W 1 1/6 30 10 31/52 1 1/5/6 3/4 JHW8808W 1 1/4 32 10 31/52 1 1/5/6 3/4 JHW8808W 1 1/6 33 10 31/52 1 1/5/6 3/4 JHW8808W 1 1/6 33 10 31/52 1 1/5/6 3/4 JHW8808W 1 1/6 33 10 31/52 1 1/5/6 3/4 JHW8809W 1 1/6 - 1 11 1/2 2 1/5/2 2 1/5/2 JHW8809W 1 1/6 - 11 1/2 2 1/5/2 2 1/5/2 JHW8809W 1 1/6 - 11 1/2 2 1/5/2 2 1/5/2 JHW8809W 1 1/6 - 11 1/2 2 1/5/2 2 1/5/2 JHW8809W 1 1/6 - 11 1/2 2 1/5/2 2 1/5/2 JHW8809W 1 1/6 41 12 2 1/6 1 JHW8810W 1 1/6 43 12 1/6 2 1/1/6 1 1/6 JHW8810W 1 1/6 43 12 1/6 2 1/1/6 1 1/6 JHW8811BW 1 1/5/4 44 12 1/6 2 1/1/6 1 1/6 JHW8811BW 1 1/6 46 12 1/6 2 1/1/6 1 1/6 JHW8811BW 1 1/6 46 12 1/6 2 1/1/6 1 1/6 JHW8811AW 1 1/6 49 13 2 1/6 1 1/4 JHW8812BW - 50 13 2 1/6 1 1/4 JHW8812BW 2 1/6 55 13 1/6 3 1/4 1 1 1/5/2 JHW8813BW 2 1/6 55 13 1/6 3 1/4 1 1 1/5/2 JHW8813W 2 1/6 55 13 1/6 3 1/4 1 1 1/5/2 JHW8813W 2 1/6 59 13 1/6 3 1/4 1 1 1/5/2 JHW8813W 2 1/6 59 13 1/6 3 1/16 1 1/2 JHW8815W 2 1/6 59 13 1/6 3 1/16 1 1/2 JHW8815W 2 1/6 65 14 1/6 3 11/6 1 1/2 JHW8815W 2 1/6 65 14 1/6 3 11/6 1 1/2 JHW8816W 2 1/6 75 16 4 1/6 1 1/4 JHW8816W 2 1/6 75 16 4 1/6 1 1/4 JHW8816W 2 1/6 75 16 4 1/6 1 1/4 JHW8816W 2 1/6 75 16 4 1/6 1 1/4 JHW8816W 3 1/6 16 4 1/6 1 1/4 JHW8816W 3 1/6 16 4 1/6 1 1/4 JHW8818W 3 1/6 8 1 8 8/2 6 2 JHW8819W 3 1/6 8 1 8 8/2 6 2 JHW8819W 3 1/6 8 1 8 8/2 6 2 JHW8819W 3 1/6 8 1 8 8/2 6 2 JHW8819W 3 1/6 8 1 8 8/2 6 2 JHW8819W 3 1/6 8 1 8 8/2 6 2 JHW8819CW 4 1/6 105 18 8/52 6 2 | | | | A | B | <u>C</u> |
|--|-----------|---------------------------------|-----|----------------------------------|-------------------|----------|
| Product Code Size (Inches) Size (IMM) Inches Un | | | | Overall | Box End | Box End |
| JHW8807W | | | | | | |
| JHW8807AW | | | | | | |
| JHW8808BW | | | 27 | | | |
| JHW8808W | | | | | | |
| JHW8808AW 1 \(\frac{1}{3}\text{in} \) JHW8808CW 1 \(\frac{1}{3}\text{in} \) 35 11 \(\frac{1}{2}\text{in} \) 2 \(\frac{1}{2}\text{in} \) JHW8809W 1 \(\frac{1}{16} \) - 11 \(\frac{1}{2} \text{in} \) 36 11 \(\frac{1}{2} \text{in} \) 2 \(\frac{1}{2}\text{in} \) JHW8809BW - 36 11 \(\frac{1}{2} \text{in} \) 38 12 2 \(\frac{1}{3}\text{in} \) JHW8810W 1 \(\frac{1}{2} \text{in} \) JHW8810W 1 \(\frac{1}{2} \text{in} \) JHW8810BW 1 \(\frac{1}{2} \text{in} \) JHW8811BW 1 \(\frac{1}{2} \text{in} \) JHW8811BW 1 \(\frac{1}{3} \text{in} \) JHW8811BW 1 \(\frac{1}{3} \text{in} \) JHW8811W 1 \(\frac{1}{3} \text{in} \) JHW8811W 1 \(\frac{1}{3} \text{in} \) JHW8812AW 1 \(\frac{1}{3} \text{in} \) JHW8812BW - 50 13 2 \(\frac{1}{6} \text{in} \) JHW8812BW 2 50 13 2 \(\frac{7}{6} \text{in} \) JHW8813BW 2 \(\frac{1}{6} \text{in} \) JHW8813BW 2 \(\frac{1}{6} \text{in} \) JHW8813BW 2 \(\frac{1}{6} \text{in} \) JHW8813BW 2 \(\frac{1}{6} \text{in} \) JHW8814W 2 \(\frac{1}{6} \text{in} \) JHW8814W 2 \(\frac{1}{6} \text{in} \) JHW8815BW 2 \(\frac{1}{6} \text{in} \) JHW8815BW 2 \(\frac{1}{6} \text{in} \) JHW8815BW 2 \(\frac{1}{6} \text{in} \) JHW8815BW 2 \(\frac{1}{6} \text{in} \) JHW8815BW 2 \(\frac{1}{6} \text{in} \) JHW8815BW 2 \(\frac{1}{6} \text{in} \text{in} \) JHW8816BW 2 \(\frac{1}{6} \text{in} \text{in} \) JHW8816BW 2 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 2 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \text{in} \) JHW8816BW 3 \(\frac{1}{6} \text{in} \text{in} \ | | | | | | |
| JHW8809CW | | | | | | |
| JHW8809W | JHW8808AW | | 33 | 10 ³¹ / ₃₂ | | |
| JHW8809BW - 36 11 ½ 2 | JHW8808CW | | 35 | 11 ½ | | |
| JHW8809BW - 36 11 ½ 2 | JHW8809W | 1 7/16 | | 11 ½ | 2 5/32 | 29/32 |
| JHW8810W | JHW8809BW | - | 36 | 11 ½ | 2 5/32 | 29/32 |
| JHW8810AW | JHW8809AW | 1 ½ | 38 | 12 | 2 7/16 | 1 |
| JHW8811BW | JHW8810W | 1 % | 41 | 12 | 2 7/16 | 1 |
| JHW8811W | JHW8810AW | 1 11/16 | 43 | 12 %16 | 2 11/16 | 1 1/8 |
| JHW8811W 1 13/16 46 12 9/16 2 11/16 1 ½ JHW8811AW 1 ½ - 13 2 ½ 1 ¼ JHW8812BW 1 15/16 49 13 2 ½ 1 ¼ JHW8812BW - 50 13 2 ½ 1 ¼ JHW8812BW 2 51 13 2 ½ 1 ¼ JHW8813BW 2 ½ 54 13 ½ 3 ¼ 1 13/22 JHW8813W 2 ½ 54 13 ½ 3 ¼ 1 13/22 JHW8813W 2 ½ 57 13 ¾ 3 ¼ 1 13/22 JHW8814W 2 ½ 57 13 ¾ 3 ¼ 1 13/22 JHW8814W 2 ½ 60 14 ½ 3 1½ 1 ½ JHW8815BW 2 ½ 64 14 ½ 3 1½ 1 ½ JHW8815W 2 ½ 64 14 ½ 3 1½ 1 ½ JHW8816W 2 ½ 67 15 3 1½ 1 ½ JHW8816W 2 ½ | JHW8811BW | 1 3/4 | 44 | 12 % 16 | 2 11/16 | 1 1/8 |
| JHW8812AW | JHW8811W | 1 13/16 | 46 | 12 %16 | | 1 1/8 |
| JHW8812BW - 50 13 2 % 1 ¼ JHW8812W 2 51 13 2 % 1 ¼ JHW8813BW 2 % 54 13 % 3 ¼ 1 ½ JHW8813W 2 % 55 13 % 3 ¼ 1 ½ JHW8813AW 2 ¼ 57 13 % 3 ¼ 1 ½ JHW8814AW 2 % 59 13 % 3 ¼ 1 ½ JHW8815BW 2 ½ 64 14 ½ 3 ½ 1 ½ JHW8815BW 2 ½ 64 14 ½ 3 ½ 1 ½ JHW8815W 2 ½ 67 15 3 ½ 1 ½ JHW8816W 2 ¾ 70 15 3 ½ 1 ½ JHW8816W 2 ½ 73 16 4 ½ 1 ¾ JHW8816W 2 ½ 73 16 4 ½ 1 ¾ JHW8816W 2 ½ 73 16 4 ½ 1 ¾ JHW8816W 3 ½ 6 1 ¾ <t< td=""><td>JHW8811AW</td><td>1 1/8</td><td></td><td>13</td><td>2 1/8</td><td>1 1/4</td></t<> | JHW8811AW | 1 1/8 | | 13 | 2 1/8 | 1 1/4 |
| JHW8812W 2 51 13 2 ½ 1 ¼ JHW8813BW 2 ½ 54 13 ½ 3 ¼ 1 ½ JHW8813W 2 ½ 55 13 ½ 3 ¼ 1 ½ JHW8813AW 2 ½ 57 13 ½ 3 ¼ 1 ½ JHW8814AW 2 ½ 59 13 ½ 3 ¼ 1 ½ JHW8814W 2 ½ 60 14 ½ 3 ½ 1 ½ JHW8815BW 2 ½ 64 14 ½ 3 ½ 1 ½ JHW8815W 2 ½ 65 14 ½ 3 ½ 1 ½ JHW8815W 2 ½ 67 15 3 ½ 1 ½ JHW8815W 2 ½ 67 15 3 ½ 1 ½ JHW8816W 2 ¾ 67 15 3 ½ 1 ½ JHW8816W 2 ¾ 70 15 3 ½ 6 1 ¾ JHW8816BW 2 ½ 73 16 4 ½ 1 ¾ 1 ¾ JHW8816BW 2 ½ | JHW8812AW | 1 ¹⁵ / ₁₆ | 49 | 13 | 2 ⁷ /8 | 1 1/4 |
| JHW8812W 2 51 13 2 ½ 1 ¼ JHW8813BW 2 ½ 54 13 ½ 3 ¼ 1 ½ JHW8813W 2 ½ 55 13 ½ 3 ¼ 1 ½ JHW8813AW 2 ½ 57 13 ½ 3 ¼ 1 ½ JHW8814AW 2 ½ 59 13 ½ 3 ¼ 1 ½ JHW8814W 2 ½ 60 14 ½ 3 ½ 1 ½ JHW8815BW 2 ½ 64 14 ½ 3 ½ 1 ½ JHW8815W 2 ½ 65 14 ½ 3 ½ 1 ½ JHW8815W 2 ½ 67 15 3 ½ 1 ½ JHW8816W 2 ½ 67 15 3 ½ 1 ½ JHW8816W 2 ¾ 70 15 3 ½ 1 ½ JHW8816W 2 ½ 73 16 4 ½ 1 ¾ JHW8816BW 2 ½ 73 16 4 ½ 1 ¾ JHW8816BW 2 ½ 73 16 | JHW8812BW | | 50 | 13 | 2 ⁷ /8 | 1 1/4 |
| JHW8813BW 2 ½ 54 13 ¾ 3 ¼ 1 ⅓2 JHW8813W 2 ¾6 55 13 ¾6 3 ¼ 1 ⅓2 JHW8813AW 2 ¼ 57 13 ¾6 3 ¼ 1 ⅓2 JHW8814AW 2 ¾6 59 13 ¾6 3 ¼ 1 ⅓2 JHW8814W 2 ¾6 60 14 ¼ 3 ¼6 1 ½ JHW8815BW 2 ½ 64 14 ¼ 3 ¼6 1 ½ JHW8815W 2 ¾6 65 14 ¼ 3 ¼6 1 ½ JHW8816W 2 ¾6 67 15 3 ⅓6 1 ½ JHW8816W 2 ¾ 70 15 3 ⅓6 1 ¾ JHW8816CW 2 ¾6 73 16 4 ¼6 1 ¾ JHW8816BW 2 ⅓6 73 16 4 ¼6 1 ¾ JHW8816BW 2 ⅙6 75 16 4 ¼6 1 ¾ JHW8817AW 3 76 16 4 ¼6 1 ¾ JHW8818W 3 ½6 80 | | 2 | | | | |
| JHW8813W | | | | | | |
| JHW8813AW 2 ¼ 57 13 ¾6 3 ¼ 1 ⅓2 JHW8814AW 2 ¾6 59 13 ¾6 3 ¼ 1 ⅓2 JHW8814W 2 ¾6 60 14 ¼ 3 1¼6 1 ½ JHW8815BW 2 ½ 64 14 ¼ 3 1¼6 1 ½ JHW8815W 2 ¾6 65 14 ¼ 3 1¼6 1 ½ JHW8816W 2 ¾ 70 15 3 ½6 1 ½ JHW8816W 2 ¾ 70 15 3 ½6 1 ½ JHW8816BW 2 ½6 73 16 4 ¼6 1 ¾ JHW8816BW 2 ½6 75 16 4 ¼6 1 ¾ JHW8816BW 2 ½6 75 16 4 ¼6 1 ¾ JHW8817AW 3 76 16 4 ¼6 1 ¾ JHW8818AW 3 ½6 80 16 4 ¼6 1 ¾ JHW8818W 3 ½ 89 18 ½2 6 2 JHW8819W 3 ½6 98 | | | 55 | | | 1 13/32 |
| HW8814W 2 \(\frac{1}{16} \) 59 13 \(\frac{1}{16} \) 3 \(\frac{1}{16} \) 1 \(\frac{1}{32} \) HW8814W 2 \(\frac{1}{6} \) 60 14 \(\frac{1}{6} \) 3 \(\frac{1}{16} \) 1 \(\frac{1}{2} \) HW8815BW 2 \(\frac{1}{2} \) 64 14 \(\frac{1}{6} \) 3 \(\frac{1}{16} \) 1 \(\frac{1}{2} \) HW8815W 2 \(\frac{1}{6} \) 65 14 \(\frac{1}{6} \) 3 \(\frac{1}{16} \) 1 \(\frac{1}{2} \) HW8815W 2 \(\frac{1}{6} \) 67 15 3 \(\frac{1}{3} \) 6 1 \(\frac{1}{2} \) HW8816W 2 \(\frac{1}{4} \) 70 15 3 \(\frac{1}{3} \) 6 1 \(\frac{1}{6} \) 1 \(\frac | | | | | | |
| JHW8814W | | | | | | |
| JHW8815BW 2 ½ 64 14 ½ 3 ½ 1 ½ JHW8815W 2 ½6 65 14 ½ 3 ½6 1 ½ JHW8815AW 2 ½ 67 15 3 ½6 1 ½ JHW8816W 2 ¾ 70 15 3 ½6 1 ½ JHW8816CW 2 ½ 73 16 4 ¾6 1 ¾ JHW8816BW 2 ½6 75 16 4 ¾6 1 ¾ JHW8817AW 3 76 16 4 ¾6 1 ¾ JHW8817W 3 ½ 80 16 4 ¾6 1 ¾ JHW8818AW 3 ½ 85 18 ½2 6 2 JHW8819BW 3 ½ 95 18 ½2 6 2 JHW8819CW 4 ½ 105 18 ½2 6 2 | | | | | | |
| JHW8815W 2 %6 65 14 % 3 ½ 1½ JHW8815AW 2 % 67 15 3 ½6 1 % JHW8816W 2 ¾ 70 15 3 ½6 1 % JHW8816CW 2 ½ 73 16 4 ¼6 1 ¾ JHW8816BW 2 ½6 75 16 4 ¼6 1 ¾ JHW8817AW 3 76 16 4 ¼6 1 ¾ JHW8817W 3 ½ 80 16 4 ¼6 1 ¾ JHW8818W 3 ½ 85 18 ½2 6 2 JHW8819BW 3 ½ 89 18 ½2 6 2 JHW8819CW 4 ½ 105 18 ½2 6 2 JHW8819CW 4 ½ 105 18 ½2 6 2 | | | | | | |
| JHW8815AW 2 \(\frac{5}{6} \) 67 15 3 \(\frac{15}{6} \) 1 \(\frac{5}{6} \) | | | | | | |
| JHW8816W 2 ¾ 70 15 3 ½6 1 ½ JHW8816CW 2 ½ 73 16 4 ½6 1 ¾ JHW8816BW 2 ½6 75 16 4 ½6 1 ¾ JHW8817AW 3 76 16 4 ½6 1 ¾ JHW8817W 3 ½ 80 16 4 ½6 1 ¾ JHW8818AW 3 ½ 89 18 ½2 6 2 JHW8819BW 3 ½ 89 18 ½2 6 2 JHW8819W 3 ½ 98 18 ½2 6 2 JHW8819CW 4 ½ 105 18 ½2 6 2 | | | | | | |
| JHW8816CW 2 % 73 16 4 % 1 % JHW8816BW 2 15% 75 16 4 % 1 % JHW8817AW 3 76 16 4 % 1 % JHW8817W 3 % 80 16 4 % 1 % JHW8818AW 3 % 85 18 % 6 2 JHW8818W 3 ½ 89 18 % 6 2 JHW8819BW 3 % 95 18 % 6 2 JHW8819W 3 % 98 18 % 6 2 JHW8819CW 4 % 105 18 % 6 2 | | | | | | |
| HW8816BW 2 15/6 75 16 4 7/6 1 3/4 | | | | | | |
| JHW8817AW 3 76 16 4 \(\frac{7}{16} \) 1 \(\frac{3}{4} \) JHW8817W 3 \(\frac{1}{6} \) 80 16 4 \(\frac{7}{16} \) 1 \(\frac{3}{4} \) JHW8818AW 3 \(\frac{1}{6} \) 85 18 \(\frac{9}{12} \) 6 2 JHW8818W 3 \(\frac{1}{6} \) 89 18 \(\frac{9}{12} \) 6 2 JHW8819BW 3 \(\frac{3}{4} \) 95 18 \(\frac{9}{12} \) 6 2 JHW8819CW 4 \(\frac{1}{6} \) 105 18 \(\frac{9}{12} \) 6 2 | | | | | | |
| JHW8817W 3 1/6 80 16 4 7/16 1 3/4 JHW8818AW 3 % 85 18 18/2 6 2 JHW8818W 3 ½ 89 18 18/2 6 2 JHW8819BW 3 ½ 95 18 18/2 6 2 JHW8819W 3 ½ 98 18 18/2 6 2 JHW8819CW 4 ½ 105 18 18/22 6 2 | | | | | | |
| JHW8818AW 3 % 85 18 %2 6 2 JHW8818W 3 ½ 89 18 %2 6 2 JHW8819BW 3 ¾ 95 18 %2 6 2 JHW8819W 3 % 98 18 %2 6 2 JHW8819CW 4 ½ 105 18 %2 6 2 | | | | | | |
| JHW8818W 3 ½ 89 18 ½ 6 2 JHW8819BW 3 ¾ 95 18 ½ 6 2 JHW8819W 3 ½ 98 18 ½ 6 2 JHW8819CW 4 ½ 105 18 ½ 6 2 | | | | | | |
| | | | | | | 2 |
| | | | | | | 2 |
| | | | | | | 2 |
| | | | | | | 2 |
| IHWXX1UWW 711/4 100 100 6 7 | JHW8819AW | 4 ½ 4 ¼ | 103 | 18 %2 | 6 | 2 |

- Striking face wrenches are designed to be struck by a hammer on the anvil area in order to loosen frozen fasteners or to set and tighten fasteners
- Anvils are proportional to opening sizes
- Special heat treating provides maximum durability for long life
- Offset handle is close to head to provide clearance in confined areas
- Williams' expanded line of offset striking face wrenches, up to 4 1/4", provides the most extensive line on the market
- Specifically engineered to hold up under the most rigorous industrial use









HAMMER WRENCHES





6 Point

| O i Oiiit | | | | |
|--------------|---------------------------------|---------------------------------|-------------------------------|-------------------------------|
| Product Code | Wrench Opening (Nut Size) | Head Dia. (Inches) | Head Thickness (Inches) | Overall Length (Inches) |
| JHWHW-6034 | 1 1/16 | 1 25/32 | 5/8 | 9 % |
| JHWHW-6040 | 1 1/4 | 2 | 23/32 | 10 1/4 |
| JHWHW-6052 | 1 5/8 | 2 ³¹ / ₆₄ | ⁶¹ / ₆₄ | 11 |
| JHWHW-6076 | 2 ¾ | 3 13/32 | 1 ½16 | 12 ¾ |
| JHWHW-6082 | 2 %16 | 3 3/4 | 1 17/32 | 12 11/16 |
| | | | | |
| JHWHW-6124 | 3 1/8 | 5 ³⁵ / ₆₄ | 1 23/32 | 14 1/2 |

- Designed for use in the petrochemical industries where clearance, particularly on flanges, and cored fasteners are often a problem:
- 6 Point Hex is offset 15 degree, and short handle length allows for use in tight spaces
- Straight Handle transfers maximum torque when struck
- Assortment fits Stud Sizes up to 2 ½"















JHWWS-476





ADJUSTABLE PIN SPANNER WRENCHES



Industrial Black Finish, SAE

| Product Code | Span Diameter (Inches) | Pin Diameter (Inches) | Pin Length (Inches) | Overall Length (Inches) |
|--------------|------------------------|-----------------------|------------------------------|-------------------------------|
| JHWO-471 | 3/4 to 2 | 1/8 | 1/8 | 5 % |
| JHWO-471A | 3/4 to 2 | 3/16 | 5/32 | 5 % |
| JHWO-472 | 1 ¼ to 3 | ³ /16 | ³ / ₁₆ | 6 ⁷ / ₈ |
| JHWO-472A | 1 ¼ to 3 | 1/4 | 7/32 | 6 ⁷ / ₈ |
| JHWO-474 | 2 to 4 ¾ | 1/4 | 1/4 | 9 1/2 |
| JHWO-474A | 4 ½ to 6 ¼ | 3/8 | 1/4 | 9 7/8 |

JHWWS-476

6-Piece Adjustable Pin Spanner Wrench Set, in Pouch

Contents Include:

| Product Code | Overall Length (Inches) | Product Code | Overall Length (Inches) |
|--------------|-------------------------------|--------------|-------------------------------|
| JHWO-471 | 5 % | JHWO-472A | 6 ⁷ / ₈ |
| JHWO-471A | 5 % | JHWO-474 | 9 ½ |
| JHWO-472 | 6 ⁷ / ₈ | JHWO-474A | 9 7/8 |

Feature

- Ideal for adjusting collars, lock nut rings, and bearings
- . Specifically engineered to hold up under the most rigorous industrial use



ADJUSTABLE HOOK SPANNER WRENCHES



Industrial Black Finish, SAE

| Product Code | Span Diameter (Inches) | Hook Depth (Inches) | Hook Thickness (Inches) | Overall Length (Inches) |
|--------------|------------------------|------------------------|----------------------------|-------------------------|
| JHW471 | 3/4 to 2 | 1/8 | 11/32 | 5 % |
| JHW472 | 1 1/4 to 3 | 5/32 | 13/32 | 7 1/4 |
| JHW474 | 2 to 4 3/4 | 3/16 | 15/32 | 11 ½ |
| JHW474A | 4 ½ to 6 ¼ | 1/4 | 15/32 | 17 ½ |
| JHW474B | 6 1/8 to 8 3/4 | 5/16 | 15/32 | 18 1/2 |

JHWWS-474

4-Piece Adjustable Hook Spanner Wrench Set, in Pouch Contents Include:

| ••••••• | | | |
|--------------|-------------------------------|--------------|-------------------------|
| Product Code | Overall Length (Inches) | Product Code | Overall Length (Inches) |
| JHW471 | 5 ³ / ₈ | JHW474 | 11 ½ |
| JHW472 | 7 1/4 | .IHW474Δ | 17 1/2 |

Features

- · Ideal for adjusting collars, lock nut rings, and bearings
- . Specifically engineered to hold up under the most rigorous industrial use



ADJUSTABLE FACE SPANNER WRENCHES



Industrial Black Finish, SAE

| Product Code | Span Diameter (Inches) | Pin Diameter (Inches) | Pin Length (Inches) | Overall Length (Inches) |
|--------------|------------------------|-----------------------|---------------------|-------------------------|
| JHW482 | 2 | 3/16 | 1/4 | 6 1/4 |
| JHW483 | 3 | 1/4 | 1/4 | 8 1/8 |
| JHW484 | 4 | 5/16 | 1/2 | 10 3/8 |

JHWWS-483

3-Piece Adjustable Face Spanner Wrench Set, in Pouch Contents Include:

| Product Code | Overall Length (Inches) | Product Code | Overall Length (Inches) |
|--------------|-------------------------|--------------|-------------------------|
| JHW482 | 6 1/4 | JHW484 | 10 3/8 |
| JHW483 | 8 1/8 | | |

- Ideal for adjusting collars, lock nut rings, and bearings
- Specifically engineered to hold up under the most rigorous industrial use





T-HANDLE HEX DRIVERS





Cushion Grip Handle, SAE and Metric

| Product Code | Size (Inches) | Product Code | Size (MM) |
|--------------|---------------|--------------|-----------|
| | | JHWHKT-2MM | 2 |
| JHWHKT-7/64 | 7/64 | JHWHKT-2.5MM | 2.5 |
| JHWHKT-1/8 | 1/8 | JHWHKT-3MM | 3 |
| JHWHKT-9/64 | 9/64 | JHWHKT-4MM | 4 |
| JHWHKT-5/32 | 5/32 | JHWHKT-5MM | 5 |
| JHWHKT-3/16 | 3/16 | JHWHKT-6MM | 6 |
| JHWHKT-7/32 | 7/32 | JHWHKT-8MM | 8 |
| JHWHKT-1/4 | 1/4 | JHWHKT-10MM | 10 |
| JHWHKT-5/16 | 5/16 | | |
| JHWHKT-3/8 | 3/8 | | |

Features

- Cushion grip provides extra comfort
- One-Piece handle construction for extra strength
- · 6 Inch shaft length

JHWWSHKT-10 10 Piece T-Handle Hex Driver Set, SAE in Pouch

Contents Include:

| Contonts | IIICIAAC | ,, | | | |
|--------------|----------|--------------|----------|--------------|------|
| | Size | | Size | | Size |
| Product Code | (Inches) | Product Code | (Inches) | Product Code | (MM) |
| | | JHWHKT-5/32 | 5/32 | JHWHKT-1/4 | 1/4 |
| JHWHKT-7/64 | 7/64 | JHWHKT-3/16 | 3/16 | JHWHKT-5/16 | 5/16 |
| JHWHKT-1/8 | 1/8 | JHWHKT-7/32 | 7/32 | JHWHKT-3/8 | 3/8 |
| JHWHKT-9/64 | 9/64 | | | | |

JHWMWSHKT-8 8 Piece T-Handle Hex Driver Set, MM in Pouch

Contents Include:

| Size (MM) | Product Code | Size (MM) |
|-----------|--------------|--|
| 2 | JHWHKT-5MM | 5 |
| 2.5 | JHWHKT-6MM | 6 |
| 3 | JHWHKT-8MM | 8 |
| 4 | JHWHKT-10MM | 10 |
| | 2 2.5 | 2 JHWHKT-5MM 2.5 JHWHKT-6MM 3 JHWHKT-8MM |

Features

· Set comes in pouch for tool box or can be hung

Universal Hex Key Stand


| Product Code | Size |
|--------------|--------------------------------------|
| JHWHKTSTAND | Width 7 1/2 x Depth 5 1/2 x Height 6 |

- Universal T-handle stand, fits inch/metric sets
- Number of slots: 22
- Fits up to 3/8" hex
- For Inch, Metric and Torx hex keys
- Can be attached to wall, bench or each other
- T-handle hex drivers are sold separately and are not included with stand
- 6" overall length







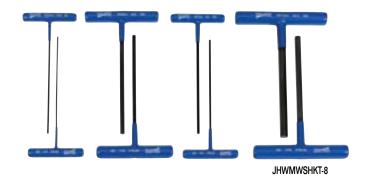













JHWWS-45



JHWWS-46



JHWMWS-47







FOLDING HEX KEY SETS

| SAE and Me | tric | | | | | |
|------------------|----------------------|---------------------------------|--|--|---------------------------|------------------------|
| Product Code | JHWWS-45 | | JHWWS-46 | | JHWMWS-47 | |
| Number of Pieces | | 8 | | 9 | 7 | |
| | Hex Size (Inches) | Key Length (Inches) | Hex Size (Inches) | Key Length (Inches) | Includes Hex Size (MM) | Key Length (Inches) |
| | . 050 ½16 | 1 ½ 1 ¾ | ⁵ / ₆₄ ³ / ₃₂ | 1 ½ 1 % | 1.5 2 | 1 3/8 1 1/2 |
| | 5/64 | 1 7/16 | 7/64 | 1 11/16 | 2.5 | 1 % |
| | 3/32 | 1 %16 | 1/8 | 1 ¹⁵ / ₁₆ | 3 | 1 3/4 |
| | 7/64 | 1 % | 9/64 | 2 | 4 | 2 |
| | 1/8 | 1 11/16 | 5/32 | 2 1/4 | 5 | 2 1/4 |
| | 9/64 | 1 ¹³ / ₁₆ | 3/16 | 2 1/2 | 6 | 2 ½ |
| | 5/32 | 2 | 7/32 | 2 ⁵ / ₈ | | |
| | | | 1/4 | 2 1/8 | | |

- Features

 Steel case is chrome plated to resist corrosion

 Keys are black oxide finish

 Convenient item for pocket or tool box





BALL END AND STANDARD HEX KEY SETS





SAE and Metric, in Handy Compact Plastic Holder

| Product Code | Number of Pieces | Type | Key Style | Key Length | Size Range |
|--------------|------------------|--------|-----------|------------|---------------|
| JHW10107 | 7 | SAE | Standard | Short | 5/64 - 1/4" |
| JHW10111 | 11 | SAE | Standard | Short | .050 - 1/4" |
| JHW10113 | 13 | SAE | Standard | Short | .050 - 3/8" |
| JHW10213 | 13 | SAE | Standard | Long | .050 - 3/8" |
| JHW10507 | 7 | Metric | Standard | Short | 1.5 - 6.0 mm |
| JHW10509 | 9 | Metric | Standard | Short | 1.5 - 10.0 mm |
| JHW13213 | 13 | SAE | Ball Hex | Long | .050 - ¾" |
| JHW13609 | 9 | Metric | Ball Hex | Long | 1.5 - 10.0 mm |

Features

- Plastic holders organize hex keys securely in place.
- Keys are black oxide finish.
- · Holders are color coded, red for fractional and blue for metric.
- Ball hex key ends are designed with ball on long arm to provide 360° of rotation at up to a 30° angle.







HEX KEY SETS IN POUCH

| SAE and Me | etric | | | |
|------------------|-------------------|---------------------|---------------|---------------------------------|
| Product Code | JHWWS-44 | | JHWMWS-27 | |
| Number of Pieces | 13 | | 11 | |
| | Hex Size (Inches) | Key Length (Inches) | Hex Size (MM) | Key Length (Inches) |
| | .050 | 1 11/16 | 2 | 2 |
| | 1/16 | 1 13/16 | 2 1/2 | 2 5/16 |
| | 5/64 | 1 31/32 | 3 | 2 7/32 |
| | 3/32 | 2 ¹ /8 | 4 | 2 ¹³ / ₁₆ |
| | 7/64 | 2 1/4 | 5 | 3 5/16 |
| | 1/8 | 2 3/8 | 6 | 3 ²³ / ₃₂ |
| | 9/64 | 2 9/16 | 8 | 4 1/16 |
| | 5/32 | 2 19/32 | 10 | 4 5/8 |
| | 3/16 | 3 | 12 | 5 7/32 |
| | 7/32 | 3 3/16 | 14 | 5 ¹⁵ / ₁₆ |
| | 1/4 | 3 1/2 | 17 | 6 ⁷ /8 |
| | 5/16 | 4 | | |
| | 3/9 | 4 17/32 | | |

Features

- · Pouch keeps hex keys organized.
- Keys are black oxide finish.







| Industrial | Black | Finish | , SAE | |
|------------|----------|---------------------------------|----------|------|
| Product | Size | Length | Width | Pkg. |
| Code | (Inches) | (Inches) | (Inches) | Qty. |
| JHWHK-050 | .050 | 1 23/32 | 1/2 | 25 |
| JHWHK-1/16 | 1/16 | 1 1/8 | 1/2 | 25 |
| JHWHK-5/64 | 5/64 | 1 31/32 | 5/8 | 25 |
| JHWHK-3/32 | 3/32 | 1 13/16 | 9/16 | 25 |
| JHWHK-7/64 | 7/64 | 2 1/4 | 23/32 | 25 |
| JHWHK-1/8 | 1/8 | 2 ¹³ / ₃₂ | 3/4 | 25 |
| JHWHK-%4 | 9/64 | 2 % | 25/32 | 25 |
| JHWHK-5/32 | 5/32 | 2 21/32 | 27/32 | 25 |
| JHWHK-¾16 | 3/16 | 2 31/32 | 1 | 25 |
| JHWHK-7/32 | 7/32 | 3 5/16 | 1 | 25 |
| JHWHK-1/4 | 1/4 | 3 % | 1 1/8 | 25 |
| .IHWHK-3% | 3/2 | 4 23/32 | 1 13/32 | 5 |

Features

• Keys are black oxide finish.





L-TYPE HEX KEYS


| Industrial | Black | Finish, | Metri | C |
|-------------|-------|---------------------------------|----------|------|
| Product | Size | Length | Width | Pkg. |
| Code | (MM) | (Inches) | (Inches) | Qty. |
| JHWHK-2mm | 2 | 2 | 5/8 | 25 |
| JHWHK-2.5mm | 2 1/2 | 2 1/4 | 23/32 | 25 |
| JHWHK-3mm | 3 | 2 %16 | 13/16 | 25 |
| JHWHK-4mm | 4 | 2 ¹³ / ₁₆ | 31/32 | 25 |
| JHWHK-5mm | 5 | 3 13/32 | 1 1/8 | 25 |
| JHWHK-6mm | 6 | 3 ¾ | 1 1/8 | 10 |
| JHWHK-8mm | 8 | 4 5/16 | 1 1/8 | 5 |
| JHWHK-10mm | 10 | 4 3/4 | 1 1/2 | 5 |
| JHWHK-12mm | 12 | 5 ½ | 1 % | 5 |
| JHWHK-14mm | 14 | 6 | 1 1/2 | 5 |
| JHWHK-17mm | 17 | 6 ¾ | 2 1/2 | 1 |

Features

Keys are black oxide finish.








JHWMWS-27









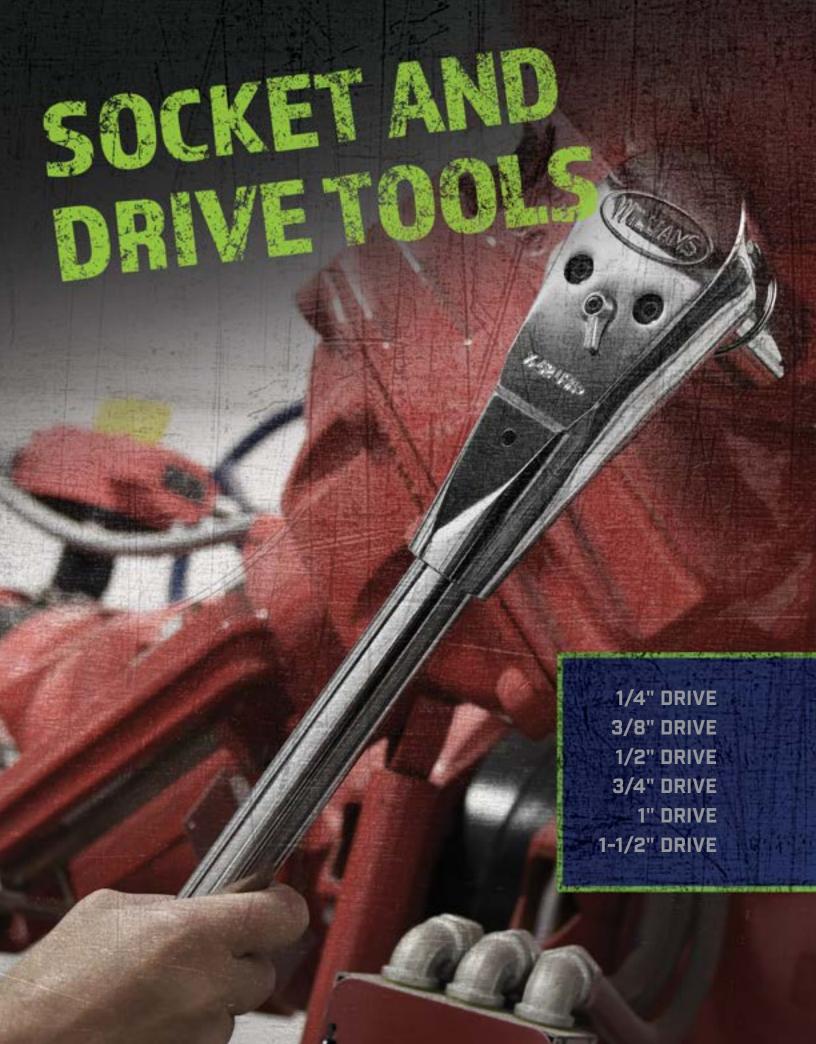



RATCHETS AND DRIVE TOOLS

Single pawl ratchet design is designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load and does not require as many working parts, reducing possible breakage and parts to repair

Enclosed head — prevents dust, dirt, and liquids from

entering head, preserving internal lubrication

36-tooth gear with 10° of engagement allowing easier ratcheting in tight conditions

Easy access reverse lever

for changing working direction quickly and easily with only one hand

Forged, one-piece ratchet

provides strength and safety for industrial applications

Nickel/Chrome plating provides increased protection from rust and corrosion

Smooth, comfort-grip handle — permits all-day use without gloves

CHROME SOCKETS

SUPERTORQUE™ lobular

openings for greater turning power without deforming the fastener



Chrome finish

feature mirror-like exterior that can be easily cleaned after each use

Extruded or hot broached from alloy steel, precision machined and fully heat treated







EXTENSIONS AND ACCESSORIES

Ball and spring socket retention





IMPACT SOCKETS

SUPERTORQUE™ lobular

openings for greater turning power without deforming the fastener



Designed for maximum engagement on 6 point fasteners

Heavy Duty - suitable for use with pneumatic and electric impact wrenches



Up to 30° angle offset

Specially heat treated for impact use to provide long life, safety, and durability

FASTENER MANAGEMENT

HEAVY-DUTY

SOCKETAND

DRIVETOOLS

FLEXTENSIONS

Socket retention pin is TIG welded, providing full rotation power to the socket

SUPERTORQUE™

lobular openings for greater turning power without deforming the fastener



7/32" cross hole & bevel on drive end has a for ease of use



TURBOSOCKET® SALVAGE SOCKETS

- Quickly and easily remove damaged or rounded nuts and bolts
- For use with ratchet, breaker bar or T-handle
- Grip on fastener tightens as more torque is applied
- No hammering is required to install socket over fastener
- Use on all types of standard nuts and bolts as well as studs, pipe nipples, and corroded auto and marine fasteners
- May be used for "best fit" on metric and fractional fasteners
- May be used with air or electric impact wrench for extra speed and turning power





MULTI DRIVE SOCKET & DRIVE TOOL SETS

| Product Code | Description | | |
|--------------|---|--|--|
| JHW50614B | 146 Piece ¼", ¾", ½" Drive Socket Set | | |
| | 6 Point Rugged Case System Tool Set, SAE & Metric | | |
| | Complete details on page 197, 222, 267 | | |
| JHW50612B | 138 Piece ¼", ¾", ½" Drive Socket Set | | |
| | 6 Point Rugged Case System Tool Set, SAE & Metric | | |
| | Complete details on page 198, 223, 268 | | |
| JHW50611B | 95 Piece ¼" & 3/8" Drive Master Socket, Wrench, | | |
| | and Screwdriver Set | | |
| | 6 & 12 Point Rugged Case System Tool Set, SAE | | |
| | Complete details on page 199, 224 | | |
| JHW50622B | 89 Piece 1/4" & 3/8" Drive Master Socket and Tool Set | | |
| | 6 & 12 Point Rugged Case System Tool Set, Metric | | |
| | Complete details on page 200, 255 | | |
| JHW50681 | 32 Piece ¼" & 3/8" Drive Bit Socket Set | | |
| | 6 Point Compact Case Tool Set, SAE & Metric | | |
| | Complete details on page 202 | | |

- Sets include comprehensive assortment of sockets and drive tools in multiple drive sizes
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Rugged case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two component handles are easy to grip and comfortable to carry















JHW50622B



JHW50681



















| 6 & 8 Point SA Product Code | AE, Packed in Exclusive I | Keep-Safe-Foam Description | System with Metal Box | | |
|--------------------------------|------------------------------|-------------------------------------|------------------------------|--|--|
| JHWWSM38HF | TB 38 Piece To | Tool Set with TB-103 Metal Tool Box | | | |
| JHWWSM-38H | | | | | |
| Contents Incl | ude: | - | | | |
| Drive Tools: | | Drive Tools: | | | |
| Product Code | Description | Product Code | Description | | |
| JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWM-106A | Spinner Handle | | |
| JHWM-42A | Flex Handle | JHWM-140A | Universal Joint | | |
| JHWM-102 | 2" Extension | JHW30008 | Sliding T-Handle | | |
| JHWM-104 | 4" Extension | JHWMFE-6 | 6" Flexible Extension | | |
| JHWM-115 | 6" Extension | | | | |
| | | Deep 6-Point Sockets | | | |
| Shallow 6-Poir | nt Sockets | Product Code | Size (Inches) | | |
| Product Code | Size (Inches) | JHWMD-606 | 3/16 | | |
| JHWM-605 | 5/32 | JHWMD-607 | 7/32 | | |
| JHWM-606 | 3/16 | JHWMD-608 | 1/4 | | |
| JHWM-607 | 7/32 | JHWMD-609 | 9/32 | | |
| JHWM-608 | 1/4 | JHWMD-610 | 5/16 | | |
| JHWM-609 | 9/32 | JHWMD-611 | 11/32 | | |
| JHWM-610 | 5/16 | JHWMD-612 | 3/8 | | |
| JHWM-611 | 11/32 | JHWMD-614 | ⁷ / ₁₆ | | |
| JHWM-612 | 3/8 | JHWMD-616 | 1/2 | | |
| JHWM-614 | ⁷ / ₁₆ | JHWMD-618 | 9/16 | | |
| JHWM-616 | 1/2 | | | | |
| JHWM-618 | 9/16 | Screwdriver Bit Sockets | | | |
| | | Product Code | Description | | |
| Shallow 8-Poir | nt Sockets | JHW35051 | #1 Phillips® Tip | | |
| Product Code | Size (Inches) | JHW35052 | #2 Phillips® Tip | | |
| 11 11 4 4 4 000 | 41 | 11 11 1/0 = 0.40 | 7/ 1/01 ii 1 m | | |

JHW35040

JHW35041

JHW35042



JHWM-808

JHWM-810





Features

- · Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use



Features

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Metal tool box made for years of rugged use

26 PIECE 1/4" DRIVE **SOCKET AND DRIVE TOOL SET**

1/4

5/16

3/8



5/32" Slotted Tip

7/32" Slotted Tip

9/32" Slotted Tip



| 6 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box | | | | | |
|---|--|--|--|--|--|
| Product Code | Description | | | | |
| JHWWSM26HFTB JHWWSM-26HF | 26 Piece Tool Set with TB-102 Metal Tool Box 26 Piece Tool Set Only - Packed in Keep Safe Foam System | | | | |

| Contents Inclu | de: | | |
|-----------------|------------------------------|---------------------|------------------------------|
| Drive Tools: | | Drive Tools: | |
| Product Code | Description | Product Code | Description |
| JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWM-106A | Spinner Handle |
| JHWM-102 | 2" Extension | JHWM-140A | Universal Joint |
| JHWM-115 | 6" Extension | | |
| Shallow 6-Point | t Sockets | Deep 6-Point So | ockets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWM-605 | 5/32 | JHWMD-606 | 3/16 |
| JHWM-606 | 3/16 | JHWMD-607 | ⁷ / ₃₂ |
| JHWM-607 | ⁷ / ₃₂ | JHWMD-608 | 1/4 |
| JHWM-608 | 1/4 | JHWMD-609 | 9/32 |
| JHWM-609 | 9/32 | JHWMD-610 | 5/16 |
| JHWM-610 | 5/16 | JHWMD-611 | 11/32 |
| JHWM-611 | 11/32 | JHWMD-612 | 3/8 |
| JHWM-612 | 3/8 | JHWMD-614 | ⁷ / ₁₆ |
| JHWM-614 | ⁷ / ₁₆ | JHWMD-616 | 1/2 |
| JHWM-616 | 1/2 | JHWMD-618 | 9/16 |
| JHWM-618 | ⁹ / ₁₆ | | |











6 & 12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|------------------|--|
| JHWWSM-22FTB | 22 Piece Tool Set with TB-102 Metal Tool Box |
| JHWWSM-22F | 22 Piece Tool Set Only - Packed in Keep Safe Foam System |
| Contents Include | Δ: |

| Drive Tools: | | Deep 6-Point Soc | kets |
|--------------------------|------------------------------|------------------|------------------------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWMD-605 | 5/32 |
| JHWM-102 | 2" Extension | JHWMD-606 | 3/16 |
| JHWM-106A | Spinner Handle | JHWMD-608 | 1/4 |
| JHWM-140A | Universal Joint | | |
| Shallow 6-Poi | nt Sockets | Deep 12-Point So | ckets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWM-605 | 5/32 | JHWMD-1210 | 5/16 |
| JHWM-606 | 3/16 | JHWMD-1211 | 11/32 |
| JHWM-608 | 1/4 | JHWMD-1212 | 3/8 |
| | | JHWMD-1214 | ⁷ / ₁₆ |
| Shallow 12-Point Sockets | | JHWMD-1216 | 1/2 |
| Product Code | Size (Inches) | JHWMD-1218 | 9/16 |
| JHWM-1210 | 5/16 | | |
| JHWM-1211 | 11/32 | | |
| JHWM-1212 | 3/8 | | |
| JHWM-1214 | 7/16 | | |
| JHWM-1216 | 1/2 | | |
| JHWM-1218 | 9/16 | | |



- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



19 PIECE 1/4" DRIVE **SOCKET AND DRIVE TOOL SET**







6 & 8 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Drive Tools: | Shallow 6-Point Sockets |
|--------------------------|--|
| Contents Include: | |
| JHWWSM-19HF | 19 Piece Tool Set Only - Packed in Keep Safe Foam System |
| JHWWSM19HFTB | 19 Piece Tool Set with TB-101 Metal Tool Box |
| Product Code | Description |

| Contents inc | iuae: | | |
|---------------------|------------------------------|-----------------|---------------|
| Drive Tools: | | Shallow 6-Point | Sockets |
| Product Code | Description | Product Code | Size (Inches) |
| JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWM-606 | 3/16 |
| JHWM-102 | 2" Extension | JHWM-607 | 7/32 |
| JHWM-115 | 6" Extension | JHWM-608 | 1/4 |
| JHWM-106A | Spinner Handle | JHWM-609 | 9/32 |
| JHWM-140A | Universal Joint | JHWM-610 | 5/16 |
| JHWM-42A | Flex Handle | JHWM-611 | 11/32 |
| | | JHWM-612 | 3/8 |
| Shallow 8-Poin | t Sockets | JHWM-614 | 7/16 |
| Product Code | Size (Inches) | JHWM-616 | 1/2 |
| JHWM-808 | 1/4 | JHWM-618 | 9/16 |
| JHWM-810 | 5/16 | | |
| JHWM-812 | 3/8 | | |

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use





















JHWWSM15HFTB

15 PIECE 1/4" DRIVE SOCKET AND DRIVE TOOL SET





6 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description | |
|--------------|--|--|
| JHWWSM15HFTB | 15 Piece Tool Set with TB-101 Metal Tool Box | |
| JHWWSM-15HF | 15 Piece Tool Set Only - Packed in Keep Safe Foam System | |

Contents Include:

| Drive Tools: | D | lp 1 . 0 . | 5 |
|----------------|------------------------------|-----------------|-----------------|
| Product Code | Description | Product Code | Description |
| JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWM-106A | Spinner Handle |
| JHWM-102 | 2" Extension | JHWM-140A | Universal Joint |
| JHWM-115 | 6" Extension | | |
| Shallow 6-Poir | nt Sockets | Shallow 6-Point | Sockets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWM-606 | 3/16 | JHWM-611 | 11/32 |
| JHWM-607 | 7/32 | JHWM-612 | 3/8 |
| JHWM-608 | 1/4 | JHWM-614 | 7/16 |
| JHWM-609 | 9/32 | JHWM-616 | 1/2 |
| JHWM-610 | 5/16 | JHWM-618 | 9/16 |

Features

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Metal tool box made for years of rugged use





13 PIECE 1/4" DRIVE SOCKET AND DRIVE TOOL SET







6 & 12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|----------------------------|--|
| JHWWSM-13FTB JHWWSM-13F | 13 Piece Tool Set with TB-101 Metal Tool Box 13 Piece Tool Set Only - Packed in Keep Safe Foam System |
| | |

Contents Include:

| Drive Tools: | | Shallow 12-Poir | nt Sockets |
|-----------------|------------------------------|-----------------|---------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWM-1208 | 1/4 |
| JHWM-102 | 2" Extension | JHWM-1210 | 5/16 |
| JHWM-106A | Spinner Handle | JHWM-1211 | 11/32 |
| JHWM-140A | Universal Joint | JHWM-1212 | 3/8 |
| | | JHWM-1214 | 7/16 |
| Shallow 6-Point | t Sockets | JHWM-1216 | 1/2 |
| Product Code | Size (Inches) | JHWM-1218 | 9/16 |
| JHWM-605 | 5/32 | | |
| JHWM-606 | 3/16 | | |

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use









6 Point Metric, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWMSM30HFTB | 30 Piece Metric Tool Set with TB-103 Metal Tool Box |
| JHWMSM-30HF | 30 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: Product Code Description Product Code Description JHWM-52EHA 5 ¹/₂¹ Enclosed Head Ratchet JHWM-106A Spinner Handle JHWM-102 2 " Extension JHWM-140A Universal Joint JHWM-115 6 " Extension JHWM-42A Flex Handle Shallow 6-Point Sockets Product Code Size (MM) Deep 6-Point Sockets Product Code Size (MM) Product Code Size (MM) JHWMM-604 4 JHWMMD-604 4 JHWMM-605 5 JHWMMD-605 5 JHWMM-606 6 JHWMMD-605.5 5 ¹/₂ JHWMM-607 7 JHWMMD-606 6 JHWMM-608 8 JHWMMD-607 7 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-613 13 JHWMM-614 14 JHWMMD-614 | Contents inc | luuci | | | |
|--|---------------------|-------------------------------|-----------------|-------------------------------|--|
| JHWM-52EHA | Drive Tools: | | | | |
| JHWM-102 | Product Code | Description | Product Code | Description | |
| Shallow 6-Point Sockets Deep 6-Point Sockets Product Code Size (MM) Shallow 6-Point Sockets Product Code Size (MM) Size (M | JHWM-52EHA | 5 1/2" Enclosed Head Ratchet | JHWM-106A | Spinner Handle | |
| Shallow 6-Point Sockets Deep 6-Point Sockets Product Code Size (MM) JHWMM-604 4 JHWMM-605 5 JHWMM-605.5 5 1/2 JHWMM-606 6 JHWMM-606 6 JHWMM-607 7 JHWMM-608 8 JHWMM-609 9 JHWMM-609 9 JHWMM-610 10 JHWMM-611 11 JHWMM-612 12 JHWMM-613 13 JHWMM-613 13 | JHWM-102 | 2" Extension | JHWM-140A | Universal Joint | |
| Product Code Size (MM) Product Code Size (MM) JHWMM-604 4 JHWMMD-604 4 JHWMM-605 5 JHWMMD-605 5 JHWMM-605.5 5 ½ JHWMMD-605.5 5½ JHWMM-606 6 JHWMMD-606 6 JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWM-115 | 6" Extension | JHWM-42A | Flex Handle | |
| Product Code Size (MM) Product Code Size (MM) JHWMM-604 4 JHWMMD-604 4 JHWMM-605 5 JHWMMD-605 5 JHWMM-605.5 5 ½ JHWMMD-605.5 5½ JHWMM-606 6 JHWMMD-606 6 JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | | | | | |
| JHWMM-604 4 JHWMMD-604 4 JHWMM-605 5 JHWMMD-605 5 JHWMM-605.5 5 ½ JHWMMD-605.5 5½ JHWMM-606 6 JHWMMD-606 6 JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | Shallow 6-Poin | t Sockets | Deep 6-Point So | ckets | |
| JHWMM-605 5 JHWMMD-605 5 JHWMM-605.5 5 \(^1/2\) JHWMMD-605.5 5 \(^1/2\) JHWMM-606 6 JHWMMD-606 6 JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | Product Code | Size (MM) | Product Code | Size (MM) | |
| JHWMM-605.5 5 ½ JHWMMD-605.5 5 ½ JHWMM-606 6 JHWMMD-606 6 JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-604 | 4 | JHWMMD-604 | 4 | |
| JHWMM-606 6 JHWMMD-606 6 JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-605 | 5 | JHWMMD-605 | 5 | |
| JHWMM-607 7 JHWMMD-607 7 JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-605.5 | 5 ¹ / ₂ | JHWMMD-605.5 | 5 ¹ / ₂ | |
| JHWMM-608 8 JHWMMD-608 8 JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-606 | 6 | JHWMMD-606 | 6 | |
| JHWMM-609 9 JHWMMD-609 9 JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-607 | 7 | JHWMMD-607 | 7 | |
| JHWMM-610 10 JHWMMD-610 10 JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-608 | | JHWMMD-608 | 8 | |
| JHWMM-611 11 JHWMMD-611 11 JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-609 | 9 | JHWMMD-609 | 9 | |
| JHWMM-612 12 JHWMMD-612 12 JHWMM-613 13 JHWMMD-613 13 | JHWMM-610 | 10 | JHWMMD-610 | 10 | |
| JHWMM-613 13 JHWMMD-613 13 | JHWMM-611 | 11 | JHWMMD-611 | 11 | |
| | JHWMM-612 | 12 | JHWMMD-612 | 12 | |
| JHWMM-614 14 JHWMMD-614 14 | JHWMM-613 | 13 | | 13 | |
| | JHWMM-614 | 14 | JHWMMD-614 | 14 | |



Features

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use



17 PIECE 1/4" DRIVE **SOCKET AND DRIVE TOOL SET**





6 Point Metric, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|-----------------------------|---|
| JHWMSM17HFTB JHWMSM-17HF | 17 Piece Metric Tool Set with TB-101 Metal Tool Box 17 Piece Tool Set Only - Packed in Keep Safe Foam System |
| | • |

| Contents Incl | ude: | | |
|------------------------------------|--|------------------------|-----------------------------------|
| Drive Tools: Product Code | Description | Product Code | Description |
| JHWM-52EHA JHWM-102 JHWM-115 | 5-½" Enclosed Head Ratchet 2" Extension 6" Extension | JHWM-106A JHWM-140A | Spinner Handle Universal Joint |
| Shallow 6-Point | Sockets Size (MM) | Product Code | Size (MM) |
| Product Code JHWMM-604 | Size (WIV) | JHWMM-609 | Size (IVIIVI) |
| JHWMM-605 | 5 | JHWMM-610 | 10 |
| JHWMM-605.5 | 5.5 | JHWMM-611 | 11 |
| JHWMM-606 | 6 | JHWMM-612 | 12 |
| JHWMM-607 | 7 | JHWMM-613 | 13 |
| JHWMM-608 | 8 | JHWMM-614 | 14 |

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



















Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

146 PIECE 1/4", 3/8", 1/2" DRIVE SOCKET AND DRIVE TOOL SET









6 & 12 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Description | |
|--------------|---|--|
| JHW50614B | 146 Piece 1/4", 3/8", 1/2" Drive Socket Set | |

1/4" Drive Contents Include:

1/4" Drive Tools

Ratchet 3" Extension Handle Universal Joint

1/4" Drive Deep 6 Point Sockets

| Metric Size | SAE Size |
|-------------|----------|
| (MM) | (Inches) |
| 4 | 3/16 |
| 5 | 7/32 |
| 6 | 1/4 |
| 7 | 9/32 |
| 8 | 5/16 |
| 9 | 11/32 |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | |

1/4" Drive Shallow 6 Point Sockets

| Metric Size | SAE Size |
|-------------|----------|
| (MM) | (Inches) |
| 4 | 5/32 |
| 5 | 3/16 |
| 5.5 | 7/32 |
| 6 | 1/4 |
| 7 | 9/32 |
| 8 | 5/16 |
| 9 | 11/32 |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 1/ | |

1/4" Drive Hex Bit Sockets

| Metric Size | SAE Size |
|-------------|----------|
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

1/4" Drive Screwdriver Bit Sockets

| ariver bit Sockets | | |
|--|-----------------|--|
| Size | Size | |
| 5/32" Slotted Tip | #0 Phillips Tip | |
| 5/32" Slotted Tip 7/32" Slotted Tip | #1 Phillips Tip | |
| 32" Slotted Tip | #2 Phillips Tip | |

1/4" Drive

| Iorx Bit Sockets | |
|------------------|------|
| Size | Size |
| T10 | T25 |
| T15 | T27 |
| T20 | T30 |

3/8" Drive Contents Include:

3/8" Drive Tools

Ratchet 3" Extension 6" Extension Adaptor - 3/8" F x 1/4" M

3/8" Drive Deep 12 Point Sockets

| Metric Size | SAE Size |
|-------------|----------|
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 19 | |

3/8" Drive Shallow

| 6 Point Sockets | | |
|-----------------|----------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 6 | 1/4 | |
| 7 | 5/16 | |
| 8 | 3/8 | |
| 9 | 7/16 | |
| 10 | 1/2 | |
| 11 | 9/16 | |
| 12 | 5/8 | |
| 13 | 11/16 | |
| 14 | 3/4 | |
| 15 | 13/16 | |
| 16 | 7/8 | |
| 17 | 15/16 | |
| 18 | 1 | |
| 19 | | |

3/8" Drive Spark Plug Socket

| | |
|-------------------|--|
| SAE Size (Inches) | |
| 5/8 | |
| 13/16 | |

1/2" Drive Contents Include:

1/2" Drive Tools

Ratchet 6" Extension 10" Extension Universal Joint Adaptor - ½" F x 3%" M

1/2" Drive Shallow 12 Point Sockets

SAE Size (Inches) % 7/16 1/2 %16 5/6 11/16 3/4 13/16 7/6 15/16 1



138 PIECE 1/4", 3/8", 1/2" DRIVE SOCKET AND DRIVE TOOL SET







6 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Description | |
|--------------|---|--|
| JHW50612B | 138 Piece 1/4", 3/8", 1/2" Drive Socket Set | |

1/4" Drive Contents Include:

1/4" Drive Tools

Ratchet
1 ½" Extension
3" Extension
Spinner Handle
Universal Joint
Hex Bit Holder
13 Piece Insert Bit Set

1/4" Drive Deep 6 Point Sockets

| 6 Point Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 9/32 |
| 9 | 5/16 |
| 10 | 11/32 |
| 11 | 3/8 |
| 12 | 7/16 |
| 13 | 1/2 |

1/4" Drive Shallow 6 Point Sockets

| Metric Size (MM) | SAE Size (Inches) | |
|---------------------|----------------------|--|
| 4 | 5/32 | |
| | | |
| 5 | ³ /16 | |
| 5.5 | 7/32 | |
| 6 | 1/4 | |
| 7 | 9/32 | |
| 8 | 5/16 | |
| 9 | 11/32 | |
| 10 | 3/8 | |
| 11 | ⁷ /16 | |
| 12 | 1/2 | |
| 13 | | |

3/8" Drive Contents Include:

3/8" Drive Tools

Ratchet 3" Extension 6" Extension Universal Joint Adaptor Hex Bit Holder

3/8" Drive Deep

| 12 Point Sockets | |
|------------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | 13/16 |
| 18 | 7/8 |
| 19 | |
| | |

3/8" Drive Shallow 6 Point Sockets

| Metric Size (MM) | SAE Size (Inches) |
|---------------------|----------------------|
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | |
| 18 | |
| 19 | |

1/2" Drive Contents Include:

1/2" Drive Tools

Ratchet 6" Extension 10" Extension Universal Joint Adaptor

1/2" Drive 12 Point

| Sockets | | |
|-------------|-------------------------------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 10 | 3/8 | |
| 11 | 7/16 | |
| 12 | 1/2 | |
| 13 | 9/16 | |
| 14 | 5/8 | |
| 15 | 11/16 | |
| 16 | 3/4 | |
| 17 | ¹³ / ₁₆ | |
| 18 | 7/8 | |
| 19 | ¹⁵ / ₁₆ | |
| 21 | 1 | |
| 22 | 1 1/16 | |
| 24 | 1 1/8 | |
| 27 | 1 3/16 | |
| 30 | 1 1/4 | |
| 32 | | |





- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry













JHW50611B

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

95 PIECE 1/4" & 3/8" DRIVE MASTER SOCKET AND TOOL SET









6 & 12 Point Rugged-Case-System Tool Set, SAE

| Product Code | Description | |
|--------------|---|--|
| JHW50611B | 95 Piece Master Socket, Wrench, and Screwdriver Set | |

1/4" Drive Contents Include:

1/4" Drive Tools

36 Tooth Quick-Release Ratchet
1 1/2" Extension
3" Extension
Flex Handle
Spinner Handle
Universal Joint
1/4" F x 3%" M Adapter

1/4" Drive Shallow 6-Point Sockets

SAE Size (Inches)

3/16
7/32
1/4
9/32
5/16
11/32
3/8
7/16
1/2
9/16

1/4" Drive Deep 6 Point Sockets

6 Point Sockets

SAE Size (Inches)

3/16
7/32
1/4
9/32
5/16
11/32
3/8
7/16
1/2
9/16

1/4" Drive Hex Bit Sockets

| mex bit Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

1/4" Drive Screwdriver Bit Sockets

| Bit Sockets | |
|-------------------|-----------------|
| Size | Size |
| 5/32" Slotted Tip | #0 Phillips Tip |
| 7/32" Slotted Tip | #1 Phillips Tip |
| %" Slotted Tin | #2 Phillins Tin |

1/4" Drive orx Bit Sockets

| fork bit Sockets | |
|------------------|------|
| Size | Size |
| T10 | T25 |
| T15 | T27 |
| T20 | T30 |

Contents Include:

3/8" Drive

3/8" Drive Tools

38 Tooth Quick-Release Ratchet
3" Extension
6" Extension
10" Extension
10" Flex Handle
Universal Joint
Sliding T-Handle
3/6" F x 1/4" M Adapter
3/6" F x 1/2" M Adapter

3/8" Drive Shallow 6-Point Sockets

6-Point Sockets
SAE Size (Inches)

3/16

7/16

1/2

9/16

5/8

11/16

3/4

13/16

7/8

15/16

3/8" Drive Deep 12 Point Sockets

SAE Size (Inches)

3/16

7/16

1/2

9/16

5/8

11/16

3/4

13/16

7/8

15/16

Other Contents Include:

Comfort Grip Screwdrivers

3/16" x 4" Slotted 1/4" x 4" Slotted #1 x 3" Phillips® #2 x 4" Phillips®

12 Point Combination Wrenches

| WIGHT | |
|------------------------------|--|
| SAE Size (Inches) | |
| 1/4 | |
| 5/16 | |
| 3/8 | |
| ⁷ / ₁₆ | |
| 1/2 | |
| 9/16 | |
| 5/8 | |
| 11/16 | |
| 3/4 | |
| | |



89 PIECE 1/4" & 3/8" DRIVE MASTER **SOCKET AND TOOL SET**







6 & 12 Point Rugged-Case-System Tool Set, Metric

| Prod | uct | Code | |
|------|-----|------|--|
| | | | |

Description

JHW50622B

89 Piece Master Socket, Wrench and Screwdriver Set

1/4" Drive **Contents Include:**

1/4" Drive Tools

36 Tooth Quick-Release Ratchet 1 ½" Extension 3" Extension Flex Handle Spinner Handle **Universal Joint** 1/4" F x 3/8" M Adapter

1/4" Drive Shallow 6-Point Sockets

1/4" Drive Hay Rit Cacket

| nex bit Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

1/4" Drive Screwdriver Bit Sockets

| Dit Occide | |
|-------------------|-----------------|
| Size | Size |
| 5/32" Slotted Tip | #0 Phillips Tip |
| 7/32" Slotted Tip | #1 Phillips Tip |
| %2" Slotted Tip | |

1/4" Drive

| iorx bit Sockets | | |
|------------------|------|--|
| Size | Size | |
| T10 | T25 | |
| T15 | T27 | |
| T20 | T30 | |
| | | |

3/8" Drive **Contents Include:**

3/8" Drive Tools

38 Tooth Quick-Release Ratchet 3" Extension 6" Extension 10" Extension 10" Flex Handle **Universal Joint** Sliding T-Handle 3/8" F x 1/4" M Adapter 3/8" F x 1/2" M Adapter

3/8" Drive Shallow 6-I

| Point Sockets |
|-----------------|
| etric Size (MM) |
| 8 |
| 9 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| |

3/8" Drive Deep 12-Point Sockets

Other Contents Include:

Comfort Grip Screwdrivers

3/16" x 4" Slotted 1/4" x 4" Slotted #1 x 3" Phillips® #2 x 4" Phillips®

12 Point Combination

| wrenches | |
|------------------|--|
| Metric Size (MM) | |
| 6 | |
| 8 | |
| 10 | |
| 12 | |
| 13 | |
| 14 | |
| 15 | |
| 17 | |
| 19 | |
| | |





- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- · Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- · Two-component handles are easy to grip and comfortable to carry

















6 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Description |
|--------------|--------------------------------|
| JHW50602B | 67 Piece 1/4" Drive Socket Set |
| • | |

Contents Include:

1/4" Drive Tools

| Rate | chet |
|----------------------|----------|
| Flex Handle | |
| 4" Extension | |
| 8" Extension | |
| 18" Sliding T-handle | |
| Universal Joint | |
| Spinner Disc | |
| Spinner Disc | |
| 1/4" Drive Shallow | |
| 6-Point Sockets | |
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 3/16 |
| 5 | 7/32 |
| 5.5 | 1/4 |
| 6 7 | 9/32 |
| 7 | 5/16 |
| 8 | 11/32 |
| 9 | 3/8 |
| 10 | 7/16 |
| 11 | 1/2 |
| 12 | 9/16 |
| 13 | |

| 1/4" Drive Deep 6 Point Sockets | |
|------------------------------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 3/16 |
| 5 | 7/32 |
| 6 | 1/4 |
| 7 | 9/32 |
| 8 | 5/16 |
| 9 | 11/32 |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 1/4" Drive | |

| 10 | 3/8 | |
|-------------------------------|------------------------------|--|
| 11 | 7/16 | |
| 12 | 1/2 | |
| 13 | 9/16 | |
| 1/4" Drive Hex Bit Sockets | | |
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 3 | 1/8 | |
| 4 | 5/32 | |
| 5 | ³ / ₁₆ | |
| 6 | 7/32 | |
| 7 | 1/4 | |
| 8 | 5/16 | |

| 1/4" Drive Slotted Bit Sockets, SAE | |
|---|--|
| Size | |
| 5/32 | |
| 7/32 | |
| 9/32 | |
| 1/4" Drive Phillips Bit Sockets, SAE | |

Size

#2



Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

47 PIECE 1/4" DRIVE SOCKET AND DRIVE TOOL SET







6 Point Rugged-Case-System Tool Set, SAE and Metric

| | • | |
|--------------|---|--|
| Product Code | Description | |
| JHW50601B | 47 Piece Deluxe 6-Point 1/4" Drive Socket Set | |

Contents Include:

| 1/4" Drive Shallow 6-Point Sockets | |
|---------------------------------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 3/16 |
| 5 | 7/32 |
| 5.5 | 1/4 |
| 6 | 9/32 |
| 7 | 5/16 |
| 8 | 11/32 |
| 9 | 3/8 |
| 10 | 7/16 |
| 11 | 1/2 |
| 12 | 9/16 |
| 13 | |
| 14 | |
| | |

| 1/4" Drive Hex Bit Sockets | |
|-------------------------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

| Screwdriver Bit Sockets |
|----------------------------|
| Size |
| 5/32" Slotted Tip |
| 7/32" Slotted Tip |
| 9/32" Slotted Tip |
| #0 Phillips® Tip |
| #1 Phillips® Tip |
| #2 Phillips® Tip |
| |







6 Point Rugged-Case-System Tool Set, Metric

| Product Code | Description |
|--------------|---------------------|
| JHW50604B | 36 Piece Socket Set |

Contents Include:

| 1/4" Drive Tools | 1/4" Drive Phillips [®] Sockets | 1/4" Drive TORX® Bit Sockets |
|--------------------|---|---------------------------------|
| Ratchet | #1 | T8 |
| 1 ½" Extension | #2 | T10 |
| 6" Extension | #3 | T15 |
| Universal Joint | | T20 |
| Sliding T-Handle | 1/4" Drive Slotted | T25 |
| Spinner Handle | Sockets | T27 |
| | Metric Size (MM) | T30 |
| 1/4" Drive Shallow | 4 | |
| 6 Point Sockets | 5.5 | |
| Metric Size (MM) | 7 | |
| 4 | | |
| 4.5 | 1/4" Drive Hex Bit | |
| 5 | Sockets | |
| 6 | 3 | |
| 7 | 4 | |
| 8 | 6 | |
| 9 | 8 | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |



32 PIECE 1/4" & 3/8" DRIVE BIT SOCKET SET







6 Point Compact Case Tool Set, SAE and Metric

| Product Code | Description |
|--------------|---|
| JHW50681 | 32 Piece 1/4" & 3/8" Drive Bit Socket Set |

Contents Include:

| 3/8" Driv Soc | | 3/8" Drive Phillips® Sockets | 1/4" Drive TORX® Bit Sockets |
|------------------|------------------------------|---------------------------------|---------------------------------|
| Metric Size | SAE Size | #1 | T10 |
| (MM) | (Inches) | #2 | T15 |
| 4 | 1/8 | #3 | T20 |
| 5 | 9/64 | | T25 |
| 6 | 5/32 | 3/8" Drive Slotted | T27 |
| / 8 | ³ / ₁₆ | Sockets | T30 |
| 9 | 7/32 1/4 | SAE Size (Inches) | |
| 10 | 5/ ₁₆ | 1/4 | 3/8" Drive TORX® Bit |
| | 3/8 | 5/16 | Sockets |
| | | 3/8 | T40 |
| | | 3/16 | T45 |
| | | | T47 |
| | | | T50 |



JHW50681

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight









JHW50661B





JHW50672A

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight



27 PIECE 1/4" DRIVE **SOCKET AND DRIVE TOOL SET**







6 Point Compact Case Tool Set. SAE and Metric

| o ronnt compe | act base 1001 bet, bal and wethic |
|---------------|---|
| Product Code | Description |
| JHW50661B | 27 Piece 1/4" Drive Socket and Drive Tool Set |

JHW50661B

Contents Include:

| 1/4" Drive Tools: |
|--------------------------|
| 5 1/4" Pear Head Ratchet |
| 1 ½" Extension |
| 6" Extension |
| Spinner Handle |
| Universal Joint |

| 1/4" Drive Shallow | | |
|--------------------|----------|--|
| 6 Point Sockets: | | |
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 4 | 3/16 | |
| 5 | 7/32 | |
| 5.5 | 1/4 | |
| 6 | 9/32 | |
| 7 | 5/16 | |
| 8 | 11/32 | |
| 9 | 3/8 | |
| 10 | 7/16 | |
| 11 | 1/2 | |
| 12 | 9/16 | |
| 13 | | |
| 14 | | |

21 PIECE 1/4" DRIVE **SOCKET AND DRIVE TOOL SET**





| 6 Point | Compact | Case ' | Tool | Set. | SAE |
|-----------|---------|--------|------|------|-----|
| O I OIIIL | Compact | Ouse | | oct, | |

| Product Code | Description |
|--------------|---|
| JHW50662B | 21 Piece 1/4" Drive Socket and Drive Tool Set |

Contents Include:

| | 1/4" Drive Shallow 6 Point Sockets | 1/4" Drive Deep 6 Point Sockets |
|--------------------------|---------------------------------------|------------------------------------|
| 1/4" Drive Tools: | SAE Size (Inches) | SAE Size (Inches) |
| 5 1/4" Pear Head Ratchet | 3/16 | 1/4 |
| 1 ½" Extension | 7/32 | 9/32 |
| 3" Extension | 1/4 | 5/16 |
| 6" Extension | 9/32 | 11/32 |
| Spinner Handle | 5/16 | 3/8 7/ |
| | 11/32 | ⁷ /16 |
| | 3/8 | '/2 |
| | 7/16 | |
| | 1/2 | |

27 PIECE 1/4" DRIVE **SOCKET AND DRIVE TOOL SET**







12 Point Compact Case Tool Set, SAE and Metric

| Product Code | Description |
|--------------|---|
| JHW50672A | 27 Piece 1/4" Drive Socket and Drive Tool Set |

Contents Include:

| | 1/4" Drive Shallow 12 Point Sockets | 1/4" Drive Shallow 12 Point Sockets |
|--------------------------|--|--|
| 1/4" Drive Tools: | SAE Size (Inches) | Metric Size (MM) |
| 5 1/4" Pear Head Ratchet | 3/16 | 4 |
| 1 ½" Extension | 7/32 | 5 |
| 6" Extension | 1/4 | 6 |
| Spinner Handle | 9/32 | 7 |
| Universal Joint | 5/16 | 8 |
| | 11/32 | 9 |
| | 3/8 | 10 |
| | 7/16 | 11 |
| | 1/2 | 12 |
| | <u>9/16</u> | 13 |
| | | 14 |



1/4" DRIVE ENCLOSED HEAD RATCHETS

Sealed Narrow Head Design, Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|---|-------------------------------|-----------------|
| JHWM-52EHA | Chrome Finish Enclosed Head Ratchet | 5 ¹ / ₄ | 36 |
| JHWM-52EHFA | Chrome Finish Flex Head Ratchet | 7 | 36 |
| JHWMB-52EHA | Black Industrial Finish Enclosed Head Ratchet | 5 ¹ / ₄ | 36 |
| JHWM-52EHRKA | Repair Kit for Enclosed Head Ratchets | | |

Fed. Spec: ANSI B107.10M

Features

- Enclosed head is sealed to prevent dust, dirt, and liquids from entering head, preserving internal lubrication
- · Forged one-piece ratchet provide strength and safety for industrial applications
- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- . Nickel/Chrome plating provides increase protection from rust and corrosion
- . Chrome finish models feature mirror-like exterior that can be easily cleaned after each use
- Single Pawl ratchet design:
 - Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load
 - Does not require as many working parts, reducing possible breakage and parts to repair
- Easy access reverse lever allows user to change working direction quickly and easily with only one hand



1/4" DRIVE ROUND HEAD RATCHET

High-Polished Chrome Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|-----------------------------------|-----------------|-----------------|
| JHWM-52A | Chrome Finish Round Head Ratchet | 5 | 40 |
| JHWM-52ARK | Repair Kit for Round Head Ratchet | | |

Fed. Spec: ANSI B107.10M

Features

- Single pawl design with 45 teeth action provides a 5° ratcheting angle
- . Shift lever reverses action instantly
- Knurled handle provides a non-slip grip
- · Chrome plating provides increased protection from rust and corrosion



1/4" DRIVE HANDLES

High-Polished Chrome Finish

| iligii-r olisilet | | | |
|-------------------|----------------------------|--------------------------------|--|
| Product Code | Description | Length (Inches) | |
| JHWM-106A | Spinner Handle | 6 | |
| JHWM-15A | Speeder Handle | 15 ¹ / ₂ | |
| JHWM-42A | Flex Handle Breaker Bar | 5 ³ / ₄ | |
| JHWM-42RK | Repair Kit for Flex Handle | | |

Fed. Spec: ANSI B107.10M

- Chrome plating provides increased protection from rust and corrosion
- . Drive handles provide extra leverage with greater strength than ratchets
- Spinner handle features 1/4" drive female handle end













JHWMB-131BA





1/4" DRIVE EXTENSIONS

| High-Polished | Chrome Finish | | |
|---------------|--------------------|--------------------------------|--|
| Product Code | Description | Length (Inches) | |
| JHWM-102 | Extension | 2 | |
| JHWM-104 | Extension | 4 | |
| JHWM-115 | Extension | 6 | |
| JHWM-110 | Extension | 10 | |
| JHWM-124 | Extension | 24 | |
| JHWMFE-6 | Flexible Extension | 6 | |
| JHWM-140A | Universal Joint | 1 ⁷ / ₁₆ | |

Fed. Spec: ANSI B107.10M

Features

• Chrome plating provides increased protection from rust and corrosion

Universal Joint

- . Flexible extension is designed for low torque applications in limited access areas
- · Ball and spring socket retention



1/4" DRIVE ADAPTORS

High-Polished Chrome and Black Industrial Finish

| Product Code | Length (Inches) | Male End (Inches) | Female End (Inches) |
|---------------|--------------------|----------------------|------------------------|
| Chrome Finish | | | |
| JHWMB-130 | 1 | 3/8 | 1/4 |
| Black Finish | | | |
| JHWMB-130B | 1 | 3/8 | 1/4 |
| JHWMB-131BA | 1 ¹ /8 | 1/4 | 3/8 |

Fed. Spec: ANSI B107.10M

Features

• Ball and spring socket retention



1/4" DRIVE SLIDING T-HANDLE.

High-Polished Chrome Finish Product Code Description Length (Inches) JHW30008 Sliding T-Handle 4 1/2

Fed. Spec: ANSI B107.10M

Features

- Ball and spring socket retention
- · High-polished chrome finish for easy cleaning
- · Spinner handle features three component comfort grip handle

1/4" SUPERTORQUE SPINNER HANDLE.

| Product Code | Description | Length (Inches) | Blade Length (Inches) |
|--------------|---------------------|--------------------|--------------------------|
| JHWSPR-SP-14 | 1/4" Spinner Handle | 7 | 2.5 |

Fed. Spec: ANSI B107.10M

- Three-component handle for maximum user comfort, soft material with ridged undermolded material provides superior grip and greater force transmission
- Integrated handle hole allows for hanging on a peg board, securing a laynard or inserting another screwdriver blade for added leverage
- Flat surface on the screwdriver handle limits rolling
- Size is shown on blade for easy identification
- · Part number laser marked on handle





6 PIECE 1/4" DRIVE RATCHET AND DRIVE TOOL SET

Furnished in a Pouch

| Product Code | Description | | |
|--------------|--|--|--|
| JHWDTM-6 | 6 Piece 1/4" Drive Ratchet and Accessory Set | | |

Contents Include:

| Product Code | Description | Product Code | Description |
|--------------|------------------|--------------|-----------------|
| JHWM-52EHA | 36 Tooth Ratchet | JHWM-42A | Flex Handle |
| JHWM-102 | 1 1/2" Extension | JHWM-106A | Spinner Handle |
| JHWM-115 | 6" Extension | JHWM-140A | Universal Joint |

Features

· All tools are professional quality, made of high-grade chrome vanadium steel



1/4" WOBBLE EXTENSIONS

High-Polished Chrome Finish

| J | | |
|--------------|-----------------|--|
| Product Code | Length (Inches) | |
| JHWM-202 | 2 | |
| JHWM-203 | 3 | |
| JHWM-206 | 6 | |
| JHWM-211 | 11 | |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- · Provides 16 degrees of additional accessibility



High-Polished Chrome Finish

| Product Code | Description | Length (Inches) |
|--------------|--------------------------------------|-----------------|
| JHW30013 | Holder for 1/4" Hex Screwdriver Bits | 3/4 |
| JHW30023 | Locking Extension | 4 |
| JHW30024 | Locking Extension | 6 |
| JHW30025 | Locking Extension | 10 |
| JHW30026 | Locking Extension | 12 |
| JHW30027 | Locking Extension | 18 |
| JHW30028 | Locking Extension | 24 |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
 Ball and spring socket retention







1/4" DRIVE SHALLOW 12 POINT SOCKETS, SAE

High-Polished Chrome Finish

| | | Α | В | С | D | Е | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|--------------------------|-------------------------------------|--|-------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWM-1208 | 1/4 | 7/8 | 15/32 | 3/8 | 7/32 | 17/32 | 7/32 | 7/16 |
| JHWM-1210 | 5/16 | 7/8 | 15/32 | 15/32 | 9/32 | 17/32 | 7/32 | - |
| JHWM-1211 | 11/32 | 7/8 | 1/2 | 1/2 | 9/32 | 17/32 | 11/32 | |
| JHWM-1212 | 3/8 | 7/8 | 17/32 | 17/32 | 9/32 | 17/32 | 3/8 | |
| JHWM-1214 | 7/16 | 7/8 | 19/32 | 19/32 | 3/8 | 17/32 | 7/16 | |
| JHWM-1216 | 1/2 | 7/8 | 11/16 | 11/16 | 3/8 | 17/32 | 1/2 | |
| JHWM-1218 | 9/16 | 29/32 | 3/4 | 3/4 | 3/8 | 17/32 | 7/32 | |



JHWWSM-7RC 7 Piece 1/4" Drive Shallow 12-Point Socket Set on Clip Rail

Contents Includes

| Ountents in | Ciuuc. | | | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWM-1208 | 1/4 | JHWM-1211 | 11/32 | JHWM-1214 | 7/16 | JHWM-1218 | 9/16 |
| JHWM-1210 | 5/16 | JHWM-1212 | 3/8 | JHWM-1216 | 1/2 | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners











JHWM-1212

JHWWSM-7RC

JHWM-1208















JHWM-606



JHWWSM-11HRC

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener Designed for maximum engagement on 6 point
- fasteners





JHWMD-1216 JHWMD-1210



JHWWSMD-6RC



High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|--------------|------------------|-----------------|----------------------------|------------------------------|--------------------------|----------------------------------|---------------------------------|------------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Dia. (Inches) | Working End Dia. (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Dia. (Inches) | Nose Length (Inches) |
| JHWM-604 | 1/8 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 1/8 | 7/16 |
| JHWM-605 | 5/32 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 5/32 | ⁷ / ₁₆ |
| JHWM-606 | 3/16 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 3/16 | ⁷ / ₁₆ |
| JHWM-607 | 7/32 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 7/32 | 7/16 |
| JHWM-608 | 1/4 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 7/32 | 7/16 |
| JHWM-609 | 9/32 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 1/4 | ⁷ / ₁₆ |
| JHWM-610 | 5/16 | 7/8 | 15/32 | 7/32 | 1/8 | 17/32 | 1/4 | 7/16 |
| JHWM-611 | 11/32 | 7/8 | 1/2 | 1/2 | 11/32 | 17/32 | 11/32 | - |
| JHWM-612 | 3/8 | 7/8 | 9/16 | 9/16 | 15/32 | 17/32 | 3/8 | - |
| JHWM-614 | 7/16 | 7/8 | 5/8 | 5/8 | 15/32 | 17/32 | 7/16 | - |
| JHWM-616 | 1/2 | 7/8 | 11/16 | 11/16 | 15/32 | 17/32 | 1/2 | - |
| JHWM-618 | 9/16 | 29/32 | 3/4 | 3/4 | 1/2 | 17/32 | 17/32 | - |
| JHWM-620 | 5/8 | 31/32 | 27/32 | 27/32 | 9/16 | 5/8 | 9/16 | - |

Fed. Spec: ANSI B107.110

JHWWSM-11HRC 11 Piece 1/4" Drive Shallow 6 Point Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWM-605 | 5/32 | JHWM-608 | 1/4 | JHWM-611 | 11/32 | JHWM-616 | 1/2 |
| JHWM-606 | 3/16 | JHWM-609 | 9/32 | JHWM-612 | 3/8 | JHWM-618 | 9/16 |
| JHWM-607 | 7/32 | JHWM-610 | 5/16 | JHWM-614 | 7/16 | | |



1/4" DRIVE SHALLOW SOCKETS, 8 POINT, SAE





| High-Polis | shed C | hrome | Finish | | | | | |
|--------------|----------|----------|---------------|---------------|---------------|----------------|-----------------------|-----------------|
| • | | Α | В | С | D | E | | F |
| | Size | OAL | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product Code | (Inches) | (Inches) | Dia. (Inches) | Dia. (Inches) | Depth (Inches | Depth (Inches) | Dia. (Inches) | Length (Inches) |
| JHWM-808 | 1/4 | 7/8 | 15/32 | 7/16 | 1/4 | 17/32 | 1/4 | 7/16 |
| JHWM-810 | 5/16 | 7/8 | 9/16 | 9/16 | 9/32 | 17/32 | 1/4 | - |
| JHWM-812 | 3/8 | 7/8 | 21/32 | 21/32 | 5/16 | 17/32 | 3/8 | - |



1/4" DRIVE DEEP SOCKETS, 12 POINT, SAE





| High-Polis | shed (| Chrom | e Finish | | | | | |
|--------------|----------|----------|------------------|-------------------|----------------|---------------------------------|-------------------|-----------------|
| • | | Α | В | С | D | Ε | | F |
| | Size | OAL | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product Code | (Inches) | (Inches) | Diameter(Inches) | Diameter (Inches) | Depth (Inches) | Depth (Inches) | Diameter (Inches) | Length (Inches) |
| JHWMD-1210 | 5/16 | 2 | 15/32 | 7/16 | 9/32 | 1 11/16 | 9/32 | 1%16 |
| JHWMD-1211 | 11/32 | 2 | 1/2 | 1/2 | 9/32 | 1 ²¹ / ₃₂ | 11/32 | - |
| JHWMD-1212 | 3/8 | 2 | 17/32 | 17/32 | 9/32 | 1 21/32 | 3/8 | |
| JHWMD-1214 | 7/16 | 2 | 19/32 | 19/32 | 3/8 | 1 ²¹ / ₃₂ | 13/32 | - |
| JHWMD-1216 | 1/2 | 2 | 11/16 | 11/16 | 3/8 | 1 ²¹ / ₃₂ | 15/32 | |
| JHWMD-1218 | 9/16 | 2 | 3/4 | 3/4 | 3/8 | 1 21/32 | 17/32 | - |

Fed. Spec: ANSI B107.110

JHWWSMD-6RC 6 Piece 1/4" Drive Deep 12 Point Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWMD-1210 | 5/16 | JHWMD-1212 | 3/8 | JHWMD-1216 | 1/2 |
| JHWMD-1211 | 11/32 | JHWMD-1214 | 7/16 | JHWMD-1218 | 9/16 |

JHWWSM-20RC 25 Piece 1/4" Drive Shallow & Deep Sockets on Clip Rails **Contents Include:**

| 12-Point Deep Sockets | | 12-Point Shallow Sockets | |
|-----------------------|------------------------------|--------------------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW30406 | ³ / ₁₆ | JHW30206 | 3/16 |
| JHW30407 | 7/32 | JHW30207 | 7/32 |
| JHW30408 | 1/4 | JHWM-1208 | 1/4 |
| JHW30409 | 9/32 | JHW30209 | 9/32 |
| JHWMD-1210 | ⁵ ⁄ ₁₆ | JHWM-1210 | 5/16 |
| JHWMD-1211 | 11/32 | JHWM-1211 | 11/32 |
| JHWMD-1212 | 3/8 | JHWM-1212 | 3/8 |
| JHWMD-1214 | 7/16 | JHWM-1214 | 7/16 |
| JHWMD-1216 | 1/2 | JHWM-1216 | 1/2 |
| JHWMD-1218 | 9/16 | JHWM-1218 | 9/16 |









1/4" DRIVE DEEP SOCKETS, 6 POINT, SAE

High-Polished Chrome Finish

| | | Α | В | С | D | | F |
|--------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWMD-605 | 5/32 | 2 | 15/32 | 9/32 | 5/32 | 5/32 | 1 %16 |
| JHWMD-606 | 3/16 | 2 | 15/32 | 5/16 | 3/16 | 3/16 | 1 %16 |
| JHWMD-607 | 7/32 | 2 | 15/32 | 11/32 | 7/32 | 7/32 | 1 %16 |
| JHWMD-608 | 1/4 | 2 | 15/32 | 3/8 | 7/32 | 7/32 | 1 %16 |
| JHWMD-609 | 9/32 | 2 | 15/32 | 13/32 | 1/4 | 9/32 | 1 %16 |
| JHWMD-610 | 5/16 | 2 | 15/32 | 7/16 | 9/32 | 9/32 | 1 %16 |
| JHWMD-611 | 11/32 | 2 | 1/2 | 1/2 | 9/32 | 11/32 | - |
| JHWMD-612 | 3/8 | 2 | 17/32 | 17/32 | 9/32 | 3/8 | - |
| JHWMD-614 | 7/16 | 2 | 19/32 | 19/32 | 3/8 | 13/32 | - |
| JHWMD-616 | 1/2 | 2 | 11/16 | 11/16 | 3/8 | 15/32 | - |
| JHWMD-618 | 9/16 | 2 | 3/4 | 3/4 | 3/8 | 17/32 | |

Fed. Spec: ANSI B107.110

JHWWSMD10HRC 10 Piece 1/4" Drive Deep 6 Point Socket Set on Clip Rail **Contents Include:**

| •••••• | | | | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWMD-606 | 3/16 | JHWMD-609 | 9/32 | JHWMD-612 | 3/8 | JHWMD-618 | 9/16 |
| JHWMD-607 | 7/32 | JHWMD-610 | 5/16 | JHWMD-614 | 7/16 | | |
| JHWMD-608 | 1/4 | JHWMD-611 | 11/32 | JHWMD-616 | 1/2 | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners









JHWWSMD10HRC

1/4" DRIVE SHALLOW SOCKETS, 6 POINT, METRIC

High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|--------------|--------------|-----------------|-----------------------------------|-------------------------------------|--------------------------|-------------------------------------|--|------------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWMM-604 | 4 | 7/8 | 15/32 | 9/32 | 3/16 | 17/32 | 5/32 | 7/16 |
| JHWMM-605 | 5 | 7/8 | 15/32 | 5/16 | 3/16 | 17/32 | 5/32 | ⁷ / ₁₆ |
| JHWMM-605.5 | 5.5 | 7/8 | 15/32 | 11/32 | 3/16 | 17/32 | 7/32 | ⁷ / ₁₆ |
| JHWMM-606 | 6 | 7/8 | 15/32 | 3/8 | 7/32 | 17/32 | 7/32 | ⁷ / ₁₆ |
| JHWMM-607 | 7 | 7/8 | 15/32 | 13/32 | 1/4 | 17/32 | 1/4 | ⁷ / ₁₆ |
| JHWMM-608 | 8 | 7/8 | 15/32 | 15/32 | 9/32 | 17/32 | 1/4 | 7/16 |
| JHWMM-609 | 9 | 7/8 | 1/2 | 1/2 | 1/2 | 17/32 | 5/16 | - |
| JHWMM-610 | 10 | 7/8 | 9/16 | 9/16 | 1/2 | 17/32 | 3/8 | - |
| JHWMM-611 | 11 | 7/8 | 19/32 | 19/32 | 1/2 | 17/32 | 13/32 | - |
| JHWMM-612 | 12 | 7/8 | 21/32 | 21/32 | 1/2 | 17/32 | 7/16 | - |
| JHWMM-613 | 13 | 7/8 | 23/32 | 23/32 | 15/32 | 17/32 | 15/32 | - |
| JHWMM-614 | 14 | 29/32 | 3/4 | 3/4 | 1/2 | 17/32 | 17/32 | • |

Fed. Spec: ANSI B107.110

JHWMSM-12HRC 12 Piece 1/4" Drive Shallow 6 Point Socket Set on Clip Rail **Contents Include:**

| | Size | | Size | 1 | Size | 1 | Size |
|--------------|----------|--------------|----------|--------------|----------|--------------|----------|
| Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | Product Code | (MM) |
| Froduct Code | CIVITAIN | Froduct Code | CIVITAIN | Froduct Code | CIVITAIN | Froduct Code | CIVITALY |
| JHWMM-604 | 4 | JHWMM-606 | 6 | JHWMM-609 | 9 | JHWMM-612 | 12 |
| JHWMM-605 | 5 | JHWMM-607 | 7 | JHWMM-610 | 10 | JHWMM-613 | 13 |
| JHWMM-605.5 | 5 1/2 | JHWMM-608 | 8 | JHWMM-611 | 11 | JHWMM-614 | 14 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners















JHWMM-604



JHWMSM-12HRC





1/4" DRIVE SHALLOW SOCKETS, 12 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|--------------|--------------|-----------------|-----------------------------------|-------------------------------------|--------------------------|-------------------------------------|--|-------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW30604A | 4 | 1 | 15/32 | 1/4 | 1/4 | 19/32 | | 1/2 |
| JHW30605A | 5 | 1 | 15/32 | 5/16 | 5/16 | 19/32 | | 1/2 |
| JHW30699A | 5.5 | 1 | 15/32 | 11/32 | 15/32 | 19/32 | | 1/2 |
| JHW30606A | 6 | 1 | 15/32 | 11/32 | 5/16 | 19/32 | | 1/2 |
| JHW30607A | 7 | 1 | 15/32 | 7/16 | 5/16 | 15/32 | | 1/2 |
| JHW30608A | 8 | 1 | 15/32 | 15/32 | 3/8 | 1/2 | | - |
| JHW30609A | 9 | 1 | 17/32 | 17/32 | 3/8 | 21/32 | | - |
| JHW30610A | 10 | 1 | 19/32 | 19/32 | 1/2 | 7/8 | | - |
| JHW30611A | 11 | 1 | 5/8 | 5/8 | 17/32 | 7/8 | | - |
| JHW30612A | 12 | 1 | 11/16 | 11/16 | 1/2 | 7/8 | | |
| JHW30613A | 13 | 1 | 23/32 | 23/32 | 1/2 | 7/8 | | - |
| JHW30614A | 14 | 1 | 3/4 | 3/4 | 1/2 | 7/8 | | |

Fed. Spec: ANSI B107.110

JHW30925 12 Piece 1/4" Drive Shallow 12 Point Socket Set on Clip Rail Contents Include:

| | Size | | Size | | Size | | Size |
|--------------|------|--------------|------|--------------|------|--------------|------|
| Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | Product Code | (MM) |
| JHW30604 | 4 | JHW30606 | 6 | JHW30609 | 9 | JHW30612 | 12 |
| JHW30605 | 5 | JHW30607 | 7 | JHW30610 | 10 | JHW30613 | 13 |
| JHW30699 | 5.5 | JHW30608 | 8 | JHW30611 | 11 | JHW30614 | 14 |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 12 point fasteners



JHWMMD-614 JHWMMD-606



1/4" DRIVE DEEP SOCKETS, 6 POINT, METRIC





| nign-Polisnea Unrome Finisn | | | | | | | | | |
|-----------------------------|------|----------|-----------|-------------|--------------|---------------------------------|-----------------------|-------------|--|
| • | | Α | В | С | D | E | | F | |
| | | | Drive End | Working End | | Bolt Clearance | Bolt Clearance | | |
| | Size | OAL | Diameter | Diameter | Broach Depth | Depth | Diameter | Nose Length | |
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | |
| JHWMMD-604 | 4 | 2 | 15/32 | 9/32 | 3/16 | 1 ²¹ / ₃₂ | 1/8 | 1 %16 | |
| JHWMMD-605 | 5 | 2 | 15/32 | 5/16 | 3/16 | 1 21/32 | 5/32 | 1 %16 | |
| JHWMMD-605.5 | 5.5 | 2 | 15/32 | 5/16 | 7/32 | 1 21/32 | 7/32 | 1 %16 | |
| JHWMMD-606 | 6 | 2 | 15/32 | 3/8 | 7/32 | 1 21/32 | 7/32 | 1 %16 | |
| JHWMMD-607 | 7 | 2 | 15/32 | 13/32 | 1/4 | 1 21/32 | 1/4 | 1 %16 | |
| JHWMMD-608 | 8 | 2 | 15/32 | 15/32 | 9/32 | 1 21/32 | 1/4 | 1 %16 | |
| JHWMMD-609 | 9 | 2 | 1/2 | 1/2 | 9/32 | 1 21/32 | 5/16 | - | |
| JHWMMD-610 | 10 | 2 | 9/16 | 9/16 | 9/32 | 1 21/32 | 3/8 | - | |
| JHWMMD-611 | 11 | 2 | 19/32 | 19/32 | 3/8 | 1 21/32 | 13/32 | - | |
| JHWMMD-612 | 12 | 2 | 21/32 | 21/32 | 3/8 | 1 21/32 | 7/16 | - | |
| JHWMMD-613 | 13 | 2 | 23/32 | 23/32 | 3/8 | 1 21/32 | 15/32 | - | |
| ILIVA/NAND C4.4 | 4.4 | 0 | 3/ | 3/ | 7/ - | 4 21/ | 17/ | | |

Fed. Spec: ANSI B107.110

JHWMSMD12HRC 12 Piece 1/4" Drive Deep 6 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| JHWMMD-604 | 4 | JHWMMD-606 | 6 | JHWMMD-609 | 9 | JHWMMD-612 | 12 |
| JHWMMD-605 | 5 | JHWMMD-607 | 7 | JHWMMD-610 | 10 | JHWMMD-613 | 13 |
| JHWMMD-605.5 | 5.5 | JHWMMD-608 | 8 | JHWMMD-611 | 11 | JHWMMD-614 | 14 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 6 point fasteners





1/4" DRIVE DEEP SOCKETS, 12 POINT, METRIC





| High-Polished Chrome Finish | | | | | | | | | |
|-----------------------------|--------------|-----------------|-------------------|-------------------|-----------------------|---------------------------------|-----------------------|----------------------|--|
| • | | Α | В | С | D | E | | F | |
| | | | Drive End | Working End | | Bolt Clearance | Bolt Clearance | | |
| Product Code | Size (MM) | OAL (Inches) | Diameter (Inches) | Diameter (Inches) | Broach Depth (Inches) | Depth (Inches) | Diameter (Inches) | Nose Length (Inches) | |
| JHW30804 | 4 | 2 | 15/32 | 9/32 | 3/16 | 1 21/32 | 1/8 | 15/16 | |
| JHW30805 | 5 | 2 | 15/32 | 5/16 | 3/16 | 1 21/32 | 5/32 | 15/16 | |
| JHW30855 | 5.5 | 2 | 15/32 | 5/16 | 7/32 | 1 21/32 | 7/32 | 15/16 | |
| JHW30806 | 6 | 2 | 15/32 | 3/8 | 7/32 | 1 21/32 | 7/32 | 15/16 | |
| JHW30807 | 7 | 2 | 15/32 | 13/32 | 1/4 | 1 21/32 | 1/4 | 15/16 | |
| JHW30808 | 8 | 2 | 15/32 | 15/32 | 9/32 | 1 21/32 | 1/4 | 15/16 | |
| JHW30809 | 9 | 2 | 1/2 | 1/2 | 9/32 | 1 21/32 | 5/16 | - | |
| JHW30810 | 10 | 2 | 9/16 | 9/16 | 9/32 | 1 ²¹ / ₃₂ | 3/8 | - | |
| JHW30811 | 11 | 2 | 19/32 | 19/32 | 3/8 | 1 ²¹ / ₃₂ | 13/32 | - | |
| JHW30812 | 12 | 2 | 21/32 | 21/32 | 3/8 | 1 21/32 | 7/16 | - | |
| JHW30813 | 13 | 2 | 23/32 | 23/32 | 3/8 | 1 ²¹ / ₃₂ | 15/32 | - | |
| JHW30814 | 14 | 2 | 3/4 | 3/4 | 7/16 | 1 21/32 | 17/32 | - | |





JHW30941 12 Piece 1/4" Drive Deep 12 Point Socket Set on Clip Rail **Contents Include:**

| | Size | | Size | | Size | | Size |
|--------------|------|--------------|------|--------------|------|--------------|------|
| Product Code | (MM) | Product Code | (MM) | Product Code | (MM) | Product Code | (MM) |
| JHW30804 | 4 | JHW30806 | 6 | JHW30809 | 9 | JHW30812 | 12 |
| JHW30805 | 5 | JHW30807 | 7 | JHW30810 | 10 | JHW30813 | 13 |
| JHW30855 | 5.5 | JHW30808 | 8 | JHW30811 | 11 | JHW30814 | 14 |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on both 6 and 12 point fasteners



1/4" DRIVE STANDARD LENGTH **HEX BIT SOCKETS, SAE**





High-Polished Chrome Finish

| Socket Outside | | | | | | | |
|----------------|------------------|---------------------------|----------------------|-------------------------|---------------------------------|--|--|
| Product Code | Size (Inches) | Socket Length (Inches) | Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code | | |
| Product Code | (inches) | unchesi | unchesi | unchesi | Product Code | | |
| JHWMA-050A | .050 | 7/8 | 15/32 | 1 ½ | JHWBITH05001 | | |
| JHWMA-2A | 1/16 | 7/8 | 15/32 | 1 ½ | JHWBITH0201 | | |
| JHWMA-2 1/2A | 5/64 | 7/8 | 15/32 | 1 ½ | JHWBITH2.501 | | |
| JHWMA-3A | 3/32 | 7/8 | 15/32 | 1 ½ | JHWBITH0301 | | |
| JHWMA-3 1/2A | 7/64 | 7/8 | 15/32 | 1 ½ | JHWBITH3.501 | | |
| JHWMA-4A | 1/8 | 7/8 | 15/32 | 1 ½ | JHWBITH0401 | | |
| JHWMA- 4 1/2A | 9/64 | 7/8 | 15/32 | 1 1/2 | JHWBITH4.501 | | |
| JHWMA-5A | 5/32 | 7/8 | 15/32 | 1 1/2 | JHWBITH0501 | | |
| JHWMA-6A | 3/16 | 7/8 | 15/32 | 1 1/2 | JHWBITH0601 | | |
| JHWMA-7A | 7/32 | 7/8 | 15/32 | 1 1/2 | JHWBITH0701 | | |
| JHWMA-8A | 1/4 | 7/8 | 15/32 | 1 1/2 | JHWBITH0801 | | |
| JHWMA-10A | 5/16 | 7/8 | 15/32 | 1 1/2 | JHWBITH1001 | | |



Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWMA-2A | 1/16 | JHWMA-4A | 1/8 | JHWMA-7A | 7/32 |
| JHWMA-2 1/2A | 5/64 | JHWMA-4 1/2A | 9/64 | JHWMA-8A | 1/4 |
| JHWMA-3A | 3/32 | JHWMA-5A | 5/32 | JHWMA-10A | 5/16 |
| JHWMA-3 1/2A | 7/64 | JHWMA-6A | 3/16 | | |

- High-polished chrome finish socket cleans easily
- Two piece design allows bits to be replaced easily











JHWMA-4A



JHWWSM-11TRC







JHWWSMS-9LRC





JHW35070





JHWMA-3HBA



JHWWSM-7HBA

1/4" DRIVE LONG HEX BIT SOCKETS, SAE





High-Polished Chrome Finish

| D 1 10 1 | Size | Socket Length | Socket Outside Diameter | Overall Length | Replacement Bit |
|--------------|----------|---------------|-------------------------|----------------|-----------------|
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | Product Code |
| JHWMA-3LA | 3/32 | 7/8 | 15/32 | 3 | JHWBITH0302 |
| JHWMA-31/2LA | 7/64 | 7/8 | 15/32 | 3 | JHWBITH3.502 |
| JHWMA-4LA | 1/8 | 7/8 | 15/32 | 3 | JHWBITH0402 |
| JHWMA-41/2LA | 9/64 | 7/8 | 15/32 | 3 | JHWBITH4.502 |
| JHWMA-5LA | 5/32 | 7/8 | 15/32 | 3 | JHWBITH0502 |
| JHWMA-6LA | 3/16 | 7/8 | 15/32 | 3 | JHWBITH0602 |
| JHWMA-7LA | 7/32 | 7/8 | 15/32 | 3 | JHWBITH0702 |
| JHWMA-8LA | 1/4 | 7/8 | 15/32 | 3 | JHWBITH0802 |
| .IHWMA-10I A | 5/16 | 7/2 | 15/32 | 3 | .IHWRITH1002 |

JHWWSMS-9LRC 9 Piece Long Hex Bit Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWMA-3LA | 3/32 | JHWMA-4½LA | 9/64 | JHWMA-7LA | 7/32 |
| JHWMA-31/2LA | 7/64 | JHWMA-5LA | 5/32 | JHWMA-8LA | 1/4 |
| JHWMA-4LA | 1/8 | JHWMA-6LA | 3/16 | JHWMA-10LA | 5/16 |

Features

- High-polished chrome finish socket cleans easily
- . Two piece design allows bits to be replaced easily



1/4" DRIVE STANDARD LENGTH HEX BIT SOCKETS, METRIC





| High-Polishe | Tigh-Polished Chrome Finish Size Socket Length Socket Outside Overall Length Bit Length | | | | | | | | | |
|--------------|---|----------|-------------------|----------|----------|--|--|--|--|--|
| Product Code | (MM) | (Inches) | Diameter (Inches) | (Inches) | (Inches) | | | | | |
| JHW35070 | 3 | 13/16 | 15/32 | 1 13/32 | 5/8 | | | | | |
| JHW35071 | 4 | 13/16 | 15/32 | 1 13/32 | 5/8 | | | | | |
| JHW35072 | 5 | 13/16 | 15/32 | 1 13/32 | 5/8 | | | | | |
| JHW35073 | 6 | 13/16 | 15/32 | 1 13/32 | 5/8 | | | | | |
| JHW35074 | 7 | 13/16 | 15/32 | 1 13/32 | 5/8 | | | | | |
| JHW35075 | 8 | 13/16 | 15/32 | 1 13/32 | 5/8 | | | | | |

JHW30904 6 Piece Hex Bit Socket Set on Clip Rail Contents Include:

| OULICOILS III | Jiaaci | | | | |
|---------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
| JHW35070 | 3 | JHW35072 | 5 | JHW35074 | 7 |
| .IHW35071 | 4 | .IHW35073 | 6 | JHW35075 | 8 |

Feature


· High-polished chrome finish socket cleans easily

1/4" DRIVE BALL TIP HEX BIT SOCKETS, SAE



JHWBITHB0801



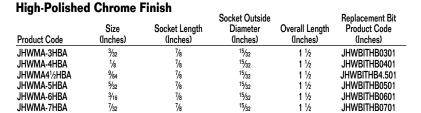

JHWWSM-7HBA 7 Piece Ball Tip Hex Bit Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|------------------------------|--------------|---------------|
| JHWMA-3HBA | 3/32 | JHWMA-5HBA | 5/32 | JHWMA-8HBA | 1/4 |
| JHWMA-4HBA | 1/8 | JHWMA-6HBA | ³ / ₁₆ | | |
| JHWMA41/2HBA | 9/64 | JHWMA-7HBA | 7/32 | | |

Features

JHWMA-8HBA

- High-polished chrome finish socket cleans easily
- Two piece design allows bits to be replaced easily





1/4" DRIVE STUBBY HEX BIT SOCKETS, SAE





| High-Polishe | ed Chrom | e Finish | Socket Outside | Overall | |
|--------------|------------------|------------------------|----------------------|--------------------|---------------------------------|
| Product Code | Size (Inches) | Socket Length (Inches) | Diameter (Inches) | Length (Inches) | Replacement Bit Product Code |
| JHWMA-4SA | 1/8 | 7/8 | 15/32 | 1 1/16 | JHWTMAXS4E2 |
| JHWMA-4.5SA | 9/64 | 7/8 | 15/32 | 1 1/16 | JHWTMAXS45E2 |
| JHWMA-5SA | 5/32 | 7/8 | 15/32 | 1 1/16 | JHWTMAXS5E2 |
| JHWMA-6SA | 3/16 | 7/8 | 15/32 | 1 1/16 | JHWTMAXS6E2 |

JHWMA-6SA JHWWSM-4TRC 4 Piece Stubby Hex Bit Socket Set on Clip Rail **Contents Include:**

| •••••• | | | |
|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWMA-4SA | 1/8 | JHWMA-5SA | 5/32 |
| JHWMA-4.5SA | 9/64 | JHWMA-6SA | 3/16 |

Features

- . High-polished chrome finish socket cleans easily
- . Two piece design allows bits to be replaced easily
- Extra-short bits provide access in confined areas





1/4" DRIVE TORX® BIT SOCKETS

| High-Polis | High-Polished Chrome Finish | | | | | | |
|--------------|-----------------------------|---------------------------|--|-------------------------|------------------------|--|--|
| Product Code | Torx® Size | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | | |
| JHW35079 | T8 | 13/16 | 1/2 | 1 13/32 | 5/8 | | |
| JHW35080 | T10 | 13/16 | 1/2 | 1 13/32 | 5/8 | | |
| JHW35081 | T15 | 13/16 | 1/2 | 1 13/32 | 5/8 | | |
| JHW35082 | T20 | 13/16 | 1/2 | 1 13/32 | 5/8 | | |
| JHW35083 | T25 | 13/16 | 1/2 | 1 13/32 | 5/8 | | |
| JHW35084 | T27 | 13/16 | 1/2 | 1 13/32 | 5/8 | | |
| JHW35085 | T30 | 13/16 | 1/6 | 1 13/32 | 5/8 | | |

JHW30908 6 Piece Torx® Bit Socket Set on Clip Rail **Contents Include:**

| Product Code | Torx® Size | Product Code | Torx® Size | Product Code | Torx® Size |
|--------------|------------|--------------|------------|--------------|------------|
| JHW35080 | T10 | JHW35082 | T20 | JHW35084 | T27 |
| JHW35081 | T15 | JHW35083 | T25 | JHW35085 | T30 |

Features

. High-polished chrome finish socket cleans easily





1/4" DRIVE SCREWDRIVER BIT SOCKETS

| ed Chron | ne Finish, Pl | hillips® and | l Slotted |
|----------|---------------|------------------------|--------------|
| | | Socket Outside | |
| Tip Size | Socket Length | Diameter | Overall Leng |
| | | Tip Size Socket Length | |

| • | | • | Socket Outside |) | |
|-----------------|-------------------|-------------------------------|-------------------|---------------------------------|---------------------|
| Product Code | Tip Size (Inches) | Socket Length (Inches) | Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) |
| Slotted Bits: | | | | | |
| JHW35040 | 5/32 | ¹³ / ₁₆ | 15/32 | 1 13/32 | 5/8 |
| JHW35041 | 7/32 | ¹³ / ₁₆ | 15/32 | 1 13/32 | 5/8 |
| JHW35042 | 9/32 | ¹³ / ₁₆ | 15/32 | 1 ¹³ / ₃₂ | 5/8 |
| Phillips® Bits: | | | | | |
| JHW35051 | #1 | 13/16 | 15/32 | 1 ¹³ / ₃₂ | 5/8 |
| JHW35052 | #2 | ¹³ / ₁₆ | 15/32 | 1 ¹³ / ₃₂ | 5/8 |
| JHW35053 | #3 | 13/16 | 15/32 | 1 13/32 | 5/8 |



JHWMA-4SA



JHWWSM-4TRC



JHW35080



JHW30908















8 & 12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|---|
| JHWWSB-56FTB | 56 Piece Tool Set with TB-104 Metal Tool Box |
| JHWWSB-56F | .56 Piece Tool Set Only Packed in Keep-Safe-Foam System |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|---------------------|--------------------------|--------------|---------------------|
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-40B | 8 9/16" Flex Handle |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| JHWB-110 | 6" Extension | JHWB-20A | Sliding T-Handle |
| JHWB-115 | 11" Extension | | <u> </u> |

| Shallow 12-Point Sockets | | Deep 12-Point Sockets | | |
|--------------------------|-------------------------------|-----------------------|-------------------------------|--|
| Product Code | Size (Inches) | Product Code | Size (Inches) | |
| JHWB-1208 | 1/4 | JHWBD-1212 | 3/8 | |
| JHWB-1210 | 5/16 | JHWBD-1214 | 7/16 | |
| JHWB-1212 | 3/8 | JHWBD-1216 | 1/2 | |
| JHWB-1214 | 7/16 | JHWBD-1218 | 9/16 | |
| JHWB-1216 | 1/2 | JHWBD-1220 | 5/8 | |
| JHWB-1218 | 9/16 | JHWBD-1222 | 11/16 | |
| JHWB-1220 | 5/8 | JHWBD-1224 | 3/4 | |
| JHWB-1222 | 11/16 | JHWBD-1226 | 13/16 | |
| JHWB-1224 | 3/4 | JHWBD-1228 | 7/8 | |
| JHWB-1226 | ¹³ / ₁₆ | JHWBD-1230 | ¹⁵ / ₁₆ | |
| JHWB-1228 | 7/8 | JHWBD-1232 | 1 | |
| JHWB-1230 | ¹⁵ / ₁₆ | | | |
| JHWB-1232 | 1 | Shallow 12-Point | Universal Sockets | |

| | | Product Code | Size (Inches) |
|--------------------|---------------|--------------|------------------------------|
| Shallow 8-Point So | ockets | JHWBU-1212 | 3/8 |
| Product Code | Size (Inches) | JHWBU-1214 | ⁷ / ₁₆ |
| JHWBD-808 | 1/4 | JHWBU-1216 | 1/2 |
| JHWBD-810 | 5/16 | JHWBU-1218 | 9/16 |
| JHWBD-812 | 3/8 | JHWBU-1220 | 5/8 |
| JHWBD-814 | 7/16 | JHWBU-1222 | 11/16 |
| JHWBD-816 | 1/2 | JHWBU-1224 | 3/4 |

| Standard Hex Bit | Sockets | Screwdriver Bit S | ockets |
|------------------|---------------|-------------------|----------------------------|
| Product Code | Size (Inches) | Product Code | Size |
| JHWBA-4A | 1/8 | JHWBA-7A-2S | 7/ ₃₂ " x .039" |
| JHWBA-5A | 5/32 | JHWBA-10A-3S | 5/16" x .047" |
| JHWBA-6A | 3/16 | JHWBA-10A-4S | 5/16" x .061" |
| JHWBA-7A | 7/32 | JHWBA-7A-2P | #2 |
| JHWBA-8A | 1/4 | JHWBA-10A-3P | #3 |
| JHWBA-10A | 5/16 | JHWBA-12A-4P | #4 |
| JHWBA-12A | 3/8 | | |

- All tools are professional quality, made of high-grade chrome vanadium steel
 Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
 Metal tool box made for years of rugged use















8 & 12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box


| Product Code | Description |
|--------------|--|
| JHWWSB-32FTB | 32 Piece Tool Set with TB-104 Metal Tool Box |
| JHWWSB-32F | 32 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use





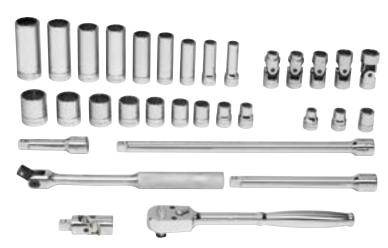















| Product Code | Description |
|--------------|--|
| JHWWSB-28FTB | 28 Piece Tool Set with TB-104 Metal Tool Box |
| JHWWSB-28F | 28 Piece Tool Set Only - Packed in Keep Safe Foam System |

ontents Include:

| Contents Inclu | de: | | |
|------------------|-------------------------------|-----------------------|---------------------|
| Drive Tools: | | Drive Tools: | |
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-40B | 8 9/16" Flex Handle |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| JHWB-110 | 6" Extension | | |
| Shallow 12-Point | Sockets | Deep 12-Point Sockets | |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWB-1208 | 1/4 | JHWBD-1212 | 3/8 |
| JHWB-1210 | 5/16 | JHWBD-1214 | 7/16 |
| JHWB-1211 | 11/32 | JHWBD-1216 | 1/2 |
| JHWB-1212 | 3/8 | JHWBD-1218 | 9/16 |
| JHWB-1214 | ⁷ / ₁₆ | JHWBD-1220 | 5/8 |
| JHWB-1216 | 1/2 | JHWBD-1222 | 11/16 |
| JHWB-1218 | ⁹ / ₁₆ | JHWBD-1224 | 3/4 |
| JHWB-1220 | 5/8 | JHWBD-1226 | 13/16 |
| JHWB-1222 | 11/16 | JHWBD-1228 | 7/8 |
| JHWB-1224 | 3/4 | | |
| JHWB-1226 | ¹³ / ₁₆ | | |
| JHWB-1228 | 7/8 | | |
| JHWB-1230 | ¹⁵ / ₁₆ | | |
| JHWB-1232 | 1 | | |

Features

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



23 PIECE 3/8" DRIVE SOCKET AND DRIVE TOOL SET



Description





Drive Tools:

Product Code

| Product Code | Description |
|--------------|--|
| JHWWSB23HFTB | 23 Piece Tool Set with TB-102 Metal Tool Box |
| JHWWSB-23HF | 23 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

Drive Tools:

Product Code

| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-40B | 8 9/16" Flex Handle |
|---------------------|--------------------------|------------------|---------------------|
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| JHWB-110 | 6" Extension | | |
| Shallow 6-Point Soc | kets | Deep 6-Point Soc | ckets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWB-612 | 3/8 | JHWBD-612 | 3/8 |
| JHWB-614 | 7/16 | JHWBD-614 | 7/16 |
| JHWB-616 | 1/2 | JHWBD-616 | 1/2 |
| JHWB-618 | 9/16 | JHWBD-618 | 9/16 |
| JHWB-620 | 5/8 | JHWBD-620 | 5/8 |
| JHWB-622 | 11/16 | JHWBD-622 | 11/16 |
| JHWB-624 | 3/4 | JHWBD-624 | 3/4 |
| JHWB-626 | 13/16 | JHWBD-626 | 13/16 |
| JHWB-628 | 7/8 | JHWBD-628 | 7/8 |

Features

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel

Description

- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use





JHWWSB23HFTB

JHWWSB-28FTB







12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSB-23FTB | 23 Piece Tool Set with TB-102 Metal Tool Box |
| JHWWSB-23F | 23 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|---------------------|--------------------------|---------------------|---------------------|
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-40B | 8 9/16" Flex Handle |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| JHWB-110 | 6" Extension | | |
| Shallow 12-Point | Sockets | Deep 12-Point S | ockets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWB-1212 | 3/8 | JHWBD-1212 | 3/8 |
| JHWB-1214 | 7/16 | JHWBD-1214 | 7/16 |
| JHWB-1216 | 1/2 | JHWBD-1216 | 1/2 |
| JHWB-1218 | 9/16 | JHWBD-1218 | 9/16 |
| JHWB-1220 | 5/8 | JHWBD-1220 | 5/8 |
| JHWB-1222 | 11/16 | JHWBD-1222 | 11/16 |
| JHWB-1224 | 3/4 | JHWBD-1224 | 3/4 |
| JHWB-1226 | 13/16 | JHWBD-1226 | 13/16 |
| JHWB-1228 | 7/8 | JHWBD-1228 | 7/8 |

Features

- · Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use









12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSB-15FTB | 15 Piece Tool Set with TB-102 Metal Tool Box |
| JHWWSB-15F | 15 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Shallow 12-Point Sockets | |
|--------------|--------------------------|--------------------------|---------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-1212 | 3/8 |
| JHWB-108 | 3" Extension | JHWB-1214 | 7/16 |
| JHWB-110 | 6" Extension | JHWB-1216 | 1/2 |
| JHWB-115 | 11" Extension | JHWB-1218 | 9/16 |
| JHWB-40B | 8 9/16" Flex Handle | JHWB-1220 | 5/8 |
| JHWB-140A | Universal Joint | JHWB-1222 | 11/16 |
| | | JHWB-1224 | 3/4 |
| | | JHWB-1226 | 13/16 |
| | | JHWB-1228 | 7/8 |

- · Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use























6 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSB12HFTB | 12 Piece Tool Set with TB-101 Metal Tool Box |
| JHWWSB-12HF | 12 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Shallow 12-Point Sockets | |
|--------------|--------------------------|--------------------------|---------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-612 | 3/8 |
| JHWB-108 | 3" Extension | JHWB-614 | 7/16 |
| JHWB-110 | 6" Extension | JHWB-616 | 1/2 |
| | | JHWB-618 | 9/16 |
| | | JHWB-620 | 5/8 |
| | | JHWB-622 | 11/16 |
| | | JHWB-624 | 3/4 |
| | | JHWB-626 | 13/16 |
| | | JHWB-628 | 7/8 |

Features

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use




29 PIECE 3/8" DRIVE **SOCKET AND DRIVE TOOL SET**











| JHWWSMB29FTB 29 Piece Tool Set with TB-103 Metal Tool Box | |
|---|-------|
| HUMBHOMB ONE ON DE TION OF DISTRICT OF E | |
| JHWWSMB-29F 29 Piece Tool Set Only - Packed in Keep Safe Foam | ystem |

Drive Tools:

Contents Include:

Drive Tools:

| Product Code | Description | Product Code | Description |
|-------------------------------|--------------------------|-----------------|------------------|
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-110 | 6" Extension |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| Shallow 6-Poin | t Sockets, SAE | Shallow 6-Point | Sockets, mm |
| Product Code | Size (Inches) | Product Code | Metric Size (mm) |
| JHWB-608 | 1/4 | JHWBM-606 | 6 |
| JHWB-610 | 5/16 | JHWBM-607 | 7 |
| JHWB-612 | 3/8 | JHWBM-608 | 8 |
| JHWB-614 | 7/16 | JHWBM-609 | 9 |
| JHWB-616 | 1/2 | JHWBM-610 | 10 |
| JHWB-618 | 9/16 | JHWBM-611 | 11 |
| | | JHWBM-612 | 12 |
| Shallow 12-point Sockets, SAE | | JHWBM-613 | 13 |
| Product Code | Size (Inches) | JHWBM-614 | 14 |
| JHWB-1220 | 5/8 | JHWBM-615 | 15 |
| JHWB-1222 | 11/16 | JHWBM-616 | 16 |
| JHWB-1224 | 3/4 | JHWBM-617 | 17 |
| JHWB-1226 | 13/16 | JHWBM-618 | 18 |
| JHWB-1228 | 7/8 | JHWBM-619 | 19 |

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use

















6 & 12 Point Metric, Packed in Exclusive Keep-Safe-Foam **System with Metal Box**

| Product Code | Description | | |
|--------------|--|--|--|
| JHWMSB-39FTB | 39 Piece Tool Set with TB-104 Metal Tool Box | | |
| JHWMSB-39F | 39 Piece Tool Set Only - Packed in Keep Safe Foam System | | |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|----------------------|--------------------------|-----------------|------------------|
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-20A | Sliding T-Handle |
| JHWB-108 | 3" Extension | JHWB-70 | Ratchet Spinner |
| JHWB-110 | 6" Extension | | • |
| JHWB-115 | 11" Extension | Shallow 12-Poir | nt Sockets |
| JHWBFE-8 | 8" Flexible Extension | Product Code | Size (MM) |
| JHWB-40B | 8 9/16" Flex Handle | JHWBM-1206 | 6 |
| JHWB-140A | Universal Joint | JHWBM-1207 | 7 |
| | | JHWBM-1208 | 8 |
| | | JHWBM-1209 | 9 |
| Deep 6-Point Sockets | | JHWBM-1210 | 10 |
| Product Code | Size (MM) | JHWBM-1211 | 11 |
| JHWBMD-608 | 8 | JHWBM-1212 | 12 |
| JHWBMD-609 | 9 | JHWBM-1213 | 13 |
| JHWBMD-610 | 10 | JHWBM-1214 | 14 |
| JHWBMD-611 | 11 | JHWBM-1215 | 15 |
| JHWBMD-612 | 12 | JHWBM-1216 | 16 |
| JHWBMD-613 | 13 | JHWBM-1217 | 17 |
| JHWBMD-614 | 14 | JHWBM-1218 | 18 |
| JHWBMD-615 | 15 | JHWBM-1219 | 19 |
| JHWBMD-616 | 16 | JHWBM-1220 | 20 |
| JHWBMD-617 | 17 | JHWBM-1221 | 21 |
| JHWBMD-618 | 18 | JHWBM-1222 | 22 |
| JHWBMD-619 | 19 | JHWBM-1224 | 24 |

- Features

 Keep-Safe-Foam system keeps tools organized and helps prevent loss

 All tools are professional quality, made of high-grade chrome vanadium steel

 Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use







JHWMSB-39FTB





















6 Point Metric, Packed in Exclusive Keep-Safe-Foam System with **Metal Box**

| Product Code | Description | | |
|--------------|--|--|--|
| JHWMSB29HFTB | 29 Piece Tool Set with TB-103 Metal Tool Box | | |
| JHWMSB-29HF | 29 Piece Tool Set Only - Packed in Keep Safe Foam System | | |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|---------------------|--------------------------|---------------------|---------------------|
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-40B | 8 9/16" Flex Handle |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| JHWB-110 | 6" Extension | | |
| Shallow 6-Poin | t Sockets | Deep 6-Point Sc | ockets |
| Product Code | Size (MM) | Product Code | Size (MM) |
| JHWBM-608 | 8 | JHWBMD-608 | 8 |
| JHWBM-609 | 9 | JHWBMD-609 | 9 |
| JHWBM-610 | 10 | JHWBMD-610 | 10 |
| JHWBM-611 | 11 | JHWBMD-611 | 11 |
| JHWBM-612 | 12 | JHWBMD-612 | 12 |
| JHWBM-613 | 13 | JHWBMD-613 | 13 |
| JHWBM-614 | 14 | JHWBMD-614 | 14 |
| JHWBM-615 | 15 | JHWBMD-615 | 15 |
| JHWBM-616 | 16 | JHWBMD-616 | 16 |
| JHWBM-617 | 17 | JHWBMD-617 | 17 |
| JHWBM-618 | 18 | JHWBMD-618 | 18 |
| JHWBM-619 | 19 | JHWBMD-619 | 19 |

Features

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
 Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener

 Metal tool box made for years of rugged use



29 PIECE 3/8" DRIVE **SOCKET AND DRIVE TOOL SET**





Description

8 9/16" Flex Handle

17

18

19



6 & 12 Point Metric, Packed in Exclusive Keep-Safe-Foam System with Metal Box

Description

8" Enclosed Head Ratchet JHWB-40B

| Product Code | Description |
|--------------|--|
| JHWMSB-29FTB | 29 Piece Tool Set with TB-103 Metal Tool Box |
| JHWMSB-29F | 29 Piece Tool Set Only - Packed in Keep Safe Foam System |

Drive Tools:

Product Code

JHWBMD-617

JHWBMD-618

JHWBMD-619

Contents Include:

Drive Tools:

Product Code

JHWB-52EHA

| JHWB-108 JHWB-110 | 3" Extension 6" Extension | JHWB-140A | Universal Joint |
|----------------------------------|------------------------------|------------------|-------------------|
| Shallow 12-Point Product Code | Sockets Size (MM) | Deep 6-Point Soc | kets Size (MM) |
| JHWBM-1208 | 8 Size (WIN) | JHWBMD-608 | 8 |
| JHWBM-1209 | 9 | JHWBMD-609 | 9 |
| JHWBM-1210 | 10 | JHWBMD-610 | 10 |
| JHWBM-1211 | 11 | JHWBMD-611 | 11 |
| JHWBM-1212 | 12 | JHWBMD-612 | 12 |
| JHWBM-1213 | 13 | JHWBMD-613 | 13 |
| JHWBM-1214 | 14 | JHWBMD-614 | 14 |
| JHWBM-1215 | 15 | JHWBMD-615 | 15 |
| JHWBM-1216 | 16 | JHWBMD-616 | 16 |

JHWBM-1218 JHWBM-1219 **Features**

JHWBM-1217

Keep-Safe-Foam system keeps tools organized and helps prevent loss

18

- All tools are professional quality, made of high-grade chrome vanadium steel
 Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use









6 Point Metric, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWMSB18HFTB | 18 Piece Tool Set with TB-102 Metal Tool Box |
| JHWMSB-18HF | 18 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|-----------------|--------------------------|-----------------|-----------------|
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-110 | 6" Extension |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| Shallow 6-Point | Sockets | Shallow 6-Point | Sockets |
| Product Code | Size (MM) | Product Code | Size (MM) |
| JHWBM-606 | 6 | JHWBM-613 | 13 |
| JHWBM-607 | 7 | JHWBM-614 | 14 |
| JHWBM-608 | 8 | JHWBM-615 | 15 |
| JHWBM-609 | 9 | JHWBM-616 | 16 |
| JHWBM-610 | 10 | JHWBM-617 | 17 |
| JHWBM-611 | 11 | JHWBM-618 | 18 |
| JHWBM-612 | 12 | JHWBM-619 | 19 |



Features

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



17 PIECE 3/8" DRIVE SOCKET AND DRIVE TOOL SET





12 Point Metric, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWMSB-17FTB | 17 Piece Tool Set with TB-102 Metal Tool Box |
| JHWMSB-17F | 17 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|--------------------------|--------------------------|--------------------------|--------------------|
| Product Code | Description | Product Code | Description |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWB-40B | 8 %16" Flex Handle |
| JHWB-108 | 3" Extension | JHWB-140A | Universal Joint |
| JHWB-110 | 6" Extension | | |
| Shallow 12-Point Sockets | | Shallow 12-Point Sockets | |
| Product Code | Size (MM) | Product Code | Size (MM) |
| JHWBM-1208 | 8 | JHWBM-1214 | 14 |
| JHWBM-1209 | 9 | JHWBM-1215 | 15 |
| JHWBM-1210 | 10 | JHWBM-1216 | 16 |
| JHWBM-1211 | 11 | JHWBM-1217 | 17 |
| JHWBM-1212 | 12 | JHWBM-1218 | 18 |
| JHWBM-1213 | 13 | JHWBM-1219 | 19 |

- . Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use























12 Point Metric, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description | |
|--------------|--|--|
| JHWMSB-16FTB | 16 Piece Tool Set with TB-102 Metal Tool Box | |
| JHWMSB-16F | 16 Piece Tool Set Only - Packed in Keep Safe Foam System | |

Contents Include:

| Drive Tools: | | Shallow 12-Point Sockets | |
|--------------------------|--------------------------|--------------------------|-----------|
| Product Code | Description | Product Code | Size (MM) |
| JHWB-52EHA | 8" Enclosed Head Ratchet | JHWBM-1213 | 13 |
| JHWB-108 | 3" Extension | JHWBM-1214 | 14 |
| | | JHWBM-1216 | 16 |
| Shallow 12-Point Sockets | | JHWBM-1217 | 17 |
| Product Code | Size (MM) | JHWBM-1218 | 18 |
| JHWBM-1208 | 8 | JHWBM-1220 | 20 |
| JHWBM-1209 | 9 | JHWBM-1221 | 21 |
| JHWBM-1210 | 10 | JHWBM-1222 | 22 |
| JHWBM-1211 | 11 | JHWBM-1224 | 24 |
| JHWBM-1212 | 12 | | |

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use





146 PIECE 1/4", 3/8", 1/2" DRIVE SOCKET AND DRIVE TOOL SET









6 & 12 Point Rugged-Case-System Tool Set, SAE and Metric

| | - | |
|--------------|---|---|
| Product Code | | Description |
| JHW50614B | | 146 Piece 1/4", 3/8", 1/2" Drive Socket Set |

1/4" Drive Contents Include:

1/4" Drive Tools

Ratchet 3" Extension Handle Universal Joint

1/4" Drive Deep 6 Point Sockets

| • | | |
|---|------------------------------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 4 | ³ / ₁₆ | |
| 4 5 6 7 | 7/32 | |
| 6 | 1/4 | |
| | 9/32 | |
| 8 | 5/16 | |
| 9 | 11/32 | |
| 10 | 3/8 | |
| 11 | 7/16 | |
| 12 | 1/2 | |
| 13 | | |

1/4" Drive Shallow 6 Point Sockets

| Metric Size | SAE Size | |
|-------------|----------|--|
| (MM) | (Inches) | |
| 4 | 5/32 | |
| 5 | 3/16 | |
| 5.5 | 7/32 | |
| 6 | 1/4 | |
| 7 | 9/32 | |
| 8 | 5/16 | |
| 9 | 11/32 | |
| 10 | 3/8 | |
| 11 | 7/16 | |
| 12 | 1/2 | |
| 13 | 9/16 | |
| 4.4 | | |

1/4" Drive Hex Bit Sockets

| nex bit Sockets | | |
|-----------------|----------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 3 | 1/8 | |
| 4 | 5/32 | |
| 5 | 3/16 | |
| 6 | 7/32 | |
| 7 | 1/4 | |
| Ω | 5/46 | |

1/4" Drive Screw-

| ULIVEL DIL SUCKEIS | | OCKEIS |
|--------------------|-------------------|-----------------|
| Size | | Size |
| | 5/32" Slotted Tip | #0 Phillips Tip |
| | 7/32" Slotted Tip | #1 Phillips Tip |
| | %2" Slotted Tin | #2 Phillins Tin |

1/4" Drive

Town Dis Cookes

| Torx Bit Sockets | |
|------------------|------|
| Size | Size |
| T10 | T25 |
| T15 | T27 |
| T20 | T30 |

3/8" Drive Contents Include:

3/8" Drive Tools

Ratchet 3" Extension 6" Extension Adaptor - 3/8" F x 1/4" M

3/8" Drive Deep 12 Point Sockets

| 12 Pullit Suckets | | |
|-------------------|-------------------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 6 | 1/4 | |
| 7 | 5/16 | |
| 8 | 3/8 | |
| 9 | 7/16 | |
| 10 | 1/2 | |
| 11 | %16 | |
| 12 | 5/8 | |
| 13 | 11/16 | |
| 14 | 3/4 | |
| 15 | ¹³ /16 | |
| 16 | 7/8 | |
| 17 | 15/16 | |
| 18 | 1 | |
| 19 | | |

3/8" Drive Shallow

| 6 Point Sockets | | |
|-----------------|----------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 6 | 1/4 | |
| 7 | 5/16 | |
| 8 | 3/8 | |
| 9 | 7/16 | |
| 10 | 1/2 | |
| 11 | 9/16 | |
| 12 | 5/8 | |
| 13 | 11/16 | |
| 14 | 3/4 | |
| 15 | 13/16 | |
| 16 | 7/8 | |
| 17 | 15/16 | |
| 18 | 1 | |
| 40 | | |

3/8" Drive Spark Plug Socket

| park Flug Socket | |
|-------------------|--|
| SAE Size (Inches) | |
| 5/8 | |
| 13/4 | |

1/2" Drive Contents Include:

1/2" Drive Tools

Ratchet 6" Extension 10" Extension Universal Joint Adaptor - 1/2" F x 3/8" M

1/2" Drive Shallow 12 Point Sockets

| Point Sockets | |
|-------------------|--|
| SAE Size (Inches) | |
| 3/8 | |
| 7/16 | |
| 1/2 | |
| 9/16 | |
| 5/8 | |
| 11/16 | |
| 3/4 | |
| 13/16 | |
| 7/8 | |
| 15/16 | |
| 1 | |
| | |





- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry













138 PIECE 1/4", 3/8", 1/2" DRIVE SOCKET AND DRIVE TOOL SET







6 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Description |
|--------------|---|
| JHW50612B | 138 Piece 1/4", 3/8", 1/2" Drive Socket Set |

1/4" Drive Contents Include:

1/4" Drive Tools

Ratchet
1 ½" Extension
3" Extension
Spinner Handle
Universal Joint
Hex Bit Holder
13 Piece Insert Bit Set

1/4" Drive Deep 6 Point Sockets

| o i dilit docketa | |
|-------------------|------------------------------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 6 7 | 1/4 |
| 8 | 9/32 |
| 9 | 5/16 |
| 10 | 11/32 |
| 11 | 3/8 |
| 12 | ⁷ / ₁₆ |
| 13 | 1/2 |

1/4" Drive Shallow 6 Point Sockets

| o Point Sockets | |
|-----------------|------------------------------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 5/32 |
| 5 | ³ / ₁₆ |
| 5.5 | 7/32 |
| 6 | 1/4 |
| 7 | 9/32 |
| 8 | 5/16 |
| 9 | 11/32 |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | |

3/8" Drive Contents Include:

3/8" Drive Tools

Ratchet 3" Extension 6" Extension Universal Joint Adaptor Hex Bit Holder

3/8" Drive Deep 12 Point Sockets

| 12 Pullit Suckets | |
|-------------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | 13/16 |
| 18 | 7/8 |
| 19 | |

3/8" Drive Shallow

| 6 Point Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | |
| 18 | |
| 19 | |

1/2" Drive Contents Include:

1/2" Drive Tools

Ratchet 6" Extension 10" Extension Universal Joint Adaptor

1/2" Drive 12 Point Sockets

| JUCKELS | |
|-------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | 13/16 |
| 18 | 7/8 |
| 19 | 15/16 |
| 21 | 1 |
| 22 | 1 1/16 |
| 24 | 1 1/8 |
| 27 | 1 3/16 |
| 30 | 1 1/4 |
| 32 | |

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry



95 PIECE 1/4" & 3/8" DRIVE MASTER SOCKET AND TOOL SET







6 & 12 Point Rugged-Case-System Tool Set, SAE

| Product Code | Description |
|--------------|---|
| JHW50611B | 95 Piece Master Socket, Wrench, and Screwdriver Set |

1/4" Drive Contents Include:

1/4" Drive Tools
36 Tooth Quick-Release Ratchet
1 ½" Extension
3" Extension
Flex Handle
Spinner Handle
Universal Joint
½" F x 3%" M Adapter

1/4" Drive Shallow 6-Point Sockets SAE Size (Inches)

3/16 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2 9/16

1/4" Drive Deep 6 Point Sockets

6 Point Sockets

SAE Size (Inches)

3/16
7/32
1/4
9/32
5/16
11/32
3/8
7/16
1/2
9/16

1/4" Drive Hex Bit Sockets

| mex bit Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

1/4" Drive Screwdriver Bit Sockets

| DIL JUCKELS | |
|-------------------|-----------------|
| Size | Size |
| 5/32" Slotted Tip | |
| 32" Slotted Tip | #1 Phillips Tip |
| 9/2" Slotted Tin | #2 Philling Tin |

1/4" Drive Torx Bit Sockets

| Torx Bit Sockets | |
|------------------|------|
| Size | Size |
| T10 | T25 |
| T15 | T27 |
| Tan | T20 |

3/8" Drive Contents Include:

3/8" Drive Tools

38 Tooth Quick-Release Ratchet
3" Extension
6" Extension
10" Extension
10" Flex Handle
Universal Joint
Sliding T-Handle
3/6" F x 1/4" M Adapter
3/6" F x 1/2" M Adapter

3/8" Drive Shallow 6-Point Sockets

6-Point Sockets

SAE Size (Inches)

3/16
7/16
1/2
9/16
5/8
11/16
3/4
13/16
7/8
15/16
1

3/8" Drive Deep 12 Point Sockets SAE Size (Inches)

3/16 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8

Other Contents Include:

Comfort Grip Screwdrivers

3/16" x 4" Slotted 1/4" x 4" Slotted #1 x 3" Phillips® #2 x 4" Phillips®

12 Point Combination Wrenches

| MICHES |
|------------------------------|
| SAE Size (Inches) |
| 1/4 |
| 5/16 |
| 3/8 |
| ⁷ / ₁₆ |
| 1/2 |
| 9/16 |
| 5/8 |
| 11/16 |
| 3/4 |
| |





JHW50611B

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater
- turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry













Features

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- . Two-component handles are easy to grip and comfortable to carry

89 PIECE 1/4" & 3/8" DRIVE **MASTER SOCKET AND TOOL SET**









6 & 12 Point Rugged-Case-System Tool Set, Metric

| Product Code | Description |
|--------------|--|
| JHW50622B | 89 Piece Master Socket, Wrench and Screwdriver Set |

1/4" Drive **Contents Include:**

1/4" Drive Tools 36 Tooth Quick-Release Ratchet 1 1/2" Extension 3" Extension Flex Handle Spinner Handle **Universal Joint** 1/4" F x 3/8" M Adapter

1/4" Drive Hex Bit Socke

| nex bit | Jockets |
|-------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

1/4" Drive Screwdriver

| DIL SU | CNCIS |
|-------------------|-----------------|
| Size | Size |
| 5/32" Slotted Tip | |
| 32" Slotted Tip | #1 Phillips Tip |
| %2" Slotted Tip | |

1/4" Drive

| IUFX DIT | Juckets |
|----------|---------|
| Size | Size |
| T10 | T25 |
| T15 | T27 |
| T20 | T30 |
| | |

3/8" Drive Contents Include:

3/8" Drive Tools 38 Tooth Quick-Release Ratchet 3" Extension 6" Extension 10" Extension 10" Flex Handle **Universal Joint** Sliding T-Handle 3/8" F x 1/4" M Adapter

3/8" F x 1/2" M Adapter 3/8" Drive Shallow 6-Point Sockets Metric Size (MM)

3/8" Drive Deep

| 12-Point Sockets | |
|------------------|--|
| Metric Size (MM) | |
| 8 | |
| 9 | |
| 10 | |
| 11 | |
| 12 | |
| 13 | |
| 14 | |
| 15 | |
| 16 | |
| 17 | |
| 18 | |
| 19 | |
| <u>*</u> | |

Other Contents Include:

Comfort Grip Screwdrivers . 3/16" x 4" Slotted 1/4" x 4" Slotted #1 x 3" Phillips® #2 x 4" Phillips®

12 Point Combination

| wrenches |
|------------------|
| Metric Size (MM) |
| 6 |
| 8 |
| 10 |
| 12 |
| 13 |
| 14 |
| 15 |
| 17 |
| 19 |
| |











6 & 12 Point Rugged-Case-System Tool Set, SAE and Metric, with 1/4" Hex Screwdriver Bits

Product Code Description

JHW50607B

79 Piece 3/8" Drive Deluxe Tool Set

1/4" Drive Contents Include:

1/4" Drive Tools

Spinner Handle Universal Joint 1/4" Hex Bit Holder Universal Joint

1/4" Hex Screwdriver Bits

5crewdriver Bi

5cz" Slotted Tip
3cs" Slotted Tip
4s" Slotted Tip
4" Phillips® Tip
#1 Phillips® Tip
#2 Phillips® Tip
#3 Phillips® Tip
#3 Square Tip
#6 Square Tip
5cz" Hex Tip
5cz" Hex Tip
5cz" Hex Tip
5cz" Hex Tip
5cz" Hex Tip
5cz" Hex Tip

3/8" Drive Contents Include:

3/8" Drive Tools

38 Tooth Quick-Release Ratchet
3" Extension
6" Extension
10" Extension
10" Flex Handle
Universal Joint
Sliding T-Handle
% F x 1/4" M Adapter
3/6" F x 1/2" M Adapter

3/8" Drive Deep 12 Point Sockets

| 12 Point | Sockets |
|-------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 19 | |

3/8" Drive Shallow 6 Point Sockets

| O I OIIIC | Dooneis |
|-------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 19 | |



JHW50607B

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry











63 PIECE 3/8" DRIVE **SOCKET, SCREWDRIVER, AND WRENCH SET**







6 & 12 Point Rugged-Case-System Tool Set, SAE and Metric

Product Code

Description

JHW50605B

63 Piece 3/8" Drive Socket, Screwdriver, and Wrench Set

1/4" Drive **Contents Include:**

1/4" Drive Tools

Spinner Handle Universal Joint 1/4" Hex Bit Holder

1/4" Hex **Screwdriver Bits**

5/32" Slotted Tip 3/16" Slotted Tip 1/4" Slotted Tip #0 Phillips® Tip #1 Phillips® Tip #2 Phillips® Tip #3 Phillips® Tip #1 Square Tip #2 Square Tip 1/4" Hex Tip 5/32" Hex Tip 7/32" Hex Tip 1/4" Hex Tip

3/8" Drive Contents Include:

3/8" Drive Tools 38 Tooth Quick-Release Ratchet

3" Extension 6" Extension 10" Extension 10" Flex Handle **Universal Joint** Sliding T-Handle 3/8" F x 1/4" M Adapter 3/8" F x 1/2" M Adapter

3/8" Drive Shallow

| 6 Point | Sockets |
|-------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 10 | • |

Additional **Contents Include:**

Comfort Grip Screwdrivers

| 3/16" x 4" Slotted | |
|--------------------|--|
| 1/4" x 4" Slotted | |
| #1 x 3" Phillips® | |
| #2 x 4" Phillins® | |

12 Point Combination Wrenches

| Wichelics |
|-------------------|
| SAE Size (Inches) |
| 1/4 |
| 5/16 |
| 3/8 |
| 7/16 |
| 1/2 |
| 6/16 |
| 5/8 |
| |
| |

Features

· All tools are professional quality, made of high-grade chrome vanadium steel

JHW50605B

- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- · Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- . Two-component handles are easy to grip and comfortable to carry



58 PIECE 3/8" DRIVE SOCKET, SCREWDRIVER, AND PLIERS SET







6 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Descripti |
|--------------|-----------|
| | |

JHW50615B 58 Piece 3/8" Drive Socket, Screwdriver and Pliers Set

1/4" Drive Contents Include:

1/4" Drive Tools

Spinner Handle Universal Joint 1/4" Hex Bit Holder

1/4" Hex Screwdriver Bits

\$\frac{\text{Screwdriver Bi}}{\psi_2\text{* Slotted Tip}} \psi_6\text{* Slotted Tip } \psi_6\text{* Slotted Tip } \psi_0\text{* Slotted Tip } \psi_0\text{* Phillips} \text{* Tip } \psi_2\text{* Phillips} \text{* Tip } \psi_2\text{* Payare Tip } \psi_2\text{* Square Tip } \psi_2\text{* Hex Tip } \psi_2\text{* Hex Tip } \psi_2\text{* Hex Tip } \psi_2\text{* Hex Tip } \psi_4\text{* Hex Tip } \psi_6\text{* Hex Tip

3/8" Drive Contents Include:

3/8" Drive Tools

38 Tooth Quick-Release Ratchet 3" Extension 6" Extension 10" Extension 10" Flex Handle Universal Joint Sliding T-Handle 3%" F x ½" M Adapter

3/8" F x ½" M Adapter 3/8" Drive Shallow 6 Point Sockets

| Metric Size | SAE Size |
|-------------|----------|
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 19 | |
| | |

Additional Contents Include:

Pliers

8" Slip Joint Pliers 9 ¾" Groove Joint Pliers 7" Diagonal Cutting Pliers 6¼" Long Nose Pliers W / Cutter

Adjustable Wrench



Features

 All tools are professional quality, made of high-grade chrome vanadium steel

JHW50615B

- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry













JHW50613B

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry







6 Point Rugged-Case-System Tool Set, Metric, with 1/4" Hex Screwdriver Bits

| wetric, with | 74 nex Screwariver bits |
|--------------|---------------------------------|
| Product Code | Description |
| JHW50613B | 35 Piece Basic Tool Set, Metric |

1/4" Drive Contents Include:

| 1/4" Drive Tools | |
|---------------------|--|
| Spinner Handle | |
| Universal Joint | |
| 1/4" Hex Bit Holder | |

1/4" Hex Screwdriver Bits

| 5/32" Slotted Tip |
|-------------------|
| 3/16" Slotted Tip |
| 1/4" Slotted Tip |
| #0 Phillips® Tip |
| #1 Phillips® Tip |
| #2 Phillips® Tip |
| #3 Phillips® Tip |
| #1 Square Tip |
| #2 Square Tip |
| 1/8" Hex Tip |
| 5⁄32" Hex Tip |
| 7/₃₂" Hex Tip |
| 1/4" Hex Tip |
| |

3/8" Drive Contents Include:

| 3/8" Drive Tools | |
|---------------------------------------|--|
| 7 3/4" Ratchet | |
| 3" Extension | |
| 6" Extension | |
| Universal Joint | |
| 1/4" Hex Bit Holder | |
| 3/8" Drive Shallow 6-Point Sockets | |
| Metric Size (MM) | |
| 6 | |
| 7 | |
| 8 | |
| 9 | |
| 10 | |
| 11 | |
| 12 | |
| 13 | |
| 14 | |
| 15 | |
| 16 | |
| 17 | |

18



34 PIECE 3/8" DRIVE **BASIC TOOL SET**





6 Point Rugged-Case-System Tool Set, SAE, with 1/4" Hex Screwdriver Bits

| Product Code | Description |
|--------------|------------------------------|
| JHW50603B | 34 Piece Basic Tool Set, SAE |

1/4" Drive

| Contents Include: | Contents Include: |
|------------------------------|--|
| 1/4" Drive Tools | 3/8" Drive Tools |
| Spinner Handle | 7¾" Ratchet |
| Universal Joint | 3" Extension |
| 1/4" Hex Bit Holder | 6" Extension |
| 1/4" Hex | Universal Joint 1⁄4" Hex Bit Holder |
| Screwdriver Bits | 2/0 D - Cl |
| 5⁄32" Slotted Tip | 3/8" Drive Shallow 6 Point Sockets |
| 3/16" Slotted Tip | |
| 1/4" Slotted Tip | SAE Size (Inches) |
| #0 Phillips® Tip | 1/4 |
| #1 Phillips [®] Tip | 5/16 |
| #2 Phillips® Tip | 3/8 |
| #3 Phillips® Tip | 7/16 |
| #1 Square Tip | 1/2 |
| #2 Square Tip | 9/16 |
| 1/8" Hex Tip | 5/8 |
| 5⁄32" Hex Tip | 11/16 |
| ⅓₂" Hex Tip | 3/4 |
| 1/4" Hex Tip | 13/16 |
| <u>'</u> | 7/8 15/ |

3/8" Drive

22 PIECE 3/8" DRIVE **BOLT THRU SOCKET SET**









6 Point Compact Case Tool Set, SAE & Metric

| Product Code | Description |
|--------------|--|
| JHW50671 | 22 Piece 3/8" Drive Bolt Thru Socket Set |

3/8" Drive Contents Include:

| 3/8" Drive Tools | |
|--------------------------|--|
| Locking Flexible Ratchet | |
| 3" Extension | |
| Adaptor | |

| 6 Point Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | |
| 16 | |
| 17 | |
| 18 | |
| 19 | |

3/8" Drive Shallow





Features

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- . Two-component handles are easy to grip and comfortable to carry



JHW50671

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- · Ratchet with 7 locking positions and flex head design









JHW50664

Features

- All tools are professional quality, made of high-grade chrome
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight



18 PIECE 3/8" DRIVE **SOCKET AND DRIVE TOOL SET**







6 & 12 Point Compact Case Tool Set, SAE

| Product Code | Description |
|--------------|---|
| JHW50664 | 18 Piece 3/8" Drive Socket and Drive Tool Set |

3/8" Drive Contents Include:

| 3/8" Drive Tools | 3/8" Drive Shallow 6 Point Sockets | 3/8" Drive Deep 12 Point Sockets |
|--------------------------|---------------------------------------|-------------------------------------|
| 7 3/4" Pear Head Ratchet | SAE Size (Inches) | SAE Size (Inches) |
| 3" Extension | 3/8 | 3/8 |
| 6" Extension | ⁷ / ₁₆ | ⁷ /16 |
| | 1/2 | 1/2 |
| 3/8" Drive | ⁹ / ₁₆ | 9/16 |
| Spark Plug Socket | 5/8 | 5/8 |
| 5/8 | 11/16 | 11/16 |
| | 3/4 | 3/4 |



JHW50666

Features

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight

47 PIECE 3/8" DRIVE **SOCKET AND DRIVE TOOL SET**









6 & 12 Point Compact Case Tool Set, SAE & Metric

| Product Code | Description |
|--------------|---|
| JHW50666 | 47 Piece 3/8" Drive Socket and Drive Tool Set |

3/8" Drive Contents Include:

| 3/8" Drive Tools | 3/8" Drive Shallow 6 Point Sockets | | 3/8" Drive Deep 12 Point Sockets | |
|--|---------------------------------------|--------------------------|-------------------------------------|--------------------------|
| 5 1/4" Pear Head Ratchet 3" Extension | Metric Size (MM) | SAE Size (Inches) | Metric Size (MM) | SAE Size (Inches) |
| 1 ½" Extension Universal Joint | 6 7 | 5/16 3/8 | 7 8 | 5/16 3/8 |
| Oniversal John | 8 9 | 7/16 1/2 | 9 | 7/ ₁₆ |
| | 10 | 9/16 | 11 | 9/16 |
| | 11 12 | 5/8 11/ ₁₆ | 13 | 5/8 11/ ₁₆ |
| | 13 14 | 3/4 | 14 15 | 3/4 |
| | 15 16 | | 16 17 | |
| | 17 | | 18 | |







12 Point Compact Case Tool Set, SAE

| Product Code | | Description | | |
|--------------------------|---|--------------------------------------|---------------|--|
| JHW50673 | 15 Piece 3/6" Drive Socket and Drive Tool Set | | | |
| Contents Include | e: | | | |
| 3/8" Drive Tools: | 3/8" Dr | 3/8" Drive Shallow 12 Point Sockets: | | |
| Description | Size (Inches) | Size (Inches) | Size (Inches) | |
| 7 3/4" Pear Head Ratchet | 1/4 | 1/2 | 3/4 | |
| 3" Extension | 5/16 | 9/16 | 13/16 | |
| 6" Extension | 3/8 | 5/8 | 7/8 | |
| Universal Joint | 7/16 | 11/16 | | |

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight



15 PIECE 3/8" DRIVE SOCKET AND DRIVE TOOL SET





| 6 Point | Compact | Case | lool Set, | SAE |
|------------|---------|------|-----------|-------------|
| Product Co | de | | | Description |

| JHW50663 | 15 Piece 3/8" Drive Socket and Drive Tool Set | | | |
|--------------------------|---|-------------------------------------|---------------|--|
| Contents Includ | e: | | | |
| 3/8" Drive Tools: | 3/8" Dri | 3/8" Drive Shallow 6 Point Sockets: | | |
| Description | Size (Inches) | Size (Inches) | Size (Inches) | |
| 7 3/4" Pear Head Ratchet | 1/4 | 1/2 | 3/4 | |

| O/O Dilve iddisi | 0/0 Dii | ve chanow o i onit t | JUCKULJ. |
|--------------------------|---------------|----------------------|---------------|
| Description | Size (Inches) | Size (Inches) | Size (Inches) |
| 7 3/4" Pear Head Ratchet | 1/4 | 1/2 | 3/4 |
| 3" Extension | 5/16 | 9/16 | 13/16 |
| 6" Extension | 3/8 | 5/8 | 7∕8 |
| Universal Joint | 7/16 | 11/16 | |

Features

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight



JHW50663

16 PIECE 3/8" DRIVE SOCKET AND DRIVE TOOL SET





6 Point Compact Case Tool Set, Metric

| Product Code | Description | | |
|--------------------------|---|----|----|
| JHW50665 | 16 Piece 3/8" Drive Socket and Drive Tool Set | | |
| Contents Include: | | | |
| 3/8" Drive Tools: | 3/8" Drive Shallow 6 Point Sockets: | | |
| Description | Size (mm) Size (mm) Size (mm) | | |
| 7 3/4" Pear Head Ratchet | 8 | 12 | 16 |
| 3" Extension | 9 | 13 | 17 |
| 6" Extension | 10 | 14 | 18 |
| Universal leint | 11 | 15 | 10 |

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight



JHW50665















3/8" DRIVE ENCLOSED HEAD RATCHETS

Williams® Sealed Narrow Head Design, Chrome and Black Industrial Finish

| | | Lengtn | Number |
|--------------|---|--------------------------------|----------|
| Product Code | Description | (Inches) | of Teeth |
| JHWB-52EHA | Chrome Finish Enclosed Head Ratchet | 8 | 36 |
| JHWB-52EHLA | Chrome Finish Enclosed Head Ratchet, Long | 10 ¹ / ₄ | 36 |
| JHWB-52EHFB | Chrome Finish Flex Head Ratchet | 9 11/16 | 36 |
| JHWBB-52EHA | Black Industrial Finish Enclosed Head Ratchet | 8 | 36 |
| JHWB-52EHRKA | Repair Kit for Enclosed Head Batchets | | |

Fed. Spec: ANSI B107.10M

Features

- Enclosed head is sealed to prevent dust, dirt, and liquids from entering head, preserving internal lubrication
- · Forged one-piece ratchet provide strength and safety for industrial applications
- . Smooth comfort-grip handle permits all-day use without gloves
- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- · Nickel/Chrome plating provides increase protection from rust and corrosion
- Chrome finish models feature mirror-like exterior that can be easily cleaned after each use
- Single Pawl ratchet design:
- 1) Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load
- 2) Does not require as many working parts, reducing possible breakage and parts to repair
- Easy access reverse lever allows user to change working direction quickly and easily with only one hand



3/8" DRIVE ROUND HEAD RATCHETS

Knurled Handle, Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|--|--------------------|--------------------|
| JHWB-52A | Chrome Finish Round Head Ratchet | 7 ⁵ /8 | 72 |
| JHWB-53A | Chrome Finish Round Head Ratchet, Long | 10 1/2 | 72 |
| JHWBB-52A | Black Industrial Finish Round Head Ratchet | 7 5/8 | 72 |
| JHWB-52ARK | Repair Kit for Round Head Ratchets | | |

Fed. Spec: ANSI B107.10M

Features

- Double pawl design with 72 teeth action provides a 5° ratcheting angle
- . Shift lever reverses action instantly
- Knurled handle provides a non-slip grip
- Chrome finish models provides increased protection from rust and corrosion



3/8" SUPERTORQUE SPINNER HANDLE

| Product Code | Description | Length (Inches) | Blade Length (Inches) |
|--------------|---------------------|--------------------|--------------------------|
| JHWSPR-SP-38 | 3/8" Spinner Handle | 9 | 4 |

Fed. Spec: ANSI B107.10M

- Three-component handle for maximum user comfort, soft material with ridged undermolded material provides superior grip and greater force transmission
- Integrated handle hole allows for hanging on a peg board, securing a laynard or inserting another screwdriver blade for added leverage
- Flat surface on the screwdriver handle limits rolling
- Size is shown on blade for easy identification
- Part number laser marked on handle



3/8" DRIVE HANDLES

Knurled Handle, High-Polished Chrome Finish

| Product Code | Description | Length (Inches) |
|--------------|------------------|-----------------|
| JHWB-40B | Flex Handle | 8 9/16 |
| JHWB-20A | Sliding T-Handle | 7 15/16 |
| JHWB-15 | Speeder Handle | 18 |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- . Drive handles provide extra leverage with greater strength than ratchets
- · Speeder handle is ideal for fast turn down of fasteners



3/8" DRIVE EXTENSIONS AND ACCESSORIES

High-Polished Chrome Finish

| Product Code | Description | Length (Inches) |
|--------------|----------------------|-----------------|
| JHWB-101 | Extension | 1 1/2 |
| JHWB-108 | Extension | 3 |
| JHWB-110 | Extension | 6 |
| JHWB-115 | Extension | 11 |
| JHWB-118 | Extension | 18 |
| JHWBFE-8 | Flexible Extension | 8 |
| JHWB-140A | Universal Joint | 2 |
| JHWB-70 | Ratchet Spinner Disk | 1 1/4 |

Fed. Spec: ANSI B107.10M

JHWWSB-5XT 5 Piece Extension Set in Pouch - 049605 Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHWB-101 | 1 1/2 | B-115 | 11 |
| JHWB-108 | 3 | B-118 | 18 |
| JHWB-110 | 6 | | |

Features

- Chrome plating provides increased protection from rust and corrosion
- Flexible extension is designed for low torque applications in limited access areas
- Ball and spring socket retention
- . Spinner disk is ideal for fast turn down of fasteners



3/8" DRIVE ADAPTORS

High-Polished Chrome and Black Industrial Finish

| riigii i oliolioa olii oliio alia biaok iliaasti ali i iliisii | | | | | | | | |
|--|---------------------------------------|-------------------|---------------------|--|--|--|--|--|
| Product Code | Length (Inches) | Male End (Inches) | Female End (Inches) | | | | | |
| Chrome Fin | ish | | | | | | | |
| JHWBS-130 | 1 ⁵ / ₁₆ | 1/2 | 3/8 | | | | | |
| Black Indus | trial Finish | | | | | | | |
| JHWBS-130B | 1 5/16 | 1/2 | 3/8 | | | | | |
| JHWBS-131BF | 1 5/16 | 3/8 | 1/2 | | | | | |
| Fed. Spec: ANSI B10 | 7.10M | | | | | | | |

Features

Ball and spring socket retention











JHWB-101

JHWB-140A

JHWB-70





JHWB-110





JHWWSB-5XT



JHWBS-130





JHWBS-130B


JHWBS-131BF









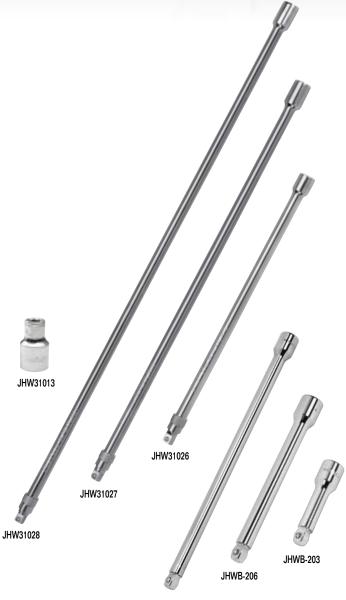

JHWB-211

3/8" DRIVE EXTENSIONS AND ACCESSORIES

High-Polished Chrome Finish

| Product Code | Description | Length (Inches) |
|--------------|--------------------------------------|-----------------|
| JHW31013 | Holder for 1/4" Hex Screwdriver Bits | 3/4 |
| JHW31023 | Locking Extension | 3 |
| JHW31024 | Locking Extension | 6 |
| JHW31025 | Locking Extension | 10 |
| JHW31026 | Locking Extension | 12 |
| JHW31027 | Locking Extension | 18 |
| JHW31028 | Locking Extension | 24 |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention

3/8" WOBBLE EXTENSIONS

High-Polished Chrome Finish

| Product Code | Length (Inches) | |
|--------------|-----------------|--|
| JHWB-201 | 1 | |
| JHWB-203 | 3 | |
| JHWB-206 | 6 | |
| JHWB-208 | 8 | |
| JHWB-211 | 11 | |
| JHWB-218 | 18 | |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- · Provides 16 degrees of additional accessibility

6 PIECE 3/8" DRIVE RATCHET AND DRIVE TOOL SET

Furnished in a Pouch

| Product Code | Description |
|--------------|--|
| JHWDTB-6 | 6 Piece 3/8" Drive Ratchet and Accessory Set |
| | |

Contents Include:

| Description |
|-------------------------------------|
| Chrome Finish Enclosed Head Ratchet |
| 3" Extension |
| 10" Extension |
| Flex Handle |
| Universal Joint |
| Sliding T-Handle |
| |

Features

• All tools are professional quality, made of high-grade chrome vanadium steel





3/8" DRIVE SHALLOW, 12 POINT SOCKETS, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|------------------|--------------------|-----------------------------------|-------------------------------------|-------------------------------|---------------------------------------|---|-------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clear- ance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWB-1208 | 1/4 | 1 1/32 | 11/16 | 13/32 | 7/32 | 9/16 | 7/32 | 17/32 |
| JHWB-1210 | 5/16 | 1 1/32 | 11/16 | 7/16 | 1/4 | 9/16 | 17/64 | 17/32 |
| JHWB-1211 | 11/32 | 1 1/32 | 11/16 | 1/2 | 9/32 | ⁹ /16 | 21/64 | 17/32 |
| JHWB-1212 | 3/8 | 1 1/32 | 11/16 | ⁹ /16 | 9/32 | ⁹ /16 | 11/32 | 17/32 |
| JHWB-1214 | 7/16 | 1 1/32 | 11/16 | 5/8 | 5/16 | ⁹ /16 | 11/32 | 17/32 |
| JHWB-1216 | 1/2 | 1 1/32 | 23/32 | 23/32 | 11/32 | 3/8 | 3/8 | - |
| JHWB-1217 | 17/32 | 1 1/32 | 25/32 | 25/32 | 13/32 | 3/4 | 1/2 | - |
| JHWB-1218 | 9/16 | 1 3/32 | 25/32 | 25/32 | 9/16 | 19/32 | 17/32 | - |
| JHWB-1219 | 19/32 | 1 3/32 | 25/32 | 25/32 | 9/16 | 9/16 | 9/16 | - |
| JHWB-1220 | 5/8 | 1 1/8 | ²⁷ / ₃₂ | ²⁷ / ₃₂ | 19/32 | 5/8 | 19/32 | - |
| JHWB-1222 | 11/16 | 1 5/32 | 15/16 | ¹⁵ / ₁₆ | 5/8 | 5/8 | 11/16 | - |
| JHWB-1224 | 3/4 | 1 ³ /16 | 1 | 1 | 11/16 | 11/16 | 23/32 | - |
| JHWB-1226 | 13/16 | 1 1/4 | 1 1/16 | 1 1/16 | 11/16 | 11/16 | 25/32 | - |
| JHWB-1228 | 7/8 | 1 %2 | 1 5/32 | 1 5/32 | 25/32 | 25/32 | 7/8 | - |
| JHWB-1230 | 15/16 | 1 % | 1 1/4 | 1 1/4 | 13/16 | 27/32 | 29/32 | - |
| JHWB-1232 | 1 | 1 13/32 | 1 5/16 | 1 5/16 | ²⁷ / ₃₂ | 7/8 | 1 | - |



JHWWSB-10RC 10 Piece 3/8" Drive Shallow 12-Point Socket Set on Clip Rail Contents Include:

| Odittonto in | oiuuci | | | | | |
|--------------|------------------------------|--------------|---------------|--------------|---------------|--|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | |
| JHWB-1210 | 5/16 | JHWB-1218 | 9/16 | JHWB-1226 | 13/16 | |
| JHWB-1212 | 3/8 | JHWB-1220 | 5/8 | JHWB-1228 | 7/8 | |
| JHWB-1214 | ⁷ / ₁₆ | JHWB-1222 | 11/16 | | | |
| .IHWR-1216 | 1/6 | .IHWR-1224 | 3/4 | | | |

JHWWSB-13RC 13 Piece 3/8" Drive Shallow 12-Point Socket Set on Clip Rail Contents Include:

| Official include: | | | | | | | | | |
|-------------------|------------------------------|--------------|---------------|--------------|-------------------------------|--|--|--|--|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | | | | |
| JHWB-1208 | 1/4 | JHWB-1218 | 9/16 | JHWB-1228 | 7/8 | | | | |
| JHWB-1210 | 5/16 | JHWB-1220 | 5/8 | JHWB-1230 | ¹⁵ / ₁₆ | | | | |
| JHWB-1212 | 3/8 | JHWB-1222 | 11/16 | JHWB-1232 | 1 | | | | |
| JHWB-1214 | ⁷ / ₁₆ | JHWB-1224 | 3/4 | | | | | | |
| JHWB-1216 | 1/2 | JHWB-1226 | 13/16 | | | | | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners





JHWWSB-10RC



JHWWSB-13RC









JHWB-1212

JHWB-1208







JHWB-616

JHWB-608



3/8" DRIVE SHALLOW SOCKETS, 6 POINT, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | F |
|-----------------|-------------------|---------------------------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Nose Length (Inches) |
| JHWB-608 | 1/4 | 1 1/32 | 11/16 | 13/32 | 7/32 | 9/16 | 1/2 |
| JHWB-610 | 5/16 | 1 1/32 | 11/16 | 7/16 | 1/4 | 9/16 | 1/2 |
| JHWB-611 | 11/32 | 1 1/32 | 11/16 | 1/2 | 9/32 | 9/16 | 1/2 |
| JHWB-612 | 3/8 | 1 1/32 | 11/16 | ⁹ /16 | 9/32 | 9/16 | 1/2 |
| JHWB-614 | 7/16 | 1 1/32 | 11/16 | 5/8 | ⁵ / ₁₆ | 9/16 | 1/2 |
| JHWB-616 | 1/2 | 1 1/32 | 23/32 | 23/32 | 11/32 | 9/16 | - |
| JHWB-618 | 9/16 | 1 3/32 | 25/32 | ²⁵ / ₃₂ | 9/16 | 19/32 | |
| JHWB-620 | 5/8 | 1 1/8 | 27/32 | 27/32 | 19/32 | 5/8 | |
| JHWB-622 | 11/16 | 1 5/32 | ¹⁵ / ₁₆ | ¹⁵ /16 | 5/8 | 5/8 | - |
| JHWB-624 | 3/4 | 1 3/16 | 1 | 1 | ²¹ / ₃₂ | 11/16 | - |
| JHWB-626 | ¹³ /16 | 1 ½ | 1 ¹ / ₁₆ | 1 1/16 | 11/16 | 23/32 | - |
| JHWB-628 | 7/8 | 1 1/32 | 1 5/32 | 1 5/32 | 3/4 | ²⁵ / ₃₂ | - |
| JHWB-630 | ¹⁵ /16 | 1 3/8 | 1 1/4 | 1 1/4 | ¹³ /16 | ²⁷ / ₃₂ | - |
| JHWB-632 | 1 | 1 ¹³ / ₃₂ | 1 5/16 | 1 5/16 | 27/32 | 7/8 | - |

Fed. Spec: ANSI B107.110

JHWWSS-8HRC 8 Piece 3/8" Drive Shallow 6 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWB-608 | 1/4 | JHWB-614 | 7/16 | JHWB-620 | 5/8 |
| JHWB-610 | 5/16 | JHWB-616 | 1/2 | JHWB-624 | 3/4 |
| .IHWR-612 | 3/6 | IHWR-618 | 9/16 | | |

JHWWSB-10HRC 10 Piece 3/8" Drive Shallow 6 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|---------------|--------------|---------------|
| JHWB-610 | ⁵ / ₁₆ | JHWB-618 | 9/16 | JHWB-626 | 13/16 |
| JHWB-612 | 3/8 | JHWB-620 | 5/8 | JHWB-628 | 7/8 |
| JHWB-614 | ⁷ /16 | JHWB-622 | 11/16 | | |
| JHWB-616 | 1/2 | JHWB-624 | 3/4 | | |

JHWWSB-13HRC 13 Piece 3/8" Drive Shallow 6 Point Socket Set on Clip Rail Contents Include:

| Confents in | ciuu c i | | | | |
|--------------|---------------------|--------------|------------------|--------------|-------------------------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWB-608 | 1/4 | JHWB-618 | ⁹ /16 | JHWB-628 | 7/8 |
| JHWB-610 | 5/16 | JHWB-620 | 5/8 | JHWB-630 | ¹⁵ / ₁₆ |
| JHWB-612 | 3/8 | JHWB-622 | 11/16 | JHWB-632 | 1 |
| JHWB-614 | 7/16 | JHWB-624 | 3/4 | | |
| JHWB-616 | 1/2 | JHWB-626 | 13/16 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners











3/8" DRIVE SHALLOW SOCKETS, 4 & 8 POINT, SAE







High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWBD-808 | 1/4 | 29/32 | 21/32 | 15/32 | 7/32 | 13/32 | 5/32 | 7/16 |
| JHWB-409 ** | 9/32 | 1 1/32 | 11/16 | 9/16 | 5/16 | 17/32 | 3/16 | 1/2 |
| JHWBD-810 | 5/16 | 29/32 | 21/32 | 9/16 | 1/4 | 13/32 | 1/4 | 7/16 |
| JHWBD-812 | 3/8 | 15/16 | 11/16 | 41/64 | 9/32 | 7/16 | 5/16 | 15/32 |
| JHWBD-814 | 7/16 | 1 | 23/32 | 23/32 | 9/32 | 1/2 | 5/16 | - |
| JHWBD-816 | 1/2 | 1 | 29/32 | 29/32 | 5/16 | 1/2 | 13/32 | - |
| JHWBD-818 | 9/16 | 1 1/8 | 1 | 1 | 13/32 | 5/8 | 17/32 | - |
| JHWBD-820 | 5/8 | 1 1/8 | 1 1/16 | 1 1/16 | 7/16 | 5/8 | 19/32 | - |
| ** 4 D : . O I | | | | · | | | · | |

^{** 4} Point Socket Fed. Spec: ANSI B107.110

JHWWSBD-7RC 7 Piece 8 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWBD-808 | 1/4 | JHWBD-814 | 7/16 | JHWBD-820 | 5/8 |
| JHWBD-810 | 5/16 | JHWBD-816 | 1/2 | | |
| JHWBD-812 | 3/8 | JHWBD-818 | 9/16 | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- 8 point sockets are designed for quick engagement on 4 point fasteners



3/8" DRIVE 5 POINT PENTA-SOCKET



Black Industrial Finish

| | | Α | В | С | D | E | | F |
|-----------|----------|----------|-----------|-------------|----------|-----------------------|-----------------------|----------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWBB-526 | 51/64 | 1 1/16 | 1 1/8 | 1 1/8 | 7/16 | 1/2 | 23/32 | • |

Features

 5 point Penta-Socket services 5 point nuts found on tamper-resistant Buffalo covers used by gas, electric, and some water companies to protect shutoff gates







3/8" DRIVE UNIVERSAL SOCKETS, 12 POINT, SAE High-Polished Chrome Finish

| Product Code | Size (Inches) | A OAL (Inches) | B Drive End Diameter (Inches) | C Open End Diameter (Inches) | D Broach Depth (Inches) | E Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | F Nose Length (Inches) |
|-----------------|------------------|---------------------------------|--|---------------------------------------|----------------------------------|--|--|---------------------------------|
| JHWBU-1212 | 3/8 | 1 ²⁵ /32 | 3/4 | 1/2 | 1/4 | 1/2 | 5/16 | 15/64 |
| JHWBU-1214 | 7/16 | 1 ²⁵ /32 | 3/4 | 5/8 | 1/4 | 1/2 | 11/32 | 15/64 |
| JHWBU-1216 | 1/2 | 125/32 | 3/4 | 11/16 | 5/16 | 9/16 | 11/32 | 9/32 |
| JHWBU-1218 | 9/16 | 1 ²⁵ /32 | 3/4 | 3/4 | 11/32 | 5/8 | 11/32 | 17/32 |
| JHWBU-1220 | 5/8 | 1 ²⁵ / ₃₂ | 3/4 | 7/8 | 13/32 | 11/16 | 11/32 | 17/32 |
| JHWBU-1222 | 11/16 | 2 | 3/4 | 15/16 | 7/16 | 23/32 | 11/32 | 17/32 |
| JHWBU-1224 | 3/4 | 21//8 | 3/4 | 1 | 17/32 | 13/16 | 11/32 | 5/8 |

Fed. Spec: ANSI B107.110

JHWWSB-7U 7 Piece 12 Point Universal Socket Set on Clip Rail Contents Include:

| Outlones in | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | | | |
|--------------|---|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWBU-1212 | 3/8 | JHWBU-1218 | 9/16 | JHWBU-1224 | 3/4 |
| JHWBU-1214 | ⁷ / ₁₆ | JHWBU-1220 | 5/8 | | |
| JHWBU-1216 | 1/2 | JHWBU-1222 | 11/16 | | |

Features

· Ideal for work in confined areas where fastener is inaccessible to standard sockets











JHWBD-814



JHWWSBD-7RC





JHWBB-526



JHWBU-1220 JHWBU-1212



JHWWSB-7U





JHW31154 JHW31142



JHW31938





JHW31539 JHW31528



JHW31939



JHWBCF24

3/8" DRIVE UNIVERSAL SOCKETS, 6 POINT, SAE





| High-Polis | sned Chro | ome Finish | | | | | | |
|-----------------|------------------|---------------------------------|-----------------------------------|----------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| | | Α | В | С | D | E | | F |
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Open End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW31142 | 3/8 | 1 53/64 | 3/4 | 9/16 | 3/8 | 35/64 | 21/64 | 5/16 |
| JHW31144 | 7/16 | 1 ⁵³ / ₆₄ | 3/4 | 5/8 | 3/8 | 35/64 | 21/64 | 5/16 |
| JHW31146 | 1/2 | 1 ⁵⁷ / ₆₄ | 3/4 | ⁴⁵ / ₆₄ | 13/32 | ³⁷ / ₆₄ | 21/64 | 13/32 |
| JHW31148 | ⁹ /16 | 1 ⁵⁷ / ₆₄ | 3/4 | ²⁵ / ₃₂ | 7/16 | ⁴³ / ₆₄ | 21/64 | 33/64 |
| JHW31150 | 5/8 | 2 | 3/4 | 55/64 | 7/16 | 45/64 | 21/64 | 33/64 |
| JHW31152 | 11/16 | 2 3/64 | 3/4 | 15/16 | 31/64 | 3/4 | 21/64 | 17/32 |
| .IHW31154 | 3/4 | 2 3/64 | 3/4 | 1 1/64 | 1/6 | 51/64 | 21/64 | 17/22 |

Fed. Spec: ANSI B107.110

JHW31938 7 Piece 6 Point Universal Socket Set on Clip Rail Contents Include:

| Ochitomico morador | | | | | |
|--------------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW31142 | 3/8 | JHW31148 | 9/16 | JHW31154 | 3/4 |
| JHW31144 | 7/16 | JHW31150 | 5/8 | | |
| JHW31146 | 1/2 | JHW31152 | 11/16 | | |

Features

· Ideal for work in confined areas where fastener is inaccessible to standard sockets

3/8" DRIVE UNIVERSAL SOCKETS, 6 POINT, METRIC





| High-Polis | hed Chr | ome Finish | | | | | | |
|------------|---------|---------------------------------|-----------|----------|-------------------------------|-------------------------------|----------------|----------|
| • | | Α | В | С | D | E | | F |
| | | | Drive End | Open End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (mm) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW31528 | 8 | 1 27/32 | 3/4 | 15/32 | 23/64 | 35/64 | 15/64 | 21/64 |
| JHW31530 | 10 | 1 ⁵⁵ / ₆₄ | 3/4 | 9/16 | 23/64 | 35/64 | 21/64 | 21/64 |
| JHW31531 | 11 | 1 ⁵⁵ / ₆₄ | 3/4 | 5/8 | 23/64 | 35/64 | 21/64 | 21/64 |
| JHW31532 | 12 | 1 ⁵⁵ / ₆₄ | 3/4 | 43/64 | 23/64 | 35/64 | 21/64 | 21/64 |
| JHW31533 | 13 | 1 ⁵⁵ / ₆₄ | 3/4 | 45/64 | 23/64 | 35/64 | 21/64 | 23/64 |
| JHW31534 | 14 | 1 15/16 | 3/4 | 49/64 | ²⁵ / ₆₄ | 39/64 | 21/64 | 1/2 |
| JHW31535 | 15 | 1 ⁵⁷ / ₆₄ | 3/4 | 53/64 | ²⁵ / ₆₄ | 39/64 | 21/64 | 1/2 |
| JHW31536 | 16 | 2 | 3/4 | 55/64 | 7/16 | ⁴⁵ / ₆₄ | 21/64 | 1/2 |
| JHW31537 | 17 | 2 | 3/4 | 15/16 | 7/16 | 45/64 | 21/64 | 1/2 |
| JHW31538 | 18 | 2 1/64 | 3/4 | 15/16 | 15/32 | 3/4 | 21/64 | 1/2 |
| JHW31539 | 19 | 2 3/64 | 3/4 | 1 | 1/2 | 49/64 | 21/64 | 1/2 |

Fed. Spec: ANSI B107.110

JHW31939 11 Piece 6 Point Universal Socket Set on Clip Rail Contents Include:

| Ochitomico informaci | | | | | |
|----------------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (mm) | Product Code | Size (mm) | Product Code | Size (mm) |
| JHW31528 | 8 | JHW31533 | 13 | JHW31537 | 17 |
| JHW31530 | 10 | JHW31534 | 14 | JHW31538 | 18 |
| JHW31531 | 11 | JHW31535 | 15 | JHW31539 | 19 |
| .IHW31532 | 12 | JHW31536 | 16 | | |

Features

JHWBCF24

Satin Chrome Finish, SAE

Ideal for work in confined areas where fastener is inaccessible to standard sockets

3/8" DRIVE CROWFOOT WRENCH, FLARE NUT, 12 POINT



53/64



| | | Α | В | С | D |
|--------------|---------------|------------------|-------------------|---------------|-------------------|
| Product Code | Size (Inches) | Diameter of Head | Thickness of Head | Width of Slot | Length of Centers |
| JHWBCF20 | 5/8 | 15/16 | 11/16 | 15/32 | 47/64 |



3/8" DRIVE CROWFOOT WRENCH, **OPEN END, SAE**



Satin Chrome Finish, SAE

| | | Α | С | D | E | F |
|--------------|---------------------------------|---------------------------------|---------------------------------|----------|-------------------------------|---------------------------------------|
| | | Outside | Center to | Overall | | |
| | Size | Diameter | Center | Length | Head Depth | Total Depth |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWBCO12 | 3/8" | 7/8 | 23/32 | 7/32 | ³³ / ₆₄ | 1 19/64 |
| JHWBCO14 | ⁷ /16" | 7/8 | 41/64 | 7/32 | ³³ / ₆₄ | 1 ¹⁷ /64 |
| JHWBCO16 | 1/2" | 1 1/32 | 51/64 | 7/32 | ³³ / ₆₄ | 1 29/64 |
| JHWBCO18 | ⁹ /16" | 1 1/4 | 59/64 | 7/32 | 33/64 | 1 % |
| JHWBCO20 | 5/8" | 1 1/4 | 55/64 | 7/32 | 33/64 | 1 19/32 |
| JHWBCO22 | 11/16" | 1 %16 | 1 3/32 | 7/32 | ³³ / ₆₄ | 1 59/64 |
| JHWBCO24 | 3/4" | 1 %16 | 1 1/32 | 7/32 | ³³ / ₆₄ | 1 ⁵⁷ / ₆₄ |
| JHWBCO26 | ¹³ / ₁₆ " | 1 23/32 | 1 ³ / ₃₂ | 9/32 | 19/32 | 2 |
| JHWBCO28 | 7/8" | 1 ²³ / ₃₂ | 1 1/32 | 9/32 | 19/32 | 1 ³¹ / ₃₂ |
| JHWBCO30 | 15/16" | 2 | 1 5/32 | 11/32 | 21/32 | 2 1/8 |
| JHWBCO32 | 1" | 2 | 1 5/64 | 11/32 | 21/32 | 2 ³ / ₃₂ |
| JHWBCO40 | 1 1/4" | 2 5/32 | 1 ¹⁵ / ₆₄ | 3/8 | ⁴¹ / ₆₄ | 2 ⁷ / ₃₂ |
| JHWBCO44 | 1 %" | 2 ¾ | 1 ¹⁹ / ₆₄ | 3/8 | ⁴¹ / ₆₄ | 2 ¾ |

JHWWSBCO-10 10 Piece 3/8" Drive Crowfoot Wrenches on Clip Rails, SAE

Contents Include:

| Outlones in | | | | | |
|--------------|-------------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWBCO12 | 3/8" | JHWBCO18 | 9/16" | JHWBCO24 | 3/4" |
| JHWBCO14 | ⁷ /16" | JHWBCO20 | 5/8" | JHWBCO26 | 13/16" |
| JHWBCO16 | 1/2" | JHWBCO22 | 11/16" | JHWBCO28 | 7/8" |
| | | | | JHWBCO32 | 1" |

Features

- Crowfoot wrenches are professional quality, made of high grade steel
- · Featuring an open end with a continuous arc for constant contact with the fastener for greater turning power without deforming the fastener



JHWBCO32







3/8" DRIVE CROWFOOT WRENCH, **OPEN END, METRIC**



* USA

Made in U.S.A.

Made in U.S.A.

Satin Chrome Finish, MM

| | | Α | В | С | D | E |
|--------------|------|----------|-------------------------------|----------|------------|-------------|
| | | Outside | Center to | Overall | | |
| | Size | Diameter | Center | Length | Head Depth | Total Depth |
| Product Code | (mm) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWBCOM10 | 10 | 7/8 | 11/16 | 1/4 | 1/2 | 1 1/4 |
| JHWBCOM11 | 11 | 7/8 | 5/8 | 1/4 | 1/2 | 1 1/4 |
| JHWBCOM12 | 12 | 1 | ¹³ / ₁₆ | 1/4 | 1/2 | 1 1/2 |
| JHWBCOM13 | 13 | 1 | 6/8 | 1/4 | 1/2 | 1 ½ |
| JHWBCOM14 | 14 | 1 | 6/8 | 1/4 | 1/2 | 1 3/8 |
| JHWBCOM15 | 15 | 1 1/4 | 7/8 | 1/4 | 1/2 | 1 % |
| JHWBCOM16 | 16 | 1 1/4 | 7/8 | 1/4 | 1/2 | 1 % |
| JHWBCOM17 | 17 | 1 1/4 | ¹³ / ₁₆ | 1/4 | 1/2 | 1 % |
| JHWBCOM18 | 18 | 1 1/2 | 1 1/8 | 1/4 | 1/2 | 1 1/8 |
| JHWBCOM19 | 19 | 1 ½ | 1 | 1/4 | 1/2 | 1 1/8 |
| JHWBCOM20 | 20 | 1 1/2 | 1 | 1/4 | 1/2 | 1 1/8 |
| JHWBCOM21 | 21 | 1 3/4 | 1 1/8 | 1/4 | 5/8 | 1 1/8 |
| JHWBCOM22 | 22 | 1 3/4 | 1 | 1/4 | 5/8 | 2 |

JHWWSBCOM-10 10 Piece 3/8" Drive Crowfoot Wrenches on Clip Rails, MM **Contents Include:**

| Ountonts in | CIUUCI | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (mm) | Product Code | Size (mm) | Product Code | Size (mm) |
| JHWBCOM10 | 10 | JHWBCOM13 | 13 | JHWBCOM16 | 16 |
| JHWBCOM11 | 11 | JHWBCOM14 | 14 | JHWBCOM17 | 17 |
| JHWBCOM12 | 12 | JHWBCOM15 | 15 | JHWBCOM18 | 18 |
| | | | | JHWBCOM19 | 19 |

- Crowfoot wrenches are professional quality, made of high grade steel
- · Featuring an open end with a continuous arc for constant contact with the fastener for greater turning power without deforming the fastener



JHWBCOM19



JHWWSBCOM-10











JHW31612BT

JHW31708BT





JHW50671

3/8" DRIVE BOLT THRU SOCKETS, 6 POINT, SAE





| Product Code | Size (Inches) | Overall Length (Inches) | External Hex Inches |
|--------------|---------------|-------------------------|---------------------|
| JHW31612BT | 3/8 | 1 7/16 | 3/4 |
| JHW31614BT | 7/16 | 1 7/16 | 3/4 |
| JHW31616BT | 1/2 | 1 7/16 | 3/4 |
| JHW31618BT | 9/16 | 1 7/16 | 3/4 |
| JHW31620BT | 5/8 | 1 7/16 | 3/4 |
| JHW31622BT | 11/16 | 1 7/16 | 3/4 |
| JHW31624BT | 3/4 | 1 7/16 | 3/4 |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 point fasteners

3/8" DRIVE BOLT THRU SOCKETS, 6 POINT, METRIC





| Product Code | Size (mm) | Overall Length (Inches) | External Hex Inches |
|--------------|-----------|-------------------------|---------------------|
| JHW31708BT | 8 | 1 7/16 | 3/4 |
| JHW31709BT | 9 | 1 1/16 | 3/4 |
| JHW31710BT | 10 | 1 7/16 | 3/4 |
| JHW31711BT | 11 | 1 7/16 | 3/4 |
| JHW31712BT | 12 | 1 7/16 | 3/4 |
| JHW31713BT | 13 | 1 7/16 | 3/4 |
| JHW31714BT | 14 | 1 7/16 | 3/4 |
| JHW31715BT | 15 | 1 7/16 | 3/4 |
| JHW31716BT | 16 | 1 7/16 | 3/4 |
| JHW31717BT | 17 | 1 7/16 | 3/4 |
| JHW31718BT | 18 | 1 7/16 | 3/4 |
| JHW31719BT | 19 | 1 7/16 | 3/4 |

Features

Designed for quick engagement on 6 point fasteners

22 PIECE 3/8" DRIVE BOLT THRU SOCKET SET







6 Point Compact Case Tool Set. SAE & MM

| | | · · · · · · · · · · · · · · · · · · · | |
|-------------------------|-------------|---------------------------------------|-------------------|
| Product Code | | Description | 1 |
| JHW50671 | , | 22 Piece 3/8" Drive Bolt T | hru Socket Set |
| Contents Include | : | | |
| 3/8" Drive Tools: | | 3/8" Drive Shallov | w 6-Point Sockets |
| Product Code | Description | Product Code | Size (mm) |

| 3/8" Drive Tools: | | 3/8" Drive Shallo | w 6-Point Sockets |
|--------------------|--------------------------|-------------------|-------------------|
| Product Code | Description | Product Code | Size (mm) |
| JHW31018 | Locking Flexible Ratchet | JHW31708BT | 8 |
| JHW31019 | 3" Extension | JHW31709BT | 9 |
| JHW31020 | Adaptor | JHW31710BT | 10 |
| | · | JHW31711BT | 11 |
| 3/8" Drive Shallov | v 6 Point Sockets: | JHW31712BT | 12 |
| Product Code | Size (Inches) | JHW31713BT | 13 |
| JHW31612BT | 3/8 | JHW31714BT | 14 |
| JHW31614BT | 7/16 | JHW31715BT | 15 |
| JHW31616BT | 1/2 | JHW31716BT | 16 |
| JHW31618BT | 9/16 | JHW31717BT | 17 |
| JHW31620BT | 5/8 | JHW31718BT | 18 |
| JHW31622BT | 11/16 | JHW31719BT | 19 |
| JHW31624BT | 3/4 | | |

Fasturas

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- · Ratchet with 7 locking positions and flex head design



3/8" DRIVE DEEP SOCKETS, 12 POINT, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|--|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWBD-1208 | 1/4 | 2 1/8 | 11/16 | 13/32 | 7/32 | 1 11/16 | 7/32 | 1 % |
| JHWBD-1210 | 5/16 | 2 1/8 | 11/16 | 15/32 | 1/4 | 1 11/16 | 5/16 | 1 % |
| JHWBD-1212 | 3/8 | 2 1/8 | 11/16 | 9/16 | 9/32 | 1 11/16 | 3/8 | 1 % |
| JHWBD-1214 | 7/16 | 2 1/8 | 11/16 | 5/8 | 9/32 | 1 ¹¹ / ₁₆ | 7/16 | 1 % |
| JHWBD-1216 | 1/2 | 2 1/8 | 23/32 | 23/32 | 11/32 | 1 11/32 | 15/32 | |
| JHWBD-1218 | 9/16 | 2 3/8 | 25/32 | 25/32 | 9/16 | 1 %16 | 17/32 | - |
| JHWBD-1220 | 5/8 | 2 % | 27/32 | 27/32 | 19/32 | 1 %16 | 19/32 | |
| JHWBD-1222 | 11/16 | 2 % | 15/16 | 15/16 | 5/8 | 1 ¹¹ / ₁₆ | 21/32 | - |
| JHWBD-1224 | 3/4 | 2 % | 1 | 1 | 21/32 | 1 ¹¹ / ₁₆ | 23/32 | - |
| JHWBD-1226 | 13/16 | 2 3/4 | 1 1/16 | 1 1/16 | 11/16 | 2 1/32 | 25/32 | - |
| JHWBD-1228 | 7/8 | 2 3/4 | 1 5/32 | 1 5/32 | 3/4 | 2 1/32 | 27/32 | - |
| JHWBD-1230 | 15/16 | 2 3/4 | 1 1/4 | 1 1/4 | ¹³ / ₁₆ | 2 1/32 | 27/32 | |
| JHWBD-1232 | 1 | 2 3/4 | 1 5/16 | 1 5/16 | ²⁷ / ₃₂ | 2 | 31/32 | - |



JHWWSBD-9RC 9 Piece 3/8" Drive Deep 12 Point Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|-------------------------------|
| JHWBD-1212 | 3/8 | JHWBD-1218 | 9/16 | JHWBD-1224 | 3/4 |
| JHWBD-1214 | 7/16 | JHWBD-1220 | 5/8 | JHWBD-1226 | ¹³ / ₁₆ |
| JHWBD-1216 | 1/2 | JHWBD-1222 | 11/16 | JHWBD-1228 | 7/8 |

JHWWSBD-13RC 13 Piece 3/8" Drive Deep 12 Point Socket Set on Clip Rail Contents Include:

| Confents in | CIUUE. | | | | |
|--------------|---------------|--------------|---------------|--------------|-------------------------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWBD-1208 | 1/4 | JHWBD-1218 | 9/16 | JHWBD-1228 | 7/8 |
| JHWBD-1210 | 5/16 | JHWBD-1220 | 5/8 | JHWBD-1230 | ¹⁵ / ₁₆ |
| JHWBD-1212 | 3/8 | JHWBD-1222 | 11/16 | JHWBD-1232 | 1 |
| JHWBD-1214 | 7/16 | JHWBD-1224 | 3/4 | | |
| JHWBD-1216 | 1/2 | JHWBD-1226 | 13/16 | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners





JHWBD-1216

JHWBD-1208



JHWWSBD-13RC













JHWBD-616

JHWBD-608



3/8" DRIVE DEEP SOCKETS, 6 POINT, SAE





| High-Polis | | A | В | С | D | E | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWBD-608 | 1/4 | 2 1/8 | 11/16 | 13/32 | 1/4 | 1 11/16 | 7/32 | 1 % |
| JHWBD-610 | 5/16 | 2 1/8 | 11/16 | 7/16 | 9/32 | 1 11/16 | 5/16 | 1 % |
| JHWBD-611 | 11/32 | 2 1/8 | 11/16 | 1/2 | 1/4 | 1 11/16 | 11/32 | 1 % |
| JHWBD-612 | 3/8 | 2 1/8 | 11/16 | 9/16 | 5/16 | 1 11/16 | 3/8 | 1 % |
| JHWBD-614 | 7/16 | 2 1/8 | 11/16 | 19/32 | 3/8 | 1 11/16 | ⁷ / ₁₆ | 1 % |
| JHWBD-616 | 1/2 | 2 1/8 | 23/32 | 23/32 | 7/16 | 1 11/16 | 15/32 | |
| JHWBD-618 | 9/16 | 2 % | 25/32 | 25/32 | 7/16 | 1 %16 | 17/32 | |
| JHWBD-620 | 5/8 | 2 % | 27/32 | 27/32 | 1/2 | 1 %16 | 19/32 | |
| JHWBD-622 | 11/16 | 2 % | 15/16 | 15/16 | 17/32 | 1 3/4 | 21/32 | |
| JHWBD-624 | 3/4 | 2 % | 1 | 1 | 5/8 | 1 3/4 | 23/32 | |
| JHWBD-626 | 13/16 | 2 3/4 | 1 1/16 | 1 1/16 | 11/16 | 1 27/32 | 25/32 | |
| JHWBD-628 | 7/8 | 2 3/4 | 1 3/32 | 1 5/32 | 23/32 | 1 27/32 | 27/32 | |
| JHWBD-630 | 15/16 | 2 3/4 | 1 1/4 | 1 1/4 | 25/32 | 2 1/32 | 27/32 | - |
| JHWBD-632 | 1 | 2 3/4 | 1 5/16 | 1 5/16 | 13/16 | 2 1/32 | 31/32 | |

JHWWSBD13HRC 13 Piece 3/8" Drive Deep 6 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHWBD-608 | 1/4 | JHWBD-618 | %16 | JHWBD-628 | 7/8 |
| JHWBD-610 | 5/16 | JHWBD-620 | 5/8 | JHWBD-630 | 15/16 |
| JHWBD-612 | 3/8 | JHWBD-622 | 11/16 | JHWBD-632 | 1 |
| JHWBD-614 | 7/16 | JHWBD-624 | 3/4 | | |
| JHWBD-616 | 1/2 | JHWBD-626 | ¹³ / ₁₆ | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners





3/8" DRIVE SPARK PLUG SOCKETS, 6 POINT, SAE

6





| | | Α | В | С | D | E | | F |
|----------|-------------------------------|--|-----------|-------------|----------|----------------|----------------|----------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW31301 | 5/8 | 2 ²⁷ / ₃₂ | 11/16 | 27/32 | 15/32 | 29/32 | 11/16 | NA |
| JHW31303 | ¹³ / ₁₆ | 2 ²³ / ₃₂ | 13/16 | 1 1/16 | 15/32 | 1 1/32 | 7/8 | NA_ |

Fed. Spec: ANSI B107.110

Features

Rubber insert holds spark plug and prevents damage to insulator



JHW31301



3/8" DRIVE SHALLOW SOCKETS, 12 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWBM-1206 | 6 | 11/32 | 11/16 | 13/32 | 7/32 | 9/16 | 7/32 | 17/32 |
| JHWBM-1207 | 7 | 1 1/32 | 11/16 | 13/32 | 7/32 | 9/16 | 7/32 | 17/32 |
| JHWBM-1208 | 8 | 1 1/32 | 11/16 | 15/32 | 1/4 | 9/16 | 9/32 | 17/32 |
| JHWBM-1209 | 9 | 1 1/32 | 11/16 | 1/2 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-1210 | 10 | 1 1/32 | 11/16 | 9/16 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-1211 | 11 | 1 1/32 | 11/16 | 5/8 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-1212 | 12 | 1 1/32 | 11/16 | 21/32 | 11/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-1213 | 13 | 1 1/32 | 23/32 | 23/32 | 11/32 | 9/16 | 3/8 | - |
| JHWBM-1214 | 14 | 1 1/32 | ²⁵ / ₃₂ | 25/32 | ⁷ /16 | 17/32 | 17/32 | |
| JHWBM-1215 | 15 | 13/32 | ¹³ / ₁₆ | ¹³ / ₁₆ | 19/32 | 19/32 | 9/16 | - |
| JHWBM-1216 | 16 | 11/8 | 27/32 | 27/32 | 19/32 | 5/8 | 19/32 | - |
| JHWBM-1217 | 17 | 15/32 | 29/32 | 29/32 | 5/8 | 5/8 | 5/8 | - |
| JHWBM-1218 | 18 | 15/32 | 31/32 | 31/32 | 5/8 | 21/32 | 11/16 | - |
| JHWBM-1219 | 19 | 1 3/16 | 1 | 1 | 21/32 | 11/16 | 23/32 | - |
| JHWBM-1220 | 20 | 1 7/32 | 1 1/32 | 1 1/32 | 11/16 | 23/32 | 3/4 | - |
| JHWBM-1221 | 21 | 1 1/4 | 1 1/8 | 1 1/8 | 23/32 | 23/32 | 3/16 | - |
| JHWBM-1222 | 22 | 1 1/32 | 1 5/32 | 1 5/32 | 3/4 | 3/4 | 3/16 | - |
| JHWBM-1223 | 23 | 1 5/16 | 1 3/16 | 1 3/16 | 3/4 | 25/32 | 7/8 | • |
| JHWBM-1224 | 24 | 1 % | 1 1/4 | 1 1/4 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 7/8 | • |
| JHWBM-1226 | 26 | 1 7/16 | 1 11/32 | 1 11/32 | 27/32 | 7/8 | 15/16 | |



JHWBM-1206



Fed. Spec: ANSI B107.110

JHWMSB-12RC 12 Piece 3/8" Drive Shallow 12 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWBM-1208 | 8 | JHWBM-1212 | 12 | JHWBM-1216 | 16 |
| JHWBM-1209 | 9 | JHWBM-1213 | 13 | JHWBM-1217 | 17 |
| JHWBM-1210 | 10 | JHWBM-1214 | 14 | JHWBM-1218 | 18 |
| .IHWRM-1211 | 11 | .IHWRM-1215 | 15 | .IHWRM-1219 | 19 |



JHWMSB-17RC 17 Piece 3/8" Drive Shallow 12 Point Socket Set on Clip Rail Contents Include:

| ••••••••••••••••••••••••••••••••••••••• | | | | | | | | |
|---|-----------|--------------|-----------|--------------|-----------|--------------|-----------|--|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | |
| JHWBM-1206 | 6 | JHWBM-1211 | 11 | JHWBM-1216 | 16 | JHWBM-1221 | 21 | |
| JHWBM-1207 | 7 | JHWBM-1212 | 12 | JHWBM-1217 | 17 | JHWBM-1222 | 22 | |
| JHWBM-1208 | 8 | JHWBM-1213 | 13 | JHWBM-1218 | 18 | | | |
| JHWBM-1209 | 9 | JHWBM-1214 | 14 | JHWBM-1219 | 19 | | | |
| JHWBM-1210 | 10 | JHWBM-1215 | 15 | JHWBM-1220 | 20 | | | |



JHWMSB-20RC 20 Piece 3/8" Drive Shallow 12 Point Socket Set on Clip Rail Contents Include:

| Ountents i | iliciaac. | | | | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|--|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | |
| JHWBM-1206 | 6 | JHWBM-1211 | 11 | JHWBM-1216 | 16 | JHWBM-1221 | 21 | |
| JHWBM-1207 | 7 | JHWBM-1212 | 12 | JHWBM-1217 | 17 | JHWBM-1222 | 22 | |
| JHWBM-1208 | 8 | JHWBM-1213 | 13 | JHWBM-1218 | 18 | JHWBM-1223 | 23 | |
| JHWBM-1209 | 9 | JHWBM-1214 | 14 | JHWBM-1219 | 19 | JHWBM-1224 | 24 | |
| JHWBM-1210 | 10 | JHWBM-1215 | 15 | JHWBM-1220 | 20 | JHWBM-1226 | 26 | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for quick engagement on both 6 and 12 point fasteners



















3/8" DRIVE SHALLOW SOCKETS, 6 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|--------------------------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWBM-605.5 | 5 ½ | 1 1/32 | 11/16 | 13/32 | 7/32 | ⁹ /16 | 3/16 | 17/32 |
| JHWBM-606 | 6 | 1 1/32 | 11/16 | 13/32 | 7/32 | ⁹ /16 | 7/32 | 17/32 |
| JHWBM-607 | 7 | 1 1/32 | 11/16 | 13/32 | 7/32 | ⁹ /16 | 7/32 | 17/32 |
| JHWBM-608 | 8 | 1 1/32 | 11/16 | 15/32 | 1/4 | ⁹ /16 | 9/32 | 17/32 |
| JHWBM-609 | 9 | 1 1/32 | 11/16 | 1/2 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-610 | 10 | 1 1/32 | 11/16 | 9/16 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-611 | 11 | 1 1/32 | 11/16 | 5/8 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-612 | 12 | 1 1/32 | 11/16 | 21/32 | 11/32 | 9/16 | 11/32 | 17/32 |
| JHWBM-613 | 13 | 1 1/32 | 23/32 | 23/32 | 11/32 | 9/16 | 3/8 | - |
| JHWBM-614 | 14 | 1 1/32 | ²⁵ /32 | 25/32 | 7/16 | 17/32 | 17/32 | - |
| JHWBM-615 | 15 | 1 ³ / ₃₂ | ¹³ / ₁₆ | ¹³ / ₁₆ | 19/32 | 19/32 | 9/16 | - |
| JHWBM-616 | 16 | 1 1/8 | 27/32 | 27/32 | 19/32 | 5/8 | 19/32 | - |
| JHWBM-617 | 17 | 1 5/32 | 29/32 | 29/32 | 5/8 | 5/8 | 5/8 | - |
| JHWBM-618 | 18 | 1 5/32 | 31/32 | 31/32 | 5/8 | 21/32 | 11/16 | |
| JHWBM-619 | 19 | 1 ³ /16 | 1 | 1 | 21/32 | 11/16 | 23/32 | - |
| JHWBM-620 | 20 | 1 7/32 | 1 1/32 | 1 ¹ /32 | 11/16 | 23/32 | 3/4 | - |
| JHWBM-621 | 21 | 1 1/4 | 1 1/8 | 1 1/8 | 23/32 | 23/32 | 3/16 | - |
| JHWBM-622 | 22 | 1 %2 | 1 5/32 | 1 5/32 | 3/4 | 3/4 | 3/16 | - |
| JHWBM-623 | 23 | 1 5/16 | 1 3/16 | 1 3/16 | 3/4 | 25/32 | 7/8 | - |
| JHWBM-624 | 24 | 1 ¾ | 1 1/4 | 1 1/4 | 13/16 | ²⁷ / ₃₂ | 7/8 | - |
| JHWBM-626 | 26 | 1 7/16 | 1 11/32 | 1 11/32 | 27/32 | 7/8 | ¹⁵ / ₁₆ | - |

Fed. Spec: ANSI B107.110

JHWMSB-12HRC

12 Piece 3/8" Drive Shallow 6 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWBM-608 | 8 | JHWBM-612 | 12 | JHWBM-616 | 16 |
| JHWBM-609 | 9 | JHWBM-613 | 13 | JHWBM-617 | 17 |
| JHWBM-610 | 10 | JHWBM-614 | 14 | JHWBM-618 | 18 |
| JHWBM-611 | 11 | JHWBM-615 | 15 | JHWBM-619 | 19 |

JHWMSB-20HRC

20 Piece 3/8" Drive Shallow 6 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWBM-605.5 | 5 ½ | JHWBM-610 | 10 | JHWBM-615 | 15 | JHWBM-620 | 20 |
| JHWBM-606 | 6 | JHWBM-611 | 11 | JHWBM-616 | 16 | JHWBM-621 | 21 |
| JHWBM-607 | 7 | JHWBM-612 | 12 | JHWBM-617 | 17 | JHWBM-622 | 22 |
| JHWBM-608 | 8 | JHWBM-613 | 13 | JHWBM-618 | 18 | JHWBM-623 | 23 |
| JHWBM-609 | 9 | JHWBM-614 | 14 | JHWBM-619 | 19 | JHWBM-624 | 24 |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners





JHWMSB-12HRC



JHWMSB-20RC



3/8" DRIVE DEEP SOCKETS, 6 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|--|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWBMD-606 | 6 | 2 1/8 | 11/16 | 13/32 | 7/32 | 1 11/16 | 7/32 | 1 % |
| JHWBMD-607 | 7 | 2 1/8 | 11/16 | 13/32 | 9/32 | 1 11/16 | 1/4 | 1 % |
| JHWBMD-608 | 8 | 2 1/8 | 11/16 | 15/32 | 9/32 | 1 11/16 | 5/16 | 1 % |
| JHWBMD-609 | 9 | 2 1/8 | 11/16 | 1/2 | 9/32 | 1 11/16 | 11/32 | 1 % |
| JHWBMD-610 | 10 | 2 1/8 | 11/16 | 9/16 | 5/16 | 1 11/16 | 3/8 | 1 % |
| JHWBMD-611 | 11 | 2 1/8 | 11/16 | 5/8 | 3/8 | 1 11/16 | 7/16 | 1 % |
| JHWBMD-612 | 12 | 2 1/8 | 11/16 | 21/32 | 13/32 | 1 11/16 | 15/32 | 1 % |
| JHWBMD-613 | 13 | 2 1/8 | 23/32 | 23/32 | 13/32 | 1 % | 17/32 | - |
| JHWBMD-614 | 14 | 2 % | 25/32 | 25/32 | 13/32 | 1 %16 | 17/32 | - |
| JHWBMD-615 | 15 | 2 % | 13/16 | 13/16 | 13/32 | 1 %16 | 17/32 | - |
| JHWBMD-616 | 16 | 2 % | 27/32 | 27/32 | 13/32 | 1 %16 | 19/32 | - |
| JHWBMD-617 | 17 | 2 ²¹ / ₃₂ | 29/32 | 29/32 | 1/2 | 1 ¹³ / ₁₆ | 5/8 | - |
| JHWBMD-618 | 18 | 2 ²¹ / ₃₂ | 31/32 | 31/32 | 1/2 | 1 ¹³ / ₁₆ | 21/32 | - |
| JHWBMD-619 | 19 | 2 ²¹ / ₃₂ | 1 | 1 | 5/8 | 1 ¹⁵ / ₁₆ | 23/32 | - |
| JHWBMD-620 | 20 | 2 ²¹ / ₃₂ | 1 1/32 | 1 1/32 | 5/8 | 1 ¹⁵ / ₁₆ | 25/32 | - |
| JHWBMD-622 | 22 | 2 1/8 | 1 5/32 | 1 5/32 | 5/8 | 2 5/32 | 7/8 | - |
| JHWBMD-623 | 23 | 2 1/8 | 1 3/16 | 1 3/16 | 1/2 | 2 5/32 | ²⁷ / ₃₂ | - |
| JHWBMD-624 | 24 | 2 1/8 | 1 1/4 | 1 1/4 | 9/16 | 2 5/32 | ¹⁵ / ₁₆ | - |
| JHWBMD-625 | 25 | 2 % | 1 %2 | 1 %2 | 9/16 | 2 1/8 | 31/32 | • |





JHWBMD-606

JHWMSBD12HRC 12 Piece 3/8" Drive Deep 6 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWBMD-608 | 8 | JHWBMD-612 | 12 | JHWBMD-616 | 16 |
| JHWBMD-609 | 9 | JHWBMD-613 | 13 | JHWBMD-617 | 17 |
| JHWBMD-610 | 10 | JHWBMD-614 | 14 | JHWBMD-618 | 18 |
| JHWBMD-611 | 11 | JHWBMD-615 | 15 | JHWBMD-619 | 19 |

JHWMSBD19HRC 19 Piece 3/8" Drive Deep 6 Point Socket Set on Clip Rail

| Contents | include: |
|--------------|-----------|
| Product Code | Size (MM) |

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWBMD-606 | 6 | JHWBMD-611 | 11 | JHWBMD-616 | 16 | JHWBMD-622 | 22 |
| JHWBMD-607 | 7 | JHWBMD-612 | 12 | JHWBMD-617 | 17 | JHWBMD-623 | 23 |
| JHWBMD-608 | 8 | JHWBMD-613 | 13 | JHWBMD-618 | 18 | JHWBMD-624 | 24 |
| JHWBMD-609 | 9 | JHWBMD-614 | 14 | JHWBMD-619 | 19 | JHWBMD-625 | 25 |
| JHWBMD-610 | 10 | JHWBMD-615 | 15 | JHWBMD-620 | 20 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 6 point fasteners







JHWMSBD19HRC













JHW31806



3/8" DRIVE DEEP SOCKETS, **12 POINT, METRIC**





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|-----------------|-----------------------------------|------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW31806 | 6 | 2 1/2 | 11/16 | 3/8 | 5/8 | 1 %16 | 7/32 | 1 7/32 |
| JHW31807 | 7 | 2 1/2 | 11/16 | 7/16 | 5/8 | 1 %16 | 1/4 | 1 7/32 |
| JHW31808 | 8 | 2 1/2 | 11/16 | 7/16 | 5/8 | 1 %16 | 9/32 | 1 7/32 |
| JHW31809 | 9 | 2 1/2 | 11/16 | 17/32 | 5/8 | 1 %16 | 5/16 | 1 7/32 |
| JHW31810 | 10 | 2 1/2 | 11/16 | 9/16 | 1 | 1 11/16 | 3/8 | 1 7/32 |
| JHW31811 | 11 | 2 1/2 | 11/16 | 5/8 | 1 | 1 25/32 | 13/32 | 1 7/32 |
| JHW31812 | 12 | 2 1/2 | 11/16 | 11/16 | 1 | 1 25/32 | 7/16 | |
| JHW31813 | 13 | 2 1/2 | 23/32 | 23/32 | 1 | 1 31/32 | 1/2 | |
| JHW31814 | 14 | 2 1/2 | 3/4 | 3/4 | 1 | 2 | 17/32 | |
| JHW31815 | 15 | 2 1/2 | 13/16 | 13/16 | 1 | 1 ¹⁵ / ₁₆ | 9/16 | |
| JHW31816 | 16 | 2 1/2 | 7/8 | 7/8 | 1 | 1 29/32 | 19/32 | |
| JHW31817 | 17 | 2 1/2 | 15/16 | ¹⁵ /16 | 1 | 2 | 21/32 | |
| JHW31818 | 18 | 2 1/2 | 31/32 | 31/32 | 1 1/16 | 1 29/32 | 11/16 | |
| JHW31819 | 19 | 2 1/2 | 1 | 1 | 1 3/32 | 1 31/32 | 23/32 | |

Fed. Spec: ANSI B107.110

JHW31934 8 Piece 3/8" Drive Deep 12 Point Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW31810 | 10 | JHW31813 | 13 | JHW31816 | 16 |
| JHW31811 | 11 | JHW31814 | 14 | JHW31817 | 17 |
| JHW31812 | 12 | JHW31815 | 15 | | |

JHW31936 14 Piece 3/8" Drive Deep 12 Point Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW31806 | 6 | JHW31811 | 11 | JHW31816 | 16 |
| JHW31807 | 7 | JHW31812 | 12 | JHW31817 | 17 |
| JHW31808 | 8 | JHW31813 | 13 | JHW31818 | 18 |
| JHW31809 | 9 | JHW31814 | 14 | JHW31819 | 19 |
| JHW31810 | 10 | JHW31815 | 15 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners



JHW31934



JHW31936



3/8" DRIVE TURBOSOCKET® SALVAGE/DAMAGED FASTENER SOCKETS





Black Industrial Finish, Metric and SAE

| | | Α | В | С | D | E | | F |
|-----------------|------------------|---------------------------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWTS38375 | 3/8 | 1 1/4 | 11/16 | 19/32 | 13/32 | 3/4 | 3/8 | 11/16 |
| JHWTS38437 | 7/16 | 1 1/4 | 11/16 | 21/32 | 1/2 | 3/4 | 7/16 | 11/16 |
| JHWTS38500 | 1/2 | 1 1/4 | 3/4 | 3/4 | 1/2 | 3/4 | 1/2 | - |
| JHWTS38562 | 9/16 | 1 1/4 | ¹³ / ₁₆ | ¹³ / ₁₆ | 1/2 | 23/32 | ⁹ /16 | - |
| JHWTS38625 | 5/8 | 1 1/4 | 29/32 | 29/32 | 1/2 | 19/32 | 5/8 | - |
| JHWTS38687 | 11/16 | 1 13/32 | 31/32 | 31/32 | 21/32 | 29/32 | 23/32 | - |
| JHWTS38750 | 3/4 | 1 ¹³ / ₃₂ | 1 ½16 | 1 1/16 | 21/32 | ²⁹ / ₃₂ | 3/4 | - |

| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
|-----------------|--------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| JHWTS38394 | 10 | 1 1/4 | 11/16 | 5/8 | 13/32 | 3/4 | 13/32 | 11/16 |
| JHWTS38472 | 12 | 1 1/4 | 23/32 | 23/32 | 1/2 | 3/4 | 15/32 | - |
| JHWTS38512 | 13 | 1 1/4 | 3/4 | 3/4 | 1/2 | 3/4 | 17/32 | - |
| JHWTS38551 | 14 | 1 1/4 | 13/16 | 13/16 | 1/2 | 23/32 | 9/16 | - |
| JHWTS38591 | 15 | 1 1/4 | 27/32 | 27/32 | 1/2 | 19/32 | 19/32 | - |
| JHWTS38669 | 17 | 1 13/32 | 31/32 | 31/32 | 21/32 | 29/32 | 23/32 | - |



JHWTS38687



JHWTSFS3807 7 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, SAE

| Λ | | 1 | |
|-----|-------|------|------|
| Con | tents | ıncı | uae: |

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|------------------------------|--------------|---------------|
| JHWTS38375 | 3/8 | JHWTS38562 | ⁹ / ₁₆ | JHWTS38750 | 3/4 |
| JHWTS38437 | 7/16 | JHWTS38625 | 5/8 | | |
| IT/Y\LG30EUU | 16 | ILIMITE20607 | 11/ | 1 | |

JHWTSCS3813 13 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, SAE and Metric

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (MM) |
|--------------|---------------|--------------|-----------|
| JHWTS38375 | 3/8 | JHWTS38394 | 10 |
| JHWTS38437 | 7/16 | JHWTS38472 | 12 |
| JHWTS38500 | 1/2 | JHWTS38512 | 13 |
| JHWTS38562 | 9/16 | JHWTS38551 | 14 |
| JHWTS38625 | 5/8 | JHWTS38591 | 15 |
| JHWTS38687 | 11/16 | JHWTS38669 | 17 |
| JHWTS38750 | 3/4 | | |



JHWTS38669

JHWTSMS3809 9 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, Metric

Contents Include:

| •••••••••• | | | | | | |
|--------------|------------|--------------|-----------|--------------|-----------|--|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | |
| JHWTS38394 | 10 | JHWTS38512 | 13 | JHWTS38625 | 16 (5%") | |
| JHWTS38437 | 11 (7/16") | JHWTS38551 | 14 | JHWTS38669 | 17 | |
| JHWTS38472 | 12 | JHWTS38591 | 15 | JHWTS38750 | 19 (¾") | |

- Quickly and easily remove damaged or rounded nuts and bolts
- · Place socket on fastener and turn with ratchet, breaker bar or T-handle
- Grip on fastener tightens as more torque is applied
- No hammering is required to install socket over fastener
- . Use on all types of standard nuts and bolts as well as studs, pipe nipples, and corroded auto and marine fasteners
- May be used for "best fit" on metric and fractional fasteners
- . May be used with air or electric impact wrench for extra speed and turning power

















JHW35170



JHW31904



JHWBA-7HBA



JHWWSBB-7RC



JHWBA-7A



JHWWSB-7A



JHWWSBS-10RC

3/8" DRIVE STANDARD LENGTH HEX BIT SOCKETS, METRIC





| Hiah-Polish | ed Chrome | Finish |
|-------------|-----------|--------|

| Product Code | Size (MM) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) |
|--------------|--------------|---------------------------|----------------------------------|-------------------------|------------------------|
| JHW35170 | 4 | 1 3/16 | 3/4 | 1 27/32 | 21/32 |
| JHW35171 | 5 | 1 3/16 | 3/4 | 1 27/32 | 21/32 |
| JHW35172 | 6 | 1 3/16 | 3/4 | 1 27/32 | 21/32 |
| JHW35173 | 7 | 1 ³ /16 | 3/4 | 1 27/32 | 21/32 |
| JHW35174 | 8 | 1 3/16 | 3/4 | 1 31/32 | 13/16 |
| JHW35175 | 9 | 1 3/16 | 3/4 | 1 31/32 | 13/16 |
| IHW35176 | 10 | 1 3/4 6 | 3/4 | 1 31/22 | 13/4 c |

JHW31904 7 Piece Hex Bit Socket Set on Clip Rail

| Contents | Include | : |
|----------|---------|---|
|----------|---------|---|

| •••••• | | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
| JHW35170 | 4 | JHW35173 | 7 | JHW35176 | 10 |
| JHW35171 | 5 | JHW35174 | 8 | | |
| JHW35172 | 6 | JHW35175 | 9 | | |

Features

. High-polished chrome finish socket cleans easily

0



3/8" DRIVE BALL TIP HEX BIT SOCKETS, SAE

| U/U | | | | | 0 | JUILLIU | |
|--------|------------|--------|-------|----|---|---------|--|
| High-F | Polished (| Chrome | Finis | sh | | | |

| Product Code | Size (Inches) | Socket Length (Inches) | Socket OutsideDiameter (Inches) | Overall Length (Inches) | Product Code |
|--------------|------------------------------|---------------------------|---------------------------------|----------------------------|---------------|
| JHWBA-3HBA | 3/32 | 1 1/16 | 11/16 | 1 27/32 | JHWBITHB03T01 |
| JHWBA-4HBA | 1/8 | 1 1/16 | 11/16 | 1 1/8 | JHWBITHB0402 |
| JHWBA-5HBA | 5/32 | 1 1/16 | 11/16 | 1 1/8 | JHWBITHB0502 |
| JHWBA-6HBA | ³ / ₁₆ | 1 1/16 | ¹¹ / ₁₆ | 1 1/8 | JHWBITHB0602 |
| JHWBA-7HBA | 7/32 | 1 1/16 | ¹¹ / ₁₆ | 1 1/8 | JHWBITHB0702 |
| JHWBA-8HBA | 1/4 | 1 1/16 | 11/16 | 1 1/8 | JHWBITHB0802 |
| JHWBA-10HBA | 5/16 | 1 1/16 | 11/16 | 1 1/8 | JHWBITHB1001 |
| JHWBA-12HBA | 3/8 | 1 1/16 | ²³ / ₃₂ | 1 1/8 | JHWBITHB1201 |

JHWWSBB-7RC 7 Piece Ball Tip Hex Bit Socket Set on Clip Rail Contents Include:

| | • | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWBA-4HBA | 1/8 | JHWBA-7HBA | 7/32 | JHWBA-12HBA | 3/8 |
| JHWBA-5HBA | 5/32 | JHWBA-8HBA | 1/4 | | |
| IHWRA SHRA | 3/4.5 | IHWRA 10HRA | 5/40 | | |

Features

- . High-polished chrome finish socket cleans easily
- · Two piece design allows bits to be replaced easily



3/8" DRIVE STANDARD LENGTH HEX BIT SOCKETS, SAE

0



High-Polished Chrome Finish

| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code |
|-----------------|---------------|------------------------|----------------------------------|-------------------------|---------------------------------|
| JHWBA-3A | 3/32 | 1 1/16 | 11/16 | 1 27/32 | JHWBITH03T01 |
| JHWBA-4A | 1/8 | 1 ½16 | 11/16 | 1 7/8 | JHWBITH0403 |
| JHWBA-5A | 5/32 | 1 ½16 | 11/16 | 1 7/8 | JHWBITH0503 |
| JHWBA-6A | 3/16 | 1 ½16 | 11/16 | 1 7/8 | JHWBITH0603 |
| JHWBA-7A | 7/32 | 1 ½16 | 11/16 | 1 7/8 | JHWBITH0703 |
| JHWBA-8A | 1/4 | 1 1/16 | 11/16 | 1 1/8 | JHWBITH0803 |
| JHWBA-10A | 5/16 | 1 1/16 | 11/16 | 1 1/8 | JHWBITH1003 |
| JHWBA-12A | 3/8 | 1 1/16 | 23/32 | 1 1/8 | JHWBITH1201 |

JHWWSB-7A 7 Piece Hex Bit Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHWBA-4A | 1/8 | JHWBA-8A | 1/4 |
| JHWBA-5A | 5/32 | JHWBA-10A | 5/16 |
| JHWBA-6A | 3/16 | JHWBA-12A | 3/8 |
| JHWBA-7A | 7/32 | | |

JHWWSBS-10RC 10 Piece Hex Bit Socket Set on Clip Rail, 3/8" & 1/2" Drive

Contents Include:

| Contonts morat | 101 | | | | |
|----------------|---------------|--------------|---------------|--------------|---------------|
| 3/8" Drive | | 3/8" Drive | | 1/2" Drive | |
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWBA-4A | 1/8 | JHWBA-8A | 1/4 | JHWSA-16A | 1/2 |
| JHWBA-5A | 5/32 | JHWBA-10A | 5/16 | JHWSA-18A | 9/16 |
| JHWBA-6A | 3/16 | JHWBA-12A | 3/8 | JHWSA-20A | 5/8 |
| JHWBA-7A | 7/32 | | | | |

- High-polished chrome finish socket cleans easily
- Two piece design allows bits to be replaced easily





3/8" DRIVE LONG HEX BIT SOCKETS, SAE





| High-Polished Chrome Finish | | | | | | | | | |
|-----------------------------|------------------|------------------------|-------------------------------------|-------------------------|---------------------------------|--|--|--|--|
| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code | | | | |
| JHWBA-3LA | 3/32 | 1 1/16 | 11/16 | 3 3/4 | JHWBITH03T02 | | | | |
| JHWBA-4LA | 1/8 | 1 1/16 | 11/16 | 3 ¾ | JHWBITH0404 | | | | |
| JHWBA-5LA | 5/32 | 1 1/16 | 11/16 | 3 ¾ | JHWBITH0504 | | | | |
| JHWBA-6LA | 3/16 | 1 1/16 | 11/16 | 3 ¾ | JHWBITH0604 | | | | |
| JHWBA-7LA | 7/32 | 1 1/16 | 11/16 | 3 ¾ | JHWBITH0704 | | | | |
| JHWBA-8LA | 1/4 | 1 1/16 | 11/16 | 3 ¾ | JHWBITH0804 | | | | |
| JHWBA-10LA | 5/16 | 1 1/16 | 11/16 | 3 ¾ | JHWBITH1004 | | | | |
| JHWBA-12LA | 3/8 | 1 1/16 | 23/32 | 3 ¾ | JHWBITH1202 | | | | |

JHWWSBS-7LRC 7 Piece Long Hex Bit Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWBA-4LA | 1/8 | JHWBA-7LA | 7/32 | JHWBA-12LA | 3/8 |
| JHWBA-5LA | 5/32 | JHWBA-8LA | 1/4 | | |
| JHWBA-6LA | 3/16 | JHWBA-10LA | 5/16 | | |

Features

- . High-polished chrome finish socket cleans easily
- . Two piece design allows bits to be replaced easily





3/8" DRIVE SCREWDRIVER BIT SOCKETS

High-Polished Chrome Finish, Phillips® and Slotted

| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code |
|-----------------|-------------------------|------------------------|-------------------------------------|---------------------------------|---------------------------------|
| Slotted Bits: | | | | | |
| JHWBA-5A-1S | 3/16 x .032 | 1 1/16 | 11/16 | 1 13/16 | JHWBITHS01 |
| JHWBA-7A-2S | 7∕ ₃₂ x .039 | 1 1/16 | 11/16 | 1 ¹³ / ₁₆ | JHWBITHS02 |
| JHWBA-10A-3S | %з2 х .047 | 1 1/16 | 11/16 | 1 1/8 | JHWBITHS04 |
| JHWBA-10A-4S | 5∕16 x .061 | 1 1/16 | 11/16 | 1 1/8 | JHWBITHS05 |
| Phillips® Bits: | | | | | |
| JHWBA-7A-1P | 1 | 1 1/16 | 11/16 | 1 1/8 | JHWBITPH0102 |
| JHWBA-7A-2P | 2 | 1 1/16 | 11/16 | 1 1/8 | JHWBITPH0202 |
| JHWBA-10A-3P | 3 | 1 1/16 | 11/16 | 1 1/8 | JHWBITPH0302 |
| JHWBA-12A-4P | 4 | 1 1/16 | 23/32 | 1 1/8 | JHWBITPH0401 |

JHWWSBSP-8RC 8 Piece Screwdriver Bit Socket Set on Clip Rail

Contents Include:

| Product Code | Tip Size | Product Code | Tip Size | Product Code | Tip Size | Product Code | Tip Size |
|--------------|-------------------------|--------------|-------------|--------------|----------|--------------|----------|
| JHWBA-5A-1S | 3/16 x .032 | JHWBA-10A-3S | %2 x .047 | JHWBA-7A-1P | 1 | JHWBA-10A-3P | 3 |
| JHWBA-7A-2S | ⁷ /₃₂ x .039 | JHWBA-10A-4S | 5√16 x .061 | JHWBA-7A-2P | 2 | JHWBA-12A-4P | 4 |

Features

- High-polished chrome finish socket cleans easily
- . Two piece design allows bits to be replaced easily



3/8" DRIVE LONG LENGTH HEX BIT SOCKETS, METRIC





High-Polished Chrome Finish

| Product Code | Size (MM) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) |
|--------------|--------------|------------------------|----------------------------------|-------------------------|
| JHW35164 | 4 | 1 3/16 | 3/4 | 6 |
| JHW35165 | 5 | 1 3/16 | 3/4 | 6 |
| JHW35166 | 6 | 1 3/16 | 3/4 | 6 |
| JHW35167 | 7 | 1 3/16 | 3/4 | 6 |
| JHW35168 | 8 | 1 3/16 | 3/4 | 6 |
| JHW35169 | 9 | 1 3/16 | 3/4 | 6 |
| JHW35163 | 10 | 1 3/16 | 3/4 | 6 |

JHW31951 7 Piece Hex Bit Socket Set on Clip Rail

Contents Include:

| Outtonts in | Jiuuc. | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
| JHW35164 | 4 | JHW35167 | 7 | JHW35163 | 10 |
| JHW35165 | 5 | JHW35168 | 8 | | |
| JHW35166 | 6 | JHW35169 | 9 | | |

Features

• High-polished chrome finish socket cleans easily













JHWBA-7A-2P





JHW31951











JHW31910



JHW35192



JHW31912

3/8" DRIVE LONG BALL TIP **HEX BIT SOCKETS, SAE**





High-Polished Chrome Finish

| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) |
|--------------|------------------|--------------------------------|----------------------------------|----------------------------|
| JHW35130 | 1/8 | 1 3/16 | 3/4 | 5 |
| JHW35131 | 9/64 | 1 ³ / ₁₆ | 3/4 | 5 |
| JHW35132 | 5/32 | 1 ³ / ₁₆ | 3/4 | 5 |
| JHW35133 | 3/16 | 1 3/16 | 3/4 | 5 |
| JHW35134 | 7/32 | 1 3/16 | 3/4 | 5 |
| JHW35135 | 1/4 | 1 ³ / ₁₆ | 3/4 | 5 |
| JHW35136 | 5/16 | 1 3/16 | 3/4 | 5 |
| JHW35137 | 3/8 | 1 3/16 | 3/4 | 5 |

JHW31947 8 Piece Ball Tip Hex Bit Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|---------------------|---------------|--------------|---------------|--------------|---------------|
| JHW35130 | 1/8 | JHW35133 | 3/16 | JHW35136 | 5/16 |
| JHW35131 | 9/64 | JHW35134 | 7/32 | JHW35137 | 3/8 |
| JHW35132 | 5/32 | JHW35135 | 1/4 | | |

Features

. High-polished chrome finish socket cleans easily

3/8" DRIVE TORX® BIT SOCKETS



| High-Polished Chrome Finish | | | | | | | | | |
|-----------------------------|-------|--------------------------------|-------------------------|---------------------------------|-------------------------------|--|--|--|--|
| Product | Torx® | Socket Length | Socket Outside Diameter | Overall Length | Bit Length | | | | |
| Code | Size | (Inches) | (Inches) | (Inches) | (Inches) | | | | |
| JHW35182 | T25 | 1 ³ / ₁₆ | 3/4 | 1 27/32 | 11/16 | | | | |
| JHW35183 | T27 | 1 3/16 | 3/4 | 1 ²⁷ / ₃₂ | 11/16 | | | | |
| JHW35184 | T30 | 1 3/16 | 3/4 | 1 ²⁷ / ₃₂ | 11/16 | | | | |
| JHW35185 | T40 | 1 ³ / ₁₆ | 3/4 | 1 ³¹ / ₃₂ | ¹³ / ₁₆ | | | | |
| JHW35186 | T45 | 1 ³ / ₁₆ | 3/4 | 1 31/32 | 13/16 | | | | |
| JHW35187 | T47 | 1 3/16 | 3/4 | 2 | 13/16 | | | | |
| JHW35188 | T50 | 1 3/16 | 3/4 | 2 | 13/16 | | | | |

1 3/16 JHW31910 7 Piece Torx® Bit Socket Set on Clip Rail **Contents Include:**

| Product Code | Torx® Size | Product Code | Torx® Size | Product Code | Torx® Size |
|--------------|------------|--------------|------------|--------------|------------|
| JHW35182 | T25 | JHW35185 | T40 | JHW35188 | T50 |
| JHW35183 | T27 | JHW35186 | T45 | | |
| JHW35184 | T30 | JHW35187 | T47 | | |

Features

• High-polished chrome finish socket cleans easily

3/8" DRIVE TAMPER-RESISTANT **TORX® BIT SOCKETS**



High-Polished Chrome Finish

| Product Code | Torx [®] Size | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | |
|-----------------|---------------------------|--------------------------------|----------------------------------|---------------------------------|---------------------|--|
| JHW35192 | T25 | 1 3/16 | 3/4 | 1 27/32 | 21/32 | |
| JHW35193 | T27 | 1 ³ / ₁₆ | 3/4 | 1 ²⁷ / ₃₂ | 21/32 | |
| JHW35194 | T30 | 1 3/16 | 3/4 | 1 27/32 | 21/32 | |
| JHW35195 | T40 | 1 3/16 | 3/4 | 1 31/32 | 13/16 | |
| JHW35196 | T45 | 1 ³ / ₁₆ | 3/4 | 1 ³¹ / ₃₂ | 13/16 | |
| JHW35197 | T47 | 1 3/16 | 3/4 | 1 31/32 | 13/16 | |
| JHW35198 | T50 | 1 3/46 | 3/4 | 1 31/22 | 13/16 | |

JHW31912 7 Piece Tamper-Resistant Torx® Bit Socket Set on Clip Rail **Contents Include:**

| Product Code | Torx® Size | Product Code | Torx® Size | Product Code | Torx® Size |
|--------------|------------|--------------|------------|--------------|------------|
| JHW35192 | T25 | JHW35195 | T40 | JHW35198 | T50 |
| JHW35193 | T27 | JHW35196 | T45 | | |
| JHW35194 | T30 | JHW35197 | T47 | | |

Features

. High-polished chrome finish socket cleans easily



3/8" DRIVE SOCKET FLEXTENSIONS

Williams Flextension are used extensively in engine and heavy equipment manufacturing, assembly and repair. They increase productivity by featuring an integrated (non-removable) design of the drive extension and socket to allow for reliable, continuous work without concern for the socket disconnecting from the extension as could happen with hand-tool type ball retained sockets.



3/8" DRIVE SOCKET FLEXTENSIONS, SAE

Black Industrial Finish

| Black Indust | triai Fin | ISN | | | | | | | |
|--------------|-----------|----------------|---------|---------------|-------------------|---------------|-----------------|---------------|--------------|
| | | Α | | | | В | С | D | E |
| Product Code | Drive | Shank Length | Tension | Socket Points | Socket (SAE) | Socket Length | Socket Diameter | Nose Diameter | Hex Depth |
| JHWISFXT412 | 3/8" | 4.57"/116.1MM | Yes | 6 | 3/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFX412 | 3/8" | 4.57"/116.1MM | No | 6 | 3/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXTD612 | 3/8" | 6.57"/166.9MM | Yes | 12 | 3/8" | 0.81"/20.6MM | 0.75"/19.1MM | 0.60"/15.2MM | 0.41"/10.4MM |
| JHWISFXT612 | 3/8" | 6.57"/166.9MM | Yes | 6 | 3/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFX612 | 3/8" | 6.57"/166.9MM | No | 6 | 3/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXT1212 | 3/8" | 12.57"/319.3MM | Yes | 6 | 3/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXT414 | 3/8" | 4.57"/116.1MM | Yes | 6 | ⁷ /16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISFX414 | 3/8" | 4.57"/116.1MM | No | 6 | ⁷ /16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISFXT614 | 3/8" | 6.57"/166.9MM | Yes | 6 | 7/16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISFX614 | 3/8" | 6.57"/166.9MM | No | 6 | 7/16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISFXT416 | 3/8" | 4.57"/116.1MM | Yes | 6 | 1/2" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFX416 | 3/8" | 4.57"/116.1MM | No | 6 | 1/2" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXT616 | 3/8" | 6.57"/166.9MM | Yes | 6 | 1/2" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSX616 | 3/8" | 6.57"/166.9MM | No | 6 | 1/2" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXT1216 | 3/8" | 12.57"/319.3MM | Yes | 6 | 1/2" | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXT418 | 3/8" | 4.57"/116.1MM | Yes | 6 | 9/16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISFX418 | 3/8" | 4.57"/116.1MM | No | 6 | 9/16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISFXT618 | 3/8" | 6.57"/166.9MM | Yes | 6 | 9/16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISFX618 | 3/8" | 6.57"/166.9MM | No | 6 | 9/16" | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISFXT420 | 3/8" | 4.57"/116.1MM | Yes | 6 | 5/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISFX420 | 3/8" | 4.57"/116.1MM | No | 6 | 5/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISFXT620 | 3/8" | 6.57"/166.9MM | Yes | 6 | 5/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISFX620 | 3/8" | 6.57"/166.9MM | No | 6 | 5/8" | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |



3/8" DRIVE SOCKET FLEXTENSIONS, METRIC

Black Industrial Finish

| | | Α | | | | В | С | D | E |
|--------------|-------|---------------|---------|---------------|-------------|---------------|-----------------|---------------|------------------|
| Product Code | Drive | Shank Length | Tension | Socket Points | Socket (mm) | Socket Length | Socket Diameter | Nose Diameter | Socket Hex Depth |
| JHWISFXTM410 | 3/8" | 4.57"/116.1MM | Yes | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXM410 | 3/8" | 4.57"/116.1MM | No | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXTM610 | 3/8" | 6.57"/166.9MM | Yes | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXM610 | 3/8" | 6.57"/166.9MM | No | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISFXTM412 | 3/8" | 4.57"/116.1MM | Yes | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXM412 | 3/8" | 4.57"/116.1MM | No | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXTM612 | 3/8" | 6.57"/166.9MM | Yes | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXM612 | 3/8" | 6.57"/166.9MM | No | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXTM413 | 3/8" | 4.57"/116.1MM | Yes | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXM413 | 3/8" | 4.57"/116.1MM | No | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXTM613 | 3/8" | 6.57"/166.9MM | Yes | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXM613 | 3/8" | 6.57"/166.9MM | No | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISFXTM415 | 3/8" | 4.57"/116.1MM | Yes | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISFXM415 | 3/8" | 4.57"/116.1MM | No | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISFXTM615 | 3/8" | 6.57"/166.9MM | Yes | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISFXM615 | 3/8" | 6.57"/166.9MM | No | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISFXTM416 | 3/8" | 4.57"/116.1MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISFXM416 | 3/8" | 4.57"/116.1MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISFXTM616 | 3/8" | 6.57"/166.9MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISFXM616 | 3/8" | 6.57"/166.9MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |

- · Durable black oxide finish
- . Socket retention pin is TIG welded, providing full rotation power to the socket
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Drive end has a 7/32" cross hole & bevel for ease of use
- . Up to 30 degree angle offset

- · Flextensions are designed for use on hand and power tools (Impulse or Direct drive); NOT FOR IMPACT TOOL USE
- Maximum working torque values: 160 Ft. Lbs. /1920 In. Lbs. /217 Nm
- · Other lengths and socket sizes available by special order. Contact your Snap-on Industrial Brands representative
- See pages 290 to 292 for 1/2" Drive Socket Flextensions





















JHWWSBHMD-7

3/8" DRIVE IMPACT EXTENSIONS AND ACCESSORIES

Black Industrial Finish

| Product Code | Description | Length (Inches) | Socket Retention |
|--------------|------------------------|-----------------|------------------|
| JHW2-103A | Impact Extension | 3 | Spring Plunger |
| JHW2-106A | Impact Extension | 6 | Spring Plunger |
| JHW2-140B | Impact Universal Joint | 2 1/4 | Spring Plunger |
| JHW2-4A | ½ M x % F Adapter | 1 1/4 | Spring Plunger |

Fed. Spec: ANSI B107.2

Features

- . Specially heat treated for impact use to provide long life, safety, and durability
- . Spring plunger provides secure socket retention for safety and convenience
- . Suitable for use with pneumatic and electric impact wrenches

3/8" DRIVE HEX TO SQUARE SHANK IMPACT EXTENSIONS

Black Industrial Finish

| Product Code | Hex Shank Size (Inches) | Square Drive Size (Inches) | Length (Inches) |
|--------------|-------------------------|----------------------------|-----------------|
| JHW2-02B | 1/4 | 3/8 | 2 |
| JHW2-33B | 7/16 | 3/8 | 2 3/4 |

Features

- Specially heat treated for impact use to provide long life, safety, and durability
- Spring plunger provides secure socket retention for safety and convenience
- . Suitable for use with pneumatic and electric impact wrenches
- . 2-33B Recommended working torque of 80 ft.lb

6 PIECE ADAPTOR SET

Black Finish and Impact, Furnished on Clip Rail

| Product Code | Description |
|--------------|---------------------|
| JHWWSB-6ADPA | 6 Piece Adaptor Set |

Contents Include:

| Product Code | Description | Product Code | Description |
|--------------|-------------------------------|--------------|--------------------------------|
| JHWMB-130B | 1/4" F x 3/8" M, Black Finish | JHW4-2F | 1/2" F x 3/8" M, Impact, Black |
| JHWMB-131BA | 3/8" F x 1/4" M, Black Finish | JHW4-6 | 1/2" F x 3/4" M, Impact, Black |
| JHWBS-130B | 3/8" F x 1/2" M. Black Finish | JHW6-4A | 34" F x 1/2" M. Impact, Black |

Features

- · Impact adaptors are suitable for use on electric and air impact wrenches
- . Black finish adaptors are designed for use with hand drive tools

3/8" DRIVE HAND IMPACT DRIVER

Black Industrial Finish

| Product Code | Length (Inches) Shank Diameter (In | |
|--------------|------------------------------------|-------|
| JHWBHMD-30 | 5 | 1 1/4 |
| Features | | * USA |

Features

- . Specially heat treated for impact use to provide long life, safety, and durability.
- Ball socket retention for fast socket changes.
- Ideal for loosening screws that cannot be loosened with an ordinary screwdriver.
- Impact driver is struck with a hammer to provide turning power.
- · Hammer blow forces bit into screw head to reduce stripping.
- Hand impact driver can be used with all 3/8" drive sockets, such as 6-point and hex-bit sockets.

7 PIECE 3/8" DRIVE IMPACT DRIVER SET

Packed in Exclusive Keep-Safe-Foam System

| Product Code | | Description | | | |
|-------------------|----------------------------------|--------------|-------------------------|--|--|
| JHWWSBHMD-7 | 7 Piece Impact Driver Set | | | | |
| Contents Include: | | | | | |
| Product Code | Description | Product Code | Description | | |
| JHWBHMD-30 | Hand Impact Driver | JHWBA-7A-2P | #2 Phillips® Bit Socket | | |
| JHWBA-7A-2S | 7/32" x .040" Slotted Bit Socket | JHWBA-10A-3P | #3 Phillips® Bit Socket | | |
| JHWBA-10A-3S | %2" x .045" Slotted Bit Socket | JHWBA-12A-4P | #4 Phillips® Bit Socket | | |
| JHWBA-10A-4S | 5/16" x .055" Slotted Bit Socket | | • | | |



* USA



3/8" DRIVE SHALLOW IMPACT SOCKETS, **6 POINT, SAE**





| | | Α | В | С | D | E | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW2-608 | 1/4 | 1 1/32 | 11/16 | 1/2 | 7/32 | 9/16 | 7/32 | 17/32 |
| JHW2-610 | 5/16 | 1 1/32 | 11/16 | 1/2 | 1/4 | 9/16 | 9/32 | 17/32 |
| JHW2-612 | 3/8 | 1 1/32 | 11/16 | 5/8 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHW2-614 | 7/16 | 1 1/16 | 11/16 | 21/32 | 9/32 | 19/32 | 11/32 | |
| JHW2-616 | 1/2 | 1 1/16 | 3/4 | 3/4 | 5/16 | 19/32 | 3/8 | |
| JHW2-618 | 9/16 | 1 3/32 | 13/16 | 13/16 | 9/16 | 19/32 | 17/32 | |
| JHW2-620 | 5/8 | 1 1/8 | 29/32 | 29/32 | 19/32 | 5/8 | 5/8 | |
| JHW2-622 | 11/16 | 1 5/32 | 31/32 | 31/32 | 19/32 | 5/8 | 21/32 | |
| JHW2-624 | 3/4 | 1 3/16 | 1 1/16 | 1 1/16 | 21/32 | 11/16 | 23/32 | |
| JHW2-626 | 13/16 | 1 1/4 | 1 1/8 | 1 1/8 | 11/16 | 23/32 | ²⁵ / ₃₂ | |
| JHW2-628 | 7/8 | 1 %32 | 1 3/16 | 1 3/16 | 3/4 | 3/4 | ²⁷ / ₃₂ | |
| JHW2-630 | 15/16 | 1 5/16 | 1 %2 | 1 %2 | 25/32 | 13/16 | 29/32 | |
| JHW2-632 | 1 | 1 5/16 | 1 11/32 | 1 11/32 | 25/32 | 25/32 | 31/32 | |



JHWWS-2-8 8 Piece 3/8" Drive Shallow 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW2-610 | 5/16 | JHW2-618 | 9/16 |
| JHW2-612 | 3/8 | JHW2-620 | 5/8 |
| JHW2-614 | 7/16 | JHW2-622 | 11/16 |
| JHW2-616 | 1/2 | JHW2-624 | 3/4 |

JHWWS-2-13 13 Piece 3/8" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Odinging ii | iciuuc. | | | | | |
|--------------|---------------|--------------|---------------|--------------|---------------|--|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | |
| JHW2-608 | 1/4 | JHW2-618 | 9/16 | JHW2-628 | 7/8 | |
| JHW2-610 | 5/16 | JHW2-620 | 5/8 | JHW2-630 | 15/16 | |
| JHW2-612 | 3/8 | JHW2-622 | 11/16 | JHW2-632 | 1 | |
| JHW2-614 | 7/16 | JHW2-624 | 3/4 | | | |
| JHW2-616 | 1/2 | JHW2-626 | 13/16 | | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- · Specially heat treated for impact use to provide long life, safety, and durability



3/8" DRIVE UNIVERSAL IMPACT SOCKETS,





6 POINT, SAE Black Industrial Finish

| Didok iiic | au Striui | | В | ^ | D | _ | | _ |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW36212 | 3/8 | 2 1/4 | 1 | 10/16 | 6/16 | 8/16 | 5/16 | 15/16 |
| JHW36214 | 7/16 | 2 1/4 | 1 | 11/16 | 6/16 | 8/16 | 6/16 | 15/16 |
| JHW36216 | 1/2 | 2 1/3 | 1 | 13/16 | 6/16 | 9/16 | 7/16 | 1 1/16 |
| JHW36218 | 9/16 | 2 1/3 | 1 | 13/16 | 6/16 | 9/16 | 8/16 | 1 1/16 |
| JHW36220 | 5/8 | 2 1/3 | 1 | 14/16 | 6/16 | 9/16 | 9/16 | 1 1/16 |
| JHW36222 | 11/16 | 2 1/8 | 1 | 1 | 8/16 | 11/16 | 10/16 | 1 1/16 |
| JHW36224 | 3/4 | 2 % | 1 | 1 2/16 | 8/16 | 11/16 | 11/16 | 1 1/16 |

Fed. Spec: ANSI B107.2

JHW36912 7 Piece 3/8" Drive Universal 6 Point Impact Socket Set on Clip Rail Contante Includa

| Contents include: | | | |
|-------------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW36212 | 3/8 | JHW36220 | 5/8 |
| JHW36214 | 7/16 | JHW36222 | 11/16 |
| JHW36216 | 1/2 | JHW36224 | 3/4 |
| IH/M/36218 | 9/ | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 6 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove







JHW2-608





JHWWS-2-13





JHW36224



JHW36912







JHW36921









JHWWS-12-12



3/8" DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, SAE





| Black Indu | ıstrial Fi | | _ | • | _ | - | | - |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|------------------------|----------------------|--------------------|
| | | A | B Drive End | Washing Fast | D | Bolt Clear- | Bolt Clearance | F Nose |
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | ance Depth (Inches) | Diameter (Inches) | Length (Inches) |
| JHW35310 | 5/16 | 1 1/8 | 3/4 | 1/2 | 3/8 | | 1/4 | 1/2 |
| JHW35312 | 3/8 | 1 1/8 | 3/4 | 1/2 | 3/8 | 1 | 3/8 | 1/2 |
| JHW35314 | 7/16 | 1 1/8 | 3/4 | 5/8 | 3/8 | / | 3/8 | 1/2 |
| JHW35316 | 1/2 | 1 1/8 | 3/4 | 3/4 | 3/8 | / | 3/8 | / |
| JHW35318 | 9/16 | 1 1/8 | 3/4 | 3/4 | 3/8 | / | 1/2 | / |
| JHW35320 | 5/8 | 1 1/8 | 1 | ¹⁵ / ₁₆ | 1/2 | / | 1/2 | / |
| JHW35322 | 11/16 | 1 1/8 | 1 | 15/16 | 1/2 | / | 1/2 | / |
| JHW35324 | 3/4 | 1 1/8 | 1 | 1 | 1/2 | / | 5/8 | / |
| JHW35326 | 13/16 | 1 1/8 | 1 1/8 | 1 | 1/2 | / | 3/4 | / |
| JHW35328 | 7/8 | 1 1/8 | 1 1/8 | 1 1/8 | 1/2 | / | 3/4 | / |
| JHW35330 | 15/16 | 1 1/8 | 1 1/4 | 1 1/4 | 1/2 | / | 3/4 | / |
| JHW35332 | 1 | 1 1/8 | 1 3/8 | 1 3/8 | 1/2 | / | 1 | / |

JHW36921 12 piece 3/8" Drive Shallow 12 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|-------------------------------|
| JHW35310 | 5/16 | JHW35318 | 9/16 | JHW35326 | 13/16 |
| JHW35312 | 3/8 | JHW35320 | 5/8 | JHW35328 | 7/8 |
| JHW35314 | 7/16 | JHW35322 | 11/16 | JHW35330 | ¹⁵ / ₁₆ |
| JHW35316 | 1/2 | JHW35324 | 3/4 | JHW35332 | 1 |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 6 or 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability
- · Drive end features pin retention hole and groove

3/8" DRIVE DEEP IMPACT SOCKETS, 6 POINT, SAE





| Black Indu | ıstrial Fi | | | • | | - | | - |
|-----------------|------------------|-----------------|--|--|-----------------------------|--|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | B Drive End Diameter (Inches) | C Working End Diameter (Inches) | Broach Depth (Inches) | E Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW12-610 | 5/16 | 2 1/8 | 11/16 | 1/2 | 1/4 | 1 21/32 | 9/32 | 1 5/8 |
| JHW12-612 | 3/8 | 2 1/8 | 11/16 | 5/8 | 9/32 | 1 % | 11/32 | 1 5/8 |
| JHW12-614 | 7/16 | 2 1/8 | 11/16 | 21/32 | 11/32 | 1 % | 11/32 | 1 5/8 |
| JHW12-616 | 1/2 | 2 1/8 | 3/4 | 3/4 | 3/8 | 1 15/32 | 7/16 | |
| JHW12-618 | 9/16 | 2 % | 13/16 | 13/16 | 7/16 | 1 1/2 | 17/32 | |
| JHW12-620 | 5/8 | 2 % | 29/32 | 29/32 | 15/32 | 11/2 | 5/8 | |
| JHW12-622 | 11/16 | 2 % | 31/32 | 31/32 | 1/2 | 1 19/32 | 21/32 | |
| JHW12-624 | 3/4 | 2 % | 1 1/16 | 1 1/16 | 9/16 | 1 19/32 | 23/32 | |
| JHW12-626 | 13/16 | 2 3/4 | 1 1/8 | 1 1/8 | 9/16 | 1 25/32 | 25/32 | |
| JHW12-628 | 7/8 | 2 3/4 | 1 3/16 | 1 3/16 | 19/32 | 1 1/8 | 27/32 | |
| JHW12-630 | 15/16 | 2 3/4 | 1 1/32 | 1 %2 | 19/32 | 1 15/16 | 29/32 | |
| JHW12-632 | 1 | 2 3/4 | 1 11/32 | 1 11/32 | 5/8 | 2 | 1 | |

Fed. Spec: ANSI B107.2

JHWWS-12-8 8 Piece 3/8" Drive Deep 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code S | lize (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|----------------|---------------|--------------|------------------|--------------|---------------|--------------|---------------|
| JHW12-610 | 5/16 | JHW12-614 | 7/16 | JHW12-618 | 9/16 | JHW12-622 | 11/16 |
| JHW12-612 | 3/8 | JHW12-616 | 1/2 | JHW12-620 | 5/8 | JHW12-624 | 3/4 |

JHWWS-12-12 12 Piece 3/8" Drive Deep 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Cod | le Size (Inches) | Product Code | Size (Inches) | Product Code | | Product Code | Size (Inches) |
|-------------|------------------|--------------|---------------|--------------|-------|-----------------|-------------------|
| JHW12-610 | 5/16 | JHW12-616 | 1/2 | JHW12-622 | 11/16 | JHW12-628 | 7/8 |
| JHW12-612 | 3/8 | JHW12-618 | 9/16 | JHW12-624 | 3/4 | JHW12-630 | ¹⁵ /16 |
| JHW12-614 | 7/16 | JHW12-620 | 5/8 | JHW12-626 | 13/16 | JHW12-632 | 1 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- · Specially heat treated for impact use to provide long life, safety, and durability






3/8" DRIVE DEEP IMPACT SOCKETS, 12 POINT, SAE





| Black Ind | lustrial | Finish | В | С | D | E | | F |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|---------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches |
| JHW36410 | 5/16 | 2 1/2 | 3/4 | 1/2 | 1/2 | / | 3/8 | 1 1/4 |
| JHW36412 | 3/8 | 2 1/2 | 3/4 | 1/2 | 3/4 | / | 1/2 | 1 1/4 |
| JHW36414 | 7/16 | 2 1/2 | 3/4 | 5/8 | 3/4 | / | 1/2 | 1 1/4 |
| JHW36416 | 1/2 | 2 1/2 | 3/4 | 3/4 | 1 | / | 1/2 | / |
| JHW36418 | 9/16 | 2 1/2 | 3/4 | 3/4 | 1 | / | 1/2 | / |
| JHW36420 | 5/8 | 2 1/2 | 1 | 1 | 1 | / | 1/2 | / |
| JHW36422 | 11/16 | 2 1/2 | 1 | 1 | 1 | / | 1/2 | / |
| JHW36424 | 3/4 | 2 1/2 | 1 | 1 | 1 | / | 3/4 | / |
| JHW36426 | ¹³ / ₁₆ | 2 1/2 | 1 | 1 | 1 | / | 3/4 | / |
| JHW36428 | 7/8 | 2 1/2 | 1 1/8 | 1 1/8 | 1 | / | 3/4 | / |
| JHW36430 | 15/16 | 2 1/2 | 1 1/4 | 1 1/4 | 1 | / | 5/8 | / |
| JHW36432 | 1 | 2 1/2 | 1 % | 1 % | 1 | / | 1 | / |





JHW36416 JHW36410

JHW36922 12 piece 3/8" Drive Shallow 12 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW36410 | 5/16 | JHW36418 | 9/16 | JHW36426 | 13/16 |
| JHW36412 | 3/8 | JHW36420 | 5/8 | JHW36428 | 7/8 |
| JHW36414 | 7/16 | JHW36422 | 11/16 | JHW36430 | 15/16 |
| JHW36416 | 1/2 | JHW36424 | 3/4 | JHW36432 | 1 |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 or 12 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability
- · Drive end features pin retention hole and groove

3/8" DRIVE SHALLOW IMPACT SOCKETS, **6 POINT, METRIC**





| Black Ind | lustria | ıl Finisi | 1 | | | | | |
|-----------------|--------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| | | Α | В | С | D | E | | F |
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW2M-607 | 7 | 1 1/32 | 11/16 | 7/16 | 7/32 | 9/16 | 1/4 | 17/32 |
| JHW2M-608 | 8 | 1 1/32 | 11/16 | 1/2 | 1/4 | 9/16 | 9/32 | 17/32 |
| JHW2M-609 | 9 | 1 1/32 | 11/16 | 9/16 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHW2M-610 | 10 | 1 1/32 | 11/16 | 5/8 | 9/32 | 9/16 | 11/32 | 17/32 |
| JHW2M-611 | 11 | 1 1/32 | 11/16 | 21/32 | 9/32 | 19/32 | 11/32 | 9/16 |
| JHW2M-612 | 12 | 1 1/16 | 23/32 | 23/32 | 9/32 | 9/16 | 11/32 | |
| JHW2M-613 | 13 | 1 1/16 | ²⁵ / ₃₂ | ²⁵ / ₃₂ | 9/32 | 19/32 | 3/8 | |
| JHW2M-614 | 14 | 1 3/32 | 13/16 | ¹³ /16 | 9/16 | 19/32 | 1/2 | |
| JHW2M-615 | 15 | 1 3/32 | 27/32 | 27/32 | 9/16 | 19/32 | 9/16 | |
| JHW2M-616 | 16 | 1 1/8 | 29/32 | 29/32 | 19/32 | 5/8 | 19/32 | |
| JHW2M-617 | 17 | 1 5/32 | 31/32 | 31/32 | 19/32 | 5/8 | 5/8 | |
| JHW2M-618 | 18 | 1 5/32 | 1 | 1 | 5/8 | 21/32 | 11/16 | |
| JHW2M-619 | 19 | 1 3/16 | 1 1/16 | 1 ½16 | 21/32 | 11/16 | 23/32 | |



JHW36922



JHW2M-607

JHWMS-2-13H 13 Piece 3/8" Drive Shallow 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW2M-607 | 7 | JHW2M-612 | 12 | JHW2M-617 | 17 |
| JHW2M-608 | 8 | JHW2M-613 | 13 | JHW2M-618 | 18 |
| JHW2M-609 | 9 | JHW2M-614 | 14 | JHW2M-619 | 19 |
| JHW2M-610 | 10 | JHW2M-615 | 15 | | |
| JHW2M-611 | 11 | JHW2M-616 | 16 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- . Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability









JHW2M-614



JHWMS-2-13H













JHW36819



JHW36910







| Black Industri | ial Fini | sh | |
|----------------|------------|-----------|-----------|
| | Α | В | С |
| | O a . a ll | Daine End | Mauldan I |

| | | Α | В | С | D | E | | F |
|-----------------|--------------|-------------------------------|-----------------------------------|-------------------------------------|--------------------------|----------------------------------|--|-------------------------|
| Product Code | Size (MM) | Overall Length (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW36607 | 7 | 1 1/8 | 3/4 | 1/2 | 3/8 | 1 | 3/8 | 1/2 |
| JHW36608 | 8 | 1 1/8 | 3/4 | 1/2 | 3/8 | / | 1/2 | 1/2 |
| JHW36609 | 9 | 1 1/8 | 3/4 | 1/2 | 3/8 | / | 1/2 | 1/2 |
| JHW36610 | 10 | 1 1/8 | 3/4 | 1/2 | 3/8 | / | 1/2 | 1/2 |
| JHW36611 | 11 | 1 1/8 | 3/4 | 1/2 | 1/2 | / | 1/2 | 1/2 |
| JHW36612 | 12 | 1 1/8 | 3/4 | 3/4 | 1/2 | / | 1/2 | / |
| JHW36613 | 13 | 1 1/8 | 3/4 | 3/4 | 1/2 | / | 1/2 | / |
| JHW36614 | 14 | 1 1/8 | 3/4 | 3/4 | 1/2 | / | 1/2 | / |
| JHW36615 | 15 | 1 1/8 | 7/8 | 7/8 | 1/2 | / | 1/2 | / |
| JHW36616 | 16 | 1 1/8 | 7/8 | 1 | 1/2 | / | 1/2 | / |
| JHW36617 | 17 | 1 1/8 | 7/8 | 1 | 1/2 | / | 5/8 | / |
| JHW36618 | 18 | 1 1/8 | 1 | 1 | 1/2 | / | 5/8 | 1 |
| JHW36619 | 19 | 1 1/8 | 1 | 1 | 1/2 | / | 5/8 | / |

JHW36923 13 Piece 3/8" Drive Shallow 12 point Impact Socket Set on Clip and Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW36607 | 7 | JHW36612 | 12 | JHW36617 | 17 |
| JHW36608 | 8 | JHW36613 | 13 | JHW36618 | 18 |
| JHW36609 | 9 | JHW36614 | 14 | JHW36619 | 19 |
| JHW36610 | 10 | JHW36615 | 15 | | |
| JHW36611 | 11 | JHW36616 | 16 | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 or 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove

3/8" DRIVE UNIVERSAL IMPACT SOCKETS, 6 POINT, METRIC





Black Industrial Finish

| | | Α | В | С | D | E | | F |
|----------|------|----------|-----------|-------------------------------|----------|----------------|----------------|-------------------------------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW36810 | 10 | 2 1/4 | 7/8 | 5/8 | 3/8 | 1/2 | 5/16 | 15/16 |
| JHW36811 | 11 | 2 1/4 | 7/8 | 11/16 | 1/2 | 1/2 | 3/8 | ¹⁵ / ₁₆ |
| JHW36812 | 12 | 2 1/4 | 7/8 | 11/16 | 1/2 | 1/2 | 3/8 | 15/16 |
| JHW36813 | 13 | 3/8 | 7/8 | ¹³ / ₁₆ | 1/2 | 9/16 | 3/8 | 1 1/16 |
| JHW36814 | 14 | 3/8 | 7/8 | 13/16 | 1/2 | 9/16 | 1/2 | 1 1/16 |
| JHW36815 | 15 | 3/8 | 7/8 | 7/8 | 1/2 | 9/16 | 9/16 | 1 1/16 |
| JHW36816 | 16 | 3/8 | 7/8 | 7/8 | 1/2 | 9/16 | 9/16 | 1 1/16 |
| JHW36817 | 17 | 3/8 | 7/8 | 1 | 1/2 | 11/16 | 5/8 | 1 1/4 |
| JHW36818 | 18 | 2 1/8 | 7/8 | 1 1/16 | 1/2 | 11/16 | 11/16 | 1 1/4 |
| JHW36819 | 19 | 2 5/8 | 7/8 | 1/8 | 1/2 | 11/16 | 11/16 | 1 1/4 |

JHW36910 10 Piece 3/8" Drive Universal 6 Point Impact Socket Set on Clip Rail Contents Include:

| | oiuuci | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
| JHW36810 | 10 | JHW36814 | 14 | JHW36818 | 18 |
| JHW36811 | 11 | JHW36815 | 15 | JHW36819 | 19 |
| JHW36812 | 12 | JHW36816 | 16 | | |
| JHW36813 | 13 | JHW36817 | 17 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- . Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove



3/8" DRIVE DEEP IMPACT SOCKETS. **6 POINT, METRIC**






Black Industrial Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|-------------------|-----------------------------------|-------------------------------------|-------------------------------|--|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW12M-607 | 7 | 2 1/8 | 11/16 | 7/16 | 9/32 | 1 ¹¹ / ₁₆ | 1/4 | 1 % |
| JHW12M-608 | 8 | 2 ½ | 11/16 | 1/2 | 1/4 | 1 ¹¹ / ₁₆ | 9/32 | 1 % |
| JHW12M-609 | 9 | 2 ½ | 11/16 | 9/16 | 9/32 | 1 ¹¹ / ₁₆ | 11/32 | 1 % |
| JHW12M-610 | 10 | 2 ½ | 11/16 | 5/8 | 9/32 | 1 ¹¹ / ₁₆ | 11/32 | 1 % |
| JHW12M-611 | 11 | 2 1/8 | 11/16 | 21/32 | ²¹ / ₆₄ | 1 ¹¹ / ₁₆ | 11/32 | 1 % |
| JHW12M-612 | 12 | 2 1/8 | 23/32 | 23/32 | 3/8 | 1 23/32 | 7/16 | - |
| JHW12M-613 | 13 | 2 1/8 | 25/32 | 25/32 | 7/16 | 1 % | 15/32 | - |
| JHW12M-614 | 14 | 2 % | ¹³ / ₁₆ | 13/16 | 13/32 | 1 %16 | 1/2 | |
| JHW12M-615 | 15 | 2 ¾ | 27/32 | ²⁷ / ₃₂ | 13/32 | 1 %16 | 9/16 | • |
| JHW12M-616 | 16 | 2 ¾ | 29/32 | ²⁹ / ₃₂ | 13/32 | 1 %16 | 19/32 | - |
| JHW12M-617 | 17 | 2 % | 31/32 | 31/32 | 7/16 | 1 3/4 | 5/8 | - |
| JHW12M-618 | 18 | 2 % | 1 | 1 | 7/16 | 1 3/4 | 11/16 | - |
| JHW12M-619 | 19 | 2 % | 1 1/16 | 1 1/16 | 9/16 | 1 3/4 | 23/32 | |
| JHW12M-620 | 20 | 2 % | 1 1/8 | 1 1/8 | 15/32 | 1 3/4 | 3/4 | - |
| JHW12M-621 | 21 | 2 % | 1 5/32 | 1 5/32 | 1/2 | 1 3/4 | 25/32 | - |
| JHW12M-622 | 22 | 2 1/8 | 1 ³ /16 | 1 3/16 | 1/2 | 1 ³¹ / ₃₂ | 27/32 | - |
| JHW12M-623 | 23 | 2 ⁷ /8 | 1 1/4 | 1 1/4 | 17/32 | 1 ³¹ / ₃₂ | 7/8 | |
| JHW12M-624 | 24 | 2 1/8 | 1 ½16 | 1 5/16 | 19/32 | 1 31/32 | 29/32 | |





JHWMS-12-13H

13 Piece 3/8" Drive Deep 6 Point Impact Socket Set on Clip Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW12M-607 | 7 | JHW12M-612 | 12 | JHW12M-617 | 17 |
| JHW12M-608 | 8 | JHW12M-613 | 13 | JHW12M-618 | 18 |
| JHW12M-609 | 9 | JHW12M-614 | 14 | JHW12M-619 | 19 |
| JHW12M-610 | 10 | JHW12M-615 | 15 | | |
| JHW12M-611 | 11 | JHW12M-616 | 16 | | |



18 Piece 3/8" Drive Deep 6 Point Impact Socket Set on Clip Rail

Contents Include:

| Contents inc | iuuei | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
| JHW12M-607 | 7 | JHW12M-613 | 13 | JHW12M-619 | 19 |
| JHW12M-608 | 8 | JHW12M-614 | 14 | JHW12M-620 | 20 |
| JHW12M-609 | 9 | JHW12M-615 | 15 | JHW12M-621 | 21 |
| JHW12M-610 | 10 | JHW12M-616 | 16 | JHW12M-622 | 22 |
| JHW12M-611 | 11 | JHW12M-617 | 17 | JHW12M-623 | 23 |
| JHW12M-612 | 12 | JHW12M-618 | 18 | JHW12M-624 | 24 |

Features

- $\textbf{SUPERTORQUE}^{\text{TM}} \ \textbf{lobular openings for greater turning power without deforming the fastener}$
- Designed for maximum engagement on 6 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability



3/8" DRIVE HEX DRIVERS









Product Code Overall Length (Inches) **Product Code Bits Optional Ret Ring** JHW2MA-612 JHW2MA-612-2 12 mm 2-1XS 72.7 mm JHW2MA-614 JHW2MA-614-2 14 mm 72.7 mm 2-1XS JHW2A-616 1/2" 2 1/8" JHW2A-616-2 2-1XS JHW2A-618 9/₁₆" 2 1/8" JHW2A-618-2 2-1XS

Features

- Designed for use with pneumatic or cordless impact guns
- Optional retaining ring ensures positive attachment to anvil
- Manufactured from special alloy steel and heat treated for optimum strength and durability
- Williams® bits are designed with a precise fit and tight tolerances to prevent slippage and disengagement
- Outperforms one-piece design models our two-piece design makes replacement economical and convenient
- Bits can be easily replaced by hand no need to put them in a vice and punch them out with a hammer
- · Optional retaining rings available for added protection









Side hole in socket permits use

with Williams Tools@Height drive tools such as ratchets,

extensions and u-joints



JHWMS-12-13H



JHWMS-12-18H







JHW2MA-614 with Optional Ret Ring 2-1XS





JHW35412 JHW35407





3/8" DRIVE DEEP IMPACT SOCKETS, 12 POINT, METRIC





| Black Ind | ustria | l Finish | | | | | | |
|--------------|--------------|-------------------------------|-----------------------------------|-------------------------------------|-----------------------------|----------------------------------|--|----------------------------|
| | | Α | В | С | D | E | | F |
| Product Code | Size (mm) | Overall Length (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW35407 | 7 | 2 1/2 | 3/4 | 1/2 | 1/2 | / | 1/4 | 1 1/4 |
| JHW35408 | 8 | 2 1/2 | 3/4 | 1/2 | 1/2 | / | 1/4 | 1 1/4 |
| JHW35409 | 9 | 2 1/2 | 3/4 | 1/2 | 1/2 | / | 1/4 | 1 1/4 |
| JHW35410 | 10 | 2 1/2 | 3/4 | 1/2 | 3/4 | / | 3/8 | 1 1/4 |
| JHW35411 | 11 | 2 1/2 | 3/4 | 1/2 | 3/4 | / | 3/8 | 1 1/4 |
| JHW35412 | 12 | 2 1/2 | 3/4 | 3/4 | 3/4 | / | 3/8 | / |
| JHW35413 | 13 | 2 1/2 | 3/4 | 3/4 | 7/8 | / | 1/2 | / |
| JHW35414 | 14 | 2 1/2 | 3/4 | 3/4 | 7/8 | / | 1/2 | / |
| JHW35415 | 15 | 2 1/2 | 7/8 | 7/8 | 1 | / | 1/2 | / |
| JHW35416 | 16 | 2 1/2 | 7/8 | 7/8 | 1 | / | 1/2 | / |
| JHW35417 | 17 | 2 1/2 | 7/8 | 7/8 | 1 | / | 1/2 | / |
| JHW35418 | 18 | 2 1/2 | 7/8 | 7/8 | 1 | 1 | 5/8 | / |
| II INMOTATO | 40 | 0.1/ | | | | , | Ē. | ٠, |

JHW36924 13 Piece 3/8" Drive Deep 12 point Impact Socket Set on Clip and Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW35407 | 7 | JHW35411 | 11 | JHW35415 | 15 |
| JHW35408 | 8 | JHW35412 | 12 | JHW35416 | 16 |
| JHW35409 | 9 | JHW35413 | 13 | JHW35417 | 17 |
| JHW35410 | 10 | JHW35414 | 14 | JHW35418 | 18 |
| | | | | JHW35419 | 19 |

Features

JHW35419

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 or 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- · Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove



JHW36924









8 & 12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|---|
| JHWWSS-57TB | 57 Piece Tool Set with JHWTB-6124B Metal Tool Box |
| JHWWSS-57F | 57 Piece Tool Set Only |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|---------------------|-------------------------------|---------------------|----------------------|
| Product Code | Description | Product Code | Description |
| JHWS-15A | 18" Speeder Handle | JHWS-70 | Ratchet Spinner Disk |
| JHWS-20A | 12" Sliding T-Handle | JHWS-102P | 2" Extension |
| JHWS-40AA | 10 13/16" Flex Handle | JHWS-110P | 5" Extension |
| JHWS-41AA | 15 1/2" Flex Handle | JHWS-115P | 10" Extension |
| JHWS-52EHA | 10 3/8" Enclosed Head Ratchet | JHWS-140A | Universal Joint |
| JHWS-52FHI A | 15" Enclosed Head Batchet | | |

| Deep 12-Point Sockets | JHWS-52EHLA | 15" Enclosed Head Ratchet | | |
|--|---------------|---------------------------|---------------|-------------------------------|
| Product Code Size (Inches) | | | Deep 12-Point | Sockets |
| JHWST-1212 3/8 | Shallow 12-Po | oint Sockets | Product Code | Size (Inches) |
| JHWST-1214 | Product Code | Size (Inches) | JHWSD-1216 | 1/2 |
| JHWST-1216 | JHWST-1212 | 3/8 | JHWSD-1218 | 9/16 |
| JHWST-1218 | JHWST-1214 | 7/16 | JHWSD-1220 | 5/8 |
| JHWST-1220 5/8 JHWSD-1226 13/16 JHWST-1222 11/16 JHWSD-1228 7/8 JHWST-1224 3/4 JHWSD-1230 15/16 JHWST-1226 13/16 JHWSD-1232 1 JHWSD-1232 1 JHWST-1228 7/8 JHWSD-1234 1 1/16 JHWST-1230 15/16 JHWSD-1236 1 1/8 JHWST-1232 1 JHWST-1232 1 JHWST-1234 1 1/16 JHWST-1236 1 1/8 Product Code Size (Inches) JHWST-1238 1 3/16 JHWST-812 3/8 JHWST-1238 1 3/16 JHWST-812 3/8 JHWST-1240 1 1/14 JHWST-814 7/16 JHWST-814 7/16 JHWST-814 7/16 JHWST-814 7/16 JHWST-814 7/16 JHWST-814 7/16 JHWST-814 7/16 JHWST-820 5/8 JHWST-1248 1 1/12 JHWST-820 5/8 JHWST-824 3/4 JHWST-824 3/4 JHWST-824 3/4 JHWST-824 3/4 JHWST-824 3/4 JHWST-824 3/16 JHWST-828 7/8 JHWST-828 7/8 JHWST-828 7/8 JHWST-824 3/8 JHWST-824 3/8 JHWST-824 3/8 JHWST-824 3/8 JHWST-825 13/16 JHWST-826 13/16 JHWST-828 7/8 JHWST-828 7/8 JHWST-828 7/8 JHWST-828 7/8 JHWST-824 3/8 JHWST-824 3/8 JHWST-825 1 JHWST-826 JHWST-828 7/8 JHWST-828 7/8 JHWST-828 7/8 JHWST-828 7/8 JHWST-824 3/4 JHWST-824 3/4 JHWST-825 1 JHWST-826 JHWST-828 7/8 JHWST-828 | JHWST-1216 | 1/2 | JHWSD-1222 | 11/16 |
| JHWST-1222 | JHWST-1218 | 9/16 | JHWSD-1224 | 3/4 |
| JHWST-1224 3/4 JHWSD-1230 15/16 JHWST-1226 13/16 JHWSD-1232 1 JHWST-1228 7/8 JHWSD-1234 1 1/16 JHWST-1230 15/16 JHWSD-1234 1 1/16 JHWST-1232 1 JHWST-1232 1 JHWST-1234 1 1/16 JHWST-1234 1 1/16 JHWST-1236 1 1/8 JHWST-1238 1 3/16 JHWST-1240 JHWST-1240 JHWST-1242 1 5/16 JHWST-1242 1 5/16 JHWST-1242 JHWST-1244 1 3/8 JHWST-1244 1 3/8 JHWST-1244 1 3/8 JHWST-1246 1 7/16 JHWST-1248 1 1/2 JHWST-1248 1 1/2 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/4 JHWST-1248 3/8 JHW | | | | |
| JHWST-1226 | JHWST-1222 | | | |
| JHWST-1228 | | | | ¹⁵ / ₁₆ |
| JHWST-1230 | | | | • |
| JHWST-1232 | | | | |
| JHWST-1234 | | | JHWSD-1236 | 1 ¹ /8 |
| JHWST-1236 | | • | | |
| JHWST-1238 | | | | |
| JHWST-1240 | | | | |
| JHWST-1242 | | | | |
| JHWST-1244 | | | | |
| JHWST-1246 | | | | |
| JHWST-822 | | | | |
| Standard Hex Bit Sockets Product Code Size (Inches) JHWST-826 JHWST-828 JHWST-828 JHWST-828 JHWSA-8A JHWSA-10A JHWSA-10A JHWSA-12A JHWSA-16A JHWSA-16A JHWSA-18A JHWSA-18A JHWSA-18A JHWSA-18A | | | | |
| Standard Hex Bit Sockets JHWST-826 13/16 Product Code Size (Inches) JHWST-828 7/8 JHWSA-8A 1/4 JHWST-832 1 JHWSA-10A 5/16 JHWST-832 1 JHWSA-12A 3/8 JHWST-832 1 JHWSA-16A 1/2 JHWST-832 1 JHWSA-18A 9/16 1 | JHWS1-1248 | 1 1/2 | | |
| Product Code Size (Inches) JHWST-828 7/s JHWSA-8A 1/4 JHWST-832 1 JHWSA-10A 5/1s JHWST-832 1 JHWSA-12A 3/s JHWSA-16A 1/2 JHWSA-18A 9/1s 9/1s | | | | |
| JHWSA-8A 1/4 JHWST-832 1 JHWSA-10A 5/16 JHWSA-12A 3/8 JHWSA-16A 1/2 JHWSA-18A 9/16 | | | | |
| JHWSA-10A 5/16 JHWSA-12A 3/8 JHWSA-16A 1/2 JHWSA-18A 9/16 | | | ⊣ | |
| JHWSA-12A 3/8 JHWSA-16A 1/2 JHWSA-18A 9/16 | | , , | JHWST-832 | 1 |
| JHWSA-16A 1/2 JHWSA-18A 9/ ₁₆ | | | | |
| JHWSA-18A 9/16 | | | | |
| | | | | |
| JHWSA-20A 5/8 | | | | |
| | JHWSA-20A | 5/8 | | |

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



















12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSS-38FTB | 38 Piece Tool Set with JHWTB-104 Metal Tool Box |
| JHWWSS-38F | 38 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | illolado! | Drive Tools: | |
|--------------|-------------------------------|--------------|--------------------------------|
| Product Code | Description | Product Code | Description |
| JHWS-15A | 18" Speeder Handle | JHWS-140A | Universal Joint |
| JHWS-41AA | | JHWS-102P | 2" Extension |
| JHWS-52EHA | 10 %" Enclosed Head Ratchet | | 5" Extension |
| JHWS-70 | Ratchet Spinner Disk | JHWS-115P | 10" Extension |
| Shallow 12-l | Point Sockets | Shallow 12-P | oint Sockets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWST-1212 | 3/8 | JHWST-1244 | 1 % |
| JHWST-1214 | 7/16 | JHWST-1246 | 1 ⁷ / ₁₆ |
| JHWST-1216 | 1/2 | JHWST-1248 | 1 ½ |
| JHWST-1218 | ⁹ / ₁₆ | | |
| JHWST-1220 | 5/8 | Deep 12-Poir | nt Sockets |
| JHWST-1222 | 11/16 | Product Code | Size (Inches) |
| JHWST-1224 | 3/4 | JHWSD-1216 | 1/2 |
| JHWST-1226 | ¹³ / ₁₆ | JHWSD-1218 | 9/16 |
| JHWST-1228 | 7/8 | JHWSD-1220 | 5/8 |
| JHWST-1230 | 15/16 | JHWSD-1222 | 11/16 |
| JHWST-1232 | 1 | JHWSD-1224 | 3/4 |
| JHWST-1234 | 1 1/16 | JHWSD-1226 | ¹³ / ₁₆ |
| JHWST-1236 | 1 1/8 | JHWSD-1228 | 7/8 |
| JHWST-1238 | 1 3/16 | JHWSD-1230 | ¹⁵ / ₁₆ |
| JHWST-1240 | 1 1/4 | JHWSD-1232 | 1 |
| JHWST-1242 | 1 5/16 | JHWSD-1234 | 1 1/16 |
| | | JHWSD-1236 | 1 1/8 |



30 PIECE 1/2" DRIVE SOCKET AND DRIVE TOOL SET

Description

15 1/2" Flex Handle

JHWS-52EHA 10 %" Enclosed Head Ratchet JHWS-115P





Description

5" Extension 10" Extension

12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSS-30FTB | 30 Piece Tool Set with JHWTB-104 Metal Tool Box |
| JHWWSS-30F | 30 Piece Tool Set Only - Packed in Keep Safe Foam System |

Drive Tools:

Product Code

JHWS-110P

Contents Include: Drive Tools:

Product Code

JHWS-41AA

| JHWS-140A | Universal Joint | | |
|--------------------------|-------------------------------|--------------|-------------------------------|
| Shallow 12-Point Sockets | | Deep 12-Poin | |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWST-1212 | 3/8 | JHWSD-1216 | 1/2 |
| JHWST-1214 | 7/16 | JHWSD-1218 | 9/16 |
| JHWST-1216 | 1/2 | JHWSD-1220 | 5/8 |
| JHWST-1218 | ⁹ /16 | JHWSD-1222 | 11/16 |
| JHWST-1220 | 5/8 | JHWSD-1224 | 3/4 |
| JHWST-1222 | 11/16 | JHWSD-1226 | ¹³ / ₁₆ |
| JHWST-1224 | 3/4 | JHWSD-1228 | 7/8 |
| JHWST-1226 | 13/16 | JHWSD-1230 | ¹⁵ / ₁₆ |
| JHWST-1228 | 7/8 | JHWSD-1232 | 1 |
| JHWST-1230 | ¹⁵ / ₁₆ | JHWSD-1234 | 1 1/16 |
| JHWST-1232 | 1 | JHWSD-1236 | 1 ½ |
| JHWST-1234 | 1 1/16 | | |
| JHWST-1236 | 1 1/8 | | |
| JHWST-1240 | 1 1/4 | | |





Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUETM lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use







12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSS-22FTB | 22 Piece Tool Set with JHWTB-104 Metal Tool Box |
| JHWWSS-22F | 22 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|--|-----------------------------------|--|-------------------------------------|
| Product Code | Description | Product Code | Description |
| JHWS-15A | 18" Speeder Handle | JHWS-102P | 2" Extension |
| JHWS-41AA | 15 ½ Flex Handle | JHWS-110P | 5" Extension |
| JHWS-52EHA | 10 3/8" Enclosed Head Ratchet | JHWS-115P | 10" Extension |
| JHWS-140A | Universal Joint | | |
| Shallow 12-Poi | nt Sockets | Shallow 12-Point | t Sockets |
| | | | |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| | | | |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| Product Code JHWST-1212 | Size (Inches) 3/8 | Product Code JHWST-1228 | Size (Inches) |
| Product Code JHWST-1212 JHWST-1214 | Size (Inches) 3/8 7/16 | Product Code JHWST-1228 JHWST-1230 | Size (Inches) |
| Product Code JHWST-1212 JHWST-1214 JHWST-1216 | Size (Inches) 3/6 7/16 1/2 | Product Code JHWST-1228 JHWST-1230 JHWST-1232 | Size (Inches) 7/8 15/16 1 |
| Product Code JHWST-1212 JHWST-1214 JHWST-1216 JHWST-1218 | Size (Inches) % 7/16 1/2 9/16 | Product Code JHWST-1228 JHWST-1230 JHWST-1232 JHWST-1234 | Size (Inches) 7/8 15/16 1 1 1/16 |



- · Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



19 PIECE 1/2" DRIVE SOCKET **AND DRIVE TOOL SET**





12 Point SAE, Packed in Exclusive Keep-Safe-Foam System with Metal Box

| Product Code | Description |
|----------------------------|--|
| JHWWSS-19FTB JHWWSS-19F | 19 Piece Tool Set with JHWTB103 Metal Tool Box 19 Piece Tool Set Only - Packed in Keep Safe Foam System |
| | |

Contents Include:

| Confents III | Liuuci | | |
|---------------------|------------------------------|---------------------|-------------------------------|
| Drive Tools: | | Drive Tools: | |
| Product Code | Description | Product Code | Description |
| JHWS-41AA | 15 ½" Flex Handle | JHWS-110P | 5" Extension |
| JHWS-52EHA | 10 %" Enclosed Head Ratchet | JHWS-140A | Universal Joint |
| Shallow 12-Po | int Sockets | Shallow 12-Poin | t Sockets |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWST-1212 | 3/8 | JHWST-1228 | 7/8 |
| JHWST-1214 | ⁷ / ₁₆ | JHWST-1230 | ¹⁵ / ₁₆ |
| JHWST-1216 | 1/2 | JHWST-1232 | 1 |
| JHWST-1218 | 9/16 | JHWST-1234 | 1 1/16 |
| JHWST-1220 | 5/8 | JHWST-1236 | 1 1/8 |
| JHWST-1222 | 11/16 | JHWST-1238 | 1 3/16 |
| JHWST-1224 | 3/4 | JHWST-1240 | 1 1/4 |
| JHWST-1226 | 13/16 | | |

Features

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use













JHWWSS-19FTB











| Product Code | Description |
|--------------|--|
| JHWWSS18HFTB | 18 Piece Tool Set with JHWTB103 Metal Tool Box |
| JHWWSS-18HF | 18 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|-------------------------|-----------------------------|-------------------------|-----------------|
| Product Code | Description | Product Code | Description |
| JHWS-41AA | 15 ½" Flex Handle | JHWS-110P | 5" Extension |
| JHWS-52EHA | 10 %" Enclosed Head Ratchet | JHWS-140A | Universal Joint |
| Shallow 6-Point Sockets | | Shallow 6-Point Sockets | |
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWST-612 | 3/8 | JHWST-626 | 13/16 |
| JHWST-614 | 7/16 | JHWST-628 | 7/8 |
| JHWST-616 | 1/2 | JHWST-630 | 15/16 |
| JHWST-618 | 9/16 | JHWST-632 | 1 |
| JHWST-620 | 5/8 | JHWST-634 | 1 1/16 |
| JHWST-622 | 11/16 | JHWST-636 | 1 1/8 |
| JHWST-624 | 3/4 | JHWST-640 | 1 1/4 |

Features

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



15 PIECE 1/2" DRIVE SOCKET AND DRIVE TOOL SET







| Product Code | Description |
|--------------|--|
| JHWWSS-15FTB | 15 Piece Tool Set with JHWTB103 Metal Tool Box |
| JHWWSS-15F | 15 Piece Tool Set Only - Packed in Keep Safe Foam System |

Contents Include:

| Drive Tools: | | Shallow 12-Poi | nt Sockets |
|---------------------|-----------------------------|----------------|-------------------------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWS-41AA | 15 ½" Flex Handle | JHWST-1214 | 7/16 |
| JHWS-52EHA | 10 %" Enclosed Head Ratchet | JHWST-1216 | 1/2 |
| JHWS-110P | 5" Extension | JHWST-1218 | 9/16 |
| JHWS-115P | 10" Extension | JHWST-1220 | 5/8 |
| JHWS-140A | Universal Joint | JHWST-1222 | 11/16 |
| | | JHWST-1224 | 3/4 |
| | | JHWST-1226 | ¹³ / ₁₆ |
| | | JHWST-1228 | 7/8 |
| | | JHWST-1230 | ¹⁵ / ₁₆ |
| | | JHWST-1232 | 1 |

- Keep-Safe-Foam system keeps tools organized and helps prevent loss
- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use















12 Point Metric, with Metal Box

Product Code Description

JHWMSS-47TB 47 Piece Tool Set with JHWTB-6124B Metal Tool Box (Keep Safe Foam Not Included)
JHWMSS-47F 47 Piece Tool Set Only - Packed in Keep Safe Foam System

| • | _ | _ | | | |
|----|-------|------|------|------|--|
| .~ | ntar | ste. | Incl | ude: | |
| -u | IIICI | ILO | | uuci | |

| Contents Include | de: | | |
|------------------|-----------------------------|--------------------|-----------|
| Drive Tools: | | Shallow 12-Point S | Sockets |
| Product Code | Description | Product Code | Size (MM) |
| JHWS-15A | 18" Speeder Handle | JHWSTM-1210 | 10 |
| JHWS-20A | 12" Sliding T-Handle | JHWSTM-1211 | 11 |
| JHWS-40AA | 10 13/16" Flex Handle | JHWSTM-1212 | 12 |
| JHWS-41AA | 15 1/2" Flex Handle | JHWSTM-1213 | 13 |
| JHWS-52EHA | 10 %" Enclosed Head Ratchet | JHWSTM-1214 | 14 |
| JHWS-60D | Stud Remover | JHWSTM-1215 | 15 |
| JHWS-70 | Ratchet Spinner Disk | JHWSTM-1216 | 16 |
| JHWS-102P | 2" Extension | JHWSTM-1217 | 17 |
| JHWS-110P | 5" Extension | JHWSTM-1218 | 18 |
| JHWS-115P | 10" Extension | JHWSTM-1219 | 19 |
| JHWS-140A | Universal Joint | JHWSTM-1220 | 20 |
| | | JHWSTM-1221 | 21 |
| Deep 12-Point So | ckets | JHWSTM-1222 | 22 |
| Product Code | Size (MM) | JHWSTM-1223 | 23 |
| JHWSMD-1213 | 13 | JHWSTM-1224 | 24 |
| JHWSMD-1214 | 14 | JHWSTM-1225 | 25 |
| JHWSMD-1215 | 15 | JHWSTM-1226 | 26 |
| JHWSMD-1216 | 16 | JHWSTM-1227 | 27 |
| JHWSMD-1217 | 17 | JHWSTM-1228 | 28 |
| JHWSMD-1218 | 18 | JHWSTM-1229 | 29 |
| JHWSMD-1219 | 19 | JHWSTM-1230 | 30 |
| JHWSMD-1221 | 21 | JHWSTM-1232 | 32 |
| JHWSMD-1222 | 22 | JHWSTM-1234 | 34 |
| JHWSMD-1224 | 24 | JHWSTM-1236 | 36 |
| JHWSMD-1227 | 27 | | |
| JHWSMD-1230 | 30 | | |



Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use



33 PIECE 1/2" DRIVE SOCKET **AND DRIVE TOOL SET**





12 Point Metric, with Metal Box

| JHWMSS-33FTB 33 Piece Tool Set with JHWTB-104 Metal Tool Box JHWMSS-33F 33 Piece Tool Set Only - Packed in Keep Safe Foam System | Product Code | Description |
|---|---|---|
| | • | 33 Piece Tool Set with JHWTB-104 Metal Tool Box 33 Piece Tool Set Only - Packed in Keep Safe Foam System |

| 011111100 001 | 00110001001001 | orny raditou irritoop | outo i outil Oyotoili |
|-------------------|----------------------------|-----------------------|-----------------------|
| Contents Include: | | | |
| Drive Tools: | | Shallow 12-Point S | ockets |
| Product Code | Description | Product Code | Size (MM) |
| JHWS-41AA | 15 1/2" Flex Handle | JHWSTM-1210 | 10 |
| JHWS-52EHA | 10 % Enclosed Head Ratchet | JHWSTM-1211 | 11 |
| JHWS-102P | 2" Extension | JHWSTM-1212 | 12 |
| JHWS-110P | 5" Extension | JHWSTM-1213 | 13 |
| JHWS-115P | 10" Extension | JHWSTM-1214 | 14 |
| JHWS-140A | Universal Joint | JHWSTM-1215 | 15 |
| | | JHWSTM-1216 | 16 |
| Deep 12-Point S | ockets | JHWSTM-1217 | 17 |
| Product Code | Size (MM) | JHWSTM-1218 | 18 |
| JHWSMD-1213 | 13 | JHWSTM-1219 | 19 |
| JHWSMD-1214 | 14 | JHWSTM-1220 | 20 |
| JHWSMD-1215 | 15 | JHWSTM-1221 | 21 |
| JHWSMD-1216 | 16 | JHWSTM-1222 | 22 |
| JHWSMD-1217 | 17 | JHWSTM-1223 | 23 |
| JHWSMD-1218 | 18 | JHWSTM-1224 | 24 |
| JHWSMD-1219 | 19 | | |
| JHWSMD-1221 | 21 | | |
| JHWSMD-1222 | 22 | | |
| JHWSMD-1224 | 24 | | |
| JHWSMD-1227 | 27 | | |
| JHWSMD-1230 | 30 | | |



- All tools are professional quality, made of high-grade chrome vanadium steel.
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener.
- Metal tool box made for years of rugged use.


















| Product Code | Description |
|--------------|--|
| JHWMSS-29FTB | 29 Piece Tool Set with JHWTB-104 Metal Tool Box |
| JHWMSS-29F | 29 Piece Tool Set Only - Packed in Keep Safe Foam System |

| Contents Inc | clude: | | |
|---------------------|-----------------------------|---------------------|-----------------|
| Drive Tools: | | Drive Tools: | |
| Product Code | Description | Product Code | Description |
| JHWS-41AA | 15 1/2" Flex Handle | JHWS-110P | 5" Extension |
| JHWS-52EHA | 10 %" Enclosed Head Ratchet | JHWS-115P | 10" Extension |
| JHWS-102P | 2" Extension | JHWS-140A | Universal Joint |
| Shallow 12-Po | int Sockets | Shallow 12-Poin | t Sockets |
| Product Code | Size (MM) | Product Code | Size (MM) |
| JHWSTM-1210 | 10 | JHWSTM-1222 | 22 |
| JHWSTM-1211 | 11 | JHWSTM-1223 | 23 |
| JHWSTM-1212 | 12 | JHWSTM-1224 | 24 |
| JHWSTM-1213 | 13 | JHWSTM-1225 | 25 |
| JHWSTM-1214 | 14 | JHWSTM-1226 | 26 |
| JHWSTM-1215 | 15 | JHWSTM-1227 | 27 |
| JHWSTM-1216 | 16 | JHWSTM-1228 | 28 |
| JHWSTM-1217 | 17 | JHWSTM-1229 | 29 |
| JHWSTM-1218 | 18 | JHWSTM-1230 | 30 |
| JHWSTM-1219 | 19 | JHWSTM-1232 | 32 |
| II IVA/OTRA 4000 | •• | U DAIOTRA AGGA | • • |

JHWSTM-1234

JHWSTM-1220 JHWSTM-1221 **Features**

. Keep-Safe-Foam system keeps tools organized and helps prevent loss

20

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use



22 PIECE 1/2" DRIVE SOCKET **AND DRIVE TOOL SET**



34





| Product Code | Description |
|----------------------------|---|
| JHWMSS-22FTB JHWMSS-22F | 22 Piece Tool Set with JHWTB-104 Metal Tool Box 22 Piece Tool Set Only - Packed in Keep Safe Foam System |
| | - |

Contents Include:

| Drive Tools: | | Drive Tools: | |
|-----------------|-------------------------------|---------------------|-----------------|
| Product Code | Description | Product Code | Description |
| JHWS-41AA | 15 1/2" Flex Handle | JHWS-115P | 10" Extension |
| JHWS-52EHA | 10 3/8" Enclosed Head Ratchet | JHWS-140A | Universal Joint |
| JHWS-110P | 5" Extension | | |
| Shallow 6-Point | Sockets | Shallow 12-Poir | nt Sockets |
| Product Code | Size (MM) | Product Code | Size (MM) |
| JHWSTM-1210 | 10 | JHWSTM-1219 | 19 |
| JHWSTM-1211 | 11 | JHWSTM-1220 | 20 |
| JHWSTM-1212 | 12 | JHWSTM-1221 | 21 |
| JHWSTM-1213 | 13 | JHWSTM-1222 | 22 |
| JHWSTM-1214 | 14 | JHWSTM-1223 | 23 |
| JHWSTM-1215 | 15 | JHWSTM-1224 | 24 |
| JHWSTM-1216 | 16 | JHWSTM-1225 | 25 |
| JHWSTM-1217 | 17 | JHWSTM-1226 | 26 |
| JHWSTM-1218 | 18 | | |

Features

- · Keep-Safe-Foam system keeps tools organized and helps prevent loss
- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



JHWMSS-29FTB











12 Point Metric, Packed in Exclusive Keep-Safe-Foam-System with Metal Box

| Product Code | Description |
|--------------|--|
| JHWMSS-20FTB | 20 Piece Tool Set with JHWTB-104 Metal Tool Box and Foam |

Contents Include:

| Product Code | Description |
|--------------|-------------------------------|
| JHWS-41AA | 15 ½" Flex Handle |
| JHWS-52EHA | 10 3/8" Enclosed Head Ratchet |
| JHWS-110P | 5" Extension |

| Shallow 12-Point Sockets | | Shallow 12-Point Sockets | |
|--------------------------|-----------|---------------------------------|-----------|
| Product Code | Size (mm) | Product Code | Size (mm) |
| JHWSTM-1210 | 10 | JHWSTM-1222 | 22 |
| JHWSTM-1213 | 13 | JHWSTM-1223 | 23 |
| JHWSTM-1214 | 14 | JHWSTM-1224 | 24 |
| JHWSTM-1215 | 15 | JHWSTM-1226 | 26 |
| JHWSTM-1217 | 17 | JHWSTM-1227 | 27 |
| JHWSTM-1218 | 18 | JHWSTM-1230 | 30 |
| JHWSTM-1219 | 19 | JHWSTM-1232 | 32 |
| JHWSTM-1220 | 20 | JHWSTM-1236 | 36 |
| JHWSTM-1221 | 21 | | |

- All tools are professional quality, made of high grade special alloy steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use



















Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

146 PIECE 1/4", 3/8", 1/2" DRIVE SOCKET AND DRIVE TOOL SET









6 & 12 Point Rugged-Case-System Tool Set, SAE and Metric

| | • | |
|--------------|----------------------------------|------------|
| Product Code | Description | |
| JHW50614B | 146 Piece 1/4", 3/8", 1/2" Drive | Socket Set |

1/4" Drive Contents Include:

1/4" Drive Tools

Ratchet 3" Extension Handle Universal Joint

1/4" Drive Deep 6 Point Sockets

| Metric Size | SAE Size |
|-------------|----------|
| (MM) | (Inches) |
| 4 | 3/16 |
| 5 | 7/32 |
| 6 | 1/4 |
| 7 | 9/32 |
| 8 | 5/16 |
| 9 | 11/32 |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | |

1/4" Drive Shallow 6 Point Sockets

| i dilit docketa | | |
|-----------------|----------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 4 | 5/32 | |
| 5 | 3/16 | |
| 5.5 | 7/32 | |
| 6 7 | 1/4 | |
| | 9/32 | |
| 8 | 5/16 | |
| 9 | 11/32 | |
| 10 | 3/8 | |
| 11 | 7/16 | |
| 12 | 1/2 | |
| 13 | 9/16 | |
| 14 | | |

1/4" Drive Hex Bit Sockets

| TICK DIL COURCES | |
|----------------------|----------|
| Metric Size SAE Size | |
| (MM) | (Inches) |
| 3 | 1/8 |
| 4 5 | 5/32 |
| | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 5/16 |

1/4" Drive Screwdriver Bit Sockets

| uriver bit Juckets | |
|--------------------|-----------------|
| Size | Size |
| 5/32" Slotted Tip | #0 Phillips Tip |
| 7/32" Slotted Tip | #1 Phillips Tip |
| %" Slotted Tin | #2 Phillins Tin |

1/4" Drive

| Iorx Bit Sockets | |
|------------------|------|
| Size | Size |
| T10 | T25 |
| T15 | T27 |
| T20 | T30 |

3/8" Drive Contents Include:

3/8" Drive Tools

Ratchet 3" Extension 6" Extension Adaptor - 3/8" F x 1/4" M

3/8" Drive Deep 12 Point Sockets

| I E I OIII OOUNCIS | |
|--------------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 19 | |

3/8" Drive Shallow

| 6 Point Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 6 | 1/4 |
| 7 | 5/16 |
| 8 | 3/8 |
| 9 | 7/16 |
| 10 | 1/2 |
| 11 | 9/16 |
| 12 | 5/8 |
| 13 | 11/16 |
| 14 | 3/4 |
| 15 | 13/16 |
| 16 | 7/8 |
| 17 | 15/16 |
| 18 | 1 |
| 19 | |

3/8" Drive Spark Plug Socket

| • | |
|-------------------------------|--|
| SAE Size (Inches) | |
| 5% | |
| ¹³ / ₁₆ | |

1/2" Drive Contents Include:

1/2" Drive Tools

Ratchet 6" Extension 10" Extension Universal Joint Adaptor - ½" F x ¾" M

1/2" Drive Shallow 12 Point Sockets

| 2 Point Sockets |
|------------------------------|
| SAE Size (Inches) |
| 3/8 |
| 7/16 |
| 1/2 |
| ⁹ / ₁₆ |
| 5/8 |
| 11/16 |
| 3/4 |
| 13/16 |
| 7/8 |
| 15/16 |
| 1 |
| |



138 PIECE 1/4", 3/8", 1/2" DRIVE SOCKET AND DRIVE TOOL SET









6 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Description |
|--------------|---|
| JHW50612B | 138 Piece 1/4", 3/8", 1/2" Drive Socket Set |

1/4" Drive Contents Include:

1/4" Drive Tools

Ratchet
1 ½" Extension
3" Extension
Spinner Handle
Universal Joint
Hex Bit Holder
13 Piece Insert Bit Set

1/4" Drive Deep 6 Point Sockets

| 6 Point Sockets | |
|-----------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 4 | 5/32 |
| 5 | 3/16 |
| 6 | 7/32 |
| 7 | 1/4 |
| 8 | 9/32 |
| 9 | 5/16 |
| 10 | 11/32 |
| 11 | 3/8 |
| 12 | 7/16 |
| 13 | 1/2 |

1/4" Drive Shallow 6 Point Sockets

| Metric Size | SAE Size |
|-------------|------------------|
| (MM) | (Inches) |
| 4 | 5/32 |
| 5 | ³ /16 |
| 5.5 | 7/32 |
| 6 | 1/4 |
| 7 | 9/32 |
| 8 | 5/16 |
| 9 | 11/32 |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | |

3/8" Drive Contents Include:

3/8" Drive Tools

Ratchet 3" Extension 6" Extension Universal Joint Adaptor Hex Bit Holder

3/8" Drive Deep

| 12 Point Sockets | |
|------------------|------------------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 10 | 3/8 |
| 11 | ⁷ /16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | 13/16 |
| 18 | 7/8 |
| 19 | |
| | |

3/8" Drive Shallow 6 Point Sockets

| 0.0 | DOUNCES |
|-------------|----------|
| Metric Size | SAE Size |
| (MM) | (Inches) |
| 10 | 3/8 |
| 11 | 7/16 |
| 12 | 1/2 |
| 13 | 9/16 |
| 14 | 5/8 |
| 15 | 11/16 |
| 16 | 3/4 |
| 17 | |
| 18 | |
| 10 | l |

1/2" Drive Contents Include:

1/2" Drive Tools

Ratchet 6" Extension 10" Extension Universal Joint Adaptor

1/2" Drive Shallow

| 12 Point Sockets | | |
|------------------|-------------------------------|--|
| Metric Size | SAE Size | |
| (MM) | (Inches) | |
| 10 | 3/8 | |
| 11 | 7/16 | |
| 12 | 1/2 | |
| 13 | 9/16 | |
| 14 | 5/8 | |
| 15 | 11/16 | |
| 16 | 3/4 | |
| 17 | 13/16 | |
| 18 | 7/8 | |
| 19 | ¹⁵ / ₁₆ | |
| 21 | 1 | |
| 22 | 1 1/16 | |
| 24 | 1 1/8 | |
| 27 | 1 3/16 | |
| 30 | 1 1/4 | |
| 32 | | |





JHW50612B

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry













JHW50617B

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

61 PIECE 1/2" DRIVE SOCKET AND TOOL SET







12 Point Rugged-Case-System Tool Set, SAE and Metric

| Product Code | Description | |
|--------------|---|----|
| JHW50617B | 61 Piece Socket, Wrench, and Screwdriver Se | et |

1/2" Drive Contents Include:

| 1/2" Drive Tools | 1/2" Drive Shallow 12 Point Sockets | | 12 Point Combination Wrenches | |
|-------------------------|--|-------------------|----------------------------------|----------------------|
| Ratchet 3" Extension | Metric Size (MM) | SAE Size (Inches) | Metric Size (MM) | SAE Size (Inches) |
| 6" Extension | 10 | 3/8 | 6 | 1/4 |
| 10" Extension | 11 | 7/16 | 8 | 5/16 |
| 15- 1/2" Flex Handle | 12 | 1/2 | 10 | 3/8 |
| Universal Joint | 13 | 9/16 | 12 | 7/16 |
| Adaptor | 14 | 5/8 | 13 | 1/2 |
| Adaptor 1/2 F x 3/4 M | 15 | 11/16 | 14 | 9/16 |
| Adaptor 1/21 x 3/4 W | 16 | 3/4 | 15 | 5/8 |
| | 17 | 13/16 | 17 | 11/16 |
| | 18 | 7/8 | 19 | 3/4 |
| | 19 | 15/16 | | |
| | 21 | 1 | Comfo | rt Grip |
| | 22 | 1 1/16 | Screwo | lrivers |
| | 24 | 1 1/8 | 3/16" x 4 | " Slotted |
| | 27 | 1 3/16 | 1/4" x 4" | Slotted |
| | 30 | 1 1/4 | # 1 x 3" | Phillips |
| | 32 | | # 2 x 4" | |



23 PIECE 1/2" DRIVE **BASIC TOOL SET**





| Product Code | Description |
|-------------------|-------------------------------------|
| JHW50609 | 23 Piece Basic Tool Set, SAE |
| Contents Include: | |
| 1/2" Drive Tools | 1/2" Drive Shallow 12-Point Sockets |
| Description | Size (Inches) |

| Contents Include: | |
|-----------------------------|-------------------------------------|
| 1/2" Drive Tools | 1/2" Drive Shallow 12-Point Sockets |
| Description | Size (Inches) |
| 9 %" Quick-Release Ratchet | 3/8 |
| 3" Extension | 7/16 |
| 6" Extension | 1/2 |
| 10" Extension | 9/16 |
| 15" Flex Handle Breaker Bar | 5/8 |
| Universal Joint | 11/16 |
| 1/2" F X 3%" M Adapter | 3/4 |
| 1/2" F X 3/4" M Adapter | 13/16 |
| • | 7/8 |
| | 15/16 |
| | 1 |
| | 1 1/16 |
| | 1 1/8 |
| | 1 3/16 |
| | 1 1/4 |



25 PIECE 1/2" DRIVE **BASIC TOOL SET**





12 Point Rugged-Case-System

| 1001 Set, Wetric | |
|------------------|--------------------------------|
| Product Code | Description |
| JHW50619 | 25 Piece Basic Tool Set Metric |

Contonto Individo.

| 1/2" Drive Tools Description | 1/2" Drive Shallow 12-Point Sockets Size (MM) |
|------------------------------|--|
| 9 7/8" Quick-Release Ratchet | 10 |
| 3" Extension | 11 |
| 6" Extension | 12 |
| | ·= |
| 10" Extension | 13 |
| 15" Flex Handle Breaker Bar | 14 |
| Universal Joint | 15 |
| 1/2" F X 3/8" M Adapter | 16 |
| 1/2" F X 3/4" M Adapter | 17 |
| · | 18 |
| | 19 |
| | 20 |
| | 21 |
| | 22 |
| | 24 |
| | 27 |
| | 30 |
| | |
| | 32 |



- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- . Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry















| 12 | Point | Compact | Case Tool | Set. SAE |
|----|---------|---------|------------------|----------|
| 16 | r viiit | Oumbace | Oase IUUI | JCI. JAL |

Product Code

| JHW50668 | 23 Piece 1/2" Drive Socket and Drive Tool Set | | |
|------------------------------|--|---|--|
| Contents Include: | | | |
| 1/2" Drive Tools Description | 1/2" Drive Deep 12 Point Sockets Size (Inches) | 1/2" Drive Shallow 12 Point Sockets Size (Inches) | |
| 9 1/8" Pear Head Ratchet | 1/2 | 7/16 | |
| 15 1/2" Flex Handle | 9/16 | 1/2 | |
| 6" Extension | 5/8 | 9/16 | |
| | 11/16 | 5/8 | |
| | ³ / ₄ | 11/16 | |
| | 13/16 | 3/4 | |
| | 7/8 | 13/16 | |
| | | 7/8 | |
| | | 15/16 | |
| | | 1 | |
| | | 1 1/16 | |
| | | 1 1/8 | |
| | | 1 1/4 | |

Description

12 PIECE 1/2" DRIVE SOCKET AND DRIVE TOOL SET







| Product Code | Description | | |
|------------------------------|--|--|--|
| JHW50667 | 12 Piece 1/2" Drive Socket and Drive Tool Set | | |
| Contents Include: | | | |
| 1/2" Drive Tools Description | 1/2" Drive Shallow 12 Point Sockets Size (Inches) | | |
| 9 %" Pear Head Ratchet | 1/2 | | |
| 6" Extension | 9/16 | | |
| | 5/8 | | |
| | 11/16 | | |
| | 3/4 | | |
| | ¹³ / ₁₆ | | |
| | 7/8 | | |
| | ¹⁵ / ₁₆ | | |
| | 1 | | |
| | 1 1/8 | | |



JHW50667



JHW50669

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Packed in rugged compact high-density polyethylene (HDPE) cases that are strong and durable yet light in weight

12 PIECE 1/2" DRIVE SOCKET AND DRIVE TOOL SET





12 Point Compact Case Tool Set, MM

| Product Code | Description | |
|------------------------------|--|--|
| JHW50669 | 12 Piece 1/2" Drive Socket and Drive Tool Set | |
| Contents Include: | | |
| 1/2" Drive Tools Description | 1/2" Drive Shallow 12 Point Sockets Size (Inches) | |
| 9 % Pear Head Ratchet | 12 | |
| 6" Extension | 13 | |
| | 14 | |
| | 15 | |
| | 16 | |
| | 17 | |
| | 18 | |
| | 19 | |
| | 22 | |
| | 24 | |



1/2" DRIVE ENCLOSED HEAD RATCHETS

Williams® Sealed Narrow Head Design, **Chrome and Black Industrial Finish**

| Product Code | Description | (Inches) | Teeth |
|--------------|---|----------|-------|
| JHWS-52EHA | Chrome Finish Enclosed Head Ratchet | 10 1/4 | 36 |
| JHWS-52EHLA | Chrome Finish Enclosed Head Ratchet, Long | 15 | 36 |
| JHWSB-52EHLA | Black Industrial Finish Enclosed Head Ratchet, Long | 15 | 36 |
| JHWS-52EHFA | Chrome Finish Flex Head Ratchet | 14 1/4 | 36 |
| JHWSB-52EHA | Black Industrial Finish Enclosed Head Ratchet | 10 1/4 | 36 |
| JHWS-52EHRKA | Repair Kit "EHA" Model Enclosed Head Ratchets | | |

Fed. Spec: ANSI B107.10M

Features

- . Enclosed head is sealed to prevent dust, dirt, and liquids from entering head, preserving internal lubrication
- · Forged one-piece ratchet provide strength and safety for industrial applications
- . Smooth comfort-grip handle permits all-day use without gloves
- . 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- · Nickel/Chrome plating provides increase protection from rust and corrosion
- . Chrome finish models feature mirror-like exterior that can be easily cleaned after each use
- Single Pawl ratchet design
 - 1) Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load
 - 2) Does not require as many working parts, reducing possible breakage and parts
- · Easy access reverse lever allows user to change working direction quickly and easily with only one hand



1/2" DRIVE ROUND HEAD RATCHETS

Knurled Handle, Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|--|-----------------|-----------------|
| JHWS-52A | Chrome Finish Round Head Ratchet | 11 5/16 | 72 |
| JHWS-53A | Chrome Finish Round Head Ratchet, Long | 15 | 72 |
| JHWBS-52A | Black Industrial Finish Round Head Ratchet | 11 5/16 | 72 |
| JHWS-52ARK | Repair Kit | | |

Fed. Spec: ANSI B107.10M

Features

- . Double pawl design with 72 teeth action provides a 5° ratcheting angle
- Shift lever reverses action instantly
- Knurled handle provides a non-slip grip
- Chrome finish models provides increased protection from rust and corrosion



1/2" DRIVE ROUND HEAD LINEMAN'S RATCHET

Knurled Handle, Chrome Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|---------------------------|--|-----------------|-----------------|
| JHWS-52LAB JHWS-52LARK | Round Head Lineman's Ratchet Repair Kit | 11 5/16 | 72 |
| | | | |

Fed. Spec: ANSI B107.10M

- · Same features as other Williams' round head ratchets
- · Extra-large shift lever allows easy reversal even when wearing gloves























1/2" DRIVE NARROW HEAD CONSTRUCTION RATCHET

Knurled Handle, Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|-------------------------|----------------------------------|----------------------------------|-----------------|
| JHWBS-71CBA | Narrow Head Construction Ratchet | 15 ¹³ / ₁₆ | 36 |
| JHWBS-71ARKA | Repair Kit | | |
| Fed. Spec: ANSI B107.10 | M | | |

Features

- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- Extra-large shift lever reverses action instantly and easily, even when wearing gloves
- Tapered spud handle easily lines up bolt holes



1/2" DRIVE SCAFFOLDING RATCHET

| Product Code | Description | Product Code | Description |
|--------------------------|--|--------------|-------------|
| JHWBS-62 | Scaffolding Ratchet with out pry bar | JHWBS-63BTIP | Hammer Tip |
| BS-63A | Scaffolding Ratchet with reversed pry bar | JHWBS-63BBAR | Pry Bar |
| JHWBS-63B JHWBS-63BRK | Scaffolding Ratchet with pry bar Repair Kit | | |

Features

- 1/2" Drive with pinned 7/8" 6-point socket, 2-1/4" length
- 36 tooth gear with 10 degree of engagement allows engagement in tight working areas
- Bronze hammer head reduces rebound
- Pry bar handle provide alignment option
- Socket feature SUPERTORQUE™ lobular opening for greater turning power without deforming the fastener
- Easy access reversing lever allows user to change working direction quickly and easily with only one hand
- Tethering device attached to handle
- Repair kit includes ratchet repair kit and cover plate



1/2" DRIVE HANDLES

Knurled Handle, Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) |
|--------------|-------------------------------------|----------------------------------|
| JHWS-40AA | Chrome Flex Handle | 10 ¹³ / ₁₆ |
| JHWSB-40AA | Black Industrial Finish Flex Handle | 10 ¹³ / ₁₆ |
| JHWS-41AA | Chrome Flex Handle | 15 ½ |
| JHWBS-41AA | Black Industrial Finish Flex Handle | 15 ½ |
| JHWS-20A | Sliding T-Handle | 12 |
| JHWS-10A | Speeder Handle | 13 ⁵ % |
| JHWS-15A | Speeder Handle | 18 1/16 |
| JHWS-41RK | Flex Handle Repair Kit | |

Fed. Spec: ANSI B107.10M

- Chrome plating provides increased protection from rust and corrosion
- Drive handles provide extra leverage with greater strength than ratchets
- Speeder handle is ideal for fast turn down of fasteners





1/2" DRIVE EXTENSIONS AND ACCESSORIES

High-Polished Chrome Finish

| Product Code | Description | Length (Inches) |
|--------------|----------------------|--|
| JHWS-102P | Extension | 2 |
| JHWS-110P | Extension | 5 |
| JHWS-115P | Extension | 10 |
| JHWS-121P | Extension | 20 |
| JHWS-140A | Universal Joint | 2 ¹¹ / ₁₆ |
| JHWS-70 | Ratchet Spinner Disk | 1 %6 |

Fed. Spec: ANSI B107.10M

JHWWSS-3XT 3 Piece Extension Set in Pouch

Contents Include:

| Product Code | Size (Inches) | |
|--------------|---------------|--|
| JHWS-102P | 2 | |
| JHWS-110P | 5 | |
| JHWS-115P | 10 | |

Features

- . Chrome plating provides increased protection from rust and corrosion
- · Ball and spring socket retention
- . Spinner disk is ideal for fast turn down of fasteners



1/2" DRIVE ADAPTORS AND EXTENSION ADAPTERS

High-Polished Chrome and Black Oxide Finish

| Product Code | Length (Inches) | Male End (Inches) | Female End (Inches) |
|-------------------------|--|-------------------|---------------------|
| Chrome Finish A | dapter | | |
| JHWSH-130 | 1 ¹⁵ / ₁₆ | 3/4 | 1/2 |
| Black Industrial | Finish Adapters | | |
| JHWSH-130B | 1 ¹⁵ / ₁₆ | 3/4 | 1/2 |
| JHWSH-131BF | 2 ½16 | 1/2 | 3/4 |
| Black Industrial | Finish Extension Ad | lapters | |
| JHWBS-05B | 5 | 3/8 | 1/2 |
| JHWBS-12B | 12 | 3/8 | 1/2 |

Fed. Spec: ANSI B107.10M

Features

- · Ball and spring socket retention
- Extension adapters offer convenience of extension and adapter in one tool



1/2" DRIVE STUD REMOVER

Satin Chrome Finish

| Sauli Cilionie i i | 111511 | | |
|--------------------------|--------------|-----------------|-------------------|
| Product Code | Description | Length (Inches) | Capacity (Inches) |
| S-60E | Stud Remover | 2 7/16 | ½ to ¾ |
| Fed. Spec: ANSI B107.10M | | | |

- · Knurled wheel grips studs during removal
- . Drive shank extends through both sides of housing for even bearing surface
- Capacity is 1/2" to 3/4" stud diameter













JHWSH-130

JHWSH-131BF



S-60E











1/2" DRIVE LOCKING EXTENSIONS

High-Polished Chrome Finish

| Product Code | Description | Length (Inches) |
|--------------|-------------------|-----------------|
| JHW32023 | Locking Extension | 3 |
| JHW32024 | Locking Extension | 6 |
| JHW32025 | Locking Extension | 10 |
| JHW32026 | Locking Extension | 12 |
| JHW32027 | Locking Extension | 18 |
| JHW32028 | Locking Extension | 24 |

Fed. Spec: ANSI B107.10M

Features

• Chrome plating provides increased protection from rust and corrosion

1/2" WOBBLE EXTENSIONS

High-Polished Chrome Finish

| Product Code | Length (Inches) |
|--------------|-----------------|
| JHWS-202P | 2 |
| JHWS-205P | 5 |
| JHWS-211P | 11 |
| JHWS-220P | 20 |

Features

- Chrome plating provides increased protection from rust and corrosion
- Provides 16 degrees of additional accessibility

6 PIECE 1/2" DRIVE RATCHET AND DRIVE TOOL SET

Furnished in a Pouch

| Product Code | Description |
|--------------|--|
| JHWDTS-6 | 6 Piece 1/2" Drive Ratchet and Accessory Set |
| | |

Contents Include:

| Product Code | Description |
|--------------|---------------------------------------|
| JHWS-52EHA | Chrome Finished Enclosed Head Ratchet |
| JHWS-102P | 2" Extension |
| JHWS-115P | 10" Extension |
| JHWS-41AA | Chrome Flex Handle |
| JHWS-140A | Universal Joint |
| JHWS-20A | Sliding T-Handle |
| | |

Features

All tools are professional quality, made of high-grade chrome vanadium steel





1/2" DRIVE SHALLOW 12 POINT SOCKETS, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|-------------------------------|---------------------------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWST-1212 | 3/8 | 1 1/2 | ²⁹ / ₃₂ | 19/32 | 5/16 | 7/8 | 11/32 | 23/32 |
| JHWST-1214 | 7/16 | 1 1/2 | 29/32 | 21/32 | 3/8 | 7/8 | 13/32 | 23/32 |
| JHWST-1216 | 1/2 | 1 1/2 | 29/32 | 3/4 | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWST-1218 | 9/16 | 1 1/2 | ²⁹ / ₃₂ | ¹³ / ₁₆ | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWST-1219 | 19/32 | 1 1/2 | ²⁹ / ₃₂ | 7/8 | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWST-1220 | 5/8 | 1 1/2 | ²⁹ / ₃₂ | ²⁹ / ₃₂ | 9/16 | 7/8 | 15/32 | |
| JHWST-1221 | 21/32 | 1 1/2 | 31/32 | 31/32 | 19/32 | 7/8 | 15/32 | |
| JHWST-1222 | 11/16 | 1 1/2 | 31/32 | 31/32 | 13/16 | 27/32 | 5/8 | - |
| JHWST-1224 | 3/4 | 1 1/2 | 1 1/32 | 1 1/32 | 13/16 | 27/32 | 23/32 | - |
| JHWST-1225 | ²⁵ / ₃₂ | 1 1/2 | 1 1/16 | 1 1/16 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 3/4 | - |
| JHWST-1226 | 13/16 | 1 1/2 | 1 1/8 | 1 1/8 | ¹³ / ₁₆ | 27/32 | 25/32 | |
| JHWST-1228 | 7/8 | 1 1/2 | 1 ³ /16 | 1 ³ / ₁₆ | ¹³ / ₁₆ | ¹³ / ₁₆ | 7/8 | |
| JHWST-1230 | ¹⁵ /16 | 1 ¹⁷ / ₃₂ | 1 %2 | 1 %2 | ¹³ / ₁₆ | ²⁷ / ₃₂ | ²⁹ / ₃₂ | - |
| JHWST-1231 | 31/32 | 1 %16 | 1 5/16 | 1 5/16 | ²⁷ / ₃₂ | 7/8 | ¹⁵ / ₁₆ | - |
| JHWST-1232 | 1 | 1 %16 | 1 11/32 | 1 11/32 | 27/32 | 7/8 | 31/32 | - |
| JHWST-1234 | 1 1/16 | 1 11/16 | 1 7/16 | 1 7/16 | 31/32 | 1 | 1 1/16 | - |
| JHWST-1236 | 1 1/8 | 1 3/4 | 1 ½ | 1 ½ | 1 1/32 | 1 1/16 | 1 1/8 | |
| JHWST-1238 | 1 ³ /16 | 1 3/4 | 1 % | 1 % | 1 | 1 1/32 | 1 5/32 | - |
| JHWST-1240 | 1 1/4 | 1 1/8 | 1 11/16 | 1 ¹¹ / ₁₆ | 1 1/8 | 1 5/32 | 1 1/4 | - |
| JHWST-1242 | 1 5/16 | 1 1/8 | 1 3/4 | 1 3/4 | 1 1/32 | 1 5/32 | 1 %2 | - |
| JHWST-1244 | 1 % | 2 1/16 | 1 13/16 | 1 ¹³ / ₁₆ | 1 | 1 5/16 | 1 11/32 | - |
| JHWST-1246 | 1 7/16 | 2 1/4 | 1 15/16 | 1 ¹⁵ / ₁₆ | 1 1/32 | 1 1/2 | 1 1/8 | - |
| JHWST-1248 | 1 1/2 | 2 1/4 | 2 | 2 | 1 1/16 | 1 ½ | 1 1/8 | - |







Fed. Spec: ANSI B107.110

JHWWSS-15RC

15 Piece 1/2" Drive Shallow 12-Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHWST-1212 | 3/8 | JHWST-1222 | 11/16 | JHWST-1232 | 1 |
| JHWST-1214 | 7/16 | JHWST-1224 | 3/4 | JHWST-1234 | 1 1/16 |
| JHWST-1216 | 1/2 | JHWST-1226 | ¹³ / ₁₆ | JHWST-1236 | 1 ½ |
| JHWST-1218 | 9/16 | JHWST-1228 | 7/8 | JHWST-1238 | 1 3/16 |
| JHWST-1220 | 5/8 | JHWST-1230 | 15/16 | JHWST-1240 | 1 1/4 |

JHWWSS-23RC

23 Piece 1/2" Drive Shallow 12-Point Socket Set on Clip Rail

Contents Include:

| Product | Size | Product | Size | Product | Size | Product | Size |
|------------|------------------------------|------------|----------|------------|-------------------------------|------------|--------------------|
| Code | (Inches) | Code | (Inches) | Code | (Inches) | Code | (Inches) |
| JHWST-1212 | 3/8 | JHWST-1221 | 21/32 | JHWST-1230 | ¹⁵ / ₁₆ | JHWST-1240 | 1 1/4 |
| JHWST-1214 | ⁷ / ₁₆ | JHWST-1222 | 11/16 | JHWST-1231 | 31/32 | JHWST-1242 | 1 ⁵ ⁄16 |
| JHWST-1216 | 1/2 | JHWST-1224 | 3/4 | JHWST-1232 | 1 | JHWST-1244 | 1 ¾ |
| JHWST-1218 | 9/16 | JHWST-1225 | 25/32 | JHWST-1234 | 1 1/16 | JHWST-1246 | 1 7/16 |
| JHWST-1219 | 19/32 | JHWST-1226 | 13/16 | JHWST-1236 | 1 1/8 | JHWST-1248 | 1 1/2 |
| JHWST-1220 | 5/8 | JHWST-1228 | 7/8 | JHWST-1238 | 1 3/16 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners



















1/2" DRIVE SHALLOW SOCKETS, 6 POINT, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWST-612 | 3/8 | 1 1/2 | 29/32 | 19/32 | 5/16 | 7/8 | 11/32 | 23/32 |
| JHWST-614 | 7/16 | 1 1/2 | 29/32 | 21/32 | 3/8 | 7/8 | 13/32 | 23/32 |
| JHWST-616 | 1/2 | 1 1/2 | 29/32 | 3/4 | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWST-618 | 9/16 | 1 1/2 | 29/32 | ¹³ / ₁₆ | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWST-619 | 19/32 | 1 1/2 | 29/32 | 7/8 | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWST-620 | 5/8 | 1 1/2 | 29/32 | 29/32 | 9/16 | 7/8 | 15/32 | - |
| JHWST-622 | 11/16 | 1 1/2 | 31/32 | 31/32 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 5/8 | - |
| JHWST-624 | 3/4 | 1 1/2 | 1 1/32 | 1 1/32 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 23/32 | - |
| JHWST-625 | ²⁵ / ₃₂ | 1 1/2 | 1 1/16 | 1 1/16 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 3/4 | - |
| JHWST-626 | 13/16 | 1 1/2 | 1 1/8 | 1 1/8 | ¹³ / ₁₆ | 27/32 | 25/32 | - |
| JHWST-628 | 7/8 | 1 1/2 | 1 3/16 | 1 3/16 | 13/16 | 13/16 | 7/8 | - |
| JHWST-630 | ¹⁵ / ₁₆ | 1 17/32 | 1 %2 | 1 %2 | 13/16 | 27/32 | 29/32 | - |
| JHWST-632 | 1 | 1 %16 | 1 11/32 | 1 11/32 | ²⁷ / ₃₂ | 7/8 | 31/32 | - |
| JHWST-634 | 1 1/16 | 1 11/16 | 1 1/16 | 1 7/16 | 31/32 | 1 | 1 1/16 | - |
| JHWST636 | 1 1/8 | 1 3/4 | 1 1/2 | 1 1/2 | 1 1/32 | 1 1/16 | 1 1/8 | - |
| JHWST-640 | 1 1/4 | 1 1/8 | 1 11/16 | 1 11/16 | 1 1/8 | 1 5/32 | 1 1/4 | - |

Fed. Spec: ANSI B107.1

JHWWSS-14HRC

14 Piece 1/2" Drive Shallow 6 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHWST-612 | 3/8 | JHWST-622 | 11/16 | JHWST-632 | 1 |
| JHWST-614 | 7/16 | JHWST-624 | 3/4 | JHWST-634 | 1 1/16 |
| JHWST-616 | 1/2 | JHWST-626 | ¹³ / ₁₆ | JHWST636 | 1 1/8 |
| JHWST-618 | 9/16 | JHWST-628 | 7/8 | JHWST-640 | 1 1/4 |
| JHWST-620 | 5/8 | JHWST-630 | ¹⁵ / ₁₆ | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners







1/2" DRIVE CROWFOOT WRENCH, **OPEN END SAE**



Satin Chrome Finish, SAE

| | | Α | С | E | F |
|--------------|----------------------|--|--|------------|-------------|
| Product Code | Size | Outside Diameter | | Head Depth | Total Depth |
| | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWSCOE30 | 15/16" | 1 ²⁷ / ₃₂ | 1 15/32 | 11/32 | 5/8 |
| JHWSCOE32 | 1" | 1 ³¹ / ₃₂ | 1 11/16 | 23/64 | 5/8 |
| JHWSCOE34 | 1 ½16" | 2 ³ / ₃₂ | 1 3/4 | 3/8 | 5/8 |
| JHWSCOE36 | 1 1/8" | 2 7/32 | 1 3/4 | 3/8 | 5/8 |
| JHWSCOE38 | 1 3/16" | 2 11/32 | 1 3/4 | 13/32 | 5/8 |
| JHWSCOE40 | 1 1/4" | 2 ¹⁵ / ₃₂ | 2 | 13/32 | 5/8 |
| JHWSCOE42 | 1 5/16" | 2 ¹⁹ / ₃₂ | 2 | 7/16 | 5/8 |
| JHWSCOE44 | 1 ¾" | 2 ²³ / ₃₂ | 2 | 7/16 | 5/8 |
| JHWSCOE46 | 1 ½16" | 2 ²⁷ / ₃₂ | 2 | 7/16 | 5/8 |
| JHWSCOE48 | 1 1/2" | 2 ³¹ / ₃₂ | 2 | 15/32 | 5/8 |
| JHWSCOE50 | 1 %16" | 2 31/32 | 1 31/32 | 15/32 | 5/8 |
| JHWSCOE52 | 1 5/8" | 3 7/32 | 1 31/32 | 1/2 | 5/8 |
| JHWSCOE54 | 1 ¹¹ /16" | 3 1/⁄3 | 2 ³ / ₁₆ | 1/2 | 5/8 |
| JHWSCOE56 | 1 3/4" | 3 ¹⁵ / ₃₂ | 2 ³ / ₁₆ | 17/32 | 5/8 |
| JHWSCOE58 | 1 ¹³ /16" | 3 19/32 | 2 3/16 | 17/32 | 5/8 |
| JHWSCOE60 | 1 1/8" | 3 23/32 | 2 3/16 | 9/16 | 5/8 |
| JHWSCOE64 | 2" | 3 ³¹ / ₃₂ | 2 ⁷ / ₃₂ | 9/16 | 5/8 |
| JHWSCOE68 | 2 1/8" | 3 ³¹ / ₃₂ | 2 ⁷ / ₃₂ | 37/64 | 5/8 |
| JHWSCOE72 | 2 1/4" | 3 ³¹ / ₃₂ | 2 ¹³ / ₃₂ | 37/64 | 5/8 |
| JHWSCOE76 | 2 3/8" | 4 3/8 | 2 31/64 | 19/32 | 5/8 |
| JHWSCOE78 | 2 7/16" | 4 3/8 | 2 7/16 | 19/32 | 5/8 |
| JHWSCOE80 | 2 1/2" | 4 3/8 | 2 13/32 | 19/32 | 5/8 |



JHWSCOE48



JHWWSSCOE-7 7 Piece 1/2" Drive Crowfoot Wrenches on Clip Rails, SAE

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWSCOE30 | 15/16" | JHWSCOE36 | 1 1/8" | JHWSCOE48 | 1 1/2" |
| JHWSCOE32 | 1" | JHWSCOE40 | 1 1/4" | | |
| JHWSCOE34 | 1 1/16" | JHWSCOE46 | 1 7/16" | | |

- Crowfoot wrenches are professional quality, made of high grade steel
- Featuring an open end with a continuous arc for constant contact with the fastener for greater turning power without deforming the fastener





JHWWSSCOE-7

















1/2" DRIVE CROWFOOT WRENCH, FLARE NUT, 12 POINT Satin Chrome Finish, SAF





| | rome Finish | Α | В | С | D |
|-----------------|---------------|------------------|-------------------------------|-------------------------------|---------------------------------|
| Product Code | Size (Inches) | Diameter of Head | Thickness of Head | Width of Slot | Length of Centers |
| JHWSCF38 | 1 3/16 | 1 11/16 | 7/8 | ²⁷ / ₃₂ | 1 3/16 |
| | | | | 31/32 | 1 17/64 |
| JHWSCF46 | 1 7/16 | 2 | 15/16 | 1 1/16 | 1 11/32 |
| JHWSCF50 | 1 %16 | 2 5/32 | ¹⁵ / ₁₆ | 1 5/32 | 1 ²⁷ / ₆₄ |
| JHWSCF52 | 1 5/8 | 2 7/32 | 15/16 | 1 7/32 | 1 29/64 |
| JHWSCF54 | 1 11/16 | 2 5/16 | 1 | 1 5/16 | 1 33/64 |
| JHWSCF56 | 1 3/4 | 2 % | 1 | 1 5/16 | 1 35/64 |
| JHWSCF58 | 1 13/16 | 2 15/32 | 1 | 1 11/32 | 1 19/32 |
| JHWSCF60 | 1 1/8 | 2 1/16 | 1 1/16 | 1 3/8 | 1 ⁴¹ / ₆₄ |





1/2" DRIVE SHALLOW SOCKETS, **8 POINT, SAE**





| High-P | olished | Chrome | Finish |
|--------|---------|--------|---------------|
| | | | |

| | | Α | В | С | D | E | | F |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWST-812 | 3/8 | 1 1/2 | 7/8 | 23/32 | 5/16 | 27/32 | 5/16 | 7/8 |
| JHWST-814 | 7/16 | 1 1/2 | 7/8 | ¹³ / ₁₆ | 3/8 | ²⁷ / ₃₂ | 5/16 | 7/8 |
| JHWST-816 | 1/2 | 1 1/2 | ²⁹ / ₃₂ | ²⁹ / ₃₂ | 13/32 | ²⁷ / ₃₂ | 11/32 | |
| JHWST-818 | 9/16 | 1 ½ | 31/32 | 31/32 | 7/16 | ²⁷ / ₃₂ | 7/16 | |
| JHWST-820 | 5/8 | 1 ½ | 1 1/16 | 1 1/16 | 1/2 | 27/32 | 7/16 | |
| JHWST-822 | 11/16 | 1 1/2 | 1 3/16 | 1 3/16 | 1/2 | 27/32 | 17/32 | - |
| JHWST-824 | 3/4 | 1 1/2 | 1 %32 | 1 %2 | 9/16 | 13/16 | ²³ / ₃₂ | - |
| JHWST-826 | 13/16 | 1 1/8 | 1 1/16 | 17/16 | 9/16 | 31/32 | ²⁷ / ₃₂ | - |
| JHWST-828 | 7∕8 | 1 3/4 | 1 1/2 | 1 1/2 | 5/8 | 1 1/16 | ¹⁵ / ₁₆ | |
| JHWST-830 | ¹⁵ / ₁₆ | 1 13/16 | 1 1/8 | 1 1/8 | 11/16 | 1 1/8 | 1 1/32 | |
| JHWST-832 | 1 | 1 15/16 | 1 11/16 | 1 11/16 | 11/16 | 1 1/4 | 1 1/32 | - |
| JHWST-834 | 1 1/16 | 1 15/16 | 1 3/4 | 1 3/4 | 23/32 | 1 1/8 | ¹³ / ₁₆ | - |
| JHWST-836 | 1 1/8 | 2 | 1 13/16 | 1 13/16 | 3/4 | 1 3/16 | ¹³ / ₁₆ | - |
| JHWST-840 | 1 1/4 | 2 | 2 | 2 | ²⁵ / ₃₂ | 1 3/16 | 1 | - |

Fed. Spec: ANSI B107.110

JHWWSS-810RC 10 Piece 1/2" Drive Shallow 8 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHWST-812 | 3/8 | JHWST-820 | 5/8 | JHWST-826 | 13/16 |
| JHWST-814 | 7/16 | JHWST-822 | 11/16 | JHWST-828 | 7/8 |
| JHWST-816 | 1/2 | JHWST-824 | 3/4 | JHWST-830 | 15/16 |
| JHWST-818 | 9/16 | | , , | | |

JHWWSS-814RC 14 Piece 8 Point Socket Set on Clip Rail Contents Include:

| Product | | Product | | Product | | Product | |
|-----------|---------------|-----------|---------------|-----------|---------------|-----------|---------------|
| Code | Size (Inches) | Code | Size (Inches) | Code | Size (Inches) | Code | Size (Inches) |
| JHWST-812 | 3/8 | JHWST-820 | 5/8 | JHWST-828 | 7/8 | JHWST-834 | 1 1/16 |
| JHWST-814 | 7/16 | JHWST-822 | 11/16 | JHWST-830 | 15/16 | JHWST-836 | 1 1/8 |
| JHWST-816 | 1/2 | JHWST-824 | 3/4 | JHWST-832 | 1 | JHWST-840 | 1 1/4 |
| JHWST-818 | 9/16 | JHWST-826 | 13/16 | | | | |







1/2" DRIVE DEEP SOCKETS, 12 POINT, SAE



| | | Α | В | С | D | E | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWSD-1216 | 1/2 | 3 1/4 | 29/32 | 3/4 | 13/32 | 2 19/32 | 15/32 | 2 15/32 |
| JHWSD-1218 | 9/16 | 3 1/4 | 29/32 | 13/16 | 7/16 | 2 19/32 | 15/32 | 2 15/32 |
| JHWSD-1220 | 5/8 | 3 1/4 | 29/32 | ²⁹ / ₃₂ | 15/32 | 2 7/16 | 19/32 | |
| JHWSD-1222 | 11/16 | 3 1/4 | 31/32 | 31/32 | 17/32 | 2 11/32 | 21/32 | |
| JHWSD-1224 | 3/4 | 3 1/4 | 1 1/16 | 1 1/16 | 19/32 | 2 5/16 | 23/32 | |
| JHWSD-1225 | 25/32 | 3 1/4 | 1 1/16 | 1 1/16 | 21/32 | 2 1/32 | ²⁵ / ₃₂ | |
| JHWSD-1226 | 13/16 | 3 1/4 | 1 1/8 | 1 1/8 | 21/32 | 2 1/32 | 25/32 | |
| JHWSD-1228 | 7/8 | 3 1/4 | 1 3/16 | 1 3/16 | 23/32 | 2 1/32 | 27/32 | |
| JHWSD-1230 | 15/16 | 3 1/4 | 1 %32 | 1 1/32 | 3/4 | 2 %32 | ²⁹ / ₃₂ | |
| JHWSD-1232 | 1 | 3 1/4 | 1 11/32 | 111/32 | 3/4 | 2 1/4 | 1 | |
| JHWSD-1234 | 1 1/16 | 3 1/4 | 1 7/16 | 1 1/16 | 3/4 | 2 1/4 | 1 1/16 | |
| JHWSD-1236 | 1 1/8 | 3 1/4 | 1 1/2 | 1 1/2 | 25/32 | 2 1/4 | 1 3/32 | |

Fed. Spec: ANSI B107.110

JHWWSSD-11RC 11 Piece 1/2" Drive Deep 12 Point Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHWSD-1216 | 1/2 | JHWSD-1224 | 3/4 | JHWSD-1232 | 1 |
| JHWSD-1218 | 9/16 | JHWSD-1226 | ¹³ / ₁₆ | JHWSD-1234 | 1 1/16 |
| JHWSD-1220 | 5/8 | JHWSD-1228 | 7/8 | JHWSD-1236 | 1 1/8 |
| JHWSD-1222 | 11/16 | JHWSD-1230 | 15/16 | | |













JHWST-824



JHWWSS-810RC



JHWWSS-814RC

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · 8 point sockets are designed for quick engagement on 4 point fasteners



JHWSD-1224 JHWSD-1216



JHWWSSD-11RC

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Designed for quick engagement on both 6 and 12 point fasteners







JHWSD-624 JHWSD-616

1/2" DRIVE DEEP SOCKETS, 6 POINT, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|--|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWSD-616 | 1/2 | 3 1/4 | 29/32 | 3/4 | 13/32 | 2 19/32 | 15/32 | 2 15/32 |
| JHWSD-618 | 9/16 | 3 1/4 | 29/32 | ¹³ / ₁₆ | 7/16 | 2 19/32 | 15/32 | 2 15/32 |
| JHWSD-620 | 5/8 | 3 1/4 | 29/32 | ²⁹ / ₃₂ | 15/32 | 2 1/16 | 19/32 | - |
| JHWSD-622 | 11/16 | 3 1/4 | 31/32 | 31/32 | 17/32 | 2 ¹¹ / ₃₂ | 21/32 | - |
| JHWSD-624 | 3/4 | 3 1/4 | 1 1/16 | 1 1/16 | 19/32 | 2 5/16 | 23/32 | - |
| JHWSD-626 | 13/16 | 3 1/4 | 1 1/8 | 1 1/8 | 21/32 | 2 1/32 | 25/32 | |
| JHWSD-628 | 7/8 | 3 1/4 | 1 3/16 | 1 3/16 | 23/32 | 2 1/32 | ²⁷ / ₃₂ | - |
| JHWSD-630 | ¹⁵ / ₁₆ | 3 1/4 | 1 %2 | 1 %2 | 3/4 | 2 1/32 | ²⁹ / ₃₂ | - |
| JHWSD-632 | 1 | 3 1/4 | 1 11/32 | 1 ¹¹ / ₃₂ | 3/4 | 2 ½ | 1 | - |
| JHWSD-634 | 1 1/16 | 3 1/4 | 1 7/16 | 1 7/16 | 25/32 | 2 ¹ / ₄ | 1 1/32 | - |
| JHWSD-636 | 1 1/8 | 3 1/4 | 1 1/2 | 1 ½ | 25/32 | 2 1/4 | 1 3/32 | - |

Fed. Spec: ANSI B107.110

JHWWSSD11HRC 11 Piece 1/2" Drive Deep 6 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------|--------------|---------------|
| JHWSD-616 | 1/2 | JHWSD-624 | 3/4 | JHWSD-632 | 1 |
| JHWSD-618 | 9/16 | JHWSD-626 | 13/16 | JHWSD-634 | 1 1/16 |
| JHWSD-620 | 5/8 | JHWSD-628 | 7/8 | JHWSD-636 | 1 ½ |
| JHWSD-622 | 11/16 | JHWSD-630 | ¹⁵ /16 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners





JHWWSSD11HRC



1/2" DRIVE SHALLOW SOCKETS, 12 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|----------------|--------|--------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|---------------------------------|----------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWSTM-1210 | 10 | 1 1/2 | 29/32 | 19/32 | 5/16 | 7/8 | 11/32 | 23/32 |
| JHWSTM-1211 | 11 | 1 1/2 | ²⁹ / ₃₂ | ¹¹ / ₁₆ | 5/16 | 7/8 | 13/32 | 23/32 |
| JHWSTM-1212 | 12 | 1 1/2 | ²⁹ / ₃₂ | 23/32 | 13/32 | 7/8 | ⁷ / ₁₆ | 23/32 |
| JHWSTM-1213 | 13 | 1 1/2 | ²⁹ / ₃₂ | ²⁵ / ₃₂ | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWSTM-1214 | 14 | 1 ½ | ²⁹ / ₃₂ | ²⁷ / ₃₂ | 3/8 | 7/8 | 15/32 | 23/32 |
| JHWSTM-1215 | 15 | 11/2 | 29/32 | 7/8 | 3/8 | 7/8 | 15/32 | - |
| JHWSTM-1216 | 16 | 1 1/2 | 29/32 | 29/32 | 9/16 | 7/8 | 15/32 | - |
| JHWSTM-1217 | 17 | 1 1/2 | 31/32 | 31/32 | 9/16 | 7/8 | 15/32 | - |
| JHWSTM-1218 | 18 | 1 1/2 | 1 | 1 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 15/32 | - |
| JHWSTM-1219 | 19 | 1 1/2 | 1 1/32 | 1 1/32 | 13/16 | 27/32 | 23/32 | |
| JHWSTM-1220 | 20 | 1 1/2 | 1 1/16 | 1 1/16 | ¹³ / ₁₆ | ²⁷ / ₃₂ | ²³ / ₃₂ | - |
| JHWSTM-1221 | 21 | 1 1/2 | 1 1/8 | 1 1/8 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 3/4 | - |
| JHWSTM-1222 | 22 | 1 1/2 | 1 3/16 | 1 3/16 | 13/16 | 27/32 | 25/32 | |
| JHWSTM-1223 | 23 | 1 1/2 | 1 1/4 | 1 1/4 | 25/32 | ¹³ / ₁₆ | 27/32 | - |
| JHWSTM-1224 | 24 | 1 17/32 | 1 %2 | 1 1/32 | 13/16 | 27/32 | 7/8 | |
| JHWSTM-1225 | 25 | 1 %16 | 1 5/16 | 1 5/16 | ¹³ / ₁₆ | 7/8 | ¹⁵ / ₁₆ | - |
| JHWSTM-1226 | 26 | 1 % | 1 ¾ | 1 3/8 | 29/32 | ¹⁵ /16 | 31/32 | - |
| JHWSTM-1227 | 27 | 1 23/32 | 1 7/16 | 1 7/16 | 31/32 | 1 | 1 | |
| JHWSTM-1228 | 28 | 1 3/4 | 1 1/2 | 1 1/2 | 1 | 1 1/16 | 1 1/32 | |
| JHWSTM-1229 | 29 | 1 3/4 | 1 %16 | 1 %16 | 1 1/32 | 1 1/16 | 1 1/16 | |
| JHWSTM-1230 | 30 | 1 3/4 | 1 % | 1 % | 1 1/32 | 1 1/32 | 1 3/32 | - |
| JHWSTM-1232 | 32 | 1 1/8 | 1 11/16 | 1 11/16 | 1 1/8 | 1 5/32 | 1 3/16 | - |
| JHWSTM-1234 | 34 | 2 ½16 | 1 3/4 | 1 ¾ | 7/8 | 1 7/16 | 1 | - |
| JHWSTM-1236 | 36 | 2 1/16 | 1 ¹⁵ /16 | 1 15/16 | 7/8 | 1 7/16 | 1 ¹³ / ₃₂ | - |
| E I O ANIOL DA | 07 440 | | | | | | | |



JHWMSS-15RC 15 Piece 1/2" Drive Shallow 12 Point Socket Set on Clip Rail

Contents Include:

| Outtonts in | CIUUCI | | | | | | |
|-------------|--------|-------------|------|-------------|------|-------------|------|
| Product | Size | Product | Size | Product | Size | Product | Size |
| Code | (MM) | Code | (MM) | Code | (MM) | Code | (MM) |
| JHWSTM-1210 | 10 | JHWSTM-1214 | 14 | JHWSTM-1218 | 18 | JHWSTM-1222 | 22 |
| JHWSTM-1211 | 11 | JHWSTM-1215 | 15 | JHWSTM-1219 | 19 | JHWSTM-1223 | 23 |
| JHWSTM-1212 | 12 | JHWSTM-1216 | 16 | JHWSTM-1220 | 20 | JHWSTM-1224 | 24 |
| JHWSTM-1213 | 13 | JHWSTM-1217 | 17 | JHWSTM-1221 | 21 | | |



15 Piece 1/2" Drive Shallow 12 Point Socket Set on Clip Rail

Contents Include:

| Product | Size | Product | Size | Product | Size | Product | Size |
|-------------|------|-------------|------|-------------|------|-------------|------|
| Code | (MM) | Code | (MM) | Code | (MM) | Code | (MM) |
| JHWSTM-1210 | 10 | JHWSTM-1217 | 17 | JHWSTM-1222 | 22 | JHWSTM-1227 | 27 |
| JHWSTM-1213 | 13 | JHWSTM-1218 | 18 | JHWSTM-1223 | 23 | JHWSTM-1230 | 30 |
| JHWSTM-1214 | 14 | JHWSTM-1219 | 19 | JHWSTM-1224 | 24 | JHWSTM-1232 | 32 |
| JHWSTM-1215 | 15 | JHWSTM-1220 | 20 | JHWSTM-1226 | 26 | | |

JHWMSS-24RC

24 Piece 1/2" Drive Shallow 12 Point Socket Seton Clip Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|
| JHWSTM-1210 | 10 | JHWSTM-1216 | 16 | JHWSTM-1222 | 22 | JHWSTM-1228 | 28 |
| JHWSTM-1211 | 11 | JHWSTM-1217 | 17 | JHWSTM-1223 | 23 | JHWSTM-1229 | 29 |
| JHWSTM-1212 | 12 | JHWSTM-1218 | 18 | JHWSTM-1224 | 24 | JHWSTM-1230 | 30 |
| JHWSTM-1213 | 13 | JHWSTM-1219 | 19 | JHWSTM-1225 | 25 | JHWSTM-1232 | 32 |
| JHWSTM-1214 | 14 | JHWSTM-1220 | 20 | JHWSTM-1226 | 26 | JHWSTM-1234 | 34 |
| JHWSTM-1215 | 15 | JHWSTM-1221 | 21 | JHWSTM-1227 | 27 | JHWSTM-1236 | 36 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners







JHWSTM-1229

JHWSTM-1212





JHWMSS-15RC



JHWMSS-15SRC















JHW32515

JHW32509



1/2" DRIVE SHALLOW SOCKETS, 6 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | Ε | | F |
|-----------------|--------------|---------------------------------|-----------------------------------|--|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW32509 | 9 | 1 1/2 | 7/8 | 9/16 | 9/16 | 11/16 | 5/16 | 23/32 |
| JHW32510 | 10 | 1 1/2 | 7/8 | 5/8 | 1/2 | 27/32 | 3/8 | 23/32 |
| JHW32511 | 11 | 1 1/2 | 7/8 | 21/32 | 1/2 | 7/8 | 13/32 | 23/32 |
| JHW32512 | 12 | 1 1/2 | 7/8 | 23/32 | 1/2 | 7/8 | 7/16 | 23/32 |
| JHW32513 | 13 | 1 1/2 | 7/8 | 3/4 | 9/16 | 27/32 | 15/32 | 23/32 |
| JHW32514 | 14 | 1 ½ | 7/8 | 13/16 | 9/16 | 13/16 | 17/32 | 23/32 |
| JHW32515 | 15 | 1 1/2 | 7/8 | 7/8 | 17/32 | 13/16 | 9/16 | |
| JHW32516 | 16 | 1 1/2 | 29/32 | ²⁹ / ₃₂ | 17/32 | ²⁷ / ₃₂ | 19/32 | - |
| JHW32517 | 17 | 1 1/2 | ¹⁵ / ₁₆ | ¹⁵ /16 | 17/32 | ²⁷ / ₃₂ | 21/32 | - |
| JHW32518 | 18 | 1 1/2 | 1 | 1 | 3/4 | 13/16 | 11/16 | - |
| JHW32519 | 19 | 1 1/2 | 1 1/16 | 1 1/16 | 3/4 | 7/8 | ⁴⁵ / ₆₄ | - |
| JHW32520 | 20 | 1 1/2 | 1 3/32 | 1 3/32 | 25/32 | ¹⁵ / ₁₆ | ⁴⁷ / ₆₄ | - |
| JHW32521 | 21 | 1 1/2 | 1 1/8 | 1 1/8 | 25/32 | ¹⁵ / ₁₆ | 49/64 | - |
| JHW32522 | 22 | 1 % | 1 3/16 | 1 3/16 | 7/8 | 1 1/32 | 25/32 | - |
| JHW32523 | 23 | 1 % | 1 7/32 | 1 7/32 | ⁷ / ₈ | 1 1/32 | 13/16 | - |
| JHW32524 | 24 | 1 % | 1 1/4 | 1 1/4 | 7/8 | 1 3/32 | 53/64 | - |
| JHW32525 | 25 | 1 % | 1 5/16 | 1 5/16 | 7/8 | 1 3/32 | 55/64 | - |
| JHW32526 | 26 | 1 3/4 | 1 5/16 | 1 ⁵ ⁄16 | 15/16 | 1 3/16 | 57/64 | - |
| JHW32527 | 27 | 1 3/4 | 1 7/16 | 1 7/16 | 15/16 | 1 3/16 | 29/32 | - |
| JHW32528 | 28 | 1 3/4 | 1 7/16 | 1 7/16 | 31/32 | 1 1/32 | 15/16 | - |
| JHW32529 | 29 | 1 3/4 | 1 1/2 | 1 ½ | 31/32 | 1 %2 | 31/32 | - |
| JHW32530 | 30 | 1 3/4 | 1 %16 | 1 %16 | 31/32 | 1 11/32 | 63/64 | - |
| JHW32532 | 32 | 1 ³¹ / ₃₂ | 1 11/16 | 1 ³¹ / ₃₂ | 1 1/8 | 1 ½ | 1 1/32 | - |
| JHW32534 | 34 | 1 ⁴⁷ / ₆₄ | 1 1/2 | 1 ⁴⁹ / ₆₄ | 31/32 | 1 11/32 | 1 1/64 | - |
| JHW32536 | 36 | 2 1/16 | 1 ¹⁵ / ₁₆ | 1 ¹⁵ / ₁₆ | 7/8 | 1 7/16 | 1 13/32 | - |

Fed. Spec: ANSI B107.110



JHW32943

16 Piece 1/2" Drive Shallow 6 Point Socket Set on Clip Rail

Contents Include:

| Product | Size | Product | Size | Product | Size | Product | Size |
|----------|------|----------|------|----------|------|----------|------|
| Code | (MM) | Code | (MM) | Code | (MM) | Code | (MM) |
| JHW32509 | 9 | JHW32513 | 13 | JHW32517 | 17 | JHW32521 | 21 |
| JHW32510 | 10 | JHW32514 | 14 | JHW32518 | 18 | JHW32522 | 22 |
| JHW32511 | 11 | JHW32515 | 15 | JHW32519 | 19 | JHW32523 | 23 |
| JHW32512 | 12 | JHW32516 | 16 | JHW32520 | 20 | JHW32524 | 24 |



JHW32941

JHW32941 24 piece 1/2" Drive Shallow 6 Point Socket Set on Clip Rails

Contents Include:

| Product | Size | Product | Size | Product | Size | Product | Size |
|----------|------|----------|------|----------|------|----------|------|
| Code | (MM) | Code | (MM) | Code | (MM) | Code | (MM) |
| JHW32509 | 9 | JHW32515 | 15 | JHW32521 | 21 | JHW32527 | 27 |
| JHW32510 | 10 | JHW32516 | 16 | JHW32522 | 22 | JHW32528 | 28 |
| JHW32511 | 11 | JHW32517 | 17 | JHW32523 | 23 | JHW32529 | 29 |
| JHW32512 | 12 | JHW32518 | 18 | JHW32524 | 24 | JHW32530 | 30 |
| JHW32513 | 13 | JHW32519 | 19 | JHW32525 | 25 | JHW32532 | 32 |
| JHW32514 | 14 | JHW32520 | 20 | JHW32526 | 26 | JHW32536 | 36 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 point fasteners



1/2" DRIVE DEEP SOCKETS, 12 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-------------|------|----------|-----------|-------------------------------|-------------------------------|---------------------------------|-------------------------------|---------------------------------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWSMD-1213 | 13 | 3 1/4 | 29/32 | 25/32 | 13/32 | 2 ¹⁵ / ₃₂ | 15/32 | 2 19/32 |
| JHWSMD-1214 | 14 | 3 1/4 | 29/32 | 27/32 | 13/32 | 2 15/32 | 15/32 | 2 ¹⁹ / ₃₂ |
| JHWSMD-1215 | 15 | 3 1/4 | 29/32 | 7/8 | 13/32 | 2 15/32 | 15/32 | |
| JHWSMD-1216 | 16 | 3 1/4 | 29/32 | ²⁹ / ₃₂ | 15/32 | 2 ½16 | 17/32 | - |
| JHWSMD-1217 | 17 | 3 1/4 | 31/32 | 31/32 | 1/2 | 2 11/32 | 5/8 | - |
| JHWSMD-1218 | 18 | 3 1/4 | 1 | 1 | 17/32 | 2 11/32 | 21/32 | |
| JHWSMD-1219 | 19 | 3 1/4 | 1 1/32 | 1 1/32 | 9/16 | 2 5/16 | 11/16 | • |
| JHWSMD-1221 | 21 | 3 1/4 | 1 1/8 | 1 1/8 | 21/32 | 2 5/16 | 3/4 | |
| JHWSMD-1222 | 22 | 3 1/4 | 1 3/16 | 1 ³ ⁄16 | 23/32 | 2 %2 | ¹³ / ₁₆ | - |
| JHWSMD-1224 | 24 | 3 1/4 | 1 %2 | 1 %32 | 3/4 | 2 %2 | 7/8 | - |
| JHWSMD-1227 | 27 | 3 1/4 | 1 7/16 | 1 1/16 | 3/4 | 2 ½ | 1 | - |
| JHWSMD-1230 | 30 | 3 1/4 | 1 % | 1 % | ¹³ / ₁₆ | 2 1/4 | 1 3/32 | - |



JHWMSSD-12RC

12 Piece 1/2" Drive Deep 12 Point Socket Set on Clip Rail


Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHWSMD-1213 | 13 | JHWSMD-1217 | 17 | JHWSMD-1222 | 22 |
| JHWSMD-1214 | 14 | JHWSMD-1218 | 18 | JHWSMD-1224 | 24 |
| JHWSMD-1215 | 15 | JHWSMD-1219 | 19 | JHWSMD-1227 | 27 |
| JHWSMD-1216 | 16 | JHWSMD-1221 | 21 | JHWSMD-1230 | 30 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners







JHWSMD-1218



JHWMSSD-12RC











JHW32717 JHW32710







1/2" DRIVE DEEP SOCKETS, 6 POINT, METRIC





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|-----------------|-----------------------------------|--|-------------------------------|--|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW32709 | 9 | 3 1/4 | 29/32 | 19/32 | 5/16 | 2 ¹⁵ / ₃₂ | 11/32 | 2 19/32 |
| JHW32710 | 10 | 3 1/4 | 29/32 | 19/32 | 5/16 | 2 ¹⁵ / ₃₂ | 11/32 | 2 19/32 |
| JHW32711 | 11 | 3 1/4 | 29/32 | 11/16 | 5/16 | 2 ¹⁵ / ₃₂ | 13/32 | 2 19/32 |
| JHW32712 | 12 | 3 1/4 | 29/32 | 23/32 | 13/32 | 2 ¹⁵ / ₃₂ | 7/16 | 2 19/32 |
| JHW32713 | 13 | 3 1/4 | 29/32 | 25/32 | 3/8 | 2 15/32 | 15/32 | 2 19/32 |
| JHW32714 | 14 | 3 1/4 | 29/32 | 27/32 | 3/8 | 2 ¹⁵ / ₃₂ | 15/32 | 2 19/32 |
| JHW32715 | 15 | 3 1/4 | 29/32 | 7/8 | 3/8 | 2 11/32 | 15/32 | - |
| JHW32716 | 16 | 3 1/4 | 29/32 | 29/32 | 9/16 | 2 11/32 | 15/32 | - |
| JHW32717 | 17 | 3 1/4 | 31/32 | 31/32 | 9/16 | 2 11/32 | 15/32 | - |
| JHW32718 | 18 | 3 1/4 | 1 | 1 | 13/16 | 2 11/32 | 15/32 | • |
| JHW32719 | 19 | 3 1/4 | 1 1/32 | 1 1/32 | ¹³ / ₁₆ | 2 5/16 | 23/32 | - |
| JHW32720 | 20 | 3 1/4 | 1 1/16 | 1 1/16 | ¹³ / ₁₆ | 2 5⁄16 | 23/32 | - |
| JHW32721 | 21 | 3 1/4 | 1 1/8 | 1 1/8 | ¹³ / ₁₆ | 2 5⁄16 | 3/4 | - |
| JHW32722 | 22 | 3 1/4 | 1 3/16 | 1 3/16 | ¹³ / ₁₆ | 2 5/16 | 25/32 | - |
| JHW32723 | 23 | 3 1/4 | 1 1/4 | 1 1/4 | 25/32 | 2 5/16 | 27/32 | • |
| JHW32724 | 24 | 3 1/4 | 1 %2 | 1 %2 | ¹³ / ₁₆ | 2 5/16 | 7/8 | - |
| JHW32725 | 25 | 3 1/4 | 1 5/16 | 1 5/16 | ¹³ / ₁₆ | 2 1/4 | ¹⁵ / ₁₆ | - |
| JHW32726 | 26 | 3 1/4 | 1 3/8 | 1 ¾ | ²⁹ / ₃₂ | 2 1/4 | 31/32 | - |
| JHW32727 | 27 | 3 1/4 | 1 7/16 | 1 ½16 | 31/32 | 2 1/4 | 1 | - |
| JHW32728 | 28 | 3 1/4 | 1 1/2 | 1 1/2 | 1 | 2 1/4 | 1 1/32 | |
| JHW32729 | 29 | 3 1/4 | 1 %16 | 1 %16 | 1 1/32 | 2 1/4 | 1 1/16 | - |
| JHW32730 | 30 | 3 1/4 | 1 % | 1 ½ | 1 1/32 | 2 1/4 | 1 3/32 | - |
| JHW32732 | 32 | 3 1/4 | 1 11/16 | 1 ¹¹ / ₁₆ | 1 1/8 | 2 1/4 | 1 ³ / ₁₆ | |
| JHW32734 | 34 | 3 1/4 | 1 3/4 | 1 3/4 | 7/8 | 2 1/4 | 1 | |
| JHW32736 | 36 | 3 1/4 | 1 ¹⁵ / ₁₆ | 1 ¹⁵ /16 | 7/8 | 2 1/4 | 1 13/32 | - |

Fed. Spec: ANSI B107.110

JHW32947 16 Piece 1/2" Drive Deep 6 Point Socket Set on Clip Rail Contents Include:

| Contonto | | , . | | | | | |
|----------|------|------------|------|----------|------|----------|------|
| Product | Size | Product | Size | Product | Size | Product | Size |
| Code | (MM) | Code | (MM) | Code | (MM) | Code | (MM) |
| JHW32709 | 9 | JHW32713 | 13 | JHW32717 | 17 | JHW32721 | 21 |
| JHW32710 | 10 | JHW32714 | 14 | JHW32718 | 18 | JHW32722 | 22 |
| JHW32711 | 11 | JHW32715 | 15 | JHW32719 | 19 | JHW32723 | 23 |
| JHW32712 | 12 | JHW32716 | 16 | JHW32720 | 20 | JHW32724 | 24 |

JHW32945 24 Piece 1/2" Drive Deep 6 Point Socket Set on Clip Rail Contents Include:

| Contents | Contents include: | | | | | | | | | |
|----------|-------------------|----------|------|----------|------|----------|------|--|--|--|
| Product | Size | Product | Size | Product | Size | Product | Size | | | |
| Code | (MM) | Code | (MM) | Code | (MM) | Code | (MM) | | | |
| JHW32709 | 9 | JHW32715 | 15 | JHW32721 | 21 | JHW32727 | 27 | | | |
| JHW32710 | 10 | JHW32716 | 16 | JHW32722 | 22 | JHW32728 | 28 | | | |
| JHW32711 | 11 | JHW32717 | 17 | JHW32723 | 23 | JHW32729 | 29 | | | |
| JHW32712 | 12 | JHW32718 | 18 | JHW32724 | 24 | JHW32730 | 30 | | | |
| JHW32713 | 13 | JHW32719 | 19 | JHW32725 | 25 | JHW32732 | 32 | | | |
| JHW32714 | 14 | JHW32720 | 20 | JHW32726 | 26 | JHW32736 | 36 | | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners



1/2" DRIVE TURBOSOCKET® SALVAGE/ DAMAGED FASTENER SOCKETS





| Black Indu | Black Industrial Finish, Metric and SAE | | | | | | | | | |
|-----------------|---|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|--|--|
| | | A' | В | С | D | E | | F | | |
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | | |
| JHWTS50750 | 3/4 | 1 21/32 | 1 1/16 | 1 1/16 | 23/32 | 1 | 3/4 | | | |
| JHWTS50812 | 13/16 | 1 21/32 | 1 1/8 | 1 1/8 | 23/32 | 1 | 13/16 | | | |
| JHWTS50875 | 7/8 | 1 21/32 | 1 3/16 | 1 3/16 | 23/32 | 1 | 7/8 | | | |
| JHWTS50937 | 15/16 | 1 21/32 | 1 5/16 | 1 5/16 | 23/32 | 1 | 15/16 | | | |
| JHWTS50100 | 1 | 1 21/22 | 1 11/2 | 1 11/2 | 23/22 | 1 | 1 | _ | | |

| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
|-----------------|--------------|---------------------------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| JHWTS51551 | 14 | 1 21/32 | 29/32 | 27/32 | 1/2 | 1 | 9/16 | 29/32 |
| JHWTS51591 | 15 | 1 21/32 | 29/32 | 29/32 | 1/2 | 1 | 19/32 | |
| JHWTS51625 | 16 | 1 ²¹ / ₃₂ | 31/32 | 31/32 | 1/2 | 23/32 | 5/8 | |
| JHWTS51669 | 17 | 1 ²¹ / ₃₂ | 1 | 1 | 21/32 | 23/32 | 11/16 | |
| JHWTS51709 | 18 | 1 ²¹ / ₃₂ | 1 1/32 | 1 1/32 | 21/32 | 23/32 | 23/32 | |
| JHWTS51750 | 19 | 1 ²¹ / ₃₂ | 1 1/16 | 1 1/16 | 23/32 | 1 | 3/4 | |
| JHWTS51827 | 21 | 1 ²¹ / ₃₂ | 1 3/16 | 1 3/16 | 21/32 | 1 | 27/32 | |

JHWTSFS5005 5 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, SAE Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | |
|--------------|---------------|--------------|---------------|--|
| JHWTS50750 | 3/4 | JHWTS50937 | 15/16 | |
| JHWTS50812 | 13/16 | JHWTS50100 | 1 | |
| JHWTS50875 | 7/8 | | | |

JHWTSMS5107 7 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, Metric Contents Include:

| Outtonts includ | C. | | | |
|-----------------|-----------|--------------|-----------|--|
| Product Code | Size (MM) | Product Code | Size (MM) | |
| JHWTS51551 | 14 | JHWTS51709 | 18 | |
| JHWTS51591 | 15 | JHWTS51750 | 19 (¾") | |
| JHWTS51625 | 16 (5%") | JHWTS51827 | 21 | |
| JHWTS51669 | 17 | | | |

- Quickly and easily remove damaged or rounded nuts and bolts
- · Place socket on fastener and turn with ratchet, breaker bar or T-handle
- Grip on fastener tightens as more torque is applied
- No hammering is required to install socket over fastener
- . Use on all types of standard nuts and bolts as well as studs, pipe nipples, and corroded auto and marine fasteners
- May be used for "best fit" on metric and fractional fasteners
- May be used with air or electric impact wrench for extra speed and turning power





JHWTS507



JHWTS51551



JHWTSFS5005



JHWTSM510















JHWSA-16A



JHWWSSS-6RC



JHW32904

1/2" DRIVE LONG HEX BIT SOCKETS, SAE





| lia | h-P | olishe | d Chr | ome F | Finish |
|-----|-----|---------|--------|---------|---------|
| шч | | Uliblic | u VIII | JIIIC I | IIIIƏII |

| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code |
|-----------------|------------------|------------------------|-------------------------------------|-------------------------|---------------------------------|
| JHWSA-8LA | 1/4 | 1 ½ | 29/32 | 4 1/2 | JHWBITH0806 |
| JHWSA-10LA | 5/16 | 1 1/2 | 29/32 | 4 1/2 | JHWBITH1006 |
| JHWSA-12LA | 3/8 | 1 1/2 | 29/32 | 4 1/2 | JHWBITH1204 |
| JHWSA-16LA | 1/2 | 1 1/2 | 31/32 | 4 1/2 | JHWBITH1602 |
| JHWSA-18LA | ⁹ /16 | 1 ⁹ /16 | 1 1/16 | 4 1/2 | JHWBITH1802 |
| JHWSA-20LA | 5/8 | 1 25/32 | 1 1/4 | 4 1/2 | JHWBITH2002 |

JHWWSSS-6LRC 6 Piece Long Hex Bit Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHWSA-8LA | 1/4 | JHWSA-16LA | 1/2 |
| JHWSA-10LA | 5/16 | JHWSA-18LA | 9/16 |
| JHWSA-12LA | 3/8 | JHWSA-20LA | 5/8 |

Features

- High-polished chrome finish socket cleans easily
- . Two piece design allows bits to be replaced easily



1/2" DRIVE STANDARD LENGTH HEX BIT SOCKETS, SAE





| High-Polis | shed Chr | rome Finish | | | |
|-----------------|------------------|------------------------|-------------------------------------|-------------------------|---------------------------------|
| Product Code | Size (Inches) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code |
| JHWSA-8A | 1/4 | 1 ½ | 29/32 | 2 1/4 | JHWBITH0805 |
| JHWSA-10A | 5/16 | 1 ½ | 29/32 | 2 1/4 | JHWBITH1005 |
| JHWSA-12A | 3/8 | 1 ½ | 29/32 | 2 1/4 | JHWBITH1203 |
| JHWSA-16A | 1/2 | 1 ½ | 31/32 | 2 1/4 | JHWBITH1601 |
| JHWSA-18A | 9/16 | 1 %16 | 1 1/16 | 2 1/4 | JHWBITH1801 |
| JHWSA-20A | 5/8 | 1 25/32 | 1 1/4 | 2 1/4 | JHWBITH2001 |

JHWWSSS-6RC 6 Piece Hex Bit Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHWSA-8A | 1/4 | JHWSA-16A | 1/2 |
| JHWSA-10A | 5/16 | JHWSA-18A | %16 |
| JHWSA-12A | 3/8 | JHWSA-20A | 5/8 |

Features

- . High-polished chrome finish socket cleans easily
- Two piece design allows bits to be replaced easily



1/2" DRIVE STANDARD LENGTH HEX BIT SOCKETS, METRIC







| Product Code | Size (MM) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) |
|--------------|--------------|------------------------|-------------------------------------|-------------------------|-------------------------------|
| JHW35274 | 8 | 1 19/32 | 29/32 | 2 13/32 | 27/32 |
| JHW35275 | 10 | 1 19/32 | 29/32 | 2 7/16 | 27/32 |
| JHW35276 | 12 | 1 19/32 | ²⁹ / ₃₂ | 2 7/16 | ²⁷ / ₃₂ |
| JHW35277 | 14 | 1 19/32 | 1 | 2 7/16 | ²⁷ / ₃₂ |
| JHW35278 | 17 | 1 19/32 | 1 3/32 | 2 7/16 | ²⁷ / ₃₂ |
| IHW35270 | 10 | 1 19/22 | 1 3/46 | 2 7/46 | 27/22 |

JHW32904 6 Piece Hex Bit Socket Set on Clip Rail

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|
| JHW35274 | 8 | JHW35277 | 14 |
| JHW35275 | 10 | JHW35278 | 17 |
| JHW35276 | 12 | JHW35279 | 19 |

Features

High-polished chrome finish socket cleans easily



1/2" DRIVE LONG LENGTH **HEX BIT SOCKETS, METRIC**





| Product Code | Size (MM) | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) |
|--------------|--------------|------------------------|----------------------------------|-------------------------|
| JHW35294 | 8 | 1 1/2 | 29/32 | 5 1/2 |
| JHW35295 | 10 | 1 ½ | ²⁹ / ₃₂ | 5 ½ |
| JHW35296 | 12 | 1 1/2 | ²⁹ / ₃₂ | 5 1/2 |
| JHW35297 | 14 | 1 ½ | 1 | 5 ½ |
| JHW35298 | 17 | 1 1/2 | 1 ³ / ₃₂ | 5 1/2 |
| JHW35299 | 19 | 1 1/2 | 1 3/16 | 5 1/2 |

JHW32953 6 Piece Hex Bit Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|
| JHW35294 | 8 | JHW35297 | 14 |
| JHW35295 | 10 | JHW35298 | 17 |
| JHW35296 | 12 | JHW35299 | 19 |

Features

· High-polished chrome finish socket cleans easily



1/2" DRIVE TORX® BIT SOCKETS

| I/E DII | 1/2 DINVETONA DII JUUNEIJ | | | | | | |
|--------------|---------------------------|---------------------------------|--|-------------------------------|------------------------|---|--|
| High-Polish | ed Chrom | | 0.1.0 | | | | |
| Product Code | Torx [®] Size | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) | | |
| JHW35283 | T40 | 1 19/32 | 29/32 | 2 7/16 | 7/8 | _ | |
| JHW35284 | T45 | 1 19/32 | 29/32 | 2 7/16 | 7/8 | | |
| JHW35285 | T50 | 1 19/32 | ²⁹ / ₃₂ | 2 7/16 | 7/8 | | |
| JHW35286 | T55 | 1 ¹⁹ / ₃₂ | ²⁹ / ₃₂ | 2 1/16 | 7/8 | | |
| IH\M/35287 | T60 | 1 19/22 | 29/22 | 27/10 | 7/0 | | |

JHW32908 5 Piece Torx® Bit Socket Set on Clip Rail

| Contents include: | | | |
|-------------------|------------|--------------|------------|
| Product Code | Torx® Size | Product Code | Torx® Size |
| JHW35283 | T40 | JHW35286 | T55 |
| JHW35284 | T45 | JHW35287 | T60 |
| JHW35285 | T50 | | |

Features

• High-polished chrome finish socket cleans easily





JHW32908

1/2" DRIVE SCREWDRIVER BIT SOCKETS

High-Polished Chrome Finish, Phillips® and Slotted

| Product Code | Size (Inches) / Point Size | Socket Length (Inches) | Diameter (Inches) | Overall Length (Inches) | Replacement Bit Product Code |
|-----------------|--------------------------------------|---------------------------|-------------------------------|-------------------------|---------------------------------|
| Slotted Bits: | | | | | |
| JHWSA-10A-3S | ²³ / ₆₄ x .061 | 1 1/2 | ²⁹ / ₃₂ | 2 %32 | JHWBITHS03 |
| JHWSA-12A-4S | ²⁷ / ₆₄ x .075 | 1 1/2 | 29/32 | 2 1/4 | JHWBITHS04 |
| Phillips® Bits: | | | | | |
| JHWSA-10A-3P | #3 | 1 1/2 | ²⁹ / ₃₂ | 2 1/4 | JHWBITPH0302 |
| JHWSA-12A-4P | #4 | 1 1/2 | ²⁹ / ₃₂ | 2 1/4 | JHWBITPH0401 |

JHWWSSSP-4RC 4 Piece Screwdriver Bit Socket Set on Clip Rail Contents Include:

| Product Code | Tip Size | Product Code | Tip Size |
|--------------|-------------------------------------|--------------|----------|
| JHWSA-10A-3S | ²³ / ₆₄ x.061 | JHWSA-10A-3P | 3 |
| JHWSA-12A-4S | ²⁷ / ₆₄ x.075 | JHWSA-12A-4P | 4 |

- · High-polished chrome finish socket cleans easily
- . Two piece design allows bits to be replaced easily









JHWSA-10A-3S



JHWWSSSP-4RC















JHW32906

1/2" DRIVE PHILLIPS® SCREWDRIVER BIT SOCKETS



High-Polished Chrome Finish

| Product Code | Tip Size | Socket Length (Inches) | Socket Outside Diameter (Inches) | Overall Length (Inches) | Bit Length (Inches) |
|--------------|----------|---------------------------|-------------------------------------|----------------------------|------------------------|
| JHW35251 | #2 | 1 19/32 | 29/32 | 2 7/16 | 7/8 |
| JHW35252 | #3 | 1 19/32 | 29/32 | 2 1/16 | 7/8 |
| JHW35253 | #4 | 1 19/32 | 29/32 | 2 7/16 | 7/8 |

JHW32906 3 Piece Phillips® Screwdriver Bit Socket Set on Clip Rail

| Product Code | Tip Size | |
|--------------|----------|--|
| JHW35251 | #2 | |
| JHW35252 | #3 | |
| JHW35253 | #4 | |

Features

. High-polished chrome finish socket cleans easily





JHWSB-30

1/2" DRIVE DRAG LINK SOCKETS

| High-Polished Chro | me Finish Overall Length | Tip Thickness | Tip Width |
|--------------------|-----------------------------|---------------|-----------|
| Product Code | (Inches) | (Inches) | (Inches) |
| JHWSB-30 | 1 % | 5/32 | 15/16 |
| JHWSB-40 | 1 11/16 | 5/32 | 1 3/16 |

Fed. Spec: ANSI B107.1

Features

· Ideal for drag links on trucks and heavy equipment, as well as large screws



1/2" DRIVE 5 POINT PENTA-SOCKET





| | | Α | В | С | D | E | | F |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWSB-526 | 51/64 | 1 1/4 | 1 1/8 | 1 1/8 | 7/16 | 1/2 | 23/32 | • |

• 5 point Penta-Socket services 5 point nuts found on tamper-resistant Buffalo covers used by gas, electric, and some water companies to protect shutoff gates





JHWSB-526




JHW4A-620 with Retaining Ring 4-1XS



JHW4A-620

1/2" DRIVE HEX DRIVERS



| ingii i onsiict | | | | |
|-----------------|-------|-------------------------|-------------------|-------------------|
| Product Code | Size | Overall Length (Inches) | Product Code Bits | Optional Ret Ring |
| JHW4A-620 | 5/8 | 3 1/2 | JHW4A-620-2 | 4-1XS |
| JHW4A-622 | 11/16 | 3 1/2 | JHW4A-622-2 | 4-1XS |
| JHW4A-624 | 3/4 | 3 ½ | JHW4A-624-2 | 4-1XS |
| JHW4A-628 | 7/8 | 3 ½ | JHW4A-628-2 | 4-1XS |

- · Designed for use with pneumatic or cordless impact guns
- . Optional retaining ring ensures positive attachment to anvil
- . Manufactured from special alloy steel and heat treated for optimum strength and durability
- Williams® bits are designed with a precise fit and tight tolerances to prevent slippage and disengagement
- · Outperforms one-piece design models our two-piece design makes replacement economical and convenient
- . Bits can be easily replaced by hand no need to put them in a vice and punch them out with a hammer
- · Optional retaining rings available for added protection



1/2" DRIVE SOCKET FLEXTENSIONS

Williams Flextension are used extensively in engine and heavy equipment manufacturing, assembly and repair. They increase productivity by featuring an integrated (non-removable) design of the drive extension and socket to allow for reliable, continuous work without concern for the socket disconnecting from the extension as could happen with hand-tool type ball retained sockets.

See page 252 for 3/8" Drive Socket Flextensions.



1/2" DRIVE SOCKET FLEXTENSIONS, SAE

Black Industrial Finish

| | | Α | | | | В | С | D | E |
|-----------------|-------|---------------------|---------|---------------|-----------|-------------------|-------------------|------------------|-------------------|
| Product Code | Drive | Shank Length | Tension | Socket Points | Socket | Socket Length | Socket Diameter | Nose Diameter | Hex Depth |
| JHWISSXT312 | 1/2" | 3.02"/76.7MM | Yes | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSX312 | 1/2" | 3.02"/76.7MM | No | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXT412 | 1/2" | 4.09"/103.9MM | Yes | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSX412 | 1/2" | 4.09"/103.9MM | No | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSX612 | 1/2" | 6.57"/166.9MM | No | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXT912 | 1/2" | 9.57"/243.1MM | Yes | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSX912 | 1/2" | 9.57"/243.1MM | No | 6 | 3/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXT314 | 1/2" | 3.02"/76.7MM | Yes | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSX314 | 1/2" | 3.02"/76.7MM | No | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSXT414 | 1/2" | 4.09"/103.9MM | Yes | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSX414 | 1/2" | 4.09"/103.9MM | No | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSXT614 | 1/2" | 6.57"/166.9MM | Yes | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSX614 | 1/2" | 6.57"/166.9MM | No | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSXT914 | 1/2" | 9.57"/243.1MM | Yes | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSX914 | 1/2" | 9.57"/243.1MM | No | 6 | 7/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.3"/7.6MM |
| JHWISSXT316 | 1/2" | 3.02"/76.7MM | Yes | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSX316 | 1/2" | 3.02"/76.7MM | No | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXT416 | 1/2" | 4.09"/103.9MM | Yes | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSX416 | 1/2" | 4.09"/103.9MM | No | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXT616 | 1/2" | 6.57"/166.9MM | Yes | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSX616 | 1/2" | 6.57"/166.9MM | No | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXT916 | 1/2" | 9.57"/243.1MM | Yes | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSX916 | 1/2" | 9.57"/243.1MM | No | 6 | 1/2 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXT418 | 1/2" | 4.09"/103.9MM | Yes | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSX418 | 1/2" | 4.09"/103.9MM | No | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWSPSXTL618 | 1/2" | 6.57"/166.9MM | Yes | 6 | 9/16 | 0.78"/19.8MM | 0.90"/22.7MM | 0.76"/19.4MM | 0.16"/4.1MM |
| JHWSPSXL618 | 1/2" | 6.57"/166.9MM | No | 6 | 9/16 | 0.78"/19.8MM | 0.90"/22.7MM | 0.76"/19.4MM | 0.16"/4.1MM |
| JHWISSXT618 | 1/2" | 6.57"/166.9MM | Yes | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSX618 | 1/2" | 6.57"/166.9MM | No | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSXT918 | 1/2" | 9.57"/243.1MM | Yes | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSX918 | 1/2" | 9.57"/243.1MM | No | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSXT1218 | 1/2" | 12.57"/319.3MM | Yes | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSX1218 | 1/2" | 12.57"/319.3MM | No | 6 | 9/16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.82"/20.8MM | 0.44"/11.2MM |
| JHWISSXT320 | 1/2" | 3.02"/76.7MM | Yes | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSX320 | 1/2" | 3.02"/76.7MM | No | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSXT420 | 1/2" | 4.09"/103.9MM | Yes | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSX420 | 1/2" | 4.09"/103.9MM | No | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSXT620 | 1/2" | 6.57"/166.9MM | Yes | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSX620 | 1/2" | 6.57"/166.9MM | No | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| SSX620SOC75 | 1/2" | 6.57"/166.9MM | No | 6 | 5/8 | 0.97"/24.7MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.35"/8.9MM |
| JHWISSXT920 | 1/2" | 9.57"/243.1MM | Yes | 6 | 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSX920 | 1/2" | 9.57"/243.1MM | No | 6 | 78 5/8 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSXT324 | 1/2" | 3.02"/76.7MM | Yes | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| J. 11110U/110LT | /4 | 3.02 / / 0.7 IVIIVI | 169 | U | /4 | 1.20 / 01.0141141 | 1.00 / 20.7191191 | 1.12 /20.7111111 | J.JU / 17.21VIIVI |












1/2" DRIVE SOCKET FLEXTENSIONS

Williams Flextension are used extensively in engine and heavy equipment manufacturing, assembly and repair. They increase productivity by featuring an integrated (non-removable) design of the drive extension and socket to allow for reliable, continuous work without concern for the socket disconnecting from the extension as could happen with hand-tool type ball retained sockets.

See page 252 for 3/8" Drive Socket Flextensions.



1/2" DRIVE SOCKET FLEXTENSIONS, SAE

| Black Industrial Finis | sh |
|------------------------|----|
|------------------------|----|

| | | Α | | | | В | С | D | E |
|--------------|-------|----------------|---------|---------------|-------------------------------|---------------|-----------------|---------------|--------------|
| Product Code | Drive | Shank Length | Tension | Socket Points | Socket | Socket Length | Socket Diameter | Nose Diameter | Hex Depth |
| JHWISSXT424 | 1/2" | 4.09"/103.9MM | Yes | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| JHWISSX424 | 1/2" | 4.09"/103.9MM | No | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| JHWISSXT624 | 1/2" | 6.57"/166.9MM | Yes | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| JHWISSX624 | 1/2" | 6.57"/166.9MM | No | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| JHWISSX624MD | 1/2" | 6.57"/166.9MM | No | 6 | 3/4 | 0.85"/21.6MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.31"/7.9MM |
| JHWISDX624LD | 1/2" | 6.57"/166.9MM | No | 12 | 3/4 | 0.85"/21.6MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.31"/7.9MM |
| JHWISSXT924 | 1/2" | 9.57"/243.1MM | Yes | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| JHWISSX924 | 1/2" | 9.57"/243.1MM | No | 6 | 3/4 | 1.25"/31.8MM | 1.00"/25.4MM | 1.12"/28.4MM | 0.56"/14.2MM |
| JHWISSXT430 | 1/2" | 4.09"/103.9MM | Yes | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSX430 | 1/2" | 4.09"/103.9MM | No | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSXT630 | 1/2" | 6.57"/166.9MM | Yes | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSX630 | 1/2" | 6.57"/166.9MM | No | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSXT930 | 1/2" | 9.57"/243.1MM | Yes | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSX930 | 1/2" | 9.57"/243.1MM | No | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSXT1230 | 1/2" | 12.57"/319.3MM | Yes | 6 | 15/16 | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |
| JHWISSX1230 | 1/2" | 12.57"/319.3MM | No | 6 | ¹⁵ / ₁₆ | 1.31"/33.3MM | 1.00"/25.4MM | 1.30"/33.0MM | 0.62"/15.7MM |



Black Industrial Finish

1/2" DRIVE SOCKET FLEXTENSIONS, METRIC

В



D

0.76"/19.3MM

0.76"/19.3MM



0.34"/8.6MM

0.34"/8.6MM



| Product Code | Drive | Shank Length | Tension | Socket Points | Socket (mm) | Socket Length | Socket Diameter | Nose Diameter | Socket Hex Depth |
|--------------|-------|---------------|---------|---------------|-------------|---------------|-----------------|---------------|------------------|
| JHWISSXTM410 | 1/2" | 4.09"/103.9MM | Yes | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXM410 | 1/2" | 4.09"/103.9MM | No | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| ISSXTMD610 | 1/2" | 6.57"/166.9MM | Yes | 12 | 10 | 1.30"/33.0MM | 0.90"/22.7MM | 0.59"/15.0MM | 0.31"/7.9MM |
| JHWISSXM610 | 1/2" | 6.57"/166.9MM | No | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXTM910 | 1/2" | 9.57"/243.1MM | Yes | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXM910 | 1/2" | 9.57"/243.1MM | No | 6 | 10 | 1.06"/26.9MM | 0.90"/22.7MM | 0.63"/16.0MM | 0.28"/7.1MM |
| JHWISSXTM412 | 1/2" | 4.09"/103.9MM | Yes | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXM412 | 1/2" | 4.09"/103.9MM | No | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXTM612 | 1/2" | 6.57"/166.9MM | Yes | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXM612 | 1/2" | 6.57"/166.9MM | No | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXTM912 | 1/2" | 9.57"/243.1MM | Yes | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXM912 | 1/2" | 9.57"/243.1MM | No | 6 | 12 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXTM413 | 1/2" | 4.09"/103.9MM | Yes | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXM413 | 1/2" | 4.09"/103.9MM | No | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |

13

13

6

6

Yes

No

JHWISSXM613 **Features**

JHWISSXTM613

- Made in the U.S.A.
- · Durable black oxide finish.
- Socket retention pin is TIG welded, providing full rotation power to the socket

6.57"/166.9MM

6.57"/166.9MM

Α

- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Drive end has a 7/32" cross hole & bevel for ease of use

1/2"

1/2"

• Up to 30 degree angle offset

1.06"/26.9MM

1.06"/26.9MM

- Flextensions are designed for use on hand and power tools (Impulse or Direct drive); NOT FOR IMPACT TOOL USE
- Maximum working torque values: 160 Ft. Lbs. /1920 In. Lbs. /217 Nm

0.90"/22.7MM

0.90"/22.7MM

С

• Other lengths and socket sizes available by special order. Contact your Williams representative







1/2" DRIVE SOCKET FLEXTENSIONS

Williams Flextension are used extensively in engine and heavy equipment manufacturing, assembly and repair. They increase productivity by featuring an integrated (non-removable) design of the drive extension and socket to allow for reliable, continuous work without concern for the socket disconnecting from the extension as could happen with hand-tool type ball retained sockets.

See page 252 for 3/8" Drive Socket Flextensions.









1/2" DRIVE SOCKET FLEXTENSION, METRIC

Black Industrial Finish

| | | Α | | | | В | С | D | E |
|---------------|-------|----------------|---------|--------|--------|---------------|-----------------|--------------|------------------|
| | | | | Socket | Socket | <u> </u> | | Socket Nose | <u> </u> |
| Product Code | Drive | Shank Length | Tension | Points | (mm) | Socket Length | Socket Diameter | Diameter | Socket Hex Depth |
| JHWISSXTM913 | 1/2" | 9.57"/243.1MM | Yes | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXM913 | 1/2" | 9.57"/243.1MM | No | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISXTM1013 | 1/2" | 10.57"/268.5MM | Yes | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSXM1013 | 1/2" | 10.57"/268.5MM | No | 6 | 13 | 1.06"/26.9MM | 0.90"/22.7MM | 0.76"/19.3MM | 0.34"/8.6MM |
| JHWISSX-TM415 | 1/2" | 4.09"/103.9MM | Yes | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISSXM415 | 1/2" | 4.09"/103.9MM | No | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISSXTM615 | 1/2" | 6.57"/166.9MM | Yes | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISSXM615 | 1/2" | 6.57"/166.9MM | No | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISSX-TM915 | 1/2" | 9.57"/243.1MM | Yes | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISSXM915 | 1/2" | 9.57"/243.1MM | No | 6 | 15 | 1.06"/26.9MM | 0.90"/22.7MM | 0.88"/22.4MM | 0.42"/10.7MM |
| JHWISSXTM416 | 1/2" | 4.09"/103.9MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXM416 | 1/2" | 4.09"/103.9MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXMD416 | 1/2" | 4.09"/103.9MM | No | 12 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSXTM616 | 1/2" | 6.57"/166.9MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXM616 | 1/2" | 6.57"/166.9MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWSPSXMD616 | 1/2" | 6.57"/166.9MM | No | 12 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.44"/11.2MM |
| JHWISSXTM916 | 1/2" | 9.57"/243.1MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXM916 | 1/2" | 9.57"/243.1MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISXTM1016 | 1/2" | 10.57"/268.5MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXM1016 | 1/2" | 10.57"/268.5MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXTM1216 | 1/2" | 12.57"/319.3MM | Yes | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXM1216 | 1/2" | 12.57"/319.3MM | No | 6 | 16 | 1.06"/26.9MM | 0.90"/22.7MM | 0.90"/22.7MM | 0.45"/11.4MM |
| JHWISSXTM418 | 1/2" | 4.09"/103.9MM | Yes | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWISSXM418 | 1/2" | 4.09"/103.9MM | No | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWSPSXMD418 | 1/2" | 4.09"/103.9MM | No | 12 | 18 | 0.88"/22.4MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.30"/7.6MM |
| JHWISSXTM618 | 1/2" | 6.57"/166.9MM | Yes | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWISSXM618 | 1/2" | 6.57"/166.9MM | No | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWSPSXMD618 | 1/2" | 6.57"/166.9MM | No | 12 | 18 | 0.88"/22.4MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.30"/7.6MM |
| JHWISSXTM918 | 1/2" | 9.57"/243.1MM | Yes | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWISSXM918 | 1/2" | 9.57"/243.1MM | No | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWISXTM1018 | 1/2" | 10.57"/268.5MM | Yes | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |
| JHWISSXM1018 | 1/2" | 10.57"/268.5MM | No | 6 | 18 | 1.06"/26.9MM | 1.00"/25.4MM | 1.00"/25.4MM | 0.45"/11.4MM |

- Made in the U.S.A.
- Durable black oxide finish
- Socket retention pin is TIG welded, providing full rotation power to the socket
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Drive end has a 7/32" cross hole & bevel for ease of use



- Up to 30 degree angle offset
- Flextensions are designed for use on hand and power tools (Impulse or Direct drive); NOT FOR IMPACT TOOL USE
- Maximum working torque values: 160 Ft. Lbs. /1920 In. Lbs. /217 Nm
- Other lengths and socket sizes available by special order. Contact your Snap-on Industrial Brands representative











JHW4-2F

JHW4-140B

1/2" DRIVE IMPACT EXTENSIONS AND ACCESSORIES

Black Industrial Finish

| Product Code | Description | Length (Inches) | Socket Retention |
|--------------|-------------------------|-------------------------------|------------------|
| JHW4-102 | Impact Extension | 3 1/2 | Lock Ring |
| JHW4-105A | Impact Extension | 5 | Spring Plunger |
| JHW4-110A | Impact Extension | 10 | Spring Plunger |
| JHW4-140B | Impact Universal Joint | 2 ¹ / ₂ | Spring Plunger |
| JHW4-2F | 3/8" M x 1/2" F Adapter | 2 1/4 | Spring Plunger |
| JHW4-6 | 3/4" M x 1/2" F Adapter | 1 1/4 | Through Hole |

Fed. Spec: ANSI B107.2

Features

- Specially heat treated for impact use to provide long life, safety, and durability
- Spring plunger provides secure socket retention for safety and convenience
- Suitable for use with pneumatic and electric impact wrenches





JHW4-6



1/2" DRIVE HEX TO SQUARE SHANK IMPACT EXTENSIONS

Black Industrial Finish

| | Hex Shank Size | Square Drive Size | Length |
|--------------|------------------------------|-------------------|-------------------------------|
| Product Code | (Inches) | (Inches) | Inches) |
| JHW4-33B | 7/16 | 1/2 | 2 ³ / ₄ |
| JHW4-35B | ⁷ / ₁₆ | 1/2 | 5 |
| JHW4-53B | 5/8 | 1/2 | 2 3/4 |

- Specially heat treated for impact use to provide long life, safety, and durability
- Spring plunger provides secure socket retention for safety and convenience
- Suitable for use with pneumatic and electric impact wrenches





1/2" DRIVE SHALLOW IMPACT SOCKETS, **6 POINT, SAE**





Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints

JHW4-612

Black Industrial Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------------------------|-----------------|---------------------------------------|---------------------------------------|--------------------------------|--|---|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW4-612 | 3/8 | 1 1/2 | 29/32 | 19/32 | 1/4 | 7/8 | 11/32 | 11/16 |
| JHW4-614 | 7/16 | 1 1/2 | 29/32 | 23/32 | 5/16 | 7/8 | 13/32 | 11/16 |
| JHW4-616 | 1/2 | 1 1/2 | 29/32 | 13/16 | 13/32 | 7/8 | 15/32 | 11/16 |
| JHW4-618 | 9/16 | 1 1/2 | ²⁹ / ₃₂ | 7/8 | 13/32 | 7/8 | 15/32 | 11/16 |
| JHW4-620 | 5/8 | 1 1/2 | 31/32 | 31/32 | 15/32 | 7/8 | 1/2 | - |
| JHW4-622 | 11/16 | 1 1/2 | 1 ¹ / ₁₆ | 1 ¹ / ₁₆ | 13/16 | 27/32 | 5/8 | - |
| JHW4-624 | 3/4 | 1 1/2 | 1 ¹ /8 | 1 ¹/s | 13/16 | ²⁷ / ₃₂ | 11/16 | - |
| JHW4-626 | 13/16 | 1 1/2 | 1 1/4 | 1 1/4 | 13/16 | ¹³ / ₁₆ | ²⁵ / ₃₂ | - |
| JHW4-628 | 7/8 | 1 1/2 | 1 ⁵ /16 | 1 ⁵ /16 | ¹³ / ₁₆ | 13/16 | 7/8 | - |
| JHW4-630 | ¹⁵ / ₁₆ | 1 3/4 | 1 ³ /8 | 1 ³ /8 | 1 ¹ / ₃₂ | 1 ¹ / ₁₆ | ¹⁵ / ₁₆ | - |
| JHW4-632 | 1 | 1 3/4 | 1 ⁷ /16 | 1 ⁷ /16 | 1 1/32 | 1 ¹ / ₁₆ | 1 | - |
| JHW4-634 | 1 1/16 | 2 | 1 9/16 | 1 9/16 | 1 1/4 | 1 ⁹ / ₃₂ | 1 1/32 | - |
| JHW4-636 | 1 ¹ /8 | 2 | 1 ⁵ /8 | 1 ⁵ /8 | 1 1/4 | 1 ⁹ /32 | 1 ¹ /8 | - |
| JHW4-638 | 1 ³ / ₁₆ | 2 | 1 ¹¹ /16 | 1 11/16 | 1 1/4 | 1 ⁹ / ₃₂ | 1 ⁵ / ₃₂ | - |
| JHW4-640 | 1 1/4 | 2 | 1 ³ / ₄ | 1 ³ / ₄ | 13/16 | 1 ⁹ / ₃₂ | 1 7/32 | - |
| JHW4-642 | 1 ⁵ / ₁₆ | 2 | 1 1/2 | 1 ⁷ /8 | 7/8 | 1 ³ /8 | 1 1/16 | - |
| JHW4-644 | 1 ³ /8 | 2 | 1 1/2 | 1 15/16 | 7/8 | 1 ³ /8 | 1 1/16 | - |
| JHW4-646 | 1 7/16 | 2 | 1 1/2 | 2 | 29/32 | 1 ³ /8 | 1 1/16 | - |
| JHW4-648 | 1 1/2 | 2 | 1 ⁹ /16 | 2 ¹ / ₈ | 29/32 | 1 ³ / ₈ | 1 1/16 | - |



JHWWS-4-7RC

7 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| •••••••• | | | |
|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW4-614 | 7/16 | JHW4-622 | 11/16 |
| JHW4-616 | 1/2 | JHW4-624 | 3/4 |
| JHW4-618 | 9/16 | JHW4-626 | 13/16 |
| JHW4-620 | 5/8 | | |



11 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Odintenta mici | uuc. | | | | |
|----------------|---------------|--------------|-------------------------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHW4-616 | 1/2 | JHW4-624 | 3/4 | JHW4-632 | 1 |
| JHW4-618 | 9/16 | JHW4-626 | ¹³ / ₁₆ | JHW4-634 | 1 ½16 |
| JHW4-620 | 5/8 | JHW4-628 | 7/8 | JHW4-636 | 1 1/8 |
| JHW4-622 | 11/16 | JHW4-630 | 15/16 | | |

JHWWS-4-14

14 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|-------------------------------|--------------|---------------|
| JHW4-612 | 3/8 | JHW4-622 | 11/16 | JHW4-632 | 1 |
| JHW4-614 | ⁷ / ₁₆ | JHW4-624 | 3/4 | JHW4-634 | 1 1/16 |
| JHW4-616 | 1/2 | JHW4-626 | ¹³ / ₁₆ | JHW4-636 | 1 1/8 |
| JHW4-618 | 9/16 | JHW4-628 | 7/8 | JHW4-640 | 1 1/4 |
| JHW4-620 | 5% | JHW4-630 | 15/16 | | |

JHWWS-4-19RC

19 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|--------------------------------|--------------|--------------------------------|
| JHW4-612 | 3/8 | JHW4-622 | 11/16 | JHW4-632 | 1 | JHW4-642 | 1 5/16 |
| JHW4-614 | 7/16 | JHW4-624 | 3/4 | JHW4-634 | 11/16 | JHW4-644 | 1 ³ /8 |
| JHW4-616 | 1/2 | JHW4-626 | ¹³ / ₁₆ | JHW4-636 | 1 1/8 | JHW4-646 | 1 ⁷ / ₁₆ |
| JHW4-618 | 9/16 | JHW4-628 | 7/8 | JHW4-638 | 1 ³ / ₁₆ | JHW4-648 | 1 1/2 |
| JHW4-620 | 5/8 | JHW4-630 | ¹⁵ / ₁₆ | JHW4-640 | 1 1/4 | | |







JHW4-618



JHWWS-4-7RC



JHWWS-4-11RC



JHWWS-4-14



JHWWS-4-19RC

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 6 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability







JHW35512



JHW37923





JHW37224



JHW37918



1/2" DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, SAE





| Black In | dustrial | Finish | | | | | | |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| | | Α | В | С | D | E | | F |
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW35512 | 3/8 | 1 1/2 | 7/8 | 5/8 | 3/8 | / | 1/4 | 5/8 |
| JHW35514 | 7/16 | 1 1/2 | 7/8 | 3/4 | 3/8 | / | 1/4 | 5/8 |
| JHW35516 | 1/2 | 1 1/2 | 7/8 | 3/4 | 3/8 | / | 1/4 | 5/8 |
| JHW35518 | 9/16 | 1 1/2 | 1 | 7/8 | 3/8 | / | 1/2 | 5/8 |
| JHW35520 | 5/8 | 1 1/2 | 1 | 1 | 1/2 | / | 1/2 | 1 |
| JHW35522 | 11/16 | 1 1/2 | 1 | 1 | 1/2 | / | 1/2 | / |
| JHW35524 | 3/4 | 1 1/2 | 1 | 1 | 1/2 | / | 5/8 | / |
| JHW35526 | 13/16 | 1 1/2 | 1 1/8 | 1 1/8 | 1/2 | / | 3/4 | / |
| JHW35528 | 7/8 | 1 1/2 | 1 1/4 | 1 1/4 | 1/2 | / | 3/4 | / |
| JHW35530 | 15/16 | 1 1/2 | 1 1/4 | 1 1/4 | 1/2 | / | 7/8 | / |
| JHW35532 | 1 | 1 1/2 | 1 1/4 | 1 1/2 | 1/2 | / | 7/8 | / |
| JHW35534 | 1 1/16 | 1 1/16 | 1 1/2 | 1 1/2 | 5/8 | / | 1 | / |
| JHW35536 | 1 1/8 | 1 1/16 | 1 1/2 | 1 1/2 | 3/4 | / | 1 | 9/16 |
| JHW35538 | 1 3/16 | 1 1/16 | 1 1/2 | 1 5/8 | 3/4 | / | 1 | 9/16 |
| JHW35540 | 1 1/4 | 1 1/16 | 1 1/2 | 1 ³ / ₄ | 3/4 | / | 1 1/8 | 9/16 |
| JHW35542 | 1 5/16 | 1 1/8 | 1 1/2 | 1 3/4 | 7/8 | 1 | 1 1/8 | 9/16 |
| JHW35544 | 1 3/8 | 1 1/8 | 1 1/2 | 1 1/8 | 7/8 | / | 1 1/4 | 9/16 |
| JHW35546 | 1 1/16 | 1 1 1/8 | 1 1/2 | 2 | 7/8 | / | 1 1/4 | 9/16 |

JHW37923

1 1/2

1 1/8

JHW35548

11 piece 1/2" Drive Impact Shallow 12 Point Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|-------------------------------|--------------|---------------|
| JHW35512 | 3/8 | JHW35520 | 5/8 | JHW35528 | 7/8 |
| JHW35514 | 7/16 | JHW35522 | 11/16 | JHW35530 | 15/16 |
| JHW35516 | 1/2 | JHW35524 | 3/4 | JHW35532 | 1 |
| JHW35518 | ⁹ ⁄ ₁₆ | JHW35526 | ¹³ / ₁₆ | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 and 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove

1/2" DRIVE UNIVERSAL IMPACT SOCKETS, 6 POINT, SAE





9/16

Black Industrial Finish

| | | А | В | · · | υ | _ E | | - 1 |
|-----------------|------------------|-----------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW37216 | 1/2 | 2 3/4 | 1 | 3/4 | 3/8 | 9/16 | 7/16 | 1 |
| JHW37218 | 9/16 | 2 3/4 | 1 | 3/4 | 3/8 | 9/16 | 7/16 | 1 |
| JHW37220 | 5/8 | 2 3/4 | 1 | 3/4 | 3/8 | 9/16 | 9/16 | 1 |
| JHW37222 | 11/16 | 2 3/4 | 1 1/4 | 1 | 1/2 | 11/16 | 11/16 | 1 1/4 |
| JHW37224 | 3/4 | 2 3/4 | 1 1/4 | 1 | 1/2 | 11/16 | 11/16 | 1 1/4 |
| JHW37226 | 13/16 | 3 | 1 1/4 | 1 1/4 | 5/8 | 13/16 | 13/16 | 1 1/2 |
| JHW37228 | 7/8 | 3 | 1 1/4 | 1 1/4 | 5/8 | 13/16 | 13/16 | 1 1/2 |

JHW37918

7 Piece 1/2" Drive Universal 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHW37216 | 1/2 | JHW37222 | 11/16 | JHW37228 | 7/8 |
| JHW37218 | 9/16 | JHW37224 | 3/4 | | |
| JHW37220 | 5/8 | JHW37226 | ¹³ / ₁₆ | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- . Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove



1/2" DRIVE UNIVERSAL IMPACT SOCKETS, **6 POINT, METRIC**





| Black In | dustr | ial Fir | nish | | | | | |
|-----------------|--------------|-----------------|--------------------------------|----------------------------------|--------------------------|----------------------------------|-------------------------------------|-------------------------|
| | | Α | В | С | D | E | | F |
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW37813 | 13 | 2 3/4 | 1 | 3/4 | 3/8 | 1/2 | 1/2 | 1 |
| JHW37814 | 14 | 2 3/4 | 1 | 3/4 | 3/8 | 1/2 | 1/2 | 1 |
| JHW37815 | 15 | 2 3/4 | 1 | 1 | 3/8 | 1/2 | 1/2 | 1 |
| JHW37816 | 16 | 2 3/4 | 1 | 1 | 3/8 | 1/2 | 1/2 | 1 |
| JHW37817 | 17 | 2 3/4 | 1 1/4 | 1 | 1/2 | 3/4 | 3/4 | 1 1/4 |
| JHW37818 | 18 | 2 3/4 | 1 1/4 | 1 | 1/2 | 3/4 | 3/4 | 1 1/4 |
| JHW37819 | 19 | 2 3/4 | 1 1/4 | 1 | 1/2 | 3/4 | 3/4 | 1 1/4 |
| JHW37820 | 20 | 3 | 1 1/4 | 1 1/4 | 5/8 | 3/4 | 3/4 | 1 1/2 |
| JHW37821 | 21 | 3 | 1 1/4 | 1 1/4 | 5/8 | 3/4 | 3/4 | 1 1/2 |
| JHW37822 | 22 | 3 | 1 1/4 | 1 1/4 | 5/8 | 3/4 | 3/4 | 1 1/2 |
| JHW37823 | 23 | 3 | 1 1/4 | 1 1/4 | 5/8 | 3/4 | 3/4 | 1 1/2 |

JHW37916 11 Piece 1/2" Drive Universal 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW37813 | 13 | JHW37817 | 17 | JHW37821 | 21 |
| JHW37814 | 14 | JHW37818 | 18 | JHW37822 | 22 |
| JHW37815 | 15 | JHW37819 | 19 | JHW37823 | 23 |
| JHW37816 | 16 | JHW37820 | 20 | | |

1/2" DRIVE DEEP IMPACT SOCKETS, **6 POINT, SAE**





Black Industrial Finish

| | | - | - | | | | | |
|-----------|----------|----------|-------------------------------|-------------------------------|-------------------------------|--|-------------------------------|---------------------------------|
| | | Α | В | С | D | Е | | F |
| Product | Size | OAL | Drive End | Working End | Broach Depth | Bolt Clearance | Bolt Clearance | Nose Length |
| Code | (Inches) | (Inches) | Diameter (Inches) | Diameter (Inches) | (Inches) | Depth (Inches) | Diameter (Inches) | (Inches) |
| JHW14-612 | 3/8 | 3 1/4 | 29/32 | 19/32 | 5/16 | 2 % | 11/32 | 2 15/32 |
| JHW14-614 | 7/16 | 3 1/4 | 29/32 | 23/32 | 11/32 | 2 % | 13/32 | 2 15/32 |
| JHW14-616 | 1/2 | 3 1/4 | ²⁹ / ₃₂ | ¹³ / ₁₆ | 13/32 | 2 % | 15/32 | 2 ¹⁵ / ₃₂ |
| JHW14-618 | 9/16 | 3 1/4 | ²⁹ / ₃₂ | 7/8 | 13/32 | 2 % | 15/32 | 2 ¹⁵ / ₃₂ |
| JHW14-620 | 5/8 | 3 ½ | 31/32 | 31/32 | 15/32 | 2 7/16 | 5/8 | |
| JHW14-622 | 11/16 | 3 ½ | 1 1/16 | 1 ½16 | 1/2 | 2 | 5/8 | |
| JHW14-624 | 3/4 | 3 ½ | 1 1/8 | 1 1/8 | 9/16 | 2 | 11/16 | |
| JHW14-626 | 13/16 | 3 1/4 | 1 1/4 | 1 1/4 | 5/8 | 2 | ²⁵ / ₃₂ | |
| JHW14-628 | 7/8 | 3 1/2 | 1 5/16 | 1 5/16 | 9/16 | 2 1/4 | 7/8 | |
| JHW14-630 | 15/16 | 3 ½ | 1 % | 1 3/8 | 3/4 | 2 1/4 | 15/16 | |
| JHW14-632 | 1 | 3 1/2 | 1 7/16 | 1 7/16 | 3/4 | 2 1/4 | 1 | |
| JHW14-634 | 1 1/16 | 3 1/2 | 1 %16 | 1 %16 | ²⁵ / ₃₂ | 2 1/4 | 1 1/32 | |
| JHW14-636 | 1 1/8 | 3 1/2 | 1 % | 1 % | ¹³ / ₁₆ | 2 1/4 | 1 1/8 | |
| JHW14-638 | 1 3/16 | 3 1/2 | 1 11/16 | 1 11/16 | ¹³ / ₁₆ | 2 1/4 | 1 3/16 | |
| JHW14-640 | 1 1/4 | 3 1/2 | 1 3/4 | 1 ¾ | 1 | 2 ²¹ / ₃₂ | 1 1/4 | |
| JHW14-642 | 1 5/16 | 3 1/2 | 1 1/2 | 1 1/8 | ¹⁵ / ₁₆ | 2 1/8 | 1 1/16 | |
| JHW14-644 | 1 % | 3 1/2 | 1 1/2 | 2 | 29/32 | 2 1/8 | 1 1/16 | • |
| JHW14-646 | 1 7/16 | 3 1/2 | 1 1/2 | 2 | 29/32 | 2 1/8 | 1 1/16 | |
| JHW14-648 | 1 1/2 | 3 1/2 | 1 9/16 | 21/6 | 29/22 | 2 7/6 | 1 1/16 | _ |

Fed. Spec: ANSI B107.2

JHWWS-14-11 11 Piece 1/2" Drive Deep 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|
| JHW14-612 | 3/8 | JHW14-620 | 5/8 | JHW14-628 | 7/8 |
| JHW14-614 | 7/16 | JHW14-622 | 11/16 | JHW14-630 | 15/16 |
| JHW14-616 | 1/2 | JHW14-624 | 3/4 | JHW14-632 | 1 |
| JHW14-618 | 9/16 | JHW14-626 | ¹³ / ₁₆ | | |

JHWWS1414RC 14 Piece 1/2" Drive Deep 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|------------------------------|--------------|-------------------------------|--------------|---------------|
| JHW14-612 | 3/8 | JHW14-622 | 11/16 | JHW14-632 | 1 |
| JHW14-614 | ⁷ / ₁₆ | JHW14-624 | 3/4 | JHW14-634 | 1 1/16 |
| JHW14-616 | 1/2 | JHW14-626 | ¹³ / ₁₆ | JHW14-636 | 1 1/8 |
| JHW14-618 | 9/16 | JHW14-628 | 7/8 | JHW14-640 | 1 1/4 |
| JHW14-620 | 5/8 | JHW14-630 | ¹⁵ / ₁₆ | | |

JHWWS-1419RC 19 Piece 1/2" Drive Deep 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|-------------------------------|--------------|---------------|--------------|--------------------|
| JHW14-612 | 3/8 | JHW14-622 | 11/16 | JHW14-632 | 1 | JHW14-642 | 1 5/16 |
| JHW14-614 | 7/16 | JHW14-624 | 3/4 | JHW14-634 | 1 1/16 | JHW14-644 | 1 3/8 |
| JHW14-616 | 1/2 | JHW14-626 | ¹³ / ₁₆ | JHW14-636 | 1 1/8 | JHW14-646 | 1 ⁷ /16 |
| JHW14-618 | 9/16 | JHW14-628 | 7/8 | JHW14-638 | 1 3/16 | JHW14-648 | 1 ½ |
| IHW14-620 | 5/6 | IHW14-630 | 15/46 | IHW14-640 | 1 1/4 | | |











TOOLS@

JHW37819

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability
- · Drive end features pin retention hole and groove



JHW14-612 JHW14-624



JHWWS-14-11




JHWWS1414RC



JHWWS-1419RC

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Designed for maximum engagement on 6 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- · Specially heat treated for impact use to provide long life, safety, and durability











444400000





JHWMS4-12HRC





JHWMS-4-23RC

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability

1/2" DRIVE SHALLOW IMPACT SOCKETS, 6 POINT, METRIC





Black Industrial Finish

| | | Α | В | С | D | E | | F |
|-----------------|--------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW4M-610 | 10 | 1 1/2 | 29/32 | 19/32 | 1/4 | 7/8 | 11/32 | 23/32 |
| JHW4M-611 | 11 | 1 1/2 | 29/32 | 23/32 | 5/16 | 7/8 | 13/32 | 23/32 |
| JHW4M-612 | 12 | 1 1/2 | ²⁹ / ₃₂ | 25/32 | 3/8 | 7/8 | 7/16 | 23/32 |
| JHW4M-613 | 13 | 1 1/2 | 29/32 | 27/32 | 13/32 | 7/8 | 15/32 | 23/32 |
| JHW4M-614 | 14 | 1 1/2 | 29/32 | 7/8 | 7/16 | 7/8 | 15/32 | 23/32 |
| JHW4M-615 | 15 | 1 1/2 | ¹⁵ / ₁₆ | ¹⁵ / ₁₆ | 7/16 | 7/8 | 15/32 | |
| JHW4M-616 | 16 | 1 1/2 | 31/32 | 31/32 | 15/32 | 7/8 | 15/32 | - |
| JHW4M-617 | 17 | 1 1/2 | 1 | 1 | 1/2 | 7/8 | 15/32 | - |
| JHW4M-618 | 18 | 1 1/2 | 1 ½16 | 1 1/16 | ²⁷ / ₃₂ | ²⁷ / ₃₂ | 21/32 | - |
| JHW4M-619 | 19 | 1 1/2 | 1 1/8 | 1 1/8 | ¹³ / ₁₆ | 27/32 | 11/16 | |
| JHW4M-620 | 20 | 1 1/2 | 1 3/16 | 1 3/16 | 13/16 | 27/32 | 23/32 | - |
| JHW4M-621 | 21 | 1 1/2 | 1 1/4 | 1 1/4 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 3/4 | - |
| JHW4M-622 | 22 | 1 1/2 | 1 5/16 | 1 5/16 | ¹³ / ₁₆ | ²⁷ / ₃₂ | 13/16 | - |
| JHW4M-623 | 23 | 1 3/4 | 1 5/32 | 1 5/32 | 1 1/32 | 1 3/32 | ²⁷ / ₃₂ | - |
| JHW4M-624 | 24 | 1 3/4 | 1 ¾ | 1 3/8 | 1 1/16 | 1 3/32 | 7/8 | |
| JHW4M-625 | 25 | 1 3/4 | 1 7/16 | 1 ⁷ /16 | 1 1/16 | 1 3/32 | ²⁹ / ₃₂ | - |
| JHW4M-626 | 26 | 1 31/32 | 1 1/2 | 1 1/2 | 1 1/4 | 1 %32 | 31/32 | - |
| JHW4M-627 | 27 | 1 31/32 | 1 %16 | 1 %16 | 1 1/4 | 1 %2 | 1 | - |
| JHW4M-629 | 29 | 1 31/32 | 1 ²¹ / ₃₂ | 1 21/32 | 1 1/4 | 1 %32 | 1 1/16 | - |
| JHW4M-630 | 30 | 1 31/32 | 1 ¹¹ /16 | 1 11/16 | 1 1/4 | 1 %32 | 1 3/32 | <u> </u> |
| JHW4M-632 | 32 | 2 | 1 ¹³ / ₁₆ | 1 ¹³ / ₁₆ | 7/8 | 1 %32 | 1 1/8 | • |
| JHW4M-634 | 34 | 2 1/16 | 1 ¹¹ / ₁₆ | 1 1/8 | ²⁹ / ₃₂ | 1 7/16 | 1 ¹¹ / ₃₂ | |
| JHW4M-636 | 36 | 2 1/4 | 1 13/16 | 2 | 29/32 | 1 % | 1 7/16 | - |

JHWMS410HRC

10 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW4M-610 | 10 | JHW4M-614 | 14 | JHW4M-618 | 18 |
| JHW4M-611 | 11 | JHW4M-615 | 15 | JHW4M-619 | 19 |
| JHW4M-612 | 12 | JHW4M-616 | 16 | | |
| JHW4M-613 | 13 | JHW4M-617 | 17 | | |

JHWMS4-12HRC

12 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW4M-613 | 13 | JHW4M-617 | 17 | JHW4M-622 | 22 |
| JHW4M-614 | 14 | JHW4M-618 | 18 | JHW4M-624 | 24 |
| JHW4M-615 | 15 | JHW4M-619 | 19 | JHW4M-627 | 27 |
| JHW4M-616 | 16 | JHW4M-621 | 21 | JHW4M-630 | 30 |

JHWMS-4-16RC

16 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW4M-610 | 10 | JHW4M-614 | 14 | JHW4M-618 | 18 | JHW4M-622 | 22 |
| JHW4M-611 | 11 | JHW4M-615 | 15 | JHW4M-619 | 19 | JHW4M-623 | 23 |
| JHW4M-612 | 12 | JHW4M-616 | 16 | JHW4M-620 | 20 | JHW4M-624 | 24 |
| JHW4M-613 | 13 | JHW4M-617 | 17 | JHW4M-621 | 21 | JHW4M-627 | 27 |

JHWMS-4-23RC

23 Piece 1/2" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW4M-610 | 10 | JHW4M-616 | 16 | JHW4M-622 | 22 | JHW4M-629 | 29 |
| JHW4M-611 | 11 | JHW4M-617 | 17 | JHW4M-623 | 23 | JHW4M-630 | 30 |
| JHW4M-612 | 12 | JHW4M-618 | 18 | JHW4M-624 | 24 | JHW4M-632 | 32 |
| JHW4M-613 | 13 | JHW4M-619 | 19 | JHW4M-625 | 25 | JHW4M-634 | 34 |
| JHW4M-614 | 14 | JHW4M-620 | 20 | JHW4M-626 | 26 | JHW4M-636 | 36 |
| JHW4M-615 | 15 | JHW4M-621 | 21 | JHW4M-627 | 27 | | |





1/2" DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, METRIC





TOOLS @ HEIGHT BROW PREVENTION SYSTEM Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints

Black Industrial Finish

| | | Α | В | С | D | Ε | | F |
|-----------------|--------------|---------------------------------|-----------------------------------|-------------------------------------|-----------------------------|-------------------------------------|--|----------------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW37610 | 10 | 1 1/2 | 7/8 | 5/8 | 3/8 | 1 | 3/8 | 5/8 |
| JHW37611 | 11 | 1 1/2 | 7/8 | 3/4 | 3/8 | / | 3/8 | 5/8 |
| JHW37612 | 12 | 1 1/2 | 7/8 | 3/4 | 3/8 | / | 3/8 | 5/8 |
| JHW37613 | 13 | 1 1/2 | 15/16 | 13/16 | 3/8 | / | 3/8 | 5/8 |
| JHW37614 | 14 | 1 1/2 | ¹⁵ / ₁₆ | 7/8 | 3/8 | / | 1/2 | 5/8 |
| JHW37615 | 15 | 1 1/2 | 1 | 7/8 | 1/2 | / | 1/2 | 5/8 |
| JHW37616 | 16 | 1 1/2 | 1 | 1 | 1/2 | / | 1/2 | / |
| JHW37617 | 17 | 1 1/2 | 1 | 1 | 1/2 | / | 9/16 | / |
| JHW37618 | 18 | 1 1/2 | 1 | 1 | 1/2 | / | 5/8 | / |
| JHW37619 | 19 | 1 1/2 | 1 1/8 | 1 1/8 | 1/2 | 1 | 5/8 | / |
| JHW37620 | 20 | 1 1/2 | 1 1/8 | 1 1/8 | 1/2 | / | 3/4 | / |
| JHW37621 | 21 | 1 1/2 | 1 1/4 | 1 1/4 | 9/16 | / | 3/4 | / |
| JHW37622 | 22 | 1 1/2 | 1 1/4 | 1 1/4 | 9/16 | / | ¹³ / ₁₆ | / |
| JHW37623 | 23 | 1 1/8 | 1 1/4 | 1 1/4 | 5/8 | / | ¹³ / ₁₆ | / |
| JHW37624 | 24 | 1 1/8 | 1 1/2 | 1 3/8 | 5/8 | / | 7/8 | / |
| JHW37625 | 25 | 1 % | 1 1/2 | 1 3/8 | 5/8 | / | 7/8 | / |
| JHW37626 | 26 | 1 1/8 | 1 1/2 | 1 1/2 | 5/8 | / | 15/16 | / |
| JHW37627 | 27 | 1 13/16 | 1 1/2 | 1 1/2 | 3/4 | / | ¹⁵ / ₁₆ | 9/16 |
| JHW37628 | 28 | 1 13/16 | 1 1/2 | 1 1/2 | 3/4 | / | 1 | 9/16 |
| JHW37629 | 29 | 1 13/16 | 1 ½ | 1 1/8 | 3/4 | / | 1 | 9/16 |
| JHW37630 | 30 | 1 13/16 | 1 1/2 | 1 1/8 | 3/4 | / | 1 | 9/16 |
| JHW37632 | 32 | 1 13/16 | 1 1/2 | 1 3/4 | 13/16 | / | 1 1/8 | 9/16 |
| JHW37633 | 33 | 1 13/16 | 1 1/2 | 1 13/16 | 7/8 | / | 1 1/8 | 9/16 |
| JHW37634 | 34 | 1 ¹³ / ₁₆ | 1 1/2 | 1 13/16 | 7/8 | / | 1 1/4 | 9/16 |
| JHW37635 | 35 | 2 | 1 1/2 | 2 | 7/8 | / | 1 1/4 | 9/16 |
| JHW37636 | 36 | 2 | 1 1/2 | 2 | 7/8 | | 1 1/4 | 9/16 |



JHW37624

JHW37610



JHW37925

10 piece 1/2" Drive Impact Shallow 12 Point, MM Socket Set on Clip Rails Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW37610 | 10 | JHW37613 | 13 | JHW37616 | 16 |
| JHW37611 | 11 | JHW37614 | 14 | JHW37617 | 17 |
| JHW37612 | 12 | JHW37615 | 15 | JHW37618 | 18 |
| | | | | JHW37619 | 19 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 and 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- · Specially heat treated for impact use to provide long life, safety, and durability



JHW37925








drive tools such as ratchets, extensions and u-joints









JHWMS-1416RC





1/2" DRIVE DEEP IMPACT SOCKETS, **6 POINT, METRIC**





Black Industrial Finish

| | | Α | В | С | D | E | | F |
|------------|------|----------|---------------------------------|--|-------------------------------|--|---------------------------------|---------------------------------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHW14M-610 | 10 | 3 1/4 | 29/32 | 19/32 | 9/32 | 2 %16 | 11/32 | 2 ¹⁵ / ₃₂ |
| JHW14M-611 | 11 | 3 1/4 | 29/32 | 23/32 | 21/64 | 2 %16 | 13/32 | 2 ¹⁵ / ₃₂ |
| JHW14M-612 | 12 | 3 1/4 | 29/32 | ⁴⁹ / ₆₄ | 23/64 | 2 %16 | 7/16 | 2 ¹⁵ / ₃₂ |
| JHW14M-613 | 13 | 3 1/4 | 29/32 | 53/64 | ²⁵ / ₆₄ | 2 %16 | 15/32 | 2 ¹⁵ / ₃₂ |
| JHW14M-614 | 14 | 3 ½ | 29/32 | 7/8 | 13/32 | 2 %16 | 15/32 | 2 ¹⁵ / ₃₂ |
| JHW14M-615 | 15 | 3 1/4 | 15/16 | ¹⁵ / ₁₆ | 13/32 | 2 7/64 | 33/64 | - |
| JHW14M-616 | 16 | 3 1/4 | 31/32 | 31/32 | 29/64 | 1 31/32 | 17/32 | - |
| JHW14M-617 | 17 | 3 1/4 | 1 | 1 | ²⁷ / ₆₄ | 1 31/32 | 39/64 | • |
| JHW14M-618 | 18 | 3 1/4 | 1 1/16 | 1 ½16 | 1/2 | 1 ³¹ / ₃₂ | 21/32 | - |
| JHW14M-619 | 19 | 3 1/4 | 1 1/8 | 1 1/8 | 35/64 | 1 ⁶¹ / ₆₄ | 11/16 | - |
| JHW14M-620 | 20 | 3 1/4 | 1 3/16 | 1 3/16 | 35/64 | 1 ⁶¹ / ₆₄ | 23/32 | - |
| JHW14M-621 | 21 | 3 1/4 | 1 1/4 | 1 1/4 | 35/64 | 1 ⁶¹ / ₆₄ | 3/4 | • |
| JHW14M-622 | 22 | 3 1/2 | 1 5/16 | 1 5/16 | 35/64 | 2 7/64 | 51/64 | • |
| JHW14M-623 | 23 | 3 1/2 | 1 11/32 | 1 11/32 | 5/8 | 2 7/64 | 53/64 | • |
| JHW14M-624 | 24 | 3 1/2 | 1 ¾ | 1 % | 5/8 | 2 7/64 | 7/8 | • |
| JHW14M-625 | 25 | 3 1/2 | 1 7/16 | 1 7/16 | 5/8 | 2 7/64 | 29/32 | • |
| JHW14M-626 | 26 | 3 1/2 | 1 31/64 | 1 ³¹ / ₆₄ | 5/8 | 2 7/64 | 15/16 | • |
| JHW14M-627 | 27 | 3 1/2 | 1 %16 | 1 %16 | ²⁵ / ₃₂ | 2 7/64 | 31/32 | • |
| JHW14M-629 | 29 | 3 1/2 | 1 % | 1 % | 13/16 | 2 7/64 | 1 1/16 | - |
| JHW14M-630 | 30 | 3 ½ | 1 11/16 | 1 11/16 | 53/64 | 2 21/32 | 1 3/32 | - |
| JHW14M-632 | 32 | 3 ½ | 1 ¹³ / ₁₆ | 1 ¹³ / ₁₆ | 7/8 | 2 ²¹ / ₃₂ | 1 1/4 | - |
| JHW14M-634 | 34 | 3 ½ | 1 3/4 | 1 ¹⁵ / ₁₆ | 57/64 | 2 ⁵⁵ / ₆₄ | 1 21/64 | - |
| JHW14M-635 | 35 | 3 ½ | 1 3/4 | 2 | ⁵⁷ / ₆₄ | 2 ⁵⁵ / ₆₄ | 1 ²³ / ₆₄ | • |
| JHW14M-636 | 36 | 3 1/2 | 1 3/4 | 2 | 57/64 | 2 ¹³ / ₁₆ | 1 1/8 | - |

JHWMS1410HRC 10 Piece 1/2" Drive Deep 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW14M-610 | 10 | JHW14M-614 | 14 | JHW14M-618 | 18 |
| JHW14M-611 | 11 | JHW14M-615 | 15 | JHW14M-619 | 19 |
| JHW14M-612 | 12 | JHW14M-616 | 16 | | |
| JHW14M-613 | 13 | JHW14M-617 | 17 | | |

JHWMS-1416RC 16 Piece 1/2" Drive Deep 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|---------------------|-----------|--------------|-----------|
| JHW14M-610 | 10 | JHW14M-614 | 14 | JHW14M-618 | 18 | JHW14M-622 | 22 |
| JHW14M-611 | 11 | JHW14M-615 | 15 | JHW14M-619 | 19 | JHW14M-623 | 23 |
| JHW14M-612 | 12 | JHW14M-616 | 16 | JHW14M-620 | 20 | JHW14M-624 | 24 |
| JHW14M-613 | 13 | JHW14M-617 | 17 | JHW14M-621 | 21 | JHW14M-627 | 27 |

JHWMS-1424RC 24 Piece 1/2" Drive Deep 6 Point Impact Socket Set on Clip Rail **Contents Include:**

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW14M-610 | 10 | JHW14M-616 | 16 | JHW14M-622 | 22 | JHW14M-629 | 29 |
| JHW14M-611 | 11 | JHW14M-617 | 17 | JHW14M-623 | 23 | JHW14M-630 | 30 |
| JHW14M-612 | 12 | JHW14M-618 | 18 | JHW14M-624 | 24 | JHW14M-632 | 32 |
| JHW14M-613 | 13 | JHW14M-619 | 19 | JHW14M-625 | 25 | JHW14M-634 | 34 |
| JHW14M-614 | 14 | JHW14M-620 | 20 | JHW14M-626 | 26 | JHW14M-635 | 35 |
| JHW14M-615 | 15 | JHW14M-621 | 21 | JHW14M-627 | 27 | JHW14M-636 | 36 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- · Specially heat treated for impact use to provide long life, safety, and durability







1/2" DRIVE DEEP IMPACT SOCKETS, 12 POINT, SAE





Black Industrial Finish

| | | Α | В | С | D | E |
|-----------------|-------------------------------|-------------------------------|-----------------------------------|-------------------------------------|-------------------------------|-------------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) |
| JHW14-1216 | 1/2 | 3 1/4 | 7/8 | 13/16 | 3/8 | 2 %16 |
| JHW14-1218 | 9/16 | 3 1/4 | 7/8 | 7/8 | 7/16 | 2 %16 |
| JHW14-1220 | 5/8 | 3 1/4 | ¹⁵ / ₁₆ | ¹⁵ / ₁₆ | 7/16 | 2 %16 |
| JHW14-1222 | 11/16 | 3 1/4 | 1 1/16 | 1 1/16 | 1/2 | 2 1/4 |
| JHW14-1224 | 3/4 | 3 1/4 | 1 1/8 | 1 1/8 | 9/16 | 2 1/4 |
| JHW14-1226 | ¹³ / ₁₆ | 3 1/4 | 1 1/4 | 1 1/4 | 9/16 | 2 1/4 |
| JHW14-1228 | 7/8 | 3 1/2 | 1 5/16 | 1 5/16 | 5/8 | 2 1/2 |
| JHW14-1230 | 15/16 | 3 1/2 | 1 3/8 | 1 3/8 | 11/16 | 2 1/2 |
| JHW14-1232 | 1 | 3 1/2 | 1 7/16 | 1 7/16 | 3/4 | 2 1/2 |
| JHW14-1234 | 1 1/16 | 3 1/2 | 1 %16 | 1 %16 | 3/4 | 2 1/2 |
| JHW14-1236 | 1 1/8 | 3 1/2 | 1 % | 1 % | 13/16 | 2 1/2 |
| JHW14-1238 | 1 3/16 | 3 1/2 | 1 11/16 | 1 11/16 | ¹³ / ₁₆ | 2 ⁷ /16 |
| JHW14-1240 | 1 1/4 | 3 1/2 | 1 3/4 | 1 3/4 | 7/8 | 2 7/16 |

Features


- SUPERTORQUE™ lobular openings for greater turning power without deforming the factorier
- Designed for maximum engagement on 6- and 12-point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- . Specially heat-treated for impact use to provide long life, safety, and durability







1/2" DRIVE DEEP IMPACT SOCKETS, 12 POINT, METRIC

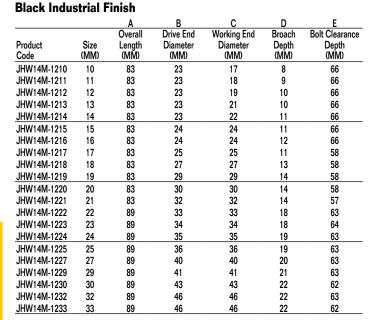

- SUPERTORQUE™ lobular openings for greater turning power without deforming the factorier
- Designed for maximum engagement on 6- and 12-point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- . Specially heat-treated for impact use to provide long life, safety, and durability









JHW14-1218



JHW14M-1212







43 PIECE 3/4" DRIVE **SOCKET AND DRIVE TOOL SET**





12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSH-43TB | 43 Piece Tool Set with JHWTB-12 Metal Tool Box |
| JHWWSH-43 | 43 Piece Tool Set Only |

Contents Include:

| Drive Tools: | | Shallow 12- | Point Socke | ts | |
|--------------|----------------------|--------------|--------------------------------|--------------|---------------------------------|
| Product Code | Description | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWH-20A | 19" Sliding T-Handle | JHWH-1224 | 3/4 | JHWH-1250 | 1 %16 |
| JHWH-41AA | 22" Flex Handle | JHWH-1226 | ¹³ / ₁₆ | JHWH-1252 | 1 % |
| JHWH-51B | 20" Ratchet | JHWH-1228 | 7/8 | JHWH-1254 | 1 11/16 |
| JHWH-104 | 3" Extension | JHWH-1230 | 15/16 | JHWH-1256 | 1 3/4 |
| JHWH-110 | 8" Extension | JHWH-1232 | 1 | JHWH-1258 | 1 ¹³ / ₁₆ |
| JHWH-115 | 16" Extension | JHWH-1234 | 1 1/16 | JHWH-1260 | 1 1/8 |
| JHWH-140A | Universal Joint | JHWH-1236 | 1 ½ | JHWH-1264 | 2 |
| | | JHWH-1238 | 1 ³ / ₁₆ | JHWH-1266 | 2 1/16 |
| Deep 12-Poi | int Sockets | JHWH-1240 | 1 1/4 | JHWH-1268 | 2 1/8 |
| Product Code | Size (Inches) | JHWH-1242 | 1 5/16 | JHWH-1270 | 2 ³ / ₁₆ |
| JHWHD-628 | 7/8 | JHWH-1244 | 1 % | JHWH-1272 | 2 1/4 |
| JHWHD-630 | 15/16 | JHWH-1246 | 1 7/16 | JHWH-1276 | 2 % |
| JHWHD-632 | 1 | JHWH-1248 | 1 1/2 | | |
| JHWHD-634 | 1 1/16 | | | | |
| JHWHD-636 | 1 ½ | | | | |
| JHWHD-640 | 1 1/4 | | | | |
| JHWHD-642 | 1 5/16 | | | | |
| JHWHD-644 | 1 ¾ | | | | |
| JHWHD-646 | 1 7/16 | | | | |
| JHWHD-648 | 1 1/2 | | | | |
| JHWHD-652 | 1 % | | | | |

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use





29 PIECE 3/4" DRIVE SOCKET AND DRIVE TOOL SET





12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|---|
| JHWWSH-29TB | 29 Piece Tool Set with JHWTB-6124B Metal Tool Box |
| JHWWSH-29 | 29 Piece Tool Set Only |
| | |

Contents Include:

| Drive Tools: | | Shallow 12-Point | Sockets |
|---------------------|----------------------|------------------|---------------------------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWH-20A | 19" Sliding T-Handle | JHWH-1242 | 1 ⁵ / ₁₆ |
| JHWH-41AA | 22" Flex Handle | JHWH-1244 | 1 3/8 |
| JHWH-51B | 20" Ratchet | JHWH-1246 | 1 7/16 |
| JHWH-104 | 3" Extension | JHWH-1248 | 1 ½ |
| JHWH-110 | 8" Extension | JHWH-1250 | 1 %6 |
| JHWH-115 | 16" Extension | JHWH-1252 | 1 % |
| JHWH-140A | Universal Joint | JHWH-1254 | 1 11/16 |
| | | JHWH-1256 | 1 3/4 |
| Shallow 12-Poir | nt Sockets | JHWH-1258 | 1 ¹³ / ₁₆ |
| Product Code | Size (Inches) | JHWH-1260 | 1 1/8 |
| JHWH-1228 | 7/8 | JHWH-1264 | 2 |
| JHWH-1230 | 15/16 | JHWH-1268 | 2 1/8 |
| JHWH-1232 | 1 | JHWH-1270 | 2 ³ /16 |
| JHWH-1234 | 1 1/16 | JHWH-1272 | 2 1/4 |
| JHWH-1236 | 1 1/8 | JHWH-1276 | 2 % |
| JHWH-1238 | 1 3/16 | | |
| JHWH-1240 | 1 1/4 | | |

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use









12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSH-22TB | 22 Piece Tool Set with JHWTB-49 Metal Tool Box |
| JHWWSH-22 | 22 Piece Tool Set Only |

Contents Include:

| Contents Inci | uae: | | |
|---------------------|-------------------------------|------------------|--|
| Drive Tools: | | Shallow 12-Point | Sockets |
| Product Code | Description | Product Code | Size (Inches) |
| JHWH-41AA | 22" Flex Handle | JHWH-1236 | 1 1/8 |
| JHWH-51B | 20" Ratchet | JHWH-1240 | 1 1/4 |
| JHWH-104 | 3" Extension | JHWH-1242 | 1 5/16 |
| JHWH-110 | 8" Extension | JHWH-1244 | 1 % |
| JHWH-115 | 16" Extension | JHWH-1246 | 1 7/16 |
| JHWH-140A | Universal Joint | JHWH-1248 | 1 ½ |
| | | JHWH-1252 | 1 % |
| Shallow 12-Poin | t Sockets | JHWH-1254 | 1 11/16 |
| Product Code | Size (Inches) | JHWH-1256 | 1 ¾ |
| JHWH-1228 | 7/8 | JHWH-1258 | 1 ¹³ / ₁₆ |
| JHWH-1230 | ¹⁵ / ₁₆ | JHWH-1260 | 1 1/8 |
| JHWH-1232 | 1 | JHWH-1264 | 2 |
| JHWH-1234 | 1 1/16 | | |

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use
























| Product Code | Description |
|--------------|--|
| JHWWSH-13TB | 13 Piece Tool Set with JHWTB-49 Metal Tool Box |
| JHWWSH-13 | 13 Piece Tool Set Only |

Contents Include:

| Drive Tools: | | Shallow 12-Point | Sockets |
|--------------------------|---------------|------------------|---------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWH-51B | 20" Ratchet | JHWH-1234 | 1 1/16 |
| JHWH-110 | 8" Extension | JHWH-1236 | 1 1/8 |
| | | JHWH-1240 | 1 1/4 |
| Shallow 12-Point Sockets | | JHWH-1242 | 1 5/16 |
| Product Code | Size (Inches) | JHWH-1244 | 1 % |
| JHWH-1228 | 7/8 | JHWH-1246 | 1 7/16 |
| JHWH-1230 | 15/16 | JHWH-1248 | 1 1/2 |
| JHWH-1232 | 1 | JHWH-1252 | 1 % |

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
 Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use





JHWWSH-13TB

20 PIECE 3/4" DRIVE **SOCKET AND DRIVE TOOL SET**







| Product Code | Description |
|--------------|--|
| JHWMSH-20TB | 20 Piece Tool Set with JHWTB-49 Metal Tool Box |
| JHWMSH-20 | 20 Piece Tool Set Only |

Contents Include:

| Drive Tools: | | Shallow 12-Point 9 | Sockets |
|------------------|-----------------|--------------------|-----------|
| Product Code | Description | Product Code | Size (MM) |
| JHWH-41AA | 22" Flex Handle | JHWHM-1230 | 30 |
| JHWH-51B | 20" Ratchet | JHWHM-1232 | 32 |
| JHWH-110 | 8" Extension | JHWHM-1235 | 35 |
| JHWH-115 | 16" Extension | JHWHM-1236 | 36 |
| JHWH-140A | Universal Joint | JHWHM-1238 | 38 |
| | | JHWHM-1241 | 41 |
| Shallow 12-Point | Sockets | JHWHM-1246 | 46 |
| Product Code | Size (MM) | JHWHM-1250 | 50 |
| JHWHM-1219 | 19 | JHWHM-1254 | 54 |
| JHWHM-1222 | 22 | JHWHM-1255 | 55 |
| JHWHM-1224 | 24 | JHWHM-1260 | 60 |
| JHWHM-1227 | 27 | | |

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use





3/4" DRIVE INTEGRATED HANDLE RATCHETS

Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|---------------------------------------|-----------------|-----------------|
| JHWH-51B | Chrome Ratchet | 20 1/8 | 32 |
| JHWHB-51B | Black Finish Ratchet | 20 ½ | 32 |
| JHWH-52EHRK | Repair Kit for JHWH-51B and JHWHB-51B | | |

Fed. Spec: ANSI B107.10M

Features

- Forged one-piece ratchet provide strength and safety for industrial applications
- . Smooth comfort-grip handle permits all-day use without gloves
- 32 tooth gear with 11 degree of engagement allows engagement in tight working areas
- Single Pawl ratchet design:
 - 1) Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load
 - 2) Does not require as many working parts, reducing possible breakage and parts to repair
- · Easy access reverse lever allows user to change working direction quickly and easily with only one hand
- Ball and Spring socket retention





3/4" DRIVE REMOVARIE-HANDIE RATCHETS

| J/T DILLE | E HEHIOTADEE-HARDEE H | MIUILIJ | |
|----------------------|---|-----------------|-----------------|
| Knurled Hai | ndle, Chrome Finish | | |
| Product Code | Description | Length (Inches) | Number of Teeth |
| Complete Rate | het | | |
| JHWH-51AB1 | Ratchet with 19 1/4" Handle | 24 11/16 | 32 |
| Components | | | |
| JHWH-51AB JHWH-A1 | Ratchet Head Only Handle Only | 6 19 ¼ | 32 |
| JHWH-52EHRKA | Repair Kit for JHWH-51AB1 and JHWH-51AB | | |

Note: Head Bore and Handle End Diameter: 13/16"

Fed. Spec: ANSI B107.10M

Features

- 32 teeth action provides an 11° ratcheting angle
- · Shift lever reverses action instantly
- . Ball and spring provide firm socket retention
- · Removable handle makes the tool more versatile, and storage easier
- Knurled handle provides a non-slip grip
- Chrome finish models provides increased protection from rust and corrosion
- · Our most rugged, high torque capacity ratchet





JHWH-41AA

JHWH-20A

JHWHB-20A

3/4" DRIVE HANDLES

Chrome and Black Industrial Finish

| Om ome and | Diack illuustilai i illisii | | |
|--------------|---------------------------------------|-----------------|------------------|
| Product Code | Description | Length (Inches) | Finish |
| JHWH-41AA | Flex Handle Breaker Bar, Knurled Grip | 22 1/8 | Chrome |
| JHWH-20A | Sliding T-Handle | 19 ½ | Chrome |
| JHWHB-20A | Sliding T-Handle | 19 1/4 | Black Industrial |

Fed. Spec: ANSI B107.10M

- Chrome plating provides increased protection from rust and corrosion
- Drive handles provide extra leverage with greater strength than ratchets
- Square drive slides on T-Handles for versatility
- · Flex handle flex drive swivels 110° in either direction















3/4" DRIVE EXTENSIONS

Chrome and Black Industrial Finish

| Omomo ana Biaok maasti | iai i iiiioii | | |
|-------------------------|-----------------|--|--|
| Product Code | Length (Inches) | | |
| Chrome Finish | | | |
| JHWH-104 | 3 | | |
| JHWH-110 | 8 | | |
| JHWH-115 | 16 | | |
| Black Industrial Finish | | | |
| JHWH-104B | 3 | | |
| JHWH-110B | 8 | | |
| JHWH-115B | 16 | | |
| | | | |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention









JHWHNX-130

JHWHNX-131

JHW33008





JHWHNX-130B

JHWHNX-131B

3/4" DRIVE ADAPTERS

| Product Code | Length | Male End | Female End | Female End |
|--------------|----------|-----------------|------------|---------------------|
| | (Inches) | (Inches) | (Inches) | Detent |
| Chrome Finis | | | 2/ | Data da a Fash Wall |
| JHWHNX-130 | 3 | 1 | 3½ | Detent on Each Wall |
| JHWHNX-131 | 3 ½6 | 3/ ₄ | 1 | Drilled Hole |
| JHW33008 | 2 1/8 | 1/2 | 3/4 | Drilled Hole |

| JHWHNX-130B | 3 | 1 | 3/4 | Detent on Each Wall |
|-------------|--------|-----|-----|---------------------|
| JHWHNX-131B | 3 1/16 | 3/4 | 1 | Drilled Hole |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention



3/4" DRIVE UNIVERSAL JOINTS

| Chrome and Black | Industrial Finish | |
|-------------------------|-------------------|-----------------|
| Product Code | Description | Length (Inches) |
| Chrome Finish | | |
| JHWH-140A | Universal Joint | 4 1/16 |
| Black Industrial Finish | | |
| JHWHB-140A | Universal Joint | 4 1/16 |

- Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention











3/4" DRIVE SHALLOW 12 POINT SOCKETS, SAE





High-Polished Chrome Finish

| | | Α | В | С | D | E | | F |
|-----------------|---------------------------------|--------------------|-----------------------------------|--|-------------------------------|-------------------------------------|--|---------------------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHWH-1224 | 3/4 | 2 | 1 7/16 | 1 1/8 | 17/32 | 1 1/4 | 11/16 | 13/16 |
| JHWH-1226 | ¹³ / ₁₆ | 2 | 1 7/16 | 1 7/32 | 9/16 | 1 1/4 | 11/16 | 13/16 |
| JHWH-1228 | 7/8 | 2 | 1 7/16 | 1 5/16 | 19/32 | 1 ½ | 11/16 | ¹³ / ₁₆ |
| JHWH-1230 | ¹⁵ / ₁₆ | 2 | 1 7/16 | 1 3/8 | 21/32 | 1 ½ | 11/16 | ¹³ / ₁₆ |
| JHWH-1231 | 31/32 | 2 | 1 7/16 | 1 ¹³ / ₃₂ | 11/16 | 1 1/4 | 11/16 | 13/16 |
| JHWH-1232 | 1 | 2 1/16 | 1 7/16 | 1 ¹⁵ / ₃₂ | 11/16 | 1 5/16 | 11/16 | 25/32 |
| JHWH-1234 | 1 1/16 | 2 1/8 | 1 1/2 | 1 %16 | 3/4 | 1 3/32 | 1 1/32 | 7/8 |
| JHWH-1236 | 1 1/8 | 2 ³ /16 | 1 1/2 | 1 % | ¹³ / ₁₆ | 1 7/32 | 1 1/8 | 29/32 |
| JHWH-1238 | 1 3/16 | 2 1/4 | 1 1/2 | 1 11/16 | 27/32 | 1 %2 | 1 5/32 | 31/32 |
| JHWH-1240 | 1 1/4 | 2 1/4 | 1 1/2 | 1 3/4 | 27/32 | 1 11/32 | 1 %2 | 15/16 |
| JHWH-1242 | 1 5/16 | 2 5/16 | 1 % | 1 1/8 | 27/32 | 1 ¹³ / ₃₂ | 1 11/32 | 1 |
| JHWH-1244 | 1 % | 2 5/16 | 1 % | 1 ¹⁵ / ₁₆ | 7/8 | 1 3/8 | 1 7/16 | 1 |
| JHWH-1246 | 1 7/16 | 2 % | 1 % | 2 | ¹⁵ / ₁₆ | 1 7/16 | 1 1/4 | 1 |
| JHWH-1248 | 1 ½ | 2 1/2 | 1 % | 2 1/8 | 1 | 1 %16 | 1 1/4 | 1 1/8 |
| JHWH-1250 | 1 %16 | 2 % | 1 3/4 | 2 3/16 | 1 5/32 | 1 11/16 | 1 ¾ | 1 1/4 |
| JHWH-1252 | 1 % | 2 % | 1 3/4 | 2 1/4 | 1 5/32 | 1 11/16 | 1 ¾ | 1 1/4 |
| JHWH-1254 | 1 11/16 | 2 3/4 | 1 ²⁵ / ₃₂ | 2 ¾ | 1 ³ /16 | 1 ¹³ / ₁₆ | 1 ¾ | 1 % |
| JHWH-1256 | 1 3/4 | 2 3/4 | 1 3/4 | 2 7/16 | 1 3/16 | 1 ¹³ / ₁₆ | 1 % | 1 % |
| JHWH-1258 | 1 ¹³ / ₁₆ | 2 1/8 | 1 3/4 | 2 1/2 | 1 1/4 | 1 31/32 | 1 5/16 | 1 7/16 |
| JHWH-1260 | 1 1/8 | 3 | 1 3/4 | 2 %16 | 1 5/16 | 2 ½16 | 1 5/16 | 1 %16 |
| JHWH-1264 | 2 | 3 1/8 | 1 3/4 | 2 ¾ | 1 5/16 | 2 3/16 | 1 5/16 | 1 11/16 |
| JHWH-1266 | 2 1/16 | 3 1/8 | 1 3/4 | 2 ¾ | 1 3/8 | 2 3/16 | 1 5/16 | 1 11/16 |
| JHWH-1268 | 2 1/8 | 3 1/4 | 1 3/4 | 2 ¹⁵ / ₁₆ | 1 ⁷ /16 | 2 5/16 | 1 5/16 | 1 ¹³ / ₁₆ |
| JHWH-1270 | 2 ³ / ₁₆ | 3 1/4 | 1 3/4 | 2 ¹⁵ ⁄ ₁₆ | 1 1/2 | 2 5/16 | 1 5/16 | 1 ¹³ / ₁₆ |
| JHWH-1272 | 2 1/4 | 3 % | 1 3/4 | 3 1/8 | 1 1/2 | 2 7/16 | 1 1/4 | 1 1/8 |
| JHWH-1274 | 2 5/16 | 3 1/2 | 1 3/4 | 3 1/4 | 1 % | 2 %16 | 1 1/4 | 2 |
| JHWH-1276 | 2 % | 3 % | 1 3/4 | 3 1/4 | 1 3/4 | 2 11/16 | 1 1/4 | 2 1/8 |



JHWH-1224

JHWH-1240

Fed. Spec: ANSI B107.110

JHWWSH-16TB

16 Piece 3/4" Drive Shallow 12-Point Socket Set with JHWTB-49 Tool Box

JHWWSH-16RC

16 Piece 3/4" Drive Shallow 12-Point Socket Set on Clip Rails

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------------------|--------------|---------------|--------------|----------------|--------------|---------------------------------|
| JHWH-1228 | 7/8 | JHWH-1236 | 1 1/8 | JHWH-1246 | 1 7/16 | JHWH-1256 | 1 3/4 |
| JHWH-1230 | ¹⁵ / ₁₆ | JHWH-1240 | 1 1/4 | JHWH-1248 | 1 ½ | JHWH-1258 | 1 ¹³ / ₁₆ |
| JHWH-1232 | 1 | JHWH-1242 | 1 5/16 | JHWH-1252 | 1 5/8 | JHWH-1260 | 1 1/8 |
| JHWH-1234 | 1 1/16 | JHWH-1244 | 1 3/8 | JHWH-1254 | 1 11/16 | JHWH-1264 | 2 |



JHWWSH-26RC

JHWWSH-26RC

26 Piece 3/4" Drive Shallow 12-Point Socket Set on Clip Rails

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|--------------------------------|--------------|----------------|--------------|--------------------------------|
| JHWH-1224 | 3/4 | JHWH-1238 | 1 ³ / ₁₆ | JHWH-1252 | 1 % | JHWH-1268 | 2 1/8 |
| JHWH-1226 | 13/16 | JHWH-1240 | 1 1/4 | JHWH-1254 | 1 11/16 | JHWH-1270 | 2 ³ / ₁₆ |
| JHWH-1228 | 7/8 | JHWH-1242 | 1 5/16 | JHWH-1256 | 1 3/4 | JHWH-1272 | 2 1/4 |
| JHWH-1230 | 15/16 | JHWH-1244 | 1 % | JHWH-1258 | 1 13/16 | JHWH-1274 | 2 5/16 |
| JHWH-1232 | 1 | JHWH-1246 | 1 ⁷ /16 | JHWH-1260 | 1 1/8 | JHWH-1276 | 2 % |
| JHWH-1234 | 1 1/16 | JHWH-1248 | 1 1/2 | JHWH-1264 | 2 | | |
| JHWH-1236 | 1 1/8 | JHWH-1250 | 1 %16 | JHWH-1266 | 2 ½16 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners





















| High-Polis | shed C | hrome | Finish | | | | | |
|--------------|----------|----------|-----------|---------------------------------|----------|-----------------------|-------------------------------|--------------------|
| | | Α | В | С | D | E | | F |
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWHD-628 | 7/8 | 3 1/2 | 1 1/16 | 1 5/16 | 5/8 | 2 1/2 | 11/16 | 2 5/16 |
| JHWHD-630 | 15/16 | 3 1/2 | 1 1/16 | 1 ¾ | 21/32 | 2 1/2 | 11/16 | 2 1/16 |
| JHWHD-632 | 1 | 3 1/2 | 1 1/2 | 1 1/16 | 23/32 | 2 1/2 | 11/16 | 2 1/16 |
| JHWHD-634 | 1 1/16 | 3 1/2 | 1 1/2 | 1 %16 | 3/4 | 2 1/2 | 3/4 | 2 1/32 |
| JHWHD-636 | 1 1/8 | 3 1/2 | 1 1/2 | 1 1/8 | 13/16 | 2 1/2 | ²⁵ / ₃₂ | 2 1/32 |
| JHWHD-640 | 1 1/4 | 3 1/2 | 1 1/2 | 1 3/4 | 1 | 2 1/2 | 7/8 | 2 3/16 |
| JHWHD-642 | 1 1/16 | 3 1/2 | 1 5/8 | 1 1/8 | 1 | 2 1/2 | 15/16 | 2 ³ /16 |
| JHWHD-644 | 1 ¾ | 3 1/2 | 1 % | 1 ¹⁵ / ₁₆ | 1 | 2 1/16 | 1 3/8 | 2 ³ /16 |
| JHWHD-646 | 1 1/16 | 3 1/2 | 1 % | 2 | 1 | 2 1/16 | 1 7/16 | 2 1/8 |
| JHWHD-648 | 1 1/2 | 3 1/2 | 1 % | 2 1/16 | 1 1/4 | 2 1/16 | 1 1/2 | 2 1/8 |
| JHWHD-652 | 1 1/8 | 3 1/2 | 1 3/4 | 2 1/4 | 1 3/8 | 2 1/16 | 1 % | 2 1/8 |
| E I O ANIOLI | D407.440 | | | | | | | |

Fed. Spec: ANSI B107.110



JHWWSHD11HRC







JHW33932

JHWWSHD11HRC 11 Piece 3/4" Drive Deep 6 Point Socket Set on Clip Rail Contents Include:

| Ountents iii | JIUUC: | | | | |
|--------------|-------------------------------|--------------|---------------|--------------|---------------|
| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
| JHWHD-628 | 7/8 | JHWHD-636 | 1 1/8 | JHWHD-646 | 1 7/16 |
| JHWHD-630 | ¹⁵ / ₁₆ | JHWHD-640 | 1 1/4 | JHWHD-648 | 1 1/2 |
| JHWHD-632 | 1 | JHWHD-642 | 1 5/16 | JHWHD-652 | 1 % |
| JHWHD-634 | 1 1/16 | JHWHD-644 | 1 3/8 | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners

High-Polished Chrome Finish



3/4" DRIVE DEEP SOCKET, 6 POINT, METRIC





| | | A | В | С | D | E | |
|--------------|-----------|---------------------------------|-----------------------------------|--|--------------------------|--|---|
| Product Code | Size (MM) | Overall Length (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) |
| JHW33719 | 19 | 3 ³⁵ / ₆₄ | 1 19/64 | 1 5/32 | 1 1/64 | 1 3/16 | 45/64 |
| JHW33722 | 22 | 3 ³⁵ / ₆₄ | 1 27/64 | 1 17/64 | 1 1/64 | 1 ³ /16 | 45/64 |
| JHW33723 | 23 | 3 ³⁵ / ₆₄ | 1 ²⁷ / ₆₄ | 1 5/16 | 1 1/64 | 1 ³ / ₁₆ | ⁴⁵ / ₆₄ |
| JHW33724 | 24 | 3 ³⁵ / ₆₄ | 1 ²⁷ / ₆₄ | 1 11/32 | 1 1/64 | 1 ³ / ₁₆ | ⁴⁵ / ₆₄ |
| JHW33727 | 27 | 3 35/64 | 1 ²⁷ / ₆₄ | 1 ½ | 1 7/64 | 1 3/16 | 15/16 |
| JHW33730 | 30 | 3 ³⁵ / ₆₄ | 1 ²⁷ / ₆₄ | 1 21/32 | 1 7/64 | 1 ³ / ₁₆ | 1 1/16 |
| JHW33732 | 32 | 3 ³⁵ / ₆₄ | 1 ²⁷ / ₆₄ | 1 ⁴⁷ /64 | 1 7/64 | 1 3/16 | 1 %4 |
| JHW33735 | 35 | 3 ³⁵ / ₆₄ | 1 1/2 | 1 ⁵⁷ / ₆₄ | 1 3/16 | 1 7/64 | 1 ¹⁷ /64 |
| JHW33736 | 36 | 3 ³⁵ / ₆₄ | 1 1/2 | 1 ³¹ / ₃₂ | 1 3/16 | 1 7/64 | 1 ¹⁹ /64 |
| JHW33738 | 38 | 3 ³⁵ / ₆₄ | 1 ½ | 2 1/32 | 1 11/32 | ¹⁵ /16 | 1 % |
| JHW33741 | 41 | 3 ³⁵ / ₆₄ | 1 37/64 | 2 ¹³ / ₆₄ | 1 11/32 | ¹⁵ / ₁₆ | 1 1/2 |
| JHW33746 | 46 | 3 ³⁵ / ₆₄ | 1 ²¹ / ₃₂ | 2 ½16 | 1 11/32 | ¹⁵ / ₁₆ | 1 ²¹ / ₃₂ |
| JHW33750 | 50 | 3 ³⁵ / ₆₄ | 1 ²¹ / ₃₂ | 2 ⁴³ / ₆₄ | 1 ²⁷ /64 | ¹⁵ / ₁₆ | 1 ²¹ / ₃₂ |
| JHW33755 | 55 | 3 ¹⁵ / ₁₆ | 1 49/64 | 2 ²⁹ / ₃₂ | 1 ½ | ²⁵ / ₃₂ | 1 ¹¹ / ₁₆ |
| JHW33760 | 60 | 3 ⁶¹ / ₆₄ | 1 49/64 | 3 5/32 | 1 37/64 | 5/8 | 1 49/64 |

JHW33932 15 piece 3/4" Drive Deep 6 Point Socket Set in Clip and Rails

| Contents I | Contents Include: | | | | | | | | | | | | |
|--------------|-------------------|--------------|-----------|--------------|-----------|--------------|-----------|--|--|--|--|--|--|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | | | | | | |
| JHW33719 | 19 | JHW33727 | 27 | JHW33736 | 36 | JHW33750 | 50 | | | | | | |
| JHW33722 | 22 | JHW33730 | 30 | JHW33738 | 38 | JHW33755 | 55 | | | | | | |
| JHW33723 | 23 | JHW33732 | 32 | JHW33741 | 41 | JHW33760 | 60 | | | | | | |
| JHW33724 | 24 | JHW33735 | 35 | JHW33746 | 46 | | | | | | | | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners



3/4" DRIVE SHALLOW SOCKETS, 12 POINT, METRIC





| High-Polished Chrome Finish | | | | | | | | | | | |
|-----------------------------|------|---------------|-----------|--|--------------------------------|-----------------------|-------------------|---------------------------------|--|--|--|
| | | A | В | С | D | E | | F | | | |
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose | | | |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | | | |
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | | | |
| JHWHM-1219 | 19 | 2 | 7/16 | 1 1/8 | ⁹ / ₁₆ | 1 1/32 | 11/16 | 13/16 | | | |
| JHWHM-1222 | 22 | 2 | 7/16 | 1 1/4 | 5/8 | 1 1/32 | 11/16 | 13/16 | | | |
| JHWHM-1223 | 23 | 2 | 1 7/16 | 1 11/32 | 5/8 | 1 1/32 | 3/4 | 9/16 | | | |
| JHWHM-1224 | 24 | 2 | 7/16 | 1 ¾ | 21/32 | 1 1/32 | 11/16 | 13/16 | | | |
| JHWHM-1225 | 25 | 2 | 1 7/16 | 1 ⁷ / ₁₆ | 2 ³ / ₃₂ | 1 1/32 | 3/4 | 2 | | | |
| JHWHM-1226 | 26 | 2 | 1 1/2 | 1 1/2 | 2 ³ / ₃₂ | 1 1/32 | 1 1/32 | 2 | | | |
| JHWHM-1227 | 27 | 2 | 1 1/2 | 1 %16 | 3/4 | 1 1/32 | 1 1/16 | 11/16 | | | |
| JHWHM-1228 | 28 | 2 | 1 1/2 | 1 ²¹ / ₃₂ | ²⁵ / ₃₂ | 1 1/32 | 1-3/32 | 1-7/32 | | | |
| JHWHM-1230 | 30 | 2 7/32 | 1 1/2 | 1 % | ¹³ / ₁₆ | 1 7/32 | 1 3/16 | ²⁷ / ₃₂ | | | |
| JHWHM-1232 | 32 | 2 1/4 | 1 1/2 | 1 3/4 | 7/8 | 1 5/16 | 1 ½16 | 7/8 | | | |
| JHWHM-1235 | 35 | 2 5/16 | 1 % | 1 ¹⁵ / ₁₆ | ²⁹ / ₃₂ | 1 13/32 | 1 7/16 | 7/8 | | | |
| JHWHM-1236 | 36 | 2 5/16 | 1% | 1 15/16 | ²⁹ / ₃₂ | 1 13/32 | 1 1/4 | 7/8 | | | |
| JHWHM-1238 | 38 | 2 1/2 | 1 % | 2 1/16 | 1 | 1 19/32 | 1 %16 | 1 1/16 | | | |
| JHWHM-1241 | 41 | 2 % | 1 3/4 | 2 3/16 | 1 1/16 | 1 23/32 | 1 13/32 | 1 ³ / ₁₆ | | | |
| JHWHM-1242 | 42 | 2 1/2 | 1 3/4 | 2 %32 | 1 1/16 | 1 1/2 | 1 ⁵ /8 | 1 21/32 | | | |
| JHWHM-1246 | 46 | 3 1/8 | 1 3/4 | 2 1/16 | 1 ³ /16 | 1 31/32 | 1 13/32 | 1 11/16 | | | |
| JHWHM-1250 | 50 | 3 | 1 3/4 | 2 5/8 | 1 5/16 | 2 3/32 | 1 13/32 | 1 ¹³ / ₃₂ | | | |
| JHWHM-1254 | 54 | 3 1/4 | 1 3/4 | 2 1/8 | 1 15/32 | 2 1/8 | 1 13/32 | 1 21/32 | | | |
| JHWHM-1255 | 55 | 3 1/4 | 1 3/4 | 2 ²⁹ / ₃₂ | 1 15/32 | 2 11/32 | 1 13/32 | 1 ²¹ / ₃₂ | | | |
| JHWHM-1260 | 60 | 3 % | 1 ¾ | 3 1/4 | 1 ¾ | 2 23/32 | 1 3/4 | 2 1/8 | | | |



JHWMSH-15RC 15 Piece 3/4" Drive Shallow 12 Point Socket Set on Clip Rail Contents Include:

| Contents i | nciuaei | | | | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|--|
| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | |
| JHWHM-1219 | 19 | JHWHM-1230 | 30 | JHWHM-1238 | 38 | JHWHM-1254 | 54 | |
| JHWHM-1222 | 22 | JHWHM-1232 | 32 | JHWHM-1241 | 41 | JHWHM-1255 | 55 | |
| JHWHM-1224 | 24 | JHWHM-1235 | 35 | JHWHM-1246 | 46 | JHWHM-1260 | 60 | |
| JHWHM-1227 | 27 | JHWHM-1236 | 36 | JHWHM-1250 | 50 | | | |



JHWHM-1232

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners





JHWMSH-15RC











JHW6-1A JHW6-2B





JHW16-648BW

3/4" DRIVE IMPACT EXTENSIONS AND ACCESSORIES

Black Industrial Finish

| | | Length | Use | | Socket |
|--------------|------------------------|----------|-----------|-------------------|----------------------|
| Product Code | Description | (Inches) | RET RING® | Use O-Ring / Pin | Retention |
| JHW38002 | Impact Extension | 7 | JHW6-1XS | JHW6-1A / JHW6-2C | Through Hole and Pin |
| JHW38003 | Impact Extension | 10 | JHW6-1XS | JHW6-1A / JHW6-2C | Through Hole and Pin |
| JHW38004 | Impact Extension | 13 | JHW6-1XS | JHW6-1A / JHW6-2C | Through Hole and Pin |
| JHW38001 | Impact Universal Joint | 4 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C | Through Hole and Pin |
| JHW38005 | ½"M x ¾"F Adapter | 2 3/16 | JHW6-1XS | JHW6-1A / JHW6-2C | Ball and Spring |
| JHW38006 | 1"M x 3/4"F Adapter | 2 7/16 | JHW6-1XS | JHW6-1A / JHW6-2C | Through Hole and Pin |

Fed. Spec: ANSI B107.2

Features

- Specially heat treated for impact use to provide long life, safety, and durability Pin and o-ring or RET RING® (sold separately) secure tools onto impact wrench for safety and convenience
- Suitable for use with pneumatic and electric impact wrenches
- · Drive end features pin retention hole and groove

3/4" DRIVE IMPACT RETAINING PINS AND RINGS

Black Industrial Finish

| Product Code | Description | Diameter | Length | Application |
|--------------|-------------------------|------------------|--------|---|
| JHW6-1A | Impact Retaining O-Ring | 1 1/4 | NA | Fits All Williams 3/4" Drive Sockets and Accessories |
| JHW6-2B | Impact Retaining Pin | ³ /16 | 1 1/4 | Fits Williams Impact Sockets with "B" Dimension to 1 3/4" |
| JHW6-2C | Impact Retaining Pin | 3/16 | 1 1/2 | Fits Williams Impact Sockets with "B" |
| | | | | Dimension 1 3/4" and Greater |

- Specially heat treated for impact use to provide long life, safety, and durability Suitable for use with pneumatic and electric impact wrenches
- For 3/4" drive impact tools with pin retention hole and groove



3/4" DRIVE RET RING® ONE-PIECE IMPACT RETAINING RINGS WITH CRUSH GAUGE

Black Industrial Finish

| Product Code | Inside Dia. (In.) |
|--------------|-------------------|
| JHW6-0XS | 1 1/4" |
| JHW6-1XS | 1 7/16" |
| JHW6-2XS | 1 5/8" |
| JHW6-3XS | 1 3/4" |
| JHW6-4XS | 2 |
| JHW6-5XS | 2 1/8" |
| JHW6-6XS | 2 1/4" |

- Fits all Williams 3/4" Drive Sockets and Accessories
- . Crush Gage on the resin pin indicates when a socket is excessively worn and should be replaced
- Securely retains sockets and accessories to square drive of impact wrench
 For 3/4" drive impact tools with pin retention hole and groove

- Made of oil resistant material
 RET RING® is a trademark of FTL Enterprises, Inc.



3/4" DRIVE BUDD® WHEEL **IMPACT SOCKET, 6 POINT, SAE**





Black Industrial Finish

| | | Α | В | С | D | Ε | | | |
|--------------|--------------|----------|-----------|----------|----------|-----------|-----------|-----------|----------|
| | | | | Working | | Bolt | Bolt | | |
| | | | Drive End | End | Broach | Clearance | Clearance | Uses | Use |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | RET RING® | O-Ring / |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Number | Pin |
| JHW16-648BW | 13/16 Square | 4 | 1 3/4 | 2 1/4 | 1 7/16 | 2 1/4 | 1 1/4 | 6-1X | 6-1A / |
| | & 1 1/2 Hav | | | | | | | | 6-2C |

Fed. Spec: ANSI B107.2

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- 13/16" square opening threads stud into wheel
- 1-1/2" hex opening engages and tightens the wheel lug nut
 Suitable for use with pneumatic and electric impact wrenches
 Specially heat treated for impact use to provide long life, safety, and durability





3/4" DRIVE SHALLOW IMPACT SOCKETS, 6 POINT, SAE





Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints



| | | Α | В | С | D | E | | F | | |
|-----------------|---------------------------------|--------------------|-----------------------------------|--|-------------------------------|-------------------------------------|--|----------------------------|-----------------------------|---------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diam- eter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Uses RET RING® Number | Use O-Ring / Pin |
| JHW6-618A | 9/16 | 2 | 1 % | 1 | 17/32 | 1 1/32 | 1/2 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-620A | 5/8 | 2 | 1 % | 1 3/32 | 17/32 | 1 1/32 | 1/2 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-622A | 11/16 | 2 | 1 % | 1 5/32 | 17/32 | 1 1/32 | 1/2 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-624A | 3/4 | 2 | 1 % | 1 1/4 | 17/32 | 1 1/32 | 11/16 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-626A | 13/16 | 2 | 1 % | 1 3/8 | 17/32 | 1 1/32 | 11/16 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-628A | 7/8 | 2 | 1 % | 1 1/2 | 19/32 | 1 1/32 | 11/16 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-630A | 15/16 | 2 | 1 % | 1 %16 | 21/32 | 1 1/32 | 11/16 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-632A | 1 | 2 | 1 % | 1 % | 11/16 | 1 1/32 | 11/16 | | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-634A | 1 1/16 | 2 | 1 % | 1 11/16 | 3/4 | 1 1/32 | 1 1/16 | 1 5/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-636 | 1 1/8 | 2 1/8 | 1 % | 1 3/4 | 3/4 | 1 5/32 | 1 1/8 | 1 7/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-638 | 1 3/16 | 2 1/8 | 1 % | 1 1/8 | 3/4 | 1 5/32 | 1 3/16 | 1 7/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6-640 | 1 1/4 | 2 1/8 | 1 3/4 | 2 | 13/16 | 1 3/32 | 1 1/4 | 1 7/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-642 | 1 5/16 | 2 1/8 | 1 3/4 | 2 1/32 | 7/8 | 1 5/32 | 1 5/16 | 1 7/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-644 | 1 % | 2 1/4 | 1 3/4 | 2 1/8 | 7/8 | 1 1/32 | 1 3/8 | 1 %16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-646 | 1 7/16 | 2 1/4 | 1 3/4 | 2 3/16 | 7/8 | 1 1/32 | 1 7/16 | 1 %16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-648 | 1 1/2 | 2 1/4 | 1 3/4 | 2 1/4 | 15/16 | 1 1/32 | 1 1/2 | 1 %16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-650 | 1 %16 | 2 % | 1 3/4 | 2 11/32 | ¹⁵ / ₁₆ | 1 ¹³ / ₃₂ | 1 % | 1 11/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-652 | 1 % | 2 % | 1 3/4 | 2 13/32 | 1 | 1 ¹³ / ₃₂ | 1 % | 1 11/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-654 | 1 11/16 | 2 %16 | 1 3/4 | 2 15/32 | 1 1/32 | 1 ¹⁹ / ₃₂ | 1 7/16 | 1 1/8 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-656 | 1 3/4 | 2 %16 | 1 3/4 | 2 17/32 | 1 1/32 | 1 19/32 | 1 3/4 | 1 1/8 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-658 | 1 13/16 | 2 % | 1 3/4 | 2 19/32 | 1 1/8 | 1 21/32 | 1 13/16 | 1 15/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-660 | 1 1/8 | 2 3/4 | 1 3/4 | 2 % | 1 1/8 | 1 ¹³ / ₁₆ | 1 7/16 | 2 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-662 | 1 ¹⁵ / ₁₆ | 2 3/4 | 1 3/4 | 2 3/4 | 1 1/8 | 1 3/4 | 1 7/16 | 2 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-664 | 2 | 2 1/8 | 1 3/4 | 2 13/16 | 1 1/8 | 1 ¹³ / ₁₆ | 1 7/16 | 2 3/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-666 | 2 1/16 | 2 1/8 | 1 3/4 | 2 1/8 | 1 3/16 | 1 ¹³ / ₁₆ | 1 7/16 | 2 3/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-670 | 2 ³ / ₁₆ | 3 ³ /16 | 1 3/4 | 3 1/16 | 1 5/16 | 2 1/16 | 2 ³ /16 | 2 1/2 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-672 | 2 1/4 | 3 3/16 | 1 3/4 | 3 1/8 | 1 3/8 | 2 5/32 | 1 27/32 | 2 1/2 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6-676 | 2 3/8 | 3 1/2 | 1 3/4 | 3 1/4 | 1 7/16 | 2 7/16 | 1 ²⁷ / ₃₂ | 2 13/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| Fed Spec: AN | | | | - | | | | | | |



JHW6-620A

Fed. Spec: ANSI B107.2

JHWWS-6-10HA 10 Piece 3/4" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|----------------|--------------|---------------|
| JHW6-654 | 1 11/16 | JHW6-660 | 1 1/8 | JHW6-666 | 2 1/16 |
| JHW6-656 | 1 3/4 | JHW6-662 | 1 15/16 | JHW6-670 | 2 3/16 |
| JHW6-658 | 1 13/16 | JHW6-664 | 2 | JHW6-672 | 2 1/4 |
| | | | | 11 11440 070 | 0.2/ |

JHWWS-6-14HA 14 Piece 3/4" Drive Shallow 6 Point Impact Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------------------|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW6-624A | 3/4 | JHW6-632A | 1 | JHW6-640 | 1 1/4 | JHW6-648 | 1 ½ |
| JHW6-626A | ¹³ / ₁₆ | JHW6-634A | 1 1/16 | JHW6-642 | 1 5/16 | JHW6-652 | 1 % |
| JHW6-628A | 7/8 | JHW6-636 | 1 1/8 | JHW6-644 | 1 ¾ | | |
| JHW6-630A | 15/16 | JHW6-638 | 1 3/16 | JHW6-646 | 1 7/16 | | |



JHWWS-6-14HA

JHWWS-6-18TB 18 Piece 3/4" Drive Shallow 6 Point Impact Socket Set packed in Tool Box Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW6-628A | 7/8 | JHW6-640 | 1 1/4 | 6-656 | 1 3/4 |
| JHW6-630A | 15/16 | JHW6-642 | 1 5/16 | 6-658 | 1 13/16 |
| JHW6-632A | 1" | JHW6-644 | 1 3/8 | 6-660 | 1 7/8 |
| JHW6-634A | 1 1/16 | JHW6-646 | 1 7/16 | 6-664 | 2" |
| JHW6-636 | 1 1/8 | JHW6-648 | 1 1/2 | 6-107 | 7" EXT |
| JHW6-638 | 1 3/16 | JHW6-652 | 1 5/8 | 6-140B | U-JOINT |
| | | | | JHWTB-6119B | TOOL BOX |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- · Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability














JHW38444

JHW38430





3/4 " DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, SAE





Black Industrial Finish

| | | Α | В | С | D | E | | F |
|-----------------|------------------|---------------------------------|-----------------------------------|-------------------------------------|-------------------------------|--|---|-------------------------------|
| Product Code | Size (Inches) | Overall Length (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
| JHW38420 | 5/8 | 2 | 1 1/2 | 1 1/8 | 5/8 | / | 1/2 | 7/8 |
| JHW38422 | 11/16 | 2 | 1 1/2 | 1 1/8 | 5/8 | / | 1/2 | 7/8 |
| JHW38424 | 3/4 | 2 | 1 1/2 | 1 1/8 | 5/8 | / | 5/8 | 7/8 |
| JHW38426 | 13/16 | 2 1/16 | 1 1/2 | 1 1/4 | 3/4 | / | 3/4 | ¹⁵ / ₁₆ |
| JHW38428 | 7/8 | 2 1/16 | 1 1/2 | 1 5/16 | 3/4 | / | 3/4 | 15/16 |
| JHW38430 | 15/16 | 2 1/16 | 1 1/2 | 1 7/16 | 3/4 | / | 7/8 | 15/16 |
| JHW38432 | 1 | 2 1/16 | 1 1/2 | 1 1/2 | 3/4 | / | 7/8 | / |
| JHW38434 | 1 1/16 | 2 1/16 | 1 1/2 | 1 1/2 | 3/4 | / | 15/16 | / |
| JHW38436 | 1 1/8 | 2 1/16 | 1 1/8 | 1 1/8 | 3/4 | / | 1 1/16 | / |
| JHW38438 | 1 3/16 | 2 1/16 | 1 3/4 | 1 3/4 | 3/4 | / | 1 1/16 | 1 |
| JHW38440 | 1 1/4 | 2 1/16 | 1 3/4 | 1 13/16 | 3/4 | / | 1 3/16 | 15/16 |
| JHW38442 | 1 5/16 | 2 1/4 | 1 3/4 | 1 13/16 | 7/8 | / | 1 3/16 | 15/16 |
| JHW38444 | 1 3/8 | 2 1/4 | 1 3/4 | 2 | 7/8 | / | 1 1/4 | ¹⁵ / ₁₆ |
| JHW38446 | 1 7/16 | 2 1/4 | 1 3/4 | 2 | 7/8 | / | 1 3/8 | ¹⁵ / ₁₆ |
| JHW38448 | 1 1/2 | 2 1/4 | 1 3/4 | 2 1/16 | 15/16 | / | 1 3/8 | 15/16 |
| JHW38450 | 1 %16 | 2 1/16 | 1 3/4 | 2 1/4 | ¹⁵ / ₁₆ | / | 1 1/2 | 1 |
| JHW38452 | 1 1/8 | 2 1/16 | 1 3/4 | 2 1/4 | ¹⁵ / ₁₆ | / | / | 1 |
| JHW38454 | 1 11/16 | 2 1/16 | 1 3/4 | 2 1/2 | 1 1/16 | / | / | 1 |
| JHW38456 | 1 3/4 | 2 1/16 | 1 3/4 | 2 1/2 | 1 1/16 | / | / | 1 |
| JHW38458 | 1 13/16 | 2 1/8 | 1 3/4 | 2 1/8 | 1 1/16 | / | / | 1 |
| JHW38460 | 1 1/8 | 2 5/8 | 1 3/4 | 2 5/8 | 1 1/16 | / | / | 1 |
| JHW38462 | 1 15/16 | 2 3/4 | 1 3/4 | 2 3/4 | 1 1/16 | / | / | 1 |
| JHW38464 | 2 | 2 ¹³ / ₁₆ | 2 1/8 | 2 3/4 | 1 5/16 | / | / | 1 |
| JHW38466 | 2 1/16 | 2 13/16 | 2 1/8 | 3 | 1 1/16 | / | / | 1 |
| JHW38468 | 2 1/8 | 2 13/16 | 2 1/8 | 3 | 1 5/16 | / | / | 1 |
| JHW38476 | 2 3/8 | 3 | 2 1/8 | 3 5/16 | 1 1/2 | 1 | / | 1 1/16 |

JHW38925

9 piece 3/4" Drive Impact Shallow 12 Point, SAE Socket Set on Clip Rails Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------|
| JHW38420 | 5/8 | JHW38426 | 13/16 | JHW38432 | 1 |
| JHW38422 | 11/16 | JHW38428 | 7/8 | JHW38434 | 1 1/16 |
| JHW38424 | 3/4 | JHW38430 | 15/16 | JHW38436 | 1 1/8 |

JHW38926

17 piece 3/4" Drive Impact Shallow 12 Point, SAE Socket Set on Clip Rails Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|--------------|---------------------------------|--------------|---------------|
| JHW38438 | 1 3/16 | JHW38446 | 1 1/16 | JHW38454 | 1 11/16 | JHW38462 | 1 15/16 |
| JHW38440 | 1 1/4 | JHW38448 | 1 1/2 | JHW38456 | 1 3/4 | JHW38464 | 2 |
| JHW38442 | 1 5/16 | JHW38450 | 1 %16 | JHW38458 | 1 ¹³ / ₁₆ | JHW38466 | 2 1/16 |
| JHW38444 | 1 3/8 | JHW38452 | 1 1/8 | JHW38460 | 1 1/8 | JHW38468 | 2 1/8 |
| | | | | | | JHW38476 | 2 3/8 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 or 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability



3/4" DRIVE DEEP IMPACT SOCKETS, 6 POINT, SAE





Black Industrial Finish

| | | Α | В | С | D | E | | F | | |
|-----------------|-------------------------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|--|--|---------------------------------|-----------------------------|---------------------|
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Uses RET RING® Number | Use O-Ring / Pin |
| JHW16-624 | 3/4 | 3 | 1 5/8 | 1 1/4 | 9/16 | 2 1/32 | 9/16 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-626 | ¹³ / ₁₆ | 3 | 1 % | 1 7/16 | 5/8 | 2 1/32 | ⁹ ⁄ ₁₆ | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-628 | 7/8 | 3 | 1 % | 1 7/16 | 5/8 | 2 1/32 | 5/8 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-630 | ¹⁵ / ₁₆ | 3 | 1 % | 1 % | 5/8 | 2 1/32 | 5/8 | | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-632 | 1 | 3 | 1 1/8 | 1 % | 11/16 | 2 1/32 | 21/32 | • | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-634 | 1 1/16 | 3 | 1 % | 1 11/16 | 11/16 | 2 1/32 | 3/4 | 2 5/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-636 | 1 1/8 | 3 | 1 % | 1 3/4 | 3/4 | 2 1/32 | ¹³ / ₁₆ | 2 5/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW16-638 | 1 3/16 | 3 1/16 | 1 3/4 | 1 ¹⁵ / ₁₆ | 3/4 | 2 7/32 | 1 3/16 | 2 1/2 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-640 | 1 1/4 | 3 1/4 | 1 3/4 | 1 ¹⁵ / ₁₆ | 7/8 | 2 %2 | 1 1/4 | 2 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-642 | 1 5/16 | 3 1/4 | 1 3/4 | 2 | 7/8 | 2 %2 | 1 %2 | 2 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-644 | 1 % | 3 1/4 | 1 3/4 | 2 1/8 | 7/8 | 2 1/32 | 1 % | 2 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-646 | 1 7/16 | 3 1/2 | 1 3/4 | 2 1/8 | 7/8 | 2 17/32 | 1 13/32 | 2 13/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-648 | 1 1/2 | 3 1/2 | 1 3/4 | 2 1/4 | ¹⁵ / ₁₆ | 2 ¹⁷ / ₃₂ | 1 1/2 | 2 13/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-650 | 1 %16 | 3 1/2 | 1 3/4 | 2 5/16 | ¹⁵ / ₁₆ | 2 ¹⁷ / ₃₂ | 1 %16 | 2 13/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-652 | 1 % | 3 ½ | 1 3/4 | 2 7/16 | ¹⁵ / ₁₆ | 2 ¹⁷ / ₃₂ | 1 % | 2 ¹³ / ₁₆ | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-654 | 1 11/16 | 3 1/2 | 1 3/4 | 2 1/2 | 1 | 2 17/32 | 1 11/16 | 2 13/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-656 | 1 3/4 | 3 1/2 | 1 3/4 | 2 1/2 | 1 | 2 ¹⁷ / ₃₂ | 1 3/4 | 2 ¹³ / ₁₆ | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-658 | 1 13/16 | 3 ¾ | 1 3/4 | 2 % | 1 1/16 | 2 3/4 | 1 13/16 | 2 ²⁵ / ₃₂ | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-660 | 1 1/8 | 3 ¾ | 1 3/4 | 2 11/16 | 1 1/8 | 2 3/4 | 1 1/8 | 2 ²⁵ / ₃₂ | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW16-664 | 2 | 3 3/4 | 1 3/4 | 2 ³ / ₁₆ | 1 1/8 | 2 ¾ | 2 | 2 ²⁵ / ₃₂ | JHW6-1XS | JHW6-1A / JHW6-2C |


Fed. Spec: ANSI B107.2

JHWWS-16-7H

7 Piece 3/4" Drive Impact Deep 6 Point Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW16-650 | 1 %16 | JHW16-658 | 1 13/16 |
| JHW16-652 | 1 5/8 | JHW16-660 | 1 1/8 |
| JHW16-654 | 1 11/16 | JHW16-664 | 2 |
| JHW16-656 | 1 3/4 | | |





JHWWS-16-8H

8 Piece 3/4" Drive Deep 6 Point Impact Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------------------|--------------|---------------|
| JHW16-628 | 7/8 | JHW16-636 | 1 1/8 |
| JHW16-630 | ¹⁵ / ₁₆ | JHW16-640 | 1 1/4 |
| JHW16-632 | 1 | JHW16-642 | 1 5/16 |
| JHW16-634 | 1 1/16 | JHW16-648 | 1 1/2 |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability



JHW16-624 JHW16-632





JHWWS-16-8H







Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints







3/4" DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, METRIC

Black Industrial Finish

Black Industrial Finish

| | | Α | В | С | D | E | | F | | |
|--------------|------|----------|-----------|---------------|-------------------------------|----------------|----------------|----------|-----------|-----------------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose | Uses | |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | RET RING® | Use |
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Number | O-Ring / Pin |
| JHW6M-1219 | 19 | 2 | 1 % | 1 1/4 | 1/2 | 1 | 2/3 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1220 | 20 | 2 | 1 1/8 | 1 3/8 | 1/2 | 1 | 2/3 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1221 | 21 | 2 | 1 % | 1 3/8 | 1/2 | 1 | 2/3 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1222 | 22 | 2 | 1 % | 1 1/2 | 1/2 | 1 | 2/3 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1223 | 23 | 2 | 1 % | 1 1/2 | 5/8 | 1 | 2/3 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1224 | 24 | 2 | 1 % | 1 1/2 | 5/8 | 1 | 3/4 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1225 | 25 | 2 | 1 % | 1 1/2 | 11/16 | 1 | 3/4 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1226 | 26 | 2 | 1 % | 1 1/2 | 11/16 | 1 | 3/4 | 1 | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1227 | 27 | 2 | 1 % | 1 % | 11/16 | 1 | 1 | - | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1228 | 28 | 2 1/4 | 1 % | 1 3/4 | 11/16 | 1 3/8 | 1 | - | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1229 | 29 | 2 1/4 | 1 % | 1 3/4 | 11/16 | 1 3/8 | 1 | | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1230 | 30 | 2 1/4 | 1 % | 1 3/4 | 3/4 | 1 3/8 | 1 | - | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1231 | 31 | 2 1/4 | 1 % | 2 | 3/4 | 1 1/4 | 1 1/4 | - | JHW6-1XS | JHW6-1A/JHW6-2B |
| JHW6M-1232 | 32 | 2 1/4 | 1 3/4 | 2 | ¹³ / ₁₆ | 1 1/4 | 1 1/4 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1233 | 33 | 2 1/4 | 1 3/4 | 2 | ¹³ / ₁₆ | 1 1/4 | 1 1/4 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1234 | 34 | 2 1/4 | 1 3/4 | 2 | 7/8 | 1 1/4 | 1 1/4 | | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1235 | 35 | 2 1/4 | 1 3/4 | 2 1//8 | 7/8 | 1 1/4 | 1 1/4 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1236 | 36 | 2 1/4 | 1 3/4 | 2 1//8 | 7/8 | 1 1/4 | 1 1/2 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1238 | 38 | 2 1/4 | 1 3/4 | 2 3/16 | 1 | 1 1/4 | 1 1/2 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1240 | 40 | 2 ½ | 1 3/4 | 2 % | 1 1/8 | 1 7/16 | 1 1/2 | • | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1241 | 41 | 2 ½ | 1 3/4 | 2 ¾ | 1 1/8 | 1 7/16 | 1 1/2 | | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1242 | 42 | 2 1/2 | 1 3/4 | 2 % | 1 1/8 | 1 3/8 | 1 1/2 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1243 | 43 | 2 1/2 | 1 3/4 | 2 1/2 | 1 1/8 | 1 3/8 | 1 3/4 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1244 | 44 | 2 1/2 | 1 3/4 | 2 1/2 | 1 1/8 | 1 % | 1 3/4 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1246 | 46 | 2 3/4 | 1 3/4 | 2 % | 1 1/8 | 1 1/2 | 1 3/4 | - | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW6M-1250 | 50 | 2 3/4 | 1 3/4 | 2 % | 1 1/8 | 1 ½ | 2 | - | JHW6-1XS | JHW6-1A/JHW6-2C |



JHW6M-1250



JHW6M-1219

3/4" DRIVE SHALLOW IMPACT SOCKETS, 6 POINT, METRIC







JHW6M-617A

| | | Α | В | С | D | E | | F | | |
|--------------|--------------|-----------------|-----------------------------------|-------------------------------------|-------------------------------|--|--|--|-----------------------------|---------------------|
| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) | Uses RET RING® Number | Use O-Ring / Pin |
| JHW6M-617A | 17 | 2 | 1 % | 1 5/32 | 17/32 | 1 1/32 | 1/2 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-619A | 19 | 2 | 1 5/8 | 1 1/4 | 17/32 | 1 1/32 | 11/16 | i | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-620A | 20 | 2 | 1 % | 1 % | 35/64 | 1 1/32 | 11/16 | ĺ | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-622A | 22 | 2 | 1 % | 1 1/2 | 19/32 | 1 1/32 | 11/16 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-624A | 24 | 2 | 1 % | 1 35/64 | 11/32 | 1 1/32 | 11/16 | 1 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-627A | 27 | 2 | 1 % | 1 ¹¹ / ₁₆ | 3/4 | 1 1/32 | 1 1/16 | 1 5/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-630 | 30 | 2 3/32 | 1 1/8 | 1 27/32 | 47/64 | 1 1/8 | 47/64 | 1 13/32 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-631 | 31 | 2 1/8 | 1 % | 1 15/16 | 3/4 | 1 3/16 | 1 7/32 | 1 1/16 | JHW6-1XS | JHW6-1A / JHW6-2B |
| JHW6M-632 | 32 | 2 1/8 | 1 3/4 | 2 | 13/16 | 1 3/16 | 1 1/4 | 1 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6M-634 | 34 | 2 1/8 | 1 3/4 | 2 | 7/8 | 1 3/16 | 1 21/64 | 1 1/16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6M-635 | 35 | 2 1/4 | 1 3/4 | 2 1/8 | 7/8 | 1 5/16 | 1 3/8 | 1 %16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6M-636 | 36 | 2 1/4 | 1 3/4 | 2 1/8 | 7/8 | 1 ½16 | 1 13/32 | 1 %16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6M-638 | 38 | 2 1/4 | 1 3/4 | 2 1/4 | ¹⁵ / ₁₆ | 1 5/16 | 1 ½ | 1 %16 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6M-641 | 41 | 2 % | 1 3/4 | 2 ¹³ / ₃₂ | 1 1/8 | 1 ¹¹ / ₁₆ | 1 39/64 | 1 ¹⁵ / ₁₆ | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW6M-646 | 46 | 2 % | 1 3/4 | 2 19/32 | 1 1/8 | 1 ²¹ / ₃₂ | 1 13/16 | 1 ¹⁵ / ₁₆ | JHW6-1XS | JHW6-1A / JHW6-2C |

JHWMS-6-8H 8 Piece 3/4" Drive Shallow 6 Point Impact Socket Set on Clip Rail Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) | | | | |
|--------------|-----------|--------------|-----------|--------------|-----------|--|--|--|--|
| JHW6M-619A | 19 | JHW6M-627A | 27 | JHW6M-636 | 36 | | | | |
| JHW6M-622A | 22 | JHW6M-630 | 30 | JHW6M-641 | 41 | | | | |
| JHW6M-624A | 24 | JHW6M-632 | 32 | | | | | | |



- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 and 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove



3/4" DRIVE ONE PIECE IMPACT HEX BIT DRIVER, SAE





Black Industrial Finish

| | | Α | В | F | | |
|--------------|----------|-------|-------------------------------|-------------|----------------|-------------------|
| | Hex Size | | Drive End | | Uses RET RING® | Use |
| Product Code | (Inches) | OAL | Diameter | Nose Length | Number | O-Ring / Pin |
| JHW38216 | 1/2 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38218 | 9/16 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38220 | 5/8 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38224 | 3/4 | 3 1/2 | 1 ³ / ₄ | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38226 | 13/16 | 3 1/2 | 1 ³ / ₄ | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38228 | 7/8 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38232 | 1 | 3 1/2 | 1 ³ / ₄ | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38236 | 1 1/8 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |
| JHW38240 | 1 1/4 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A / JHW6-2C |

JHW38932

5 Piece 3/4" Drive Hex-Driver Impact Socket Set on Clip Rail

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW38220 | 5/8 | JHW38228 | 7/8 |
| JHW38224 | 3/4 | JHW38232 | 1 |
| JHW38226 | 13/16 | | |



JHW38216

Side hole in socket permits use

with Williams Tools@Height

drive tools such as ratchets, extensions and u-joints

JHW38903

9 Piece 3/4" Drive Hex-Driver Impact Socket Set with 50085 Metal Box

Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|---------------|
| JHW38216 | 1/2 | JHW38228 | 7/8 |
| JHW38218 | 9/16 | JHW38232 | 1 |
| JHW38220 | 5/8 | JHW38236 | 1 1/8 |
| JHW38224 | 3/4 | JHW38240 | 1 1/4 |
| JHW38226 | 13/16 | | |

- . One-piece design maximizes strength and reduces breakage
- Chamfered ends provide easy engagement of the drive tool and fastener
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove



JHW38932
















JHW35812



3/4" DRIVE ONE PIECE IMPACT HEX BIT DRIVER, METRIC





Black Industrial Finish

| | | Overall Length | Drive End | | Uses RET Ring | |
|--------------|---------------|----------------|-------------------|-------------|---------------|-----------------|
| Product Code | Hex Size (MM) | (Inches) | Diameter (Inches) | Nose Length | Number | use O-Ring/Pin |
| JHW35810 | 10 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35812 | 12 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35814 | 14 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35817 | 17 | 3 ½ | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35819 | 19 | 3 ½ | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35821 | 21 | 3 ½ | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35824 | 24 | 3 ½ | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35827 | 27 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35830 | 30 | 3 ½ | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |
| JHW35832 | 32 | 3 1/2 | 1 3/4 | 3/4 | JHW6-1XS | JHW6-1A/JHW6-2C |

Fed. Spec: ANSI B107.2

JHW38936

10 Piece 3/4" Drive One Piece Impact Hex Bit Drivers, Metric

Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|--------------|-----------|--------------|-----------|--------------|-----------|
| JHW35810 | 10 | JHW35819 | 19 | JHW35830 | 30 |
| JHW35812 | 12 | JHW35821 | 21 | JHW35832 | 32 |
| JHW35814 | 14 | JHW35824 | 24 | | |
| JHW35817 | 17 | JHW35827 | 27 | | |





27 PIECE 1" DRIVE SOCKET AND DRIVE TOOL SET





12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSX-28TB | 27 Piece Tool Set with JHWTB-12 Metal Tool Box |
| JHWWSX-28 | 27 Piece Tool Set Only |

Contents Include:

| Drive Tools: | | Shallow 12-Poin | t Sockets |
|--------------------------|---------------------------|-----------------|--|
| Product Code | Description | Product Code | Size (Inches) |
| JHWX-20 | 20" Sliding T-Handle/Head | JHWX-1252 | 1 % |
| JHWX-41C | 34 ¾6" Flex Handle | JHWX-1258 | 1 ¹³ / ₁₆ |
| JHWX-51B | 20" Ratchet | JHWX-1260 | 1 1/8 |
| JHWX-110 | 8" Extension | JHWX-1264 | 2 |
| JHWX-115 | 16" Extension | JHWX-1268 | 2 1/8 |
| | | JHWX-1270 | 2 ³ / ₁₆ |
| Shallow 12-Point Sockets | | JHWX-1272 | 2 ½ |
| Product Code | Size (Inches) | JHWX-1276 | 2 % |
| JHWX-1234 | 1 1/16 | JHWX-1280 | 2 1/2 |
| JHWX-1236 | 1 1/8 | JHWX-1282 | 2 ⁹ / ₁₆ |
| JHWX-1240 | 1 1/4 | JHWX-1284 | 2 ⁵ % |
| JHWX-1242 | 1 5/16 | JHWX-1288 | 2 ¾ |
| JHWX-1244 | 1 % | JHWX-1294 | 2 ¹⁵ / ₁₆ |
| JHWX-1246 | 1 7/16 | JHWX-1296 | 3 |
| JHWX-1248 | 1 ½ | JHWX-12100 | 3 ½ |

Features

- · All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use







19 PIECE 1" DRIVE **SOCKET AND DRIVE TOOL SET**

| 12 Point SAE, with Metal Box | | | |
|------------------------------|--|--|--|
| Product Code | Description | | |
| JHWWSX-21TB | 19 Piece Tool Set with JHWTB-12 Metal Tool Box | | |
| JHWWSX-21 | 19 Piece Tool Set Only | | |

Contents Include:

| Drive Tools: | | Shallow 12-Point | |
|---------------------|-----------------------------|------------------|--|
| Product Code | Description | Product Code | Size (Inches) |
| JHWX-20 | 20" Sliding T-Handle / Head | JHWX-1260 | 1 1/8 |
| JHWX-41C | 34 3/16" Flex Handle | JHWX-1264 | 2 |
| JHWX-51B | 20" Ratchet | JHWX-1270 | 2 ³ ⁄ ₁₆ |
| JHWX-110 | 8" Extension | JHWX-1272 | 2 1/4 |
| JHWX-115 | 16" Extension | JHWX-1276 | 2 % |
| | | JHWX-1280 | 2 ½ |
| Shallow 12-P | oint Sockets | JHWX-1282 | 2 %16 |
| Product Code | Size (Inches) | JHWX-1284 | 2 % |
| JHWX-1248 | 1 ½ | JHWX-1288 | 2 3/4 |
| JHWX-1252 | 1 5/8 | JHWX-1294 | 2 ¹⁵ / ₁₆ |
| JHWX-1258 | 1 13/16 | JHWX-1296 | 3 |

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Metal tool box made for years of rugged use







JHWWSX-28TB





JHWWSX-21TB











JHWX-51B

19 PIECE 1" DRIVE SOCKET AND DRIVE TOOL SET





12 Point SAE, with Metal Box

| Product Code | Description |
|--------------|--|
| JHWWSX-20TB | 19 Piece Tool Set with JHWTB-12 Metal Tool Box |
| JHWWSX-20 | 19 Piece Tool Set Only |

Contents Include:

| Drive Tools: | | Shallow 12-Point | t Sockets |
|---------------------|---------------------------|------------------|--------------------|
| Product Code | Description | Product Code | Size (Inches) |
| JHWX-20 | 20" Sliding T-Handle/Head | JHWX-1242 | 1 5/16 |
| JHWX-41C | 34 3/16" Flex Handle | JHWX-1244 | 1 3/8 |
| JHWX-51B | 20" Ratchet | JHWX-1246 | 1 7/16 |
| JHWX-110 | 8" Extension | JHWX-1248 | 1 ½ |
| JHWX-115 | 16" Extension | JHWX-1252 | 1 % |
| | | JHWX-1258 | 1 13/16 |
| Shallow 12-P | oint Sockets | JHWX-1260 | 1 1/8 |
| Product Code | Size (Inches) | JHWX-1264 | 2 |
| JHWX-1234 | 1 1/16 | JHWX-1270 | 2 ³ /16 |
| JHWX-1236 | 1 1/8 | JHWX-1272 | 2 1/4 |
| JHWX-1240 | 1 1/4 | JHWX-1276 | 2 ¾ |

Features

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- · Metal tool box made for years of rugged use





Integrated Handle, Chrome Finish

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|-------------------------|-----------------|-----------------|
| JHWX-51B | Chrome Ratchet | 20 1/8 | 24 |
| JHWX-52EHRK | Repair Kit for JHWX-51B | | |

Fed. Spec: ANSI B107.10M

Fastures

- Forged one-piece ratchet provide strength and safety for industrial applications
- Smooth comfort-grip handle permits all-day use without gloves
- 24 tooth gear with 15 degree of engagement allows engagement in tight working areas
- Chrome finish with mirror-like exterior can be easily cleaned after each use
- Single Pawl ratchet design:
 - 1) Designed for tighter tolerances between pawl and gear which reduces metal fatigue and slippage under load
 - Does not require as many working parts, reducing possible breakage and parts to repair
- Easy access reverse lever allows user to change working direction quickly and easily with only one hand
- Spring and plunger socket retention





1" DRIVE REMOVABLE-HANDLE RATCHETS

Knurled Handle, Chrome Finish

Complete Ratchet

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|-------------------------|-----------------|-----------------|
| JHWX-52A1 | Ratchet with 36" Handle | 41 | 24 |

Components

| Product Code | Description | Length (Inches) | Number of Teeth |
|--------------|-------------------|-----------------|-----------------|
| JHWX-52 | Ratchet Head Only | 7 13/16 | 24 |
| JHWX-52H36 | Handle Only | 36 | 24 |
| JHWX-52RK | Repair Kit | | |

Note: Head Bore and Handle End Diameter: 1-7/64"

Fed. Spec: ANSI B107.10M

Features

- 24 teeth action provides an 15° ratcheting angle
- Shift lever reverses action instantly
- . Dual socket retention, with both ball and plunger on male drive for versatility
- · Removable handle makes the tool more versatile, and storage easier
- Knurled handle provides a non-slip grip
- . Chrome finish models provides increased protection from rust and corrosion
- Our most rugged, high torque capacity ratchet



1" DRIVE HANDLES

Chrome and Black Industrial Finish

| Product Code | Description | Length (Inches) | Finish |
|-----------------------|--|-----------------|----------------------------|
| JHWX-41C JHWX-41CB | Flex Handle Breaker Bar, Knurled Grip Flex Handle Breaker Bar, Knurled Grip | | Chrome Black Industrial |
| JHWX-20 | Sliding T-Handle | 20 | Chrome |

Sliding T-Handle Components

| Product Code | Description | Length (Inches) | Finish |
|--------------|--------------|-----------------|--------|
| JHWX-20B | Handle | 20 | Chrome |
| JHWX-20C | Sliding Head | 1 15/16 | Chrome |

Fed. Spec: ANSI B107.10M

Features

- Chrome plating provides increased protection from rust and corrosion
- Drive handles provide extra leverage with greater strength than ratchets
- Square drive slides on T-Handles for versatility
- Flex handle flex drive swivels 110° in either direction
- · Spring and plunger socket retention



1" DRIVE EXTENSIONS

Chrome Finish

| On one i misn | |
|---------------|-----------------|
| Product Code | Length (Inches) |
| JHWX-110 | 8 |
| JHWX-115 | 16 |

Fed. Spec: ANSI B107.10M

- . Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention
- Hole in wall of drive end accommodates plunger for firm tool retention




















1" DRIVE SHALLOW 12 POINT SOCKETS, SAE

High-Polished Chrome Finish





JHWWSX-17



| | | Α | В | С | D | E | | F |
|--------------|---------------------------------|-------------------|-----------|---------------------------------|---------------------------------|--|--|--|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWX-1234 | 1 1/16 | 2 1/4 | 2 | 1 % | 3/4 | 1 1/16 | 13/16 | 7/8 |
| JHWX-1236 | 1 1/8 | 2 1/4 | 2 | 1 3/4 | 3/4 | 1 1/16 | 13/16 | 7/8 |
| JHWX-1240 | 1 1/4 | 2 ¾ | 2 | 1 1/8 | 3/4 | 1 ½ | ¹³ / ₁₆ | 7/8 |
| JHWX-1242 | 1 5/16 | 2 1/2 | 2 | 2 ½16 | ¹³ / ₁₆ | 1 %2 | ¹⁵ / ₁₆ | 1 %16 |
| JHWX-1244 | 1 3/8 | 2 1/2 | 2 | 2 1/8 | 7/8 | 1 11/32 | 1 ¹³ / ₃₂ | 1 %16 |
| JHWX-1246 | 1 7/16 | 2 ¾ | 2 | 2 ³ ⁄16 | 1 | 1 15/32 | 1 1/2 | 1 11/16 |
| JHWX-1248 | 1 1/2 | 2 3/4 | 2 | 2 1/4 | 1 | 1 19/32 | 1 %16 | 1 13/16 |
| JHWX-1252 | 1 % | 2 1/8 | 2 | 2 % | 1 1/8 | 1 3/4 | 1 11/16 | 1 15/16 |
| JHWX-1254 | 1 11/16 | 2 1/8 | 2 | 2 ¾ | 1 ³ /16 | 1 %16 | 1 3/4 | 1 ¹⁵ / ₁₆ |
| JHWX-1256 | 1 3/4 | 3 | 2 | 2 %16 | 1 1/4 | 1 ²⁷ /32 | 1 ¹³ / ₁₆ | 2 1/16 |
| JHWX-1258 | 1 ¹³ / ₁₆ | 3 1/8 | 2 1/8 | 2 ⁵ / ₈ | 1 1/4 | 1 ³¹ / ₃₂ | 1 7/16 | 2 3/16 |
| JHWX-1260 | 1 1/8 | 3 1/4 | 2 1/8 | 2 ¾ | 1 7/16 | 2 3/32 | 1 7/16 | 2 5/16 |
| JHWX-1264 | 2 | 3 % | 2 1/8 | 2 ¹⁵ / ₁₆ | 1 1/2 | 2 1/4 | 1 7/16 | 2 1/16 |
| JHWX-1268 | 2 1/8 | 3 ½ | 2 1/4 | 3 1/8 | 1 1/2 | 2 11/32 | 1 7/16 | 2 1/16 |
| JHWX-1270 | 2 3/16 | 3 % | 2 1/4 | 3 1/8 | 1 17/32 | 2 15/32 | 2 1/4 | 2 11/16 |
| JHWX-1272 | 2 1/4 | 3 3/4 | 2 1/4 | 3 1/4 | 1 % | 2 % | 2 11/32 | 2 ²³ / ₃₂ |
| JHWX-1276 | 2 % | 3 1/8 | 2 1/4 | 3 % | 1 % | 2 ¾ | 2 ¾ | 2 ¹³ / ₁₆ |
| JHWX-1280 | 2 1/2 | 4 ½ | 2 1/4 | 3 ½ | 1 3/4 | 2 ³¹ / ₃₂ | 2 ½ | 3 1/16 |
| JHWX-1282 | 2 %16 | 4 ½ | 2 1/4 | 3 %16 | 1 ¹³ / ₁₆ | 2 ³¹ / ₃₂ | 2 %16 | 3 ¾16 |
| JHWX-1284 | 2 % | 4 1/4 | 2 1/4 | 3 % | 1 1/8 | 3 3/32 | 2 % | 3 1/8 |
| JHWX-1288 | 2 3/4 | 4 1/2 | 2 1/4 | 3 ¾ | 2 | 3 ¾ | 2 3/4 | 3 1/16 |
| JHWX-1294 | 2 ¹⁵ / ₁₆ | 4 27/32 | 2 1/4 | 4 | 2 1/8 | 3 ²³ / ₃₂ | 2 ¹⁵ / ₁₆ | 3 ²⁵ / ₃₂ |
| JHWX-1296 | 3 | 4 ⁷ /8 | 2 1/4 | 4 1/8 | 2 1/8 | 3 ¾ | 3 | 3 ²⁷ / ₃₂ |
| JHWX-12100 | 3 1/8 | 4 31/32 | 2 1/4 | 4 1/4 | 2 1/8 | 3 ²⁷ / ₃₂ | 3 1/8 | 3 ²⁹ / ₃₂ |

Fed. Spec: ANSI B107.1

JHWWSX-17 17 Piece 1" Drive Shallow 12-Point Socket Set Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|---------------|--------------|--|--------------|---------------|
| JHWX-1234 | 1 1/16 | JHWX-1248 | 1 1/2 | JHWX-1264 | 2 |
| JHWX-1236 | 1 1/8 | JHWX-1252 | 1 % | JHWX-1268 | 2 1/8 |
| JHWX-1240 | 1 1/4 | JHWX-1254 | 1 ¹¹ / ₁₆ | JHWX-1270 | 2 3/16 |
| JHWX-1242 | 1 5/16 | JHWX-1256 | 1 3/4 | JHWX-1272 | 2 1/4 |
| JHWX-1244 | 1 % | JHWX-1258 | 1 ¹³ / ₁₆ | JHWX-1276 | 2 % |
| JHWX-1246 | 1 7/16 | JHWX-1260 | 1 1/8 | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for quick engagement on both 6 and 12 point fasteners





Black Industrial Finish

| Product Code | Description | Length (Inches) | Use RET RING® | Use O-Ring / Pin | Socket Retention |
|--------------|--|-----------------|------------------|---------------------|----------------------|
| JHW7-107 | Impact Extension | 7 1/4 | JHW7-2XS | JHW7-1B / JHW7-2D | Through Hole and Pin |
| JHW7-113 | Impact Extension | 13 | JHW7-2XS | JHW7-1B / JHW7-2D | Through Hole and Pin |
| JHW7-140B | Impact Universal Joint | 4 1/2 | JHW7-3XS | JHW7-1B / JHW7-2D | Through Hole and Pin |
| JHW7-6 | ³ / ₄ "M x 1"F Adapter | 3 | JHW7-2XS | JHW7-1B / JHW7-2D | Through Hole and Pin |
| JHW7-8 | 1 ½"M x 1"F Adapter | 3 % | JHW7-2XS | JHW7-1B / JHW7-2D | Through Hole and Pin |

Fed. Spec: ANSI B107.2

- . Specially heat treated for impact use to provide long life, safety, and durability
- Pin and o-ring or RET RING® (sold separately) secure tools onto impact wrench for safety and convenience
- Universal joint provides 55° range of motion
- · Suitable for use with pneumatic and electric impact wrenches
- Drive end features pin retention hole and groove









1" DRIVE IMPACT RETAINING PINS AND RINGS

| Product Code | Description | Diameter | Length | Application |
|--------------|-------------------------|----------|--------|---|
| JHW7-1B | Impact Retaining O-Ring | 2 | NA | Fits Williams Impact Tools with "B" Dimension to 2 3/8" |
| JHW7-2D | Impact Retaining Pin | 3/16 | 1 3/4 | Fits Williams Impact Tools with "B" Dimension to 2 3/8" |
| JHW7-1C | Impact Retaining O-Ring | 3 1/4 | NA | Fits Williams Impact Tools with "B" Dimension of 3 1/4" |
| JHW7-2F | Impact Retaining Pin | 3/16 | 2 % | Fits Williams Impact Tools with "B" Dimension of 3 1/4" |

Features

- Specially heat treated for impact use to provide long life, safety, and durability
 Suitable for use with pneumatic and electric impact wrenches
- . For 1" Drive impact tools with pin retention hole and groove

1" DRIVE RET RING® ONE-PIECE **IMPACT RETAINING RINGS WITH CRUSH GAUGE**

| Product Code | Groove Diameter (Inches) | Application |
|--------------|--------------------------|--|
| JHW7-1XS | 1 3/4 | Fits Competitive Impact Sockets |
| JHW7-2XS | 2 | Fits Williams 1" Drive Tools with "B" Dimension of 2 1/8" and 2 1/4" |
| JHW7-3XS | 2 1/8 | Fits Williams 1" Drive Tools with "B" Dimension of 2 %" |
| JHW7-4XS | 2 1/4 | Fits Competitive Impact Sockets |
| JHW7-5XS | 2 1/2 | Fits Competitive Impact Sockets |
| JHW7-6XS | 2 5/8 | Fits Competitive Impact Sockets |

Features

- Fits all Williams 1" Drive Sockets and Accessories
- Crush Gage on the resin pin indicates when a socket is excessively worn and should be replaced
- Securely retains sockets and accessories to square drive of impact wrench
- For 1" drive impact tools with pin retention hole and groove
- Made of oil resistant material
- RET RING® is a trademark of FTL Enterprises, Inc.



1" DRIVE BUDD® WHEEL IMPACT SOCKET, **6 POINT, SAE**





| Black Industrial Finish | | | | | | | | | | |
|-------------------------|--------------------------|-----------------|-----------------------------------|-------------------------------------|--------------------------|-------------------------------------|--|--|--|--|
| | | Α | В | С | D | E | | | | |
| Product Code | Size (Inches) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | | | |
| JHW17-648BW | 13/16 Square / 1 1/2 Hex | 4 | 1 3/4 | 2 1/4 | 1 7/16 | 2 1/4 | 1 1/4 | | | |
| Fed. Spec: ANSI B10 | Fed. Spec: ANSI B107.2 | | | | | | | | | |

Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- 13/16" square opening threads stud into wheel
- . 1-1/2" hex opening engages and tightens the wheel lug nut
- · Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability



19 PIECE 1" DRIVE IMPACT SOCKET SET

6 Point Shallow SAE Set in Tool Box

| Product Code | Description | | | | | | | |
|---------------------------|--|-----|--|--|--|--|--|--|
| JHWWS-7-19TB | WWS-7-19TB 19 Piece 1" Drive Shallow 6 Point Impact Socket Set in Tool Box | | | | | | | |
| Contents Include: | • | | | | | | | |
| Product Code Size (Inches | Product Code Size (Inches) Product Code Size (Inches) Product Code Size (Inches) | es) | | | | | | |

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|--------------|-------------------|--------------|---------------|--------------|-------------------|--------------|---------------|
| JHW7-648 | 1 1/2 | JHW7-668 | 2 1/8 | JHW7-684 | 2 ⁵ /8 | JHW7-6104 | 3 1/4 |
| JHW7-652 | 1 ⁵ /8 | JHW7-672 | 2 1/4 | JHW7-688 | 2 3/4 | JHW7-6112 | 3 1/2 |
| JHW7-656 | 1 3/4 | JHW7-676 | 2 3/8 | JHW7-692 | 2 7/8 | JHW7-107 | 7 3/8" EXT |
| JHW7-660 | 1 7/8 | JHW7-680 | 2 1/2 | JHW7-696 | 3 | JHW7-140B | U-Joint |
| .IHW7-664 | 2 | .IHW7-682 | 2 9/16 | .IHW7-6100 | 3 1/8 | JHWTR-6124R | Tool Box |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability









JHW17-648BW











Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints








1" DRIVE SHALLOW IMPACT SOCKETS, 6 POINT, SAE

Black Industrial Finish

| Product Code | Black Inc | lustria | l Finisł | 1 | | | | | | | |
|--|-----------|---------|----------|-------|-------------|--------|----------------|------|--------|----------|-------------------|
| Product Code | | | Α | В | С | D | E | | F | | |
| Code | | _ | | | Working End | | | | | | |
| JHHVT-664 | | | | | | | | | Length | | |
| JHINT-666 196 2 | | | | | | | | | | | |
| JHMT-658 | | | | | | | | | | | |
| JHMPT-652 | | | | | | | | | | | |
| JHM7-652 | | | | | | | | | | | |
| JHWY-664 1 1/6 2 1/2 2 1/2 1 1/4 1/6 1 1/6 | | | | | | | | | | | |
| JHWY-686 1 1/4 | | | | | | | | | | | - |
| JHWY-680 1½ 2½ 2½ 2½ 2½ 2½ 2½ 2½ | | | | | | | | | | | |
| JHWY-640 | | | | | | | | | | | |
| JHNY-684 2 15/66 2 15/66 2 15/66 2 15/66 1 15 | | | | | | | | | | | |
| JHWY-644 1% 2½ 2½ 2½ 2½ 2½ 2½ 2½ 2 | | | | | | | | | | | |
| JHWY-666 1 7% 2 ½ 2 | | | | | | | | | | | |
| JHWY-680 1½ 2½ 2½ 2½ 2½ 1½ 1½ 1½ | | | | | | | | | | | |
| JHWY-660 1 1% 2 2% 2 1/4 2% 1 1/6 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | | | | | | | | | | | |
| JHWT-652 | | | | | | | | | | | |
| JHWT-665 1 11% 2 2% 2 3% 2 2% 1 1 2% 1 1 2% 1 1 1 2 1 3 JHWT-305 JHWT-18 JHWT-20 JHWT-668 1 1 3% 2 1 3% 2 3% 2 3% 1 3% 1 1 3% 2 1 1 3% 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | | | | | | | | | | | |
| JHWT-656 1 ½ 2 ½ 2 ½ 2 ½ 1 ½ 1 ½ 1 ½ 1 ½ 1 ½ 1 ½ | | | | | | | | | | | |
| JHWT-688 1 1% 2 1% 2 2% 2 3% 2 2% 1 1% 1 1% 1 1% | | | | | | | | | | | |
| JHWT-660 1 1% 2 1% 2 2% 2 3% 1 3% 1 1% 1 12% 1 1% 1 1 | | | | | | | | | | | |
| JHWT-6662 1 19/16 2 19/16 2 29/16 29/16 19/16 19/16 29 | | | | | | | | | | | |
| JHWT-668 | | | | | | | | | | | |
| JHWY-666 | | | | | | | | | | | |
| JHWT-668 | | | | | | | | | | | |
| JHWY-670 | | | | | | | | | | | |
| JHW7-672 | | | | | | | | | | | |
| JHW7-676 | | | | | | | | | | | |
| JHW7-676 | | | | | | | | | | | |
| JHW7-678 | | | | | | | | | | | |
| JHW7-680 2 ½ 3 ¾ 2 ½ 3 ½ 3 ½ 1 ½ 2 ½ 2 ½ 2 ½ 2 ½ 1 HW7-3XS JHW7-1B JHW7-2D JHW7-682 2 ½ 3 ¾ 2 ½ 3 ¾ 1 ½ 2 ½ 2 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B JHW7-2D JHW7-686 2 ½ 3 ¾ 2 ½ 3 ¾ 1 ½ 2 ½ 2 ½ 2 ½ 2 ½ JHW7-3XS JHW7-1B JHW7-2D JHW7-686 2 ½ 3 ¾ 2 ½ 3 ¾ 1 ½ 2 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B JHW7-2D JHW7-688 2 ¼ 3 ¾ 2 ½ 3 ¾ 1 ½ 2 ½ 2 ½ 2 ½ 2 ½ JHW7-3XS JHW7-1B JHW7-2D JHW7-689 2 ¼ 4 2 ½ 4 1 ½ 2 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B JHW7-2D JHW7-692 2 ¼ 4 ½ 2 ¼ 4 1 ½ 6 2 ½ 2 3 JHW7-3XS JHW7-1B JHW7-2D JHW7-692 2 ¼ 4 ½ 4 ½ 4 1 ½ 6 2 ½ 2 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B JHW7-2D JHW7-693 3 ¼ 4 ½ 2 ½ 4 ½ 2 ½ 2 ½ 2 ½ 2 ½ 6 3 ½ JHW7-3XS JHW7-1B JHW7-2D JHW7-694 2 ½ 4 ½ 4 ½ 4 ½ 4 ½ 4 ½ 4 ½ 4 ½ 4 ½ 4 | | | | | | | | | | | |
| JHW7-682 | | | | | | | | | | | |
| JHW7-686 | | | | | | | | | | | |
| JHW7-686 2 '1½6 3 ½ 2 ½ 3 ¾ 1 1¾6 2 1½2 2 ½ 2 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-688 2 ½ 4 3 ½ 3 ½ 3 ¾ 1 1¾6 2 2½2 2 ½ 2 ¾ 2½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-692 2 ½ 4 2 ½ 4 1 1¾6 2 1½6 2 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-692 2 ½ 4 2 ½ 4 1 1¾6 2 1½6 2 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-696 3 4 ¾6 2 ½ 4 ¼ 2 ½ 2 ½ 2 ½ ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-696 3 4 ¾6 2 ½ 4 ¼ 2 ½ ½ 3 ¾6 2 ½ 3 ¾ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6100 3 ¼ 4 ¼6 2 ½ 4 ¼ 2 ½ ½ 3 ¾6 2 ½ 3 ¾ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6104 3 ¼ 4 ¾6 2 ½ 4 ¼ 2 ½ ½ 3 ¾6 2 ½ 3 ¾6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6104 3 ¼ 4 ¼6 2 ½ 4 ¼ 2 ½ ½ 3 ½ 4 ½ 2 ½ 3 ½ 3 ½ 3 ½ JHW7-1B / JHW7-2D JHW7-6108 3 ¾6 4 ½2 2 ½ 4 ¼ 2 ½ 4 ¾ 2 ½ 4 ¾ 2 ½ 4 ¾ 3 ½ 2 ½ 2 ½ 4 ¾ 1½ 2 ¼ 3 ½6 2 ½ 2 ¼ 3 ¼6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ¾6 4 ¼ 2 ½ 5 ½ 5 ½ 5 ½ 6 3 ½ 2 ½ 6 3 ½ 2 ½ 2 ¼ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ¾6 4 ¼ 2 ½ 5 ½ 5 ¼6 3 ½2 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ¾6 5 ¼6 2 ½ 5 ½ 5 ½ 6 2 ½6 3 ½2 2 ½ 2 ½ 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 ¼6 5 ¼6 2 ½ 5 ½ 5 ½ 2 ½6 3 ½2 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ¼6 5 ¼6 2 ½ 5 ½ 5 ½ 2 ½ 3 3 ½2 2 ½ 2 ½ 2 ¼ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ¼6 5 ¼6 2 ½ 5 ½ 5 ½ 2 ½ 6 3 ½2 2 ½ 3 3 ¼6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 ½6 5 ¼6 2 ½ 5 ½6 5 ½ 2 ½6 3 ½2½ 2 ½ 3 3 ¾6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 3 ¼6 5 ¼6 2 ½ 5 ½ 5 ½ 2 ½6 3 ½2½ 2 ½6 3 ½2½ 3 ¼6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 ¼6 5 ½ 2 ½ 5 ½6 5 ½ 2 ½6 3 ½2½ 2 ½6 3 ½2½ 3 ½6 3 ½2 3 ½6 3 ½6 | | | | | | | | | | | |
| JHW7-688 | | | | | | | | | | | |
| JHW7-690 | | | | | | | | | | | |
| JHW7-692 2 % 4 2 % 4 1 13/16 2 11/16 2 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-694 2 15/16 4 % 2 % 4 % 2 ½ 2 16 3 5/16 2 % 3 % JHW7-3XS JHW7-1B / JHW7-2D JHW7-6100 3 % 4 % 2 % 4 ½ 2 ½ 6 3 ½ 2 ½ 6 3 ½ 3 ½ 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6104 3 ¼ 4 3/6 2 % 4 ½ 2 ½/16 3 ½ 2 ½/16 3 ½ 2 ½ 2 3/6 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6108 3 % 4 72/32 2 ½ 4 ½ 2 ½/16 3 ½/2 2 ½/2 2 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6108 3 ½ 4 ½ 2 ½ 4 ½/2 ½/16 3 ½/2 2 ½/2 2 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 ½ 4 ¼ 2 ½ 4 ¼ 2 ½/4 3 ½/2 2 ½ 2 ½/2 2 ½/2 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 ½ 4 ¼ 2 ½ 5 5 ½/2 3 ½/2 2 ½ 2 ½ 2 ½/2 2 ½ 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6118 3 ½/2 4 ¼ 2 ½/4 5 5 ½/2 2 ½/2 3 ½/2 2 ½/2 2 ½/2 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6110 3 ¼ 5 ½/2 2 ½ | | | | | | | | | | | |
| JHW7-694 2 19/6 4 3/6 2 3/6 4 4/8 2 1/32 2 11/6 2 19/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-696 3 4 4/3 2 3/6 4 4/4 2 1/6 3 5/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6100 3 3/6 4 3/6 2 3/6 4 4/4 2 1/6 3 5/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6104 3 3/4 4 3/6 2 3/6 4 3/4 2 1/6 3 5/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6108 3 3/6 4 3/4 2 3/6 4 3/4 2 1/6 3 3/6 2 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 3/2 4 3/4 2 3/6 5 3/6 2 1/4 3 5/16 2 1/2 2 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 3/6 4 3/4 2 3/6 5 5/6 2 3/6 3 1/3/2 2 5/6 2 1/3/2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6118 3 1/6 4 3/4 2 3/6 5 5/6 2 3/6 5 3/6 2 3/6 3 1/3/2 2 5/6 2 1/3/2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 3/4 5 5/6 2 3/6 5 5/6 2 3/6 3 1/3/2 2 5/6 3 3/2/2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6122 3 13/6 5 3/6 2 3/6 5 5/6 2 3/6 5 3/6 2 3/6 3 1/3/2 3 3/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 3/6 5 3/6 2 3/6 5 5/6 2 3/6 5 5/6 2 3/6 3 1/3/2 3 3/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 3/6 5 3/6 2 3/6 5 5/6 2 3/6 5 5/2 2 3/6 3 3/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 3/6 5 3/6 2 3/6 5 5/2 2 3/6 5 5/2 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 3/6 5 3/6 2 3/6 5 5/2 2 3/6 5 5/2 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6130 4 3/6 5 3/6 2 3/6 5 5/2 2 3/6 5 3/2 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/6 5 3/6 2 3/6 5 3/6 2 3/6 5 3/6 2 3/6 5 3/6 2 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/6 5 3/6 2 3/6 5 3/6 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/6 5 3/6 2 3/6 5 3/6 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/6 5 3/6 2 3/6 5 3/6 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 3/6 5 3/6 2 3/6 5 3/6 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 3/6 5 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 3/6 5/6 2 3/6 6 2 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6144 4 3/6 5 3/6 3 3/6 3 3/6 3 3/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6144 4 3/6 5 3/6 6 3/6 3/6 5/6 2 3/6 6 2 3/6 3 3/6 3 3/6 JHW7- | | | | | | | | | | | |
| JHW7-696 3 4 % 2 % 4 ¼ 2 ½ 6 3 ½ 6 2 % 3 ½ 6 2 % 3 % JHW7-3XS JHW7-1B / JHW7-2D JHW7-6100 3 ½ 4 % 2 % 4 ¼ 2 ½ 6 3 ½ 2 ½ 2 % 3 ½ 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6104 3 ¼ 4 % 2 % 4 ½ 2 ½ 1 % 3 ½ 2 ½ 2 ½ 2 % JHW7-3XS JHW7-1B / JHW7-2D JHW7-6108 3 ½ 4 ½ 2 ½ 8 4 ½ 2 ½ 1 % 3 ½ 2 ½ 2 ½ 2 ½ 2 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 ½ 4 ¾ 2 ½ 5 5 2 ½ 5 ½ 5 ½ 2 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ½ 4 ¾ 2 ½ 5 5 ½ 2 ½ 3 ½ 6 3 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ½ 4 ¾ 2 ½ 5 5 ½ 2 ½ 3 ½ 3 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ½ 4 ¾ 2 ½ 5 5 ½ 2 ½ 3 ½ 3 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ½ 5 ½ 6 2 ½ 5 ½ 6 2 ½ 3 ½ 3 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ¼ 5 ½ 6 2 ½ 5 ½ 6 2 ½ 6 3 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ¼ 5 ½ 6 2 ½ 5 ½ 6 2 ½ 6 3 ½ 2 ½ 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 ½ 5 ½ 6 5 ½ 2 ½ 6 3 ½ 2 ½ 6 3 ½ 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 ½ 5 ½ 6 5 ½ 2 ½ 6 5 ½ 2 ½ 6 3 ½ 2 ½ 6 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 3 ¼ 6 5 ½ 2 ½ 5 5 ½ 2 ½ 6 3 ½ 2 ½ 6 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 4 5 ½ 5 ½ 2 ½ 5 5 ½ 2 ½ 6 3 ½ 2 ½ 6 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 4 5 ½ 5 ½ 2 ½ 6 5 ½ 2 ½ 6 3 ½ 2 ½ 6 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 ½ 6 5 ½ 2 ½ 6 6 2 ¾ 6 3 ½ 2 ½ 6 6 2 ¾ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ¼ 6 5 ½ 2 ½ 6 6 2 ¾ 6 3 ½ 2 ½ 6 6 2 ¾ 3 ½ 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ¼ 6 5 ½ 2 ½ 6 6 2 ¾ 6 3 ½ 2 ½ 6 6 2 ¾ 3 ½ 3 ½ 3 ½ 3 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6140 4 ¼ 6 5 ½ 2 ½ 6 5 ¼ 6 2 ½ 6 5 ¼ 6 2 ½ 6 5 ¼ 6 2 ½ 6 3 ½ 5 ½ 2 ½ 6 6 2 3 ½ 6 3 ½ 5 ½ 2 ½ 6 6 2 3 ½ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 6 2 3 ½ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ 6 3 ½ 2 ½ 6 5 ¼ | | | | | | | | | | | |
| JHW7-6100 3 1/8 4 1/8 2 1/8 4 1/4 2 1/16 3 1/16 2 1/8 3 1/8 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6104 3 1/4 4 1/8 2 1/8 4 1/8 2 1/16 3 1/32 2 1/8 3 1/8 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6108 3 1/8 4 1/8 2 1/8 3 1/16 2 1/2 2 1/2 2 1/2 2 1/8 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 1/2 4 1/4 2 1/8 5 1/8 2 1/16 3 1/32 2 1/2 2 1/2 2 1/2 2 1/2 2 1/2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 1/8 4 1/4 2 1/8 5 1/8 2 1/16 3 1/32 2 1/2 2 1/2 2 1/2 2 1/2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6118 3 1/16 4 1/4 2 1/8 5 1/6 5 1/6 3 1/1/2 2 1/2 2 1/2 2 1/2 2 1/2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 1/4 5 1/8 5 1/6 2 1/8 5 1/8 2 1/8 5 1/2 2 1/8 3 1/32 2 1/4 2 1/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 1/4 5 1/8 5 1/6 2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1 | | | | | | | | | | | |
| JHW7-6104 3 ½ 4 ¾ 6 2 ¾ 4 ½ 2 ½ 1/16 3 ½ 2 ¾ 3 ¾ JHW7-1B / JHW7-2D JHW7-6108 3 ¾ 4 ¾ 2 ½ 2 ¾ 4 ¾ 2 ½ 3 ¾ 1 ½ 2 ½ 2 ¾ 3 ¾ 1 ½ 2 ½ 2 ¾ 3 ¾ 1 ½ 2 ½ 2 ¾ 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6112 3 ½ 4 ¾ 2 ¼ 5 ¾ 5 ½ 2 ¼ 6 5 2 ½ 6 3 1½ 2 2 ½ 2 ½ 1 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ¾ 5 4 ¾ 4 2 ¼ 5 ¾ 5 ½ 2 ¼ 6 5 2 ½ 6 3 1½ 2 2 ½ 2 ½ 1 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6118 3 1½ 6 4 ¾ 2 ½ 5 5 ½ 6 2 ½ 6 3 1½ 2 2 ½ 2 ½ 2 ½ 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ¾ 5 ½ 6 2 ½ 5 ½ 6 2 ½ 6 3 1½ 2 2 ½ 2 ½ 1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ½ ½ 5 ½ 6 2 ½ 5 ½ 2 ¾ 3 ½ 2 ½ 3 ½ 3 ½ 2 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6122 3 1½ 6 5 ½ 2 ½ 5 ½ 2 ½ 6 3 2½ 2 ¾ 3 ½ 3 ½ 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 ½ 5 ½ 2 ½ 5 ½ 2 ½ 6 3 2½ 2 ½ 6 3 2½ 2 ¾ 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 ½ 5 ½ 2 ½ 5 5 ½ 2 ½ 6 3 2½ 2 ½ 6 3 2½ 2 ¼ 3 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 3 1½ 6 5 ½ 2 ½ 5 5 ½ 2 ½ 6 3 2½ 2 ½ 6 3 2½ 2 ½ 3 3 3 3 ½ 6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6130 4 ½ 6 5 ½ 2 ½ 6 5 ½ 2 1½ 2 2 ½ 6 3 2½ 2 1½ 2 3 3 3 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 ½ 6 5 ½ 2 ½ 6 6 2 3 ½ 6 5 ½ 2 1½ 2 1½ 2 3 3 3 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ¾ 6 5 ½ 2 ½ 6 6 2 3 ½ 6 5 ½ 2 1½ 2 1½ 2 3 3 3 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3 ½ 5 ½ 2 ½ 6 6 2 3 ½ 5 3 2 ½ 3 2 ½ 3 3 3 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ½ 6 5 ½ 2 ½ 6 6 2 3 ½ 2 ½ 6 6 2 3 ½ 3 2 ½ 2 ½ 3 3 3 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ½ 6 5 ½ 2 ½ 6 6 2 3 ½ 6 5 2 ½ 2 ½ 6 3 2 ½ 2 ½ 3 3 3 3 ½ 3 3 ½ 3 3 ½ 3 3 JHW7-1B / JHW7-2D JHW7-6140 4 ½ 6 5 ½ 2 ½ 6 6 2 3 ½ 6 2 ½ 6 2 3 2 ½ 3 2 3 2 3 ½ 3 3 3 3 3 3 3 3 3 3 | | | | | | | | | | | |
| JHW7-6108 3 \(\frac{3}{8} \) 4 \(\frac{2}{3}\)2 \(2 \frac{3}{8} \) 4 \(\frac{5}{8} \) 2 \(\frac{1}{4} \) 3 \(\frac{5}{16} \) 2 \(\frac{1}{2} \) 2 \(\frac{3}{2}\)6 \\ JHW7-3XS \\ JHW7-1B \/ JHW7-2D \\ JHW7-6112 3 \(\frac{1}{2} \) 4 \(\frac{3}{4} \) 2 \(\frac{3}{8} \) 5 \(\frac{5}{16} \) 3 \(\frac{1}{1}\)3 \(\frac{1}{2} \) 2 \(\frac{1}{2} \) 2 \(\frac{1}{2} \) 3 \(\frac{1}{2} \) JHW7-3XS \\ JHW7-1B \/ JHW7-2D \\ JHW7-6118 3 \(\frac{1}{1}\)16 4 \(\frac{3}{4} \) 2 \(\frac{3}{8} \) 5 \(\frac{5}{16} \) 2 \(\frac{7}{16} \) 3 \(\frac{1}{3}\)32 \(2 \frac{3}{4} \) 2 \(\frac{1}{16} \) JHW7-3XS \\ JHW7-1B \/ JHW7-2D \\ JHW7-6118 3 \(\frac{1}{1}\)16 4 \(\frac{3}{4} \) 2 \(\frac{3}{8} \) 5 \(\frac{5}{16} \) 2 \(\frac{7}{16} \) 3 \(\frac{1}{3}\)32 \(2 \frac{3}{4} \) 2 \(\frac{1}{16} \) JHW7-3XS \\ JHW7-1B \/ JHW7-2D \\ JHW7-6120 3 \(\frac{3}{16} \) 5 \(\frac{7}{6} \) 5 \(\frac{7}{6} \) 3 \(\frac{2}{16} \) 3 \(\frac{2} | | | | | | | | | | | |
| JHW7-6112 3 ½ 4 ¾ 2 ¾ 5 ¼ 5 ½ 5 ½ 5 ½ 2 ¾ 3 1½32 2 ½ 2 5% JHW7-3XS JHW7-1B / JHW7-2D JHW7-6116 3 ¾ 4 ¾ 2 ¾ 5 ½ 2 ¾ 3 1½32 2 ½ 2 ½ 2 ½ 3 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6118 3 1¼6 4 ¾ 2 ¾ 5 ½ 5 ½ 2 ¾ 3 1½32 2 ¾ 2 1½1 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 ¾ 5 ¼ 6 5 ¼ 6 2 ¾ 5 ½ 2 ½ 3 ½ 3 ½ 2 ½ 3 ½ 2 ½ 3 ½ 3 ½ 3 ½ 3 | | | | | | | | | | | |
| JHW7-6116 3 ½ 4 ¾ 2 ½ 5 5 ½ 2 ½ 6 3 ½ 2 ½ 2 ½ 6 3 ½ 2 ½ 1 ½ 2 ½ 1 ½ 1 ½ 1 ½ 1 ½ 1 ½ 1 ½ 1 | | | | | | | 3 716 3 11/ | | | | |
| JHW7-6118 3 11/16 4 3/4 2 3/8 5 5/16 2 7/16 3 13/32 2 3/4 2 15/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6120 3 3/4 5 1/16 5 3/16 2 3/8 5 1/8 2 3/8 3 21/64 2 5/8 3 23/64 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6122 3 13/16 5 3/16 2 3/8 5 3/8 2 17/32 3 8/16 2 5/8 3 23/64 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6124 3 7/8 5 1/4 2 3/8 5 1/4 2 9/16 3 25/32 3 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 3 15/16 5 5/16 2 3/8 5 1/2 2 9/16 3 25/32 3 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6128 4 5 3/8 2 3/8 5 1/2 2 9/16 3 25/32 2 19/32 3 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6130 4 1/16 5 3/8 2 3/8 5 1/2 2 15/32 2 19/32 3 3 33/44 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 1/8 5 3/8 2 3/8 5 1/2 2 15/32 2 19/32 3 3 33/44 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/16 5 1/2 2 3/8 5 3/4 2 5/8 3 25/32 3 3 3/8 3 3/44 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/16 5 1/2 2 3/8 5 3/4 2 5/8 3 25/32 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/16 5 1/2 2 3/8 5 3/4 2 5/8 3 25/32 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/16 5 1/2 2 3/8 5 3/4 2 5/8 3 25/32 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/16 5 1/2 2 3/8 5 13/16 2 21/32 3 25/32 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6140 4 3/8 5 5/6 2 3/8 5 27/32 2 5/8 3 25/32 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6140 4 3/16 5 5/8 2 3/8 5 27/32 2 5/8 3 25/32 3 3/8 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6144 4 1/2 5 5/8 2 3/8 6 2 23/8 3 3/16 3 25/32 3 3/8 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6146 4 3/16 5 5/8 2 3/8 6 6 2 3/14 3 3/16 3 25/32 3 3/18 3 25/32 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6152 4 3/4 5 3/4 3 1/4 6 1/32 3 3/16 3 25/32 3 3/8 3 25/32 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 1/4 3 1/4 7 3 3 3/16 3 25/32 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 1/4 3 1/4 7 3 3 3/16 4 3/16 4 3/14 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 1/4 3 1/4 7 1/2 3 3/16 4 3/16 4 3/14 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 1/4 3 1/4 7 1/2 3 3/16 4 3/16 4 3/16 4 3/12 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 1/4 3 1/4 8 1/4 3 3/16 4 3/16 4 3/16 4 3/14 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 1/4 3 | | | | | | | | | | | |
| JHW7-6120 3 ¾ 5 ½ 6 2 ⅓ 5 ½ 8 2 ⅓ 5 ⅓ 8 2 17/32 3 9/16 2 ⅓ 8 3 29/44 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6122 3 13/16 5 ⅓ 16 2 ⅓ 5 ⅓ 8 2 17/32 3 9/16 2 ⅓ 3 23/42 3 1/6 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6126 3 15/16 5 ⅓ 8 2 ⅓ 5 11/32 2 9/16 3 25/32 3 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6128 4 5 ⅓ 8 2 ⅓ 5 11/32 2 9/16 3 25/32 2 ½ 3 3 3 ½ 15/46 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6130 4 ½ 5 ⅓ 8 2 ⅓ 5 11/2 2 15/32 2 19/32 3 3 33/44 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 ½ 6 5 ⅓ 8 2 ⅓ 5 5 ½ 2 15/32 2 19/32 3 3 33/44 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/46 5 ½ 2 3/46 5 9/16 2 33/44 3 55/44 3 3 3 41/46 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 ½ 5 ½ 2 3/46 5 3/4 2 5/46 3 25/32 3 3 3/46 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 ½ 5 ½ 2 3/46 5 3/4 2 5/46 3 25/32 3 3 3/46 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 ½ 5 ½ 2 3/46 5 3/4 2 5/46 3 25/32 3 3/46 3 3 3/46 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6140 4 3/48 5 5/48 2 3/46 5 27/32 2 5/48 3 25/32 3 3/46 3 3 3/46 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6140 4 3/48 5 5/48 2 3/46 6 2 3/44 3 25/32 3 3/48 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6144 4 ½ 5 5/48 2 3/48 6 2 3/44 3 25/32 3 3/48 3 19/32 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6146 4 9/16 5 5/48 2 3/48 6 2 3/44 3 25/32 3 3/48 3 19/32 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6148 4 5/8 5 3/4 6 1/2 3/4 3 1/4 6 13/32 3 1/4 6 13/42 3 3/4 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/32 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 13/42 3 1/4 6 1 | | | | | | | | | | | |
| JHW7-6122 3 1 1 1 6 5 1 6 2 1 6 5 1 8 2 1 7 1 2 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1 | | | | | | | | | | | |
| JHW7-6124 3 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ¼ 2 % 5 ½ 2 % 5 ½ 2 % 3 2% 3 3 % 3 ¼ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6130 4 ½ 5 % 2 ½ 5 ½ 2 ½ 2 ½ 3 3³ 3 3³ 4 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 ½ 5 % 2 ½ 5 ½ 2 ½ 2 ½ 3 3³ 3³ 4 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 ½ 5 % 2 ½ 6 2 ³½ 2 ½ 3 3³ 3½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ¾ 5 ½ 2 ¾ 6 2 ³¾ 3 ½ 3 ½ 3 ¼ 3 ½ JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 ¾ 5 ½ 2 ¾ 6 2 ³¾ 3 ½ 3 ½ 3 ½ 3 ¼ 3 ¼ 3 ¼ 3 ¼< | | | | | | | | | | | |
| JHW7-6126 3 1 5/6 5 5/16 2 3/6 5 1/32 2 9/16 3 25/32 3 3 3/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6130 4 1/16 5 9/8 2 3/8 5 1/2 2 15/32 2 19/32 3 3 33/64 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 1/8 5 3/8 2 3/8 5 9/16 2 9/16 3 25/32 2 7/8 3 33/64 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6132 4 1/8 5 3/8 2 3/8 5 9/16 2 9/16 3 25/32 2 7/8 3 3/32 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6134 4 3/16 5 1/2 2 3/6 6 2 3/64 3 59/64 3 3 5/64 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6136 4 1/4 5 1/2 2 3/8 5 3/4 2 5/8 3 2 3/8 3 3/6 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6138 4 5/16 5 1/2 2 3/8 5 3/4 2 5/8 3 2 3/2 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6140 4 3/8 5 5/8 2 3/8 5 2 7/32 2 5/8 3 2 5/32 3 3/8 3 5/16 JHW7-3XS JHW7-1B / JHW7-2D JHW7-6142 4 7/16 5 5/8 2 3/8 6 2 2 3/8 4 3 2 5/32 3 3/8 3 3/8 3 3/8 JHW7-1B / JHW7-2D JHW7-6144 4 1/2 5 5/8 2 3/8 6 2 2 3/8 6 2 2 3/8 3 2 3/8 3 2 3/8 3 3/8 JHW7-1B / JHW7-2D JHW7-6144 4 4/16 5 5/8 3 3/4 6 1/2 2 3/4 3 3/2 3 3/8 3 3/8 3 3/8 JHW7-1B / JHW7-2D JHW7-6144 4 4/16 5 5/8 3 3/4 6 1/2 2 3/4 3 3/2 3 3/8 3 3/8 3 3/8 JHW7-1B / JHW7-1D / JHW7-2D JHW7-6148 4 5/8 5 3/4 3 3/4 6 5/2 2 3/4 3 3/16 3 2 3/2 3 3/8 3 3/32 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6152 4 3/4 5 3/4 3 3/4 6 5/8 2 5/64 3 2 3/32 3 3/2 3 3/2 3 3/32 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6156 4 7/6 6 3 3/4 7 3 3 2 3/32 3 3/12 3 3/32 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 3/4 3 3/4 7 3 3 3/16 4 5/16 4 3/44 4 3/44 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 3/4 3 3/4 7 3 3 3/16 4 5/16 4 3/44 4 3/44 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 3/4 6 3/2 3 3/4 6 3/16 4 3/16 4 3/16 4 3/46 4 3/44 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 3/4 6 3/2 3 3/4 6 3/16 4 3/16 4 3/44 4 3/44 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 3/4 6 3/2 3 3/4 6 3/16 4 3/16 4 3/16 4 3/14 JHW8-1XS JHW7-1C - JHW7-2F JHW7-6160 5 6 3/4 6 3/2 3 3/4 8 3/4 6 3/16 4 3/16 4 3/16 4 3/16 5 3/4 6 3/2 3 3/4 5/16 3 3/16 4 3/16 3 3/16 3 3/14 5/16 3 3/14 5/16 3 3/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 5/16 3 3/14 | | | | | | | | | | | |
| $ \begin{array}{llllllllllllllllllllllllllllllllllll$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | 2 78 | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| $ \begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | | |
| JHW7-6172 5% 6% 3% 7% 3% 7% 3% 4% 4% 4% 4% JHW8-1XS JHW7-1C - JHW7-2F JHW7-6184 5% 6% 3% 8% 8% 3% 4% 4% JHW8-1XS JHW7-1C - JHW7-2F | | | | | | | | | | | |
| JHW7-6184 5 ¾ 6 ½ 3 ¼ 8 ¼ 3 ¾ 4 17/32 4 4 ½ 3 HW8-1XS JHW7-1C - JHW7-2F | | | | | | | | | | | |
| | | | | | | | | | | | |
| | JHW7-6184 | - | 6 ½ | 3 1/4 | 8 1/4 | 3 1/16 | 4 17/32 | 4 | 4 1/32 | JHW8-1XS | JHW7-1C - JHW7-2F |



JHW7-654



Fed. Spec: ANSI B107.2









1 " DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, SAE

Black Industrial Finish

| Black Indi | | Α | В | С | D | Е | | F | | |
|--------------|-----------------------------------|----------|-----------|-------------------|----------|--|--------------------------------------|----------|-----------------------|------------------|
| | , | | | Working | | Bolt | Bolt | | | |
| | | | Drive End | End | Broach | Clearance | Clearance | Nose | Uses | |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | RET RING [®] | Use |
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Number | O-Ring / Pin |
| JHW7-1224 | 3/4" | 2 | 2 1/8 | 1 3/8 | 1/2 | 7/8 | 3/4 | 3/4 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1226 | ¹³ / ₁₆ " | 2 1/4 | 2 1/8 | 1 3/8 | 5/8 | 1 1/8 | 3/4 | 1 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1228 | 7/8" | 2 1/4 | 2 1/8 | 1 1/2 | 5/8 | 1 1/8 | 3/4 | 1 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1230 | ¹⁵ /16" | 2 1/4 | 2 1/8 | 1 % | 2/3 | 1 1/8 | 1 | 1 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1232 | 1" | 2 1/4 | 2 1/8 | 1 % | 2/3 | 1 1/8 | 1 | 1 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1234 | 1 1/16" | 2 1/2 | 2 1/8 | 1 3/4 | 3/4 | 1 1/3 | 1 | 1 1/4 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1236 | 1 1/8" | 2 ½ | 2 1/8 | 1 3/4 | 3/4 | 1 1/3 | 1 | 1 1/4 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1238 | 1 3/16" | 2 ½ | 2 1/8 | 1 1/8 | 3/4 | 1 1/3 | 1 1/4 | 1 1/4 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1240 | 1 1/4" | 2 ½ | 2 1/8 | 2 | 3/4 | 1 1/3 | 1 1/4 | 1 1/4 | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1242 | 1 5/16" | 2 3/4 | 2 1/8 | 2 1/8 | 7/8 | 1 % | 1 1/4 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1244 | 1 %" | 2 3/4 | 2 1/8 | 2 1/8 | 7/8 | 1 % | 1 1/3 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1246 | 1 7/16" | 2 3/4 | 2 1/8 | 2 ½ | 1 | 1 % | 1 7/16 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1248 | 1 1/2" | 2 3/4 | 2 1/4 | 2 3/8 | 1 | 1 % | 1 1/16 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1250 | 1 %16" | 2 3/4 | 2 1/4 | 2 3/8 | 1 | 1 % | 1 7/16 | | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1252 | 1 %" | 2 3/4 | 2 1/4 | 2 % | 1 1/8 | 1 % | 1 %16 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1254 | 1 11/16" | 2 3/4 | 2 1/4 | 2 % | 1 1/8 | 1 % | 1 7/16 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1256 | 1 3/4" | 3 | 2 1/4 | 2 % | 1 1/4 | 1 1/8 | 1 7/16 | | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1258 | 1 ¹³ / ₁₆ " | 3 | 2 1/4 | 2 % | 1 1/8 | 1 1/8 | 1 7/16 | | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1260 | 1 1/8" | 3 | 2 1/4 | 2 3/4 | 1 1/4 | 1 1/8 | 1 7/16 | | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1262 | 1 ¹⁵ / ₁₆ " | 3 1/4 | 2 1/4 | 2 1/8 | 1 | 2 | 1 1/8 | | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1264 | 2" | 3 1/4 | 2 1/4 | 2 1/8 | 1 1/3 | 2 | 2 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1266 | 2 1/16" | 3 ½ | 2 1/4 | 3 | 1 ½ | 2 1/8 | 2 | | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1268 | 2 1/8" | 3 1/2 | 2 1/4 | 3 | 1 1/3 | 2 1/8 | 2 | - | JHW7-2XS | JHW7-1B/JHW7-2D |
| JHW7-1270 | 2 3/16" | 3 1/2 | 2 % | 3 1/8 | 1 1/2 | 2 1/8 | 2 1/8 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1272 | 2 1/4" | 3 1/2 | 2 % | 3 1/4 | 1 1/2 | 2 1/8 | 2 1/4 | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1274 | 2 5/16" | 3 3/4 | 2 % | 3 1/4 | 1 1/2 | 2 % | 2 1/4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1276 | 2 %" | 3 3/4 | 2 % | 3 3/8 | 1 1/2 | 2 3/8 | 2 1/3 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1278 | 2 7/16" | 3 ¾ | 2 % | 3 1/2 | 1 1/2 | 2 1/4 | 2 1/2 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1280 | 2 1/2" | 3 3/4 | 2 % | 3 1/2 | 1 1/2 | 2 1/4 | 2 1/2 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1282 | 2 %16" | 4 | 2 % | 3 % | 1 1/2 | 2 1/2 | 2 1/2 | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1284 | 2 %" | 4 | 2 % | 3 % | 1 1/2 | 2 1/2 | 2 1/2 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1286 | 2 11/16" | 4 | 2 % | 3 ¾ | 1 3/4 | 2 1/2 | 2 ² / ₃ | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1288 | 2 3/4" | 4 1/4 | 2 % | 3 ⁷ /8 | 1 3/4 | 2 3/4 | 2 3/4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1290 | 2 13/16" | 4 1/4 | 2 % | 3 1/8 | 1 3/4 | 2 11/16 | 2 3/4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1292 | 2 1/8" | 4 1/4 | 2 % | 4 | 1 3/4 | 2 11/16 | 2 3/4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1294 | 2 15/16" | 4 1/4 | 2 % | 4 1/8 | 1 3/4 | 2 % | 3 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1296 | 3" | 4 1/4 | 2 % | 4 1/8 | 1 3/4 | 2 ⁵ /8 | 3 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-1298 | 3 1/16" | 4 1/2 | 2 % | 4 1/4 | 2 | 2 1/8 | 3 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12100 | 3 1/8" | 4 1/2 | 2 % | 4 1/4 | 2 | 2 | 3 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12104 | 3 1/4" | 4 1/2 | 2 % | 4 1/2 | 2 | 2 ¹³ / ₁₆ | 3 1/4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12108 | 3 %" | 5 | 2 % | 4 % | 2 1/4 | 3 1/4 | 3 1/4 | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12112 | 3 1/2" | 5 | 2 3/8 | 5 | 2 1/4 | 3 1/4 | 3 1/2 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12116 | 3 5/8" | 5 | 2 3/8 | 4 1/8 | 2 1/4 | 3 3/16 | 3 % | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12120 | 3 3/4" | 5 | 2 % | 5 1/8 | 2 1/4 | 3 3/16 | 3 3/4 | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12124 | 3 %" | 5 ½ | 2 % | 5 1/4 | 2 1/2 | 3 % | 3 % | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12128 | 4" | 5 1/2 | 2 % | 5 % | 2 1/2 | 3 % | 4 | - | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12132 | 4 1/8" | 5 1/2 | 2 % | 5 ½ | 2 1/2 | 3 1/2 | 4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| JHW7-12136 | 4 1/4" | 5 1/2 | 2 % | 5 ¾ | 2 1/2 | 3 1/2 | 4 1/4 | | JHW7-3XS | JHW7-1B/JHW7-2D |
| 11 11 12 100 | 4 1/1 | F 2/ | - /· | ^- | 0.1/ | 0.7/ | 41/ | - | UIV/7-3/0 | UIV7-10/011V7-20 |

JHW7-3XS

JHW7-1B/JHW7-2D



- **Features** SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 and 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability










JHW7-1296





Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints







1" DRIVE DEEP IMPACT SOCKETS, 6 POINT, SAE

Black Industrial Finish


| | | Α | В | С | D | E | | F | | |
|--------------------------|---|--------------------------------------|--|--|--|---|--|--|----------------------|--|
| | | | D | Working | | Bolt | Bolt | | | |
| | Size | OAL | Drive End Diameter | End Diameter | Broach Depth | Clearance Depth | Clearance Diameter | Nose Length | Uses RET RING® | |
| Product Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Number | Use O-Ring / Pin |
| JHW17-632 | 1 | 3 | 2 1/8 | 1 19/32 | 3/4 | 1 13/16 | 11/16 | 7/8 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-634 | 1 1/16 | 3 ¾ | 2 1/8 | 1 3/4 | 1 ²³ / ₃₂ | 2 19/32 | 3/4 | 7/8 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-636 | 1 1/8 | 3 ¾ | 2 1/8 | 1 13/16 | 1 25/32 | 2 19/32 | % | 7/8 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-638 | 1 ³ / ₁₆ 1 ¹ / ₄ | 3 3¾ | 2 1/8 2 1/8 | 1 ¹³ / ₁₆ 1 ³¹ / ₃₂ | ³ / ₄ 1 ¹⁵ / ₁₆ | 1 ¹³ / ₁₆ 2 ¹⁹ / ₃₂ | ¹³ / ₁₆ ⁷ / ₈ | 7∕ ₈ | JHW7-2XS JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-640 JHW17-642 | 1 5/16 | 3 3/4 | 2 1/8 | 2 1/16 | 2 1/32 | 2 27/32 | 1 | <u>1</u> 1 | JHW7-2XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-644 | 1 3/8 | 4 | 2 1/8 | 2 1/16 | 2 1/8 | 2 ²⁷ / ₃₂ | 1 | i | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-646 | 1 7/16 | 4 | 2 1/8 | 2 1/4 | 2 3/16 | 2 27/32 | 1 | 2 1/4 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-648 | 1 1/2 | 4 | 2 1/4 | 2 3/8 | 2 1/4 | 2 ²⁷ / ₃₂ | 1 1/8 | 2 1/2 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-650 | 1%16 | 3 ½ | 2 1/4 | 2 % | 1 | 2 11/32 | 1 17/32 | 2 ½ | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-652 | 1 % | 3 % | 2 1/4 | 2 7/16 | 2 13/32 | 3 3/32 | 1 1/8 | 2 ⁵ / ₈ | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW17-654 JHW17-656 | 1 ¹ / ₁₆ 1 ³ / ₄ | 4 1/4 4 1/4 | 2 ½ 2 ¼ | 2 ¹⁷ / ₃₂ 2 ¹⁹ / ₃₂ | 2 ½ 2 % | 3 ³ / ₃₂ 3 ¹ / ₃₂ | 1 ¼ 1 ¼ | 2 % 2 % | JHW7-3XS JHW7-3XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-658 | 1 13/16 | 4 1/2 | 2 1/4 | 2 ¹¹ / ₁₆ | 2 ²¹ / ₃₂ | 3 %32 | 1 1/4 | 2 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-660 | 1 1/8 | 4 1/2 | 2 1/4 | 2 3/4 | 2 3/4 | 3 1/4 | 1 3/8 | 2 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-662 | 1 15/16 | 4 1/2 | 2 1/4 | 2 27/32 | 2 13/16 | 3 1/4 | 1 3/8 | 3 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-664 | 2 | 4 1/2 | 2 1/4 | 2 ²⁹ / ₃₂ | 2 1/8 | 3 1/32 | 1 3/8 | 3 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-666 | 2 1/16 | 4 3/4 | 2 1/4 | 3 | 2 31/32 | 3 15/32 | 1 ½ | 3 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-668 | 2 1/8 | 4 % | 2 3/8 | 3 1/4 | 1 5/16 | 3 3/16 | 1 5/8 | 3 % | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-670 JHW17-672 | 2 ³ / ₁₆ 2 ¹ / ₄ | 4 3/4 | 2 ¹³ / ₃₂ 2 ¹³ / ₃₂ | 3 ⁵ / ₃₂ 3 ⁷ / ₃₂ | 3 ½ 3 ¾ | 3 ⁷ / ₁₆ 3 ¹³ / ₃₂ | 1 ½ 1 % | 3 % 3 % | JHW7-3XS JHW7-3XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-672 JHW17-674 | 2 ⁵ / ₁₆ | 5 | 2 ¹³ / ₃₂ | 3 ⁵ / ₁₆ | 3 1/16 | 3 ²¹ / ₃₂ | 1 5/8 | 3 1/2 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-676 | 2 3/8 | 5 | 2 13/32 | 3 % | 3 3/8 | 3 5/8 | 1 3/4 | 3 1/2 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-678 | 2 7/16 | 4 1/2 | 2 % | 3 1/2 | 1 1/2 | 3 7/32 | 1 3/4 | 3 1/2 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-680 | 2 1/2 | 4 1/2 | 2 % | 3 ½ | 1 % | 3 | 2 1/2 | 3 1/2 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-682 | 2 %16 | 4 1/8 | 2 % | 3 % | 1 % | 3 ½ | 2 | 3 % | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-684 | 2 % | 4 11/16 | 2 % | 3 3/4 | 1 5/8 | 3 11/32 | 2 | 3 ¹¹ / ₁₆ | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-686 JHW17-688 | 2 ¹ / ₁₆ 2 ³ / ₄ | 5 ¼ 5 ⅓ | 2 % 2 % | 3 ¾ 3 ¾ | 1 ¹³ / ₁₆ 1 ³ / ₄ | 2 ½ 3 % | 2 2 | 3 ¹¹ / ₁₆ 4 ¹ / ₈ | JHW7-3XS JHW7-3XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-690 | 2 ¹³ / ₁₆ | 5 ½ | 2 % | 4 | 1 13/16 | 2 ²⁷ / ₃₂ | 2 | 4 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-692 | 2 1/8 | 4 1/8 | 2 % | 4 | 1 13/16 | 3 %16 | 2 | 3 7/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-694 | 2 ¹⁵ / ₁₆ | 4 1/8 | 2 ¾ | 4 1/8 | 2 1/32 | 2 11/16 | 2 | 3 ⁷ /8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-696 | 3 | 5 1/8 | 2 % | 4 1/4 | 2 1/32 | 3 1/8 | 2 % | 4 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6100 | 3 1/8 | 5 ½ | 2 % | 4 % | 2 1/32 | 3 1/32 | 2 % | 4 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6104 | 3 1/4 | 5 ³ / ₈ | 2 ³ / ₈ | 4 ½ 4 % | 2 ¹ / ₃₂ | 3 1/32 | 2 ³ / ₂ | 4 ³ / ₈ | JHW7-3XS JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6108 JHW17-6112 | 3 % 3 ½ | 5 ½ 5 ½ | 2 % 2 % | 4 % 4 ¾ | 2 1/4 | 3 ⁵ / ₁₆ 4 ³ / ₃₂ | 2 ½ 2 ½ | 4 ½ 4 ½ | JHW7-3XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-6116 | 3 ½ 3 % | 5 ½ | 2 % | 5 | 2 ⁵ / ₁₆ | 4 3/32 | 2 % | 4 ½ 4 ½ | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6118 | 3 11/16 | 5 17/32 | 2 % | 5 5/16 | 2 7/16 | 3 % | 2 3/4 | 4 17/32 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6120 | 3 3/4 | 5 %16 | 2 % | 5 ½ | 2 1/4 | 3 19/32 | 2 ¹³ / ₁₆ | 4 %16 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6122 | 3 13/16 | 5 31/32 | 2 % | 5 ¾ | 2 17/32 | 4 11/32 | 2 % | 4 31/32 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6124 | 3 % | 5 %16 | 2 % | 5 1/4 | 2 %16 | 3 % | 3 | 4 % 6 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6126 | 3 ¹⁵ / ₁₆ | 6 ½ 6 ½ | 2 ¾ 2 ¾ | 5 ½ 5 ½ | 2 ¹³ / ₃₂ 2 ¹⁷ / ₃₂ | 4 ¹³ / ₃₂ 4 ³ / ₃₂ | 3 2 | 5 ½ 5 ½ | JHW7-3XS JHW7-3XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-6128 JHW17-6130 | 4 4 ½16 | 6 ½ | 2 % 2 % | 5 ½ 5 ½ | 2 ¹⁵ / ₃₂ | 4 732 4 ½ | 3 | 5 ⁵ / ₃₂ | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6132 | 4 1/8 | 6 1/8 | 2 % | 5 17/32 | 2 17/32 | 4 3/32 | 2 % | 5 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6134 | 4 3/16 | 6 7/32 | 2 % | 6 | 2 1/2 | 4 %16 | 3 | 5 7/32 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6136 | 4 1/4 | 6 %2 | 2 % | 5 ¾ | 2 % | 4 %16 | 3 1/8 | 5 1/32 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6138 | 4 5/16 | 6 11/32 | 2 % | 5 ¹³ / ₁₆ | 2 21/32 | 4 % | 3 % | 5 ¹¹ / ₃₂ | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6140 | 4 3/8 | 6 13/32 | 2 % | 5 27/32 | 2 % | 4 %16 | 3 1/8 | 5 13/32 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW17-6142 | 4 ⁷ / ₁₆ 4 ¹ / ₂ | 6 ¹³ / ₃₂ 7 | 2 ¾ 2 ¾ | 6 6 | 2 ²¹ / ₃₂ 2 ³ / ₄ | 4 % 5 | 2 % 3 % | 5 ¹³ / ₃₂ | JHW7-3XS JHW7-3XS | JHW7-1B / JHW7-2D JHW7-1B / JHW7-2D |
| JHW17-6144 JHW17-6146 | 4 % 4 % 16 | 7 ½ | 2 78 3 ½ | 6 ½ | 2 3/4 | 4 ¹⁹ / ₃₂ | 3 % | 6 6 | JHW8-1XS | JHW7-1C - JHW7-2F |
| JHW17-6148 | 4 5% | 7 1/8 | 3 1/4 | 6 ¹³ / ₁₆ | 2 13/16 | 4 3/32 | 3 1/2 | 6 ½ | JHW8-1XS | JHW7-1C - JHW7-2F |
| JHW17-6152 | 4 3/4 | 6 3/4 | 3 1/4 | 6 5/8 | 2 ²⁹ / ₃₂ | 4 29/32 | 3 1/2 | 5 ³ ⁄ ₄ | JHW8-1XS | JHW7-1C - JHW7-2F |
| JHW17-6156 | 4 1/8 | 7 1/4 | 3 1/4 | 7 | 3 | 5 1/32 | 3 ½ | 6 1/4 | JHW8-1XS | JHW7-1C - JHW7-2F |
| JHW17-6160 | 5 | 7 3/4 | 3 1/4 | 7 | 3 | 5 ²¹ / ₃₂ | 3 ½ | 6 3/4 | JHW8-1XS | JHW7-1C - JHW7-2F |
| JHW17-6172 | 5 ¾ | 8 | 3 1/4 | 7 ½ | 3 %16 | 5 ²⁵ / ₃₂ | 3 21/32 | 7 | JHW8-1XS | JHW7-1C - JHW7-2F |
| JHW17-6184 | 5 3/4 | 8 | 3 1/4 | 8 1/4 | 3 %16 | 6 1/32 | 4 | 7 | JHW8-1XS | JHW7-1C - JHW7-2F |





Features

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability



JHW17-660



1" DRIVE SHALLOW IMPACT SOCKETS, 6 POINT, METRIC





TOOLS@ Side hole in socket permits use with Williams Tools@Height drive tools such as ratchets, extensions and u-joints

Black Industrial Finish

| | | Α | В | С | D | E | | F | | |
|--------------|------|--------------------------------|-----------|-------------------------------|---------------------------------|---------------------------------|--|----------|-----------|-------------------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose | Uses | |
| | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | RET RING® | Use |
| Product Code | (MM) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Number | O-Ring / Pin |
| JHW7M-627 | 27 | 2 1/4 | 21/8 | 1 3/4 | 11/16 | 1 1/16 | 3/4 | 7/8 | JHW7-2XS | JHW7-1B /JHW 7-2D |
| JHW7M-630 | 30 | 2 1/4 | 2 1/8 | 1 1/8 | 11/16 | 1 ½16 | ¹³ / ₁₆ | 7/8 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW7M-632 | 32 | 2 % | 2 1/8 | 2 | 3/4 | 1 3/16 | 15/16 | 7/8 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW7M-635 | 35 | 2 1/2 | 2 1/8 | 2 1/8 | 7/8 | 1 5/16 | 1 3/8 | - | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW7M-638 | 38 | 2 % | 2 1/4 | 2 11/32 | ¹⁵ /16 | 1 15/32 | 1 ½ | 1 % | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW7M-641 | 41 | 2 3/4 | 2 1/4 | 2 ¾ | 1 1/16 | 1 % | 1 19/32 | 1 3/4 | JHW7-2XS | JHW7-1B / JHW7-2D |
| JHW7M-646 | 46 | 2 15/16 | 2 % | 2 3/4 | 1 ³ /16 | 1 23/32 | 1 13/16 | 1 15/16 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW7M-650 | 50 | 3 | 2 % | 2 ³ / ₄ | 1 1/4 | 1 27/32 | 1 ⁶¹ / ₆₄ | 2 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW7M-660 | 60 | 3 1/2 | 2 % | 3 1/2 | 1 1/2 | 2 11/32 | 1 3/4 | 2 1/2 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW7M-665 | 65 | 3 % | 2 % | 3 % | 1 % | 2 1/8 | 2 1/4 | 2 % | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW7M-670 | 70 | 3 1/8 | 2 % | 3 ¾ | 1 ¹³ / ₁₆ | 2 ²¹ / ₃₂ | 2 ³ / ₄ | 2 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |
| JHW7M-675 | 75 | 4 ³ / ₁₆ | 2 % | 4 ½ | 2 1/32 | 2 11/16 | 2 ¹⁵ / ₁₆ | 3 1/8 | JHW7-3XS | JHW7-1B / JHW7-2D |




- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability
- Drive end features pin retention hole and groove
- Dual marked with corresponding SAE size





JHW7M-650



1-1/2" DRIVE IMPACT EXTENSIONS AND ACCESSORIES

Black Industrial Finish

| Product Code | Description | Length (Inches) | Use RET RING® | Use O-Ring / Pin | Socket Retention |
|--------------|---------------------------|-----------------|------------------|---------------------|----------------------|
| JHW8-108 | Impact Extension | 8 | JHW8-1XS | JHW7-1C /JHW8-2E | Through Hole and Pin |
| JHW8-115 | Impact Extension | 15 | JHW8-1XS | JHW7-1C / JHW8-2E | Through Hole and Pin |
| JHW8-140B | Impact Universal Joint | 6 1/16 | JHW8-1XS | JHW7-1C / JHW8-2E | Through Hole and Pin |
| JHW8-7 | 1 M x 1 1/2 F Adapter | 4 1/4 | JHW8-1XS | JHW7-1C / JHW8-2E | Through Hole and Pin |
| JHW8-8 | 1 1/2"M x 2 1/2"F Adapter | 6 ¾ | JHW8-4XS | JHW9-1D / JHW9-2G | Through Hole and Pin |

Fed. Spec: ANSI B107.2

Features

- Specially heat treated for impact use to provide long life, safety, and durability.
- Pin and o-ring or RET RING® (sold separately) secure tools onto impact wrench for safety and convenience.
- Universal joint provides 55° range of motion.
- Suitable for use with pneumatic and electric impact wrenches.
- Drive end features pin retention hole and groove.







JHW8-140B

JHW8-7

JHW8-8

1-1/2" SLIDING T-HANDLE

Black Industrial Finish

| Product Code | Length (Inches) | Shaft Diameter (Inches) | Socket Retention | | | | | | |
|--------------|-----------------|-------------------------|--------------------|--|--|--|--|--|--|
| JHW8-20 | 36 | 2 ½ | Plunger and Spring | | | | | | |
| | | | | | | | | | |

- · Drive end slides on bar for additional flexibility.
- Ideal for turning 1-1/2" drive sockets when impact wrench is not available.














JHW8-1XS



JHW41144



1-1/2" DRIVE IMPACT RETAINING PINS AND RINGS

| Product Code | Description | Dia. (Inches) | Length (Inches) | Application |
|--------------|-------------------------|---------------|-----------------|--|
| JHW7-1C | Impact Retaining O-Ring | 3 1/4 | NA | Fits All Williams 1 1/2" Drive Sockets & Accessories |
| JHW8-2E | Impact Retaining Pin | 1/4 | 2 1/8 | Fits All Williams 1 1/2" Drive Sockets & Accessories |
| JHW9-1D | Impact Retaining O-Ring | 4 ½ | NA | |
| JHW9-2G | Impact Retaining Pin | 5/16 | 2 % | |

Features

- . Specially heat treated for impact use to provide long life, safety, and durability
- Suitable for use with pneumatic and electric impact wrenches
- For 1-1/2" Drive impact tools with pin retention hole and groove



1-1/2" DRIVE RET RING® ONE-PIECE IMPACT RETAINING RINGS WITH CRUSH GAUGE

| Product Code | Diameter (Inches) | Application |
|--------------|-------------------|---|
| JHW8-1XS | 2 1/8 | Fits Williams 1 ½" Drive Tools with "B" Dimension of 3 ¼" |
| JHW8-2XS | 3 % | Fits Competitive Impact Sockets |
| JHW8-3XS | 3 1/8 | Fits Competitive Impact Sockets |
| JHW8-4XS | 4 % | Fits Competitive Impact Sockets |

Features

- Fits all Williams 1-1/2" Drive Sockets and Accessories
- · Crush Gage on the resin pin indicates when a socket is excessively worn and should be replaced
- Securely retains sockets and accessories to square drive of impact wrench
- For 1-1/2" drive impact tools with pin retention hole and groove
- Made of oil resistant material

Black Industrial Finish

• RET RING® is a trademark of FTL Enterprises, Inc.





Made in U.S.A.

1-1/2" DRIVE SHALLOW IMPACT SOCKETS, 12 POINT, SAE

12



| | | Α | В | С | | | | | |
|----------|---------------------------------|----------|-----------------|-------------------|-------------|----------------|------------------|-----------|--|
| | | Overall | | Working End | D Broach | E Bolt | Bolt Clearance | F Nose | |
| Product | Size | Length | Drive End Diam- | Diameter | Depth | Clearance | Diameter | Length | |
| Code | (Inches) | (Inches) | eter (Inches) | (Inches) | (Inches) | Depth (Inches) | (Inches) | (Inches) | |
| | | | | | 4 | Deptil dilches | | | |
| JHW41144 | 1 3/8 | 3 1/8 | 3 % | 2 1/2 | 1 | /, | 1 3/16 | 1 3/8 | |
| JHW41146 | 1 7/16 | 3 1/8 | 3 % | 2 1/2 | 1 | /, | 1 1/4 | 1 3/8 | |
| JHW41148 | 1 1/2 | 3 1/8 | 3 % | 2 5/8 |] | 1, | 1 1/4 | 1 3/8 | |
| JHW41150 | 1 %16 | 3 1/8 | 3 % | 2 5/8 | 1 | / | 1 3/8 | 1 3/8 | |
| JHW41152 | 1 5/8 | 3 1/8 | 3 % | 2 3/4 | 1 | / | 1 3/8 | 1 3/8 | |
| JHW41154 | 1 11/16 | 3 1/4 | 3 % | 2 3/4 | 1 1/16 | / | 1 1/2 | 1 1/2 | |
| JHW41156 | 1 3/4 | 3 1/4 | 3 % | 2 15/16 | 1 1/16 | / | 1 1/2 | 1 1/2 | |
| JHW41158 | 1 13/16 | 3 1/4 | 3 3/8 | 2 15/16 | 1 1/16 | / | 1 5/8 | 1 1/2 | |
| JHW41160 | 1 1/8 | 3 1/16 | 3 % | 3 1/8 | 1 3/16 | / | 1 5/8 | 1 5/8 | |
| JHW41162 | 1 15/16 | 3 1/16 | 3 % | 3 1/8 | 1 3/16 | | 1 3/4 | 1 1/8 | |
| JHW41164 | 2 | 3 1/16 | 3 3/8 | 3 1/4 | 1 3/16 | / | 1 3/4 | 1 1/8 | |
| JHW41166 | 2 1/16 | 3 1/16 | 3 ¾ | 3 1/4 | 1 3/16 | / | 1 1/8 | 1 1/8 | |
| JHW41168 | 2 1/8 | 3 1/2 | 3 ¾ | 3 3/8 | 1 1/2 | / | 1 1/8 | / | |
| JHW41170 | 2 3/16 | 3 1/2 | 3 ¾ | 3 3/8 | 1 1/2 | / | 1 1/8 | / | |
| JHW41172 | 2 1/4 | 3 1/2 | 3 % | 3 1/8 | 1 1/2 | / | 2 1/16 | 1 3/4 | |
| JHW41174 | 2 1/16 | 3 1/2 | 3 ¾ | 3 ⅓ | 1 1/2 | / | 2 1/16 | 1 3/4 | |
| JHW41176 | 2 % | 3 1/2 | 3 ¾ | 3 ⅓ | 1 1/2 | / | 2 1/16 | 1 3/4 | |
| JHW41178 | 2 1/16 | 3 3/4 | 3 ¾ | 3 1/8 | 1 1/8 | / | ² /14 | 1 3/4 | |
| JHW41180 | 2 1/2 | 3 3/4 | 3 ¾ | 3 1/8 | 1 1/8 | / | ² /14 | 1 3/4 | |
| JHW41182 | 2 1/16 | 3 3/4 | 3 3/8 | 3 1/8 | 1 1/8 | / | 2/14 | 1 3/4 | |
| JHW41184 | 2 1/8 | 3 3/4 | 3 % | 4 3/16 | 1 1/8 | / | 2 1/16 | 1 3/4 | |
| JHW41186 | 2 11/16 | 3 3/4 | 3 % | 4 3/16 | 1 1/8 | / | 2 1/16 | 1 3/4 | |
| JHW41188 | 2 3/4 | 3 3/4 | 3 % | 4 3/16 | 1 1/8 | / | 2 1/2 | 1 3/4 | |
| JHW41190 | 2 ¹³ / ₁₆ | 4 1/16 | 3 3/8 | 4 1/4 | 1 3/4 | / | 2 1/2 | 1 3/4 | |
| JHW41192 | 2 1/8 | 4 1/16 | 3 3/8 | 4 1/4 | 1 3/4 | / | 2 1/8 | 1 3/4 | |
| JHW41194 | 2 15/16 | 4 1/16 | 3 3/8 | 4 1/4 | 1 3/4 | / | 2 1/8 | 1 3/4 | |
| JHW41196 | 3 | 4 1/4 | 3 3/8 | 4 ⁵ ⁄8 | 2 | / | 2 3/4 | 1 3/4 | |
| JHW41200 | 3 1/8 | 4 1/4 | 3 3/8 | 4 ⁵ ⁄8 | 2 | / | 2 3/4 | 1 3/4 | |
| JHW41204 | 3 1/4 | 4 1/4 | 3 3/8 | 4 15/16 | 2 | / | 3 | 1 3/4 | |
| JHW41208 | 3 3/8 | 4 1/4 | 3 3/8 | 4 15/16 | 2 | | 3 | 1 3/4 | |
| JHW41212 | 3 1/2 | 4 5/8 | 3 3/8 | 5 | 2 3/16 | 1 | 3 1/4 | 1 3/4 | |
| JHW41220 | 3 3/4 | 4 5/8 | 3 3/4 | 5 1/4 | 2 3/16 | / | 3 1/2 | 2 | |
| JHW41224 | 3 1/8 | 4 15/16 | 3 3/4 | 5 1/16 | 2 1/4 | 1 | 3 5/8 | 2 | |
| JHW41226 | 3 15/16 | 4 15/16 | 3 3/4 | 5 1/16 | 2 1/4 | 1 | 3 5/8 | 2 | |
| | | 4 15/16 | 3 3/4 | 5 7/16 | 2 1/4 | | 3 3/4 | 2 | |

- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- . Designed for maximum engagement on 6 and 12 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat treated for impact use to provide long life, safety, and durability





1-1/2" DRIVE SHALLOW IMPACT SOCKETS, 6 POINT, SAE





Black Industrial Finish

| | | Α | В | С | D | Ε | | F | | |
|------------------|-------------------------------|---------------------------------|-----------|---------------------------------|--|---------------------------------|-----------------------|---------------------------------|-----------|-------------------|
| | | | Drive End | Working End | Broach | Bolt Clearance | Bolt Clearance | Nose | Uses | |
| Product | Size | OAL | Diameter | Diameter | Depth | Depth | Diameter | Length | RET RING® | Use |
| Code | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | (Inches) | Number | O-Ring / Pin |
| JHW8-646 | 1 7/16 | 3 1/32 | 3 1/4 | 2 1/8 | 57/64 | 1 25/64 | 1 7/16 | 1 7/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-648 | 1 1/2 | 3 3/32 | 3 1/4 | 2 1/8 | 29/32 | 1 7/16 | 1 31/64 | 1 17/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-652 | 1 5/8 | 3 3/16 | 3 1/4 | 2 29/32 | 1 1/32 | 1 %16 | 1 % | 1 21/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-654 | 1 11/16 | 3 1/4 | 3 1/4 | 2 31/32 | 1 1/16 | 1 %16 | 1 11/16 | 1 39/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-656 | 1 3/4 | 3 1/32 | 3 1/4 | 3 1/32 | 1 1/32 | 1 21/32 | 1 21/32 | 1 %16 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-658 | 1 13/16 | 3 ²¹ / ₆₄ | 3 1/4 | 3 3/32 | 1 5/32 | 1 11/64 | 1 13/16 | 1 5/8 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-660 | 1 1/8 | 3 % | 3 1/4 | 3 5/32 | 1 7/32 | 1 3/4 | 1 1/8 | 1 23/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-664 | 2 | 3 7/16 | 3 1/4 | 3 1/2 | 1 %2 | 1 ¹³ / ₁₆ | 2 | 1 51/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-666 | 2 1/16 | 3 1/2 | 3 1/4 | 3 ½ | 1 13/32 | 1 55/64 | 2 1/16 | 1 55/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-668 | 2 1/8 | 3 %16 | 3 1/4 | 3 1/2 | 1 27/64 | 1 59/64 | 2 1/8 | 1 59/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-670 | 2 3/16 | 3 21/32 | 3 1/4 | 3 1/2 | 1 7/16 | 2 | 2 3/16 | 2 1/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-672 | 2 1/4 | 3 3/4 | 3 1/4 | 3 % | 1 17/32 | 2 1/8 | 2 1/4 | 2 1/8 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-676 | 2 3/8 | 3 1/4 | 3 1/4 | 3 ²⁵ / ₃₂ | 1 %16 | 2 1/4 | 2 3/8 | 2 17/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-678 | 2 7/16 | 3 15/16 | 3 1/4 | 3 ²⁵ / ₃₂ | 1 % | 2 ¹⁹ / ₆₄ | 2 7/16 | 2 5/16 | JHW8-1XS | JHW7-1C / JHW8-2E |
| | 2 ½ 2 ½ | 3 ·9/16 4 | 3 1/4 | 3 1/32 | 1 19/16 | 2 3/8 | 2 7/16 2 31/64 | 2 1/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-680 | | | | | | | | | | |
| JHW8-682 | 2 %16 | 4 1/32 | 3 1/4 | 3 29/32 | 1 % | 2 ¹³ / ₃₂ | 2 %16 | 2 ³ / ₆₄ | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-684 | 2 ⁵ / ₈ | 4 3/32 | 3 1/4 | 4 | 1 11/16 | 2 ¹⁵ / ₃₂ | 2 % | 2 7/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-688 | 2 3/4 | 4 7/32 | 3 1/4 | 4 5/32 | 1 13/16 | 2 7/16 | 2 3/4 | 2 15/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-692 | 2 1/8 | 4 ⁵ / ₁₆ | 3 1/4 | 4 5/16 | 1 % | 2 11/16 | 2 % | 2 %2 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-694 | 2 15/16 | 4 % | 3 1/4 | 4 % | 1 29/32 | 2 3/4 | 2 % | 2 23/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-696 | 3 | 4 7/16 | 3 1/4 | 4 7/16 | 1 5/16 | 2 27/32 | 2 % | 2 13/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-698 | 3 1/16 | 4 1/2 | 3 1/4 | 4 %16 | 1 31/32 | 2 % | 2 % | 2 15/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6100 | 3 1/8 | 4 %16 | 3 1/4 | 4 % | 2 | 3 | 2 % | 2 1/2 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6104 | 3 1/4 | 4 21/32 | 3 1/4 | 4 ²⁵ / ₃₂ | 2 1/8 | 3 | 2 % | 2 19/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6108 | 3 % | 4 3/4 | 3 1/4 | 4 ¹⁵ / ₁₆ | 2 7/32 | 3 1/8 | 2 % | 2 43/64 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6110 | 3 7/16 | 4 27/32 | 3 1/4 | 5 | 2 %32 | 3 7/32 | 2 % | 2 3/4 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6112 | 3 ½ | 4 29/32 | 3 1/4 | 5 1/16 | 2 5/16 | 3 1/4 | 2 % | 2 13/16 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6116 | 3 % | 5 1/8 | 3 1/4 | 5 1/4 | 2 13/32 | 3 7/16 | 2 % | 3 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6120 | 3 3/4 | 5 1/8 | 3 1/4 | 5 ¾ | 2 15/32 | 3 ½ | 2 % | 3 1/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6122 | 3 13/16 | 5 ³ /16 | 3 1/4 | 5 ¾ | 2 17/32 | 3 % | 2 % | 3 3/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6124 | 3 1/8 | 5 1/4 | 3 1/4 | 5 17/32 | 2 %16 | 3 % | 2 % | 3 5/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6128 | 4 | 5 ¹³ / ₃₂ | 3 1/4 | 5 ²¹ / ₃₂ | 2 % | 3 ²⁵ / ₃₂ | 2 % | 3 1/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6132 | 4 1/8 | 5 %16 | 3 1/4 | 5 ¹³ / ₁₆ | 2 3/4 | 3 59/64 | 2 % | 3 1/16 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6136 | 4 1/4 | 5 11/16 | 3 1/4 | 5 ³¹ / ₃₂ | 2 13/16 | 4 1/16 | 2 % | 3 %16 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6138 | 4 1/16 | 5 ²⁵ / ₃₂ | 3 1/4 | 6 1/32 | 2 % | 4 5/32 | 2 % | 3 21/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6140 | 4 % | 5 ²⁷ / ₃₂ | 3 1/4 | 6 ¾32 | 2 ²⁹ / ₃₂ | 4 7/32 | 2 ⅓ | 3 ²¹ / ₃₂ | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6144 | 4 1/2 | 6 | 3 1/4 | 6 1/4 | 3 1/32 | 4 % | 2 % | 3 ¹⁵ / ₁₆ | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6148 | 4 % | 6 ½16 | 3 1/4 | 6 ¹³ / ₁₆ | 3 ½16 | 4 ⁷ / ₁₆ | 3 ½ | 4 3/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6152 | 4 ¾ | 6 ½ | 3 1/4 | 6 %16 | 3 1/8 | 4 1/2 | 2 % | 4 | JHW8-1XS | JHW7-1C / JHW8-2E |
| <u>JHW8-6156</u> | 4 1/8 | 6 3/4 | 3 1/4 | 7 | 3 1/8 | 5 7/64 | 3 ½ | 4 19/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6160 | 5 | 6 3/4 | 3 1/4 | 7 1/8 | 3 1/16 | 5 ⁷ / ₆₄ | 3 ½ | 4 %16 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6172 | 5 ¾ | 7 | 3 1/4 | 7 ½16 | 3 1/4 | 5 1/8 | 4 | 4 29/32 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6184 | 5 ¾ | 7 | 3 1/4 | 7 % | 3 ½ | 5 ½ | 3 ¾ | 4 1/8 | JHW8-1XS | JHW7-1C / JHW8-2E |
| JHW8-6196 | 6 ½ | 7 1/4 | 5 | 8 1/2 | 3 ¹¹ / ₁₆ | 5 ¾ | 4 1/2 | 5 ½16 | JHW8-4XS | JHW9-1D / JHW8-2E |
| JHW8-6208 | 6 1/2 | 7 1/2 | 5 | 9 1/4 | 3 ½ | 5 % | 5 | 5 %4 | JHW8-4XS | JHW9-1D / JHW8-2E |
| JHW8-6220 | 6 7/8 | 7 1/8 | 5 | 9 1/4 | 3 % | 6 | 4 3/4 | 5 ³³ / ₆₄ | JHW8-4XS | JHW9-1D / JHW8-2E |
| JHW8-6232 | 7 1/4 | 8 1/8 | 5 | 10 | 4 1/2 | 6 1/4 | 5 ½ | 5 ⁴⁹ / ₆₄ | JHW8-4XS | JHW9-1D / JHW8-2E |
| JHW8-6244 | 7 % | 8 1/4 | 5 | 10 ¾ | 4 13/16 | 6 ¾ | 6 ½ | 5 ⁵⁷ / ₆₄ | JHW8-4XS | JHW9-1D / JHW8-2E |
| JHW8-6256 | 8 | 83/8 | 5 | 11 | 5 ½16 | 6 ¹ / ₂ | 7 | 61/64 | JHW8-4XS | JHW9-1D / JHW8-2E |
| | | | | | | | | | | |




- SUPERTORQUE™ lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- . Specially heat treated for impact use to provide long life, safety, and durability






JHW8-696







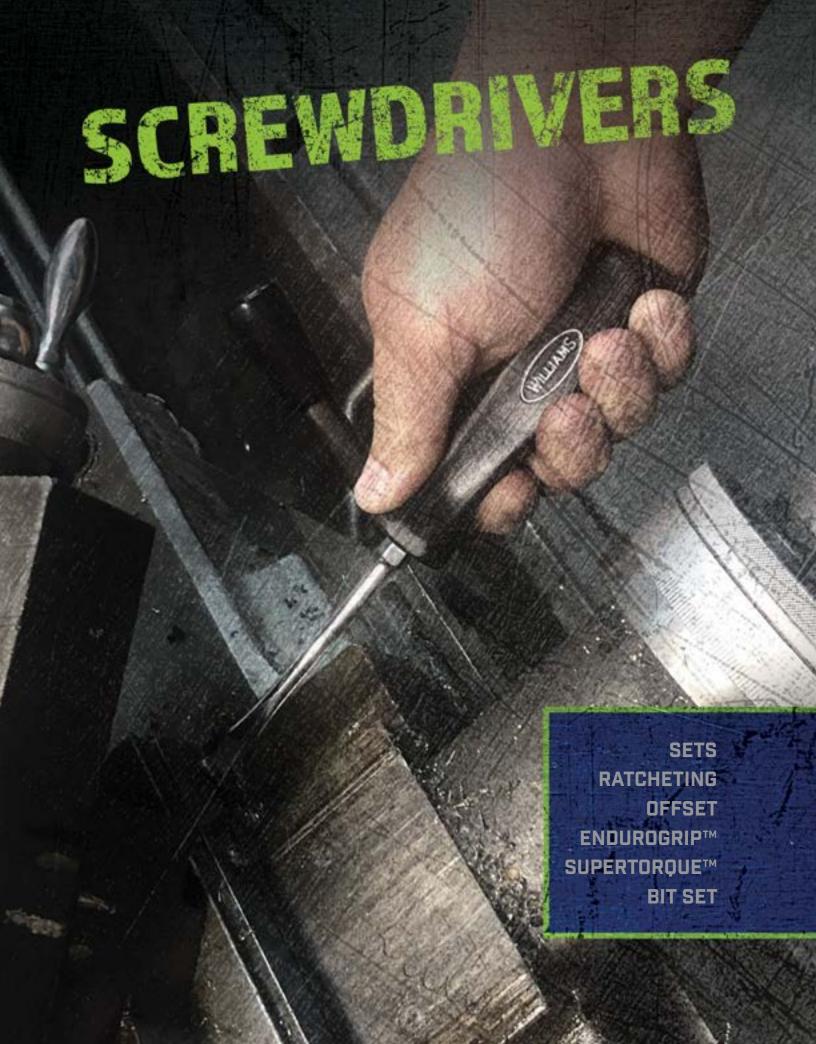



SUPERTORQUE™ **SCREWDRIVERS**

Hanging hole in the handle also permits T-bar insertion for transmission of additional force

3 component handle for maximum user comfort and force transmission

Double-shaped handle for use with both hands. Heavy duty design for maximum torque power

High performance, chrome plated alloy steel blade for high corrosion resistance

Laser marking on the blade (Size & COO)

Indelible tip symbol by overflow for easy identification of the tip

Flat face prevents rolling

8 Different Tip Styles Available



Keystone

Slotted

Cabinet Slotted

Phillips

Torx

Tamper-

Square/ Robertson

Nutdriver Hex

Pozidriv

Sand blasted tip for greater screw-tip adherence

SCREWDRIVERS

COMFORT, POWER AND VERSATILITY



ENDUROGRIP™

handle with thumb stop allow for added turning power without discomfort or slippage



Hex bolsters on shafts allow a wrench to be used for extra turning power

Chrome blades prevent — corrosion and can be easily cleaned

Blades are made from **special alloy steel** for extra strength

Vapor-blasted tips grip fasteners and prevent chipping, extending tool life



3 Different Tip Styles Available







Flat face prevents rolling

K

Keystone Slotted Cabinet I Slotted

Phillips



19 PIECE ENDUROGRIP™ AND SUPERTORQUE™ COMBINATION SCREWDRIVER SET



Premium Comfort Grip & Three Component handle with Black Oxide Tips

| Product Code | - Description |
|--------------|--|
| JHW100P-19MD | 19 Piece ENDUROGRIP™ Combination Screwdriver Set |
| | |

| • | | | | | | | |
|---|---|--------------|------------------------------|--|--|--|--|
| Contents Include: | | | | | | | |
| | Overall Length | Blade Length | | | | | |
| Product Code | (Inches) | (Inches) | Tip | | | | |
| JHWSDE-43 | 6 11/16 | 3 | Cabinet Slotted 3/16" | | | | |
| JHWSDE-46 | 9 11/16 | 6 | Cabinet Slotted 3/16" | | | | |
| JHWSPR-C-18-3 | 6 | 3 | Cabinet Slotted 1/8" | | | | |
| JHWSPR-C-18-4 | 9 | 4 | Cabinet Slotted 1/8" | | | | |
| JHWSPR-C-52-6 | 11 ¾ | 6 | Cabinet Slotted 5/32" | | | | |
| JHWSDR-22 | 6 1/8 | 3 | Keystone Slotted 3/16" | | | | |
| JHWSDS-62 | 3 1/2 | 1 3/4 | Keystone Slotted 1/4" Stubby | | | | |
| JHWSDR-24 | 7 1/8 | 4 | Keystone Slotted 1/4" | | | | |
| JHWSDR-26 | 10 11/16 | 6 | Keystone Slotted 5/16" | | | | |
| JHWSDR-28 | 12 ¹¹ / ₁₆ | 8 | Keystone Slotted %" | | | | |
| JHWSDS-33 | 17 ¹³ / ₁₆ | 12 | Keystone Slotted %" | | | | |
| JHWSPR-P-0-3 | 6 1/2 | 3 | Phillips® #0 | | | | |
| JHWSPR-P-1-3 | 7 3/4 | 3 | Phillips® #1 | | | | |
| JHWSDP-1-3 | 6 1/4 | 3 | Phillips® #1 | | | | |
| JHWSDP-2-4 | 7 15/16 | 4 | Phillips® #2 | | | | |
| JHWSDP-2-8 | 12 | 8 | Phillips® #2 | | | | |
| JHWSDP-3-6 | 10 ½ | 6 | Phillips® #3 | | | | |
| JHWSDP-4-6 | 10 3/4 | 8 | Phillips® #4 | | | | |
| | | | 3 | | | | |



. Set contains a comprehensive assortment of screwdrivers to get the job done

1 ½

 Williams comfort grip handle with thumb stop allow for added turning power without discomfort or slippage



8 PIECE ENDUROGRIP™ MIXED SCREWDRIVER SET

3 1/2



Phillips® #2 Stubby

Comfort-Grip Handle With Round Blade

| Product Code | Description |
|--------------|-------------------------------------|
| JHW100P-8MD | 8 Piece ENDUROGRIP™ Screwdriver Set |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|--------------------------------|--------------------------|------------------------|
| JHWSDR-24 | 7 7/8 | 4 | Keystone Slotted 1/4" |
| JHWSDR-26 | 10 11/16 | 6 | Keystone Slotted 5/16" |
| JHWSDR-28 | 12 ³ / ₄ | 8 | Keystone Slotted 3/8" |
| JHWSDP-1-3 | 6 1/4 | 3 | Phillips®#1 |
| JHWSDP-2-4 | 7 15/16 | 4 | Phillips®#2 |
| JHWSDP-3-6 | 10 ¹ / ₂ | 6 | Phillips®#3 |
| JHWSDE-43 | 6 11/16 | 3 | Cabinet Slotted 3/16" |
| JHWSDE-46 | 9 11/16 | 6 | Cabinet Slotted 3/16" |

- Contains 3 keystone slotted, 3 Phillips®, and 2 Cabinet Tip screwdrivers
- Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage
- Chrome blades prevent corrosion and can be easily cleaned
- Blades are made from special alloy steel for extra strength
- · Vapor-blasted tips grip fasteners and prevent chipping, extending tool life
- · Hex bolsters on shafts allow a wrench to be used for extra turning power






JHW100P-8MD



5 PIECE ENDUROGRIP™ MIXED SCREWDRIVER SET



| _ · | |
|--------------|-------------------------------------|
| Product Code | Description |
| | 5 Piece ENDUROGRIP™ Screwdriver Set |
| JHW100P-5MD | Phillips® / Keystone Slotted Tips |

Contents Include:

| | Overall Length | Blade Length | _ |
|--------------|-------------------------------|--------------|------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSDR-22 | 6 ¹ / ₈ | 3 | Keystone Slotted 3/16" |
| JHWSDR-24 | 7 ⁷ /8 | 4 | Keystone Slotted 1/4" |
| JHWSDR-26 | 10 11/16 | 6 | Keystone Slotted 5/16" |
| JHWSDP-1-3 | 6 ¹ / ₄ | 3 | Phillips®#1 |
| JHWSDP-2-4 | 7 ¹⁵ /16 | 4 | Phillips® #2 |



6 PIECE ENDUROGRIP™ **KEYSTONE SLOTTED SCREWDRIVER SET**





| Product Code | Description |
|--------------|--|
| JHW100P-6SD | 6 Piece ENDUROGRIP™ Keystone Slotted Screwdriver Set |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|---|--------------------------|------------------------|
| JHWSDR-22 | 6 1/8 | 3 | Keystone Slotted 3/16" |
| JHWSDR-24 | 7 1/8 | 4 | Keystone Slotted 1/4" |
| JHWSDR-26 | 10 ¹¹ / ₁₆ | 6 | Keystone Slotted 5/16" |
| JHWSDR-28 | 12 ¹¹ / ₁₆ | 8 | Keystone Slotted 3/8" |
| JHWSDR-30 | 14 ¾ | 10 | Keystone Slotted 7/16" |
| JHWSDS-33 | 17 ¹³ / ₁₆ | 12 | Keystone Slotted 3/8" |





JHW100P-6SD

JHW100P-6PD

JHW100P-5MD

6 PIECE ENDUROGRIP™ **PHILLIPS® SCREWDRIVER SET**





| Product Code | Description | | |
|--------------|---|--|--|
| JHW100P-6PD | 6 Piece ENDUROGRIP™ Phillips® Screwdriver Set | | |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|--------------------------------|--------------------------|--------------------------|
| JHWSDP-1-3 | 6 ¹ / ₄ | 3 | Phillips®#1 |
| JHWSDP-2-4 | 7 15/16 | 4 | Phillips® #2 |
| JHWSDP-2-8 | 12 | 8 | Phillips [®] #2 |
| JHWSDP-3-6 | 10 ¹ / ₂ | 6 | Phillips®#3 |
| JHWSDP-4-6 | 10 ³ / ₄ | 6 | Phillips®#4 |
| JHWSDP-2-ST | 3 1/2 | 1 1/2 | Phillips® #2 Stubby |





ENDUROGRIP™ Screwdrivers Feature

- . Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage
- Chrome blades prevent corrosion and can be easily cleaned
- Blades are made from special alloy steel for extra strength
- · Vapor-blasted tips grip fasteners and prevent chipping, extending tool life
- · Hex bolsters on shafts allow a wrench to be used for extra turning power



12 PIECE SUPERTORQUE™ COMBINATION SCREWDRIVER SET



Three Component Comfort Grip Handles

Product Code Description


JHWSPRS-12CKPT 12 Piece SUPERTORQUE™ Combination Screwdriver Set

Contents Include:

| | Overall Length | Blade Length | |
|---------------|---------------------------------|--------------|------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSPR-C-36-1 | 3 7/8 | 1 1/2 | Cabinet Slotted 3/16" |
| JHWSPR-C-14-1 | 3 7/8 | 1 1/2 | Cabinet Slotted 1/4" |
| JHWSPR-K-36-4 | 7 3/4 | 4 | Keystone Slotted 3/16" |
| JHWSPR-K-14-4 | 8 ¹ / ₄ | 4 | Keystone Slotted 1/4" |
| JHWSPR-K-14-6 | 10 ³ / ₁₆ | 6 | Keystone Slotted 1/4" |
| JHWSPR-K-56-6 | 10 9/16 | 6 | Keystone Slotted 5/16" |
| JHWSPR-P-1-3 | 5 ¹¹ / ₁₆ | 3 | Phillips® #1 |
| JHWSPR-P-2-1 | 3 7/8 | 1 1/2 | Phillips® #2 |
| JHWSPR-P-2-4 | 8 1/4 | 4 | Phillips® #2 |
| JHWSPR-P-3-6 | 10 ⁹ / ₁₆ | 6 | Phillips® #3 |
| JHWSPR-T-15-4 | 7 3/4 | 4 | Torx® T15 |
| JHWSPR-T-25-5 | 8 1/4 | 5 | Torx® T25 |



- Contains 2 cabinet slotted, 4 keystone slotted, 4 Phillips® and 2 TORX® screwdrivers
- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- . Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion

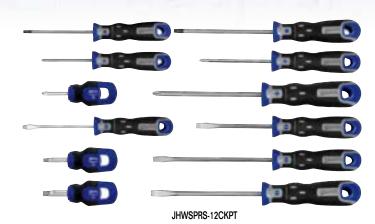

8 PIECE SUPERTORQUE™ COMBINATION SCREWDRIVER SET



Three Component Comfort Grip Handles

Product Code Description

JHWSPRS-8CKP 8 Piece SUPERTORQUE™ Combination Screwdriver Set

Contents Include:

| | Overall Length | Blade Length | _ |
|---------------|---------------------------------|--------------|------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSPR-C-14-1 | 3 7/8 | 1 1/2 | Cabinet Slotted 1/4" |
| JHWSPR-K-36-4 | 7 3/4 | 4 | Keystone Slotted 3/16" |
| JHWSPR-K-14-4 | 8 ¹ / ₄ | 4 | Keystone Slotted 1/4" |
| JHWSPR-K-56-6 | 10 ⁹ / ₁₆ | 6 | Keystone Slotted 5/16" |
| JHWSPR-K-38-8 | 12 9/16 | 8 | Keystone Slotted 3/8" |
| JHWSPR-P-1-3 | 5 ¹¹ / ₁₆ | 3 | Phillips® #1 |
| JHWSPR-P-2-1 | 3 ⁷ /8 | 1 1/2 | Phillips® #2 |
| JHWSPR-P-2-4 | 8 ¹ / ₄ | 4 | Phillips® #2 |

- Contains 1 cabinet slotted, 4 keystone slotted and 3 Phillips® screwdrivers
- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- . Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



JHWSPRS-8CKP





JHWSPRS-6CK

6 PIECE SUPERTORQUE™ COMBINATION SCREWDRIVER SET



Component Comfort Grip Handles


| Product Code | Description | | |
|--------------|--|--|--|
| JHWSPRS-6CK | 6 Piece SUPERTORQUE™ Combination Screwdriver Set | | |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|---------------|---------------------------------|--------------------------|------------------------|
| JHWSPR-C-36-1 | 3 7/8 | 1 1/2 | Cabinet Slotted 3/16" |
| JHWSPR-C-14-1 | 3 ⁷ /8 | 1 1/2 | Cabinet Slotted 1/4" |
| JHWSPR-K-14-4 | 8 1/4 | 4 | Keystone Slotted 1/4" |
| JHWSPR-K-36-4 | 7 3/4 | 4 | Keystone Slotted 3/16" |
| JHWSPR-K-56-6 | 10 ⁹ / ₁₆ | 6 | Keystone Slotted 5/16" |
| JHWSPR-K-38-8 | 12 9/16 | 8 | Keystone Slotted 3/8" |

Features

- Contains 2 cabinet slotted and 4 keystone slotted screwdrivers
- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion

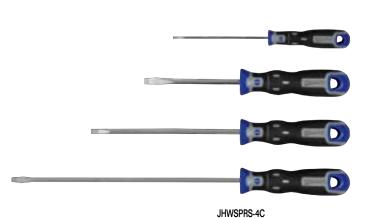

4 PIECE SUPERTORQUE™ CABINET SLOTTED SCREWDRIVER SET



Three Component Comfort Grip Handles

| Product Code | Description | |
|--------------|--|--|
| JHWSPRS-4C | 4 Piece SUPERTOROUE™ Cabinet Tin Screwdriver Set | |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------------------------|---|-----------------------|--|
| JHWSPR-C-18-4 JHWSPR-C-36-4 | 6 ¹¹ / ₁₆ 6 ¹³ / ₁₆ | 4 | Cabinet Slotted 1/8" Cabinet Slotted 3/16" |
| JHWSPR-C-36-6 | 9 3/4 | 6 | Cabinet Slotted 3/16" |
| JHWSPR-C-36-10 | 13 11/16 | 10 | Cabinet Slotted 3/16" |

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



6 PIECE SUPERTORQUE™ PHILLIPS® SCREWDRIVERS SET



Three Component Comfort Grip Handles

| Product Code | Description | | |
|--------------|---|--|--|
| JHWSPRS-6P | 6 Piece SUPERTORQUE™ Phillips® Screwdrivers Set | | |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|---------------------------------|--------------------------|--------------|
| JHWSPR-P-1-1 | 3 1/8 | 1 1/2 | Phillips® #1 |
| JHWSPR-P-1-3 | 5 ¹¹ / ₁₆ | 3 | Phillips® #1 |
| JHWSPR-P-2-1 | 3 1/8 | 1 1/2 | Phillips® #2 |
| JHWSPR-P-2-4 | 8 1/4 | 4 | Phillips® #2 |
| JHWSPR-P-2-8 | 12 1/8 | 8 | Phillips® #2 |
| JHWSPR-P-3-6 | 10 %16 | 6 | Phillips® #3 |

Features

- 3 component handles provides a maximum comfort grip
- · Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



JHWSPRS-6P

6 PIECE SUPERTORQUE™ TORX® SCREWDRIVER SET



Three Component Comfort Grip Handles

| Product Code | - Description | |
|--------------|--|--|
| JHWSPRS-6T | 6 Piece SUPERTORQUE™ TORX® Screwdriver Set | |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|---------------|-------------------------------|--------------------------|-----------|
| JHWSPR-T-10-3 | 7 1/4 | 3 | Torx® T10 |
| JHWSPR-T-15-4 | 7 1/4 | 4 | Torx® T15 |
| JHWSPR-T-20-4 | 7 3/4 | 4 | Torx® T20 |
| JHWSPR-T-25-5 | 8 ¹ / ₄ | 5 | Torx® T25 |
| JHWSPR-T-27-5 | 8 1/4 | 5 | Torx® T27 |
| JHWSPR-T-30-6 | 8 1/4 | 6 | Torx® T30 |

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



JHWSPRS-6T





MAGNETIC RATCHETING SCREWDRIVER



Comfort Grip Handle

| | Overall Length | Blade Length |
|--------------|----------------|--------------|
| Product Code | (Inches) | (Inches) |
| JHWWRS-1 | 9 | 4 |

Features

- Includes 5 bits: 2 slotted, #1 Phillips®, #2 Phillips®, and T-15 TORX®
- . Ergonomically designed handle for greater user comfort and control
- · Hi-impact plastic handle for durability and flexibility in all types of work applications
- . Heavy-duty 3-way on-off-locked ratcheting mechanism allows consistent and smooth operation
- · Powerful magnetic shank securely holds bit in place before, during and after the job application
- Stainless steel shank eliminates problems of chrome chipping or rust.
- · Easy bit storage in handle
- Accepts all standard 1/4" hex shank bits





T-HANDLE RATCHETING **SCREWDRIVERS**



Comfort Grip T-Handles

| Product Code | Overall Length (Inches) | Blade Length (Inches) |
|--------------|---------------------------------|-------------------------------|
| JHWWRST1 | 3 7/8 | 2 |
| JHWWRST4 | 5 ¹³ / ₁₆ | 3 ⁷ / ₈ |
| JHWWRST8 | 9 ¹³ / ₁₆ | 7 ⁷ /8 |

- Includes #2 Phillips® bit
- Ergonomically designed T-Handle fits the palm and provides extra leverage
- . Hi-impact plastic handle for durability and flexibility in all types of work applications
- Heavy-duty 3-way On-Off-Locked ratcheting mechanism allows consistent and smooth operation
- . Stainless steel shank eliminates problems of chrome chipping or rust
- Accept all standard 1/4" hex shank bits





1/4" HEX SHANK BIT HOLDER

3-Component Handle

| Product Code | Overall Length (Inches) | Bits Included |
|---------------|-------------------------|------------------|
| JHWSPR-0-14-5 | 9 29/64 | No |

Features

• 3 component handle provides a maximum comfort grip

MINI RATCHETING SCREWDRIVER



Satin Chrome Finish

| Product Code | Overall Length (Inches) | |
|--------------|-------------------------|--|
| 807SXUSA | 4 | |

Features

- · Smooth and consistent reverse ratcheting mechanism
- Perfect size for working in tight spaces and for hard to reach fasteners
- Tips are precision machined to fit precisely to fasteners

OFFSET SCREWDRIVERS



Cushion Grip Handle

| | Overall Length | |
|--------------|----------------|---------------------|
| Product Code | (Inches) | Tip |
| JHW24101 | 4 | Slotted 3/16" x PH1 |
| JHW24102 | 4 | Slotted 1/4" x PH2 |
| JHW24103 | 6 | Slotted 5/16" x PH3 |
| JHW24104 | 4 | Phillips® # 1 x # 2 |
| JHW24105 | 8 | Phillips® # 3 x # 4 |

- · Blades are made from special alloy steel for extra strength
- · One piece tool steel construction
- Tips are 90 degree angled







ENDUROGRIP™ CABINET SLOTTED SCREWDRIVERS



ENDUROGRIP™ Comfort Grip Handles and Blades

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|----------------------------------|-----------------------|-----------------------|
| JHWSDE-4 | 7 15/16 | 4 | Cabinet Slotted 1/4" |
| JHWSDE-8 | 11 ¹¹ / ₁₆ | 8 | Cabinet Slotted 1/4" |
| JHWSDE-43 | 6 ¹¹ / ₁₆ | 3 | Cabinet Slotted 3/16" |
| JHWSDE-46 | 9 11/16 | 6 | Cabinet Slotted 3/16" |
| JHWSDE-50 | 13 ¾ | 10 | Cabinet Slotted 3/16" |
| JHWSDE-53 | 6 ¹³ / ₆₄ | 3 | Cabinet Slotted 1/8" |

Features

- Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage
- Hi-polish chrome blades prevent corrosion and can be easily cleaned
- · Vapor-blasted tips grip fasteners and prevent chipping, extending tool life
- · Blades are made from special alloy steel for extra strength



ENDUROGRIP™ KEYSTONE SLOTTED SCREWDRIVERS



ENDUROGRIP™ Comfort Grip Handles and Blades

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|---|--------------------------|------------------------|
| JHWSDS-62 | 3 ½ | 1 3/4 | Keystone Slotted 1/4" |
| JHWSDR-22 | 6 ½ | 3 | Keystone Slotted 3/16" |
| JHWSDR-24 | 7 | 4 | Keystone Slotted 1/4" |
| JHWSDR-26 | 10 ¹¹ / ₁₆ | 6 | Keystone Slotted 5/16" |
| JHWSDR-28 | 12 ¹¹ / ₁₆ | 8 | Keystone Slotted %" |
| JHWSDR-30 | 14 ¾ | 10 | Keystone Slotted 7/16" |
| JHWSDS-33 | 17 ¹³ / ₁₆ | 12 | Keystone Slotted %" |

Features

- Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage.
- Hi-polish chrome blades prevent corrosion and can be easily cleaned.
- Vapor-blasted tips grip fasteners and prevent chipping, extending tool life.
- Blades are made from special alloy steel for extra strength.
- *SDS-33 features 3/8" heavy-duty square shank



ENDUROGRIP™ PHILLIPS® SCREWDRIVERS



ENDUROGRIP™ Comfort Grip Handles and Blades

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|---------------------------------|-----------------------|--------------------------|
| JHWSDP-1-3 | 6 1/4 | 3 | Phillips® #1 |
| JHWSDP-2-4 | 7 ¹⁵ / ₁₆ | 4 | Phillips [®] #2 |
| JHWSDP-2-8 | 12 | 8 | Phillips [®] #2 |
| JHWSDP-3-6 | 10 ¹ / ₂ | 6 | Phillips [®] #3 |
| JHWSDP-4-6 | 10 ³ / ₄ | 6 | Phillips [®] #4 |
| JHWSDP-2-ST | 3 ³ / ₈ | 1 1/2 | Phillips® #2 Stubby |

- Comfort-grip handle with thumb stop allow for added turning power without discomfort or slippage
- Hi-polish chrome blades prevent corrosion and can be easily cleaned
- · Vapor-blasted tips grip fasteners and prevent chipping, extending tool life
- Blades are made from special alloy steel for extra strength
- · Hex bolsters on shafts allow a wrench to be used for extra turning power





SUPERTORQUE™ **KEYSTONE SLOTTED SCREWDRIVERS**



Three Component Comfort Grip Handles

| | Overall Length | Blade Length | |
|----------------|---------------------------------|--------------|------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSPR-K-14-4 | 8 1/4 | 4 | Keystone Slotted 1/4" |
| JHWSPR-K-14-5 | 9 ³ / ₄ | 5 | Keystone Slotted 1/4" |
| JHWSPR-K-14-6 | 10 ³ / ₁₆ | 6 | Keystone Slotted 1/4" |
| JHWSPR-K-36-4 | 7 3/4 | 4 | Keystone Slotted 3/16" |
| JHWSPR-K-36-6 | 9 ³ / ₄ | 6 | Keystone Slotted 3/16" |
| JHWSPR-K-36-9 | 12 11/16 | 9 | Keystone Slotted 3/16" |
| JHWSPR-K-38-12 | 16 ¹ / ₂ | 12 | Keystone Slotted 3/8" |
| JHWSPR-K-38-8 | 12 ⁹ / ₁₆ | 8 | Keystone Slotted 3/8" |
| JHWSPR-K-56-6 | 10 9/16 | 6 | Keystone Slotted 5/16" |
| JHWSPR-K-56-7 | 12 9/16 | 8 | Keystone Slotted 5/16" |
| JHWSPR-K-72-4 | 8 3/4 | 4 | Keystone Slotted 7/32" |
| JHWSPR-K-72-6 | 10 ³ / ₄ | 6 | Keystone Slotted 7/32" |

Features

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion

SUPERTORQUE™ **CABINET SLOTTED SCREWDRIVERS**



Three Component Comfort Grip Handles

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|----------------|---|--------------------------|-----------------------|
| JHWSPR-C-14-1 | 3 1/4 | 1 | Cabinet Slotted 1/4" |
| JHWSPR-C-36-1 | 3 7/8 | 1 1/2 | Cabinet Slotted 3/16" |
| JHWSPR-C-18-3 | 6 | 3 | Cabinet Slotted 1/8" |
| JHWSPR-C-36-4 | 6 13/16 | 4 | Cabinet Slotted 3/16" |
| JHWSPR-C-32-3 | 7 | 3 | Cabinet Slotted 3/32" |
| JHWSPR-C-94-3 | 7 3/4 | 3 | Cabinet Slotted 9/64" |
| JHWSPR-C-52-4 | 8 3/4 | 4 | Cabinet Slotted 5/32" |
| JHWSPR-C-18-4 | 9 | 4 | Cabinet Slotted 1/8" |
| JHWSPR-C-94-5 | 9 3/4 | 5 | Cabinet Slotted 9/64" |
| JHWSPR-C-36-6 | 9 3/4 | 6 | Cabinet Slotted 3/16" |
| JHWSPR-C-14-6 | 10 ³ / ₄ | 6 | Cabinet Slotted 1/4" |
| JHWSPR-C-52-6 | 11 ³ / ₄ | 6 | Cabinet Slotted 5/32" |
| JHWSPR-C-18-8 | 12 ¹ / ₂ | 8 | Cabinet Slotted 1/8" |
| JHWSPR-C-36-10 | 13 ¹¹ / ₁₆ | 10 | Cabinet Slotted 3/16" |

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion







SUPERTORQUE™ PHILLIPS® **SCREWDRIVERS**



Three Component Comfort Grip Handles

| | Overall Length | Blade Length | _ |
|--------------|---------------------------------|--------------|--------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSPR-P-1-1 | 3 ⁷ / ₈ | 1 1/2 | Phillips [®] #1 |
| JHWSPR-P-2-1 | 3 ⁷ / ₈ | 1 1/2 | Phillips [®] #2 |
| JHWSPR-P-1-3 | 5 ¹¹ / ₁₆ | 3 | Phillips [®] #1 |
| JHWSPR-P-2-4 | 8 1/4 | 4 | Phillips® #2 |
| JHWSPR-P-0-3 | 6 ¹ / ₂ | 3 | Phillips® #0 |
| JHWSPR-P-2-6 | 10 3/16 | 6 | Phillips® #2 |
| JHWSPR-P-3-6 | 10 9/16 | 6 | Phillips® #3 |
| JHWSPR-P-2-8 | 12 ¹ / ₈ | 8 | Phillips® #2 |
| JHWSPR-P-1-8 | 12 ³ / ₄ | 8 | Phillips® #2 |

Features

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion

SUPERTORQUE™ POZIDRIV® SCREWDRIVERS



Three Component Comfort Grip Handles

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|--------------------------------|--------------------------|--------------|
| JHWSPR-Z-0-3 | 7 1/4 | 3 | Pozidriv® #0 |
| JHWSPR-Z-1-3 | 7 3/4 | 3 | Pozidriv® #1 |
| JHWSPR-Z-2-4 | 8 3/4 | 4 | Pozidriv® #2 |
| JHWSPR-Z-3-6 | 10 ³ / ₄ | 6 | Pozidriv® #3 |

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- · Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



SUPERTORQUE™ TAMPER-RESISTANT TORX® SCREWDRIVERS



Three Component Comfort Grip Handles

| | Overall Length | Blade Length | |
|---------------|-------------------------------|--------------|-------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSPR-X-10-3 | 7 3/8 | 3 | Tamper Resist Torx® T10 |
| JHWSPR-X-15-4 | 7 1/2 | 4 | Tamper Resist Torx® T15 |
| JHWSPR-X-20-4 | 8 | 4 | Tamper Resist Torx® T20 |
| JHWSPR-X-25-5 | 8 | 5 | Tamper Resist Torx® T25 |
| JHWSPR-X-27-5 | 8 ³ / ₄ | 5 | Tamper Resist Torx® T27 |
| JHWSPR-X-30-6 | 8 ³ / ₄ | 6 | Tamper Resist Torx® T30 |
| JHWSPR-X-40-6 | 11 ⁵ /8 | 6 | Tamper Resist Torx® T40 |

Features

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- · Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



SUPERTORQUE™ TORX® SCREWDRIVERS



Three Component Comfort Grip Handles

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|---------------|--------------------------------|--------------------------|-----------|
| JHWSPR-T-6-3 | 6 | 3 | Torx® T6 |
| JHWSPR-T-7-3 | 6 ¹ / ₄ | 3 | Torx® T7 |
| JHWSPR-T-8-3 | 6 ³ / ₈ | 3 | Torx® T8 |
| JHWSPR-T-9-3 | 7 1/4 | 3 | Torx® T9 |
| JHWSPR-T-10-3 | 7 3/8 | 3 | Torx® T10 |
| JHWSPR-T-15-4 | 7 1/2 | 4 | Torx® T15 |
| JHWSPR-T-20-4 | 8 | 4 | Torx® T20 |
| JHWSPR-T-25-5 | 8 | 5 | Torx® T25 |
| JHWSPR-T-27-5 | 8 3/4 | 5 | Torx® T27 |
| JHWSPR-T-30-6 | 8 ³ / ₄ | 6 | Torx® T30 |
| JHWSPR-T-40-6 | 11 ¹ / ₂ | 6 | Torx® T40 |
| JHWSPR-T-45-6 | 11 ¹ / ₂ | 6 | Torx® T45 |

Features

- · 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion



SUPERTORQUE™ ROBERTSON® SCREWDRIVERS



Three Component Comfort Grip Handles

| | Overall Length | Blade Length | |
|--------------|-------------------------------|--------------|--------------------------|
| Product Code | (Inches) | (Inches) | Tip |
| JHWSPR-R-1-4 | 8 | 4 | Robertson® #1 (5, 6, 7) |
| JHWSPR-R-2-5 | 8 | 5 | Robertson® #2 (8, 9, 10) |
| JHWSPR-R-3-6 | 8 ³ / ₄ | 6 | Robertson® #3 (12, 14) |

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion











JHWSPR-N-SAE7



JHWSPR-N-MM5

| Three Component Comfort Grip Handles | | | |
|--------------------------------------|-------------------------|--------------------------|-------------|
| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
| JHWSPR-N-5-6 | 10.5 | 6 | 5mm |
| JHWSPR-N-6-6 | 10.5 | 6 | 6mm |
| JHWSPR-N-7-6 | 11 | 6 | 7 mm |
| JHWSPR-N-8-6 | 11 | 6 | 8 mm |
| JHWSPR-N-9-6 | 11 | 6 | 9mm |
| JHWSPR-N-12-6 | 11.75 | 6 | 1/4" |
| JHWSPR-N-13-6 | 10.5 | 6 | 11/32" |
| JHWSPR-N-14-6 | 10.5 | 6 | 1/4" |
| JHWSPR-N-36-6 | 10 | 6 | 3/16" |
| JHWSPR-N-38-6 | 11.75 | 6 | 3/8" |
| JHWSPR-N-56-6 | 10.5 | 6 | 5/16" |
| JHWSPR-N-76-6 | 11.75 | 6 | 7/16" |
| | | | |

JHWSPR-N-SAE7 7 Piece SAE Nutdriver Set

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|---------------|-------------------------|--------------------------|--------|
| JHWSPR-N-12-6 | 11.75 | 6 | 1/4" |
| JHWSPR-N-13-6 | 10.5 | 6 | 11/32" |
| JHWSPR-N-14-6 | 10.5 | 6 | 1/4" |
| JHWSPR-N-36-6 | 10 | 6 | 3/16" |
| JHWSPR-N-38-6 | 11.75 | 6 | 3/8" |
| JHWSPR-N-56-6 | 10.5 | 6 | 5/16" |
| JHWSPR-N-76-6 | 11.75 | 6 | 7/16" |

- 3 component handles provides a maximum comfort grip
- · Size is shown on blade and tip style is shown on handle for easy identification
- Chrome blades prevent corrosion and can be easily cleaned
- Sand blasted tip for greater screw-tip adherence and high resistance against corrosion

5 **PIECE SUPERTORQUE™ NUTDRIVERS**

Three Component Comfort Grip Handles

| Product Code | Description |
|--------------|---|
| JHWSPRS-6P | 6 Piece SUPERTORQUE™ Phillips® Screwdrivers Set |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip |
|--------------|-------------------------|--------------------------|-------------|
| JHWSPR-N-5-6 | 10.5 | 6 | 5mm |
| JHWSPR-N-6-6 | 10.5 | 6 | 6mm |
| JHWSPR-N-7-6 | 11 | 6 | 7 mm |
| JHWSPR-N-8-6 | 11 | 6 | 8mm |
| JHWSPR-N-9-6 | | 6 | |

- 3 component handles provides a maximum comfort grip
- Size is shown on blade and tip style is shown on handle for easy identification
- . Chrome blades prevent corrosion and can be easily cleaned
- · Sand blasted tip for greater screw-tip adherence and high resistance against corrosion





72 PIECE BIT SET

| Product Code | Description |
|--------------|------------------|
| JHW24900 | 72 Piece Bit Set |

Contents Include:

| Hex (| | |
|-------|-----|--------|
| Size | QTY | Length |
| 1/4 | 2 | 1" |
| 3/16 | 2 | 1" |
| 5/16 | 2 | 1" |
| 5/32 | 2 | 1" |

| 7/32 | 2 | 1" |
|---------|--------|--------|
| Phillip | s® (13 | 3) |
| Size | QTY | Length |
| 1 | 3 | 1" |
| 2 | 4 | 1" |
| 3 | 2 | 1" |
| 4 | 4 | 211 |

| | 3 | 1 | 2" |
|----|-------|---------|--------|
| | Pozid | riv® (7 |) |
| 47 | Size | QTY | Length |
| | 2 | 3 | 1" |
| | 3 | 2 | 1" |
| | 2 | 1 | 2" |
| | 3 | 1 | 2" |

| | <u>ა</u> | | |
|---|----------|-------|--------|
| | Squar | e (6) | |
| U | Size | QTY | Length |
| | 2 | 2 | 1" |
| | 3 | 2 | 1" |
| | 2 | 2 | 2" |

| Slotte | d Tip | (12) |
|--------|-------|--------|
| Size | QTY | Length |
| 6-8 | 3 | 1" |
| 8-10 | 2 | 1" |
| 10-12 | 2 | 1" |
| 12-14 | 1 | 1" |
| 8-10 | 2 | 2" |
| 10-12 | 1 | 2" |
| 12-14 | 1 | 2" |

| TORX | ® (15) | |
|-------------|--------|--------|
| Size | QTY | Length |
| 7 | 1 | 1" |
| 8 | 1 | 1" |
| 10 | 1 | 1" |
| 15 | 1 | 1" |
| 20 | 1 | 1" |
| 25 | 1 | 1" |
| 27 | 1 | 1" |
| 30 | 1 | 1" |
| 30 | 2 | 1" |
| 40 | 2 | 1" |
| 15 | 1 | 2" |
| 20 | 1 | 2" |
| 25 | 1 | 2" |
| | | |

| Nut Driver (8) | | | | |
|----------------|-----|--------|--|--|
| Size | QTY | Length | | |
| 1/4 | 1 | 1" | | |
| 11/32 | 1 | 1" | | |
| 3/16 | 1 | 1" | | |
| 3/8 | 1 | 1" | | |
| 5/16 | 1 | 1" | | |
| 5/32 | 1 | 1" | | |
| 7/16 | 1 | 1" | | |
| 9/32 | 11 | 1" | | |


Hex Magnetic Holder (1)

Description Hex Magnetic Holder



JHW24900

- S2 material for higher torque, optimum durability and performance
- All parts are engineered and produced according to ANSI standard
- The set also includes a magnetic bit holder allowing for quick change of driving bits
- Folding case design is compact and robust with pivoting dual bit holders that allow for easy and quick access to the accessories
- Industrial case is made from a highly durable, plastic material

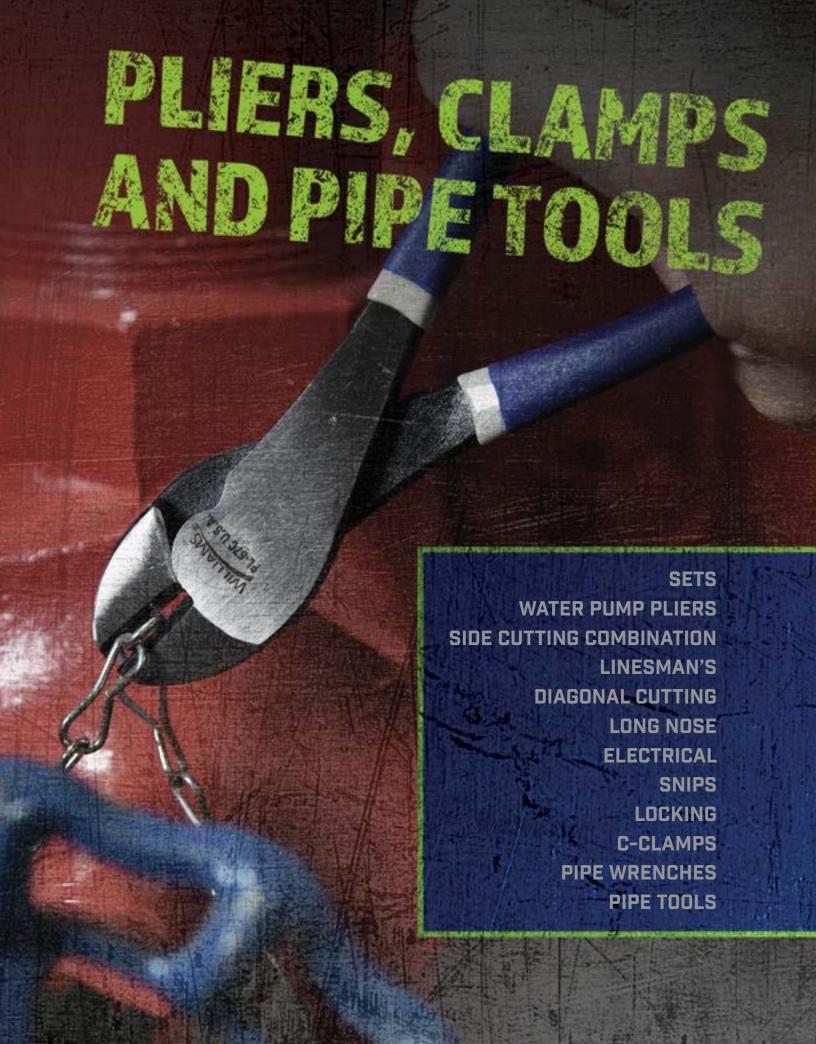





Ergonomically designed two-component handles provide durability and a comfortable, secure, non-slip grip

High-leverage joint placement to reduce the required cutting force

Joint design ensures a smooth joint action

Heavy-duty design -

high performance tool steel construction adds extra strength

On/Off return spring for higher comfort and higher frequency cutting may be turned off for storage in belt or pocket

HIGH LEVERAGE DIAGONAL CUTTING PLIERS

Induction hardened cutting edges

Double-dipped plastic handles are designed to cut wire with ease

CHAIN NOSE

PLIERS

Polished heads resist rust and corrosion, extending the tool life

industrial hardened cutting edges





17 PIECE COMBINATION PLIER SET

| | Description | | |
|----------------------------------|--|--|--|
| 17 Pi | 17 Piece Combination Plier Set | | |
| lude: | | | |
| Description | Handle Type | | |
| 8" Slip Joint | Double Dipped Plastic Handles | | |
| 9 ¾" Groove Joint | Double Dipped Plastic Handles | | |
| 15 ¾" Groove Joint | Double Dipped Plastic Handles | | |
| 7" Heavy Duty Diagonal Cutting | Double Dipped Plastic Handles | | |
| 6 1/4" Curved Chain Nose | Double Dipped Plastic Handles | | |
| 8" long nose | Double Dipped Plastic Handles | | |
| 8 1/4" Multi-Purpose Wire Cutter | Double Dipped Plastic Handles with Curved Wire Cutter | | |
| 5 ½" Mini Wire Cutter | Double Dipped Plastic Handles with Curved Wire Cutter | | |
| 9" Heavy Duty Linesman | Double Dipped Plastic and Bi-Mold Comfort Grip Handles | | |
| 7" Side Cutting Combination | Ergonomically Designed Handles | | |
| 10" Water Pump | Double Dipped Plastic Handles | | |
| 7" Nut Gripping | Heavy Duty Design with PVC Grips | | |
| 6 1/2" Duck Bill | Double Dipped Plastic Handles | | |
| 7 1/2" End Cutting | Double Dipped Plastic Handles | | |
| 11" Bent Nose | Double Dipped Plastic Handles | | |
| 11" Long Reach Chain Nose | Double Dipped Plastic Handles | | |
| 11" Extra Long Diagonal | Double Dipped Plastic Handles | | |
| | Bude: Description 8" Slip Joint 9 %" Groove Joint 15 %" Groove Joint 7" Heavy Duty Diagonal Cutting 6 %" Curved Chain Nose 8" long nose 8 "A" Multi-Purpose Wire Cutter 5 %" Mini Wire Cutter 9" Heavy Duty Linesman 7" Side Cutting Combination 10" Water Pump 7" Nut Gripping 6 %" Duck Bill 7 ½" End Cutting 11" Bent Nose 11" Long Reach Chain Nose | | |

Features

- Double-dipped plastic handle grips are comfortable yet durable
- Ergo handles provide maximum gripping comfort



JHWPLS-17

6 PIECE GENERAL SERVICE PLIERS SET

Double-Dipped Plastic Handles

| Product Code | Description | | |
|-------------------------------------|--|--|--|
| JHWPLS-6A | 6 Piece General Service Pliers Set | | |
| Contents Include: | | | |
| Product Code | Description | | |
| JHWPL-1519C | 5" utility superjoint | | |
| JHWPL-1520C | 10" utility superjoint | | |
| JHWPL-46C 6" diagonal cutting | | | |
| JHWPL76C 6 1/2" chain nose side cut | | | |
| JHW2628G-6 | 6" side cutting combination | | |
| JHW23503 | 8 ¹ / ₄ " front-end stripper | | |

- Combines Williams' most popular pliers in to a single set
- 6 piece set packaged in a pouch











Double-Dipped Plastic Handles

Product Code Description JHWPLS-4GL 4 Piece Combination Pliers Set

Contents Include:

| Product Code | Description |
|--------------|---|
| JHWPL-1523C | 12" Utility Superjoint Pliers |
| JHWPL205C | 8 1/2" Industrial Grade Linesman's Pliers |
| JHWPL-47C | 7" Industrial Grade Diagonal Cutting Pliers |
| JHWPL116C | 7" Long Nose Needle Pliers |
| | - |

Features

- Double-dipped plastic handle grips are comfortable yet durable
- · Jaws are polished with rust-protective coating
- Packaged in a bag



4 PIECE COMBINATION PLIERS SET

Double-Dipped Plastic Handles

Product Code Description JHWPLS-4SG 4 Piece Combination Pliers Set

| Product Code | Description |
|--------------|---|
| JHWPL-8C | 8" Combination Slip Joint Pliers |
| JHWPL-1520C | 10" Utility Superjoint Pliers |
| JHWPL-47C | 7" Industrial Grade Diagonal Cutting Pliers |
| JHWPL116C | 7" Long Nose Needle Pliers |

- Double-dipped plastic handle grips are comfortable yet durable
- · Jaws are polished with rust-protective coating





UTILITY SUPERJOINT PLIERS

Double-Dipped Plastic Handles

| Features | Overall Length (Inches) | Maximum Opening (Inches) | Tip Width (Inches) |
|-------------|----------------------------|--------------------------|-----------------------|
| JHWPL-1519C | 5 | 1/2 | 3/16 |
| JHWPL-1520C | 10 | 1 1/2 | 5/16 |
| JHWPL-1523C | 12 | 2 ⁵ /8 | 1/2 |
| JHWPL-1524C | 16 | 4 | 1/2 |

Features

- Multiple parallel jaw positions are locked in to proper groove for superior non-slip performance
- · Serrated jaws for maximum gripping power
- · Polished heads resist rust and corrosion, extending the tool life



WATER PUMP PLIERS

| Product Code | Overall Length (Inches) | Maximum Jaw Opening (Inches) | Tip Width (Inches) |
|--------------|-------------------------|--------------------------------------|--------------------|
| JHW6223 | 8 | 1 3/4 | 1/2 |
| JHW6224 | 10 | 2 ³ / ₈ | 1/2 |
| JHW6225 | 12 | 2 ⁵ / ₈ | 1/2 |

Features

- · Hardened jaws and teeth for exceptionally tough gripping surface
- Comfortable two-component handles combines durability and a secure non-slip grip
- Wide, deep opening jaws have flat and pipe grip jaw so one pair of pliers can be used for more jobs

UNIVERSAL PLIERS WRENCHES

With Comfort Grip

| Product Code | Overall Length (Inches) | Maximum Jaw Opening (Inches) | Pipe Maximum Diameter (Inches) |
|--------------|--------------------------------|---------------------------------|-----------------------------------|
| JHW140 | 8 7/16 | 1 3/16 | 3/4 |
| JHW141 | 11 | 1 ³ / ₈ | 1 |
| JHW142 | 14 ¹ / ₂ | 2 ¹ / ₁₆ | 1 1/2 |
| JHW143 | 21 ⁷ /8 | 3 ¹ / ₁₆ | 2 1/2 |
| JHW144 | 28 ³ / ₈ | 4 ³ / ₈ | 3 ¹ / ₂ |

- Black oxide and anti-rust treated high alloy steel provide long life and durability
- Precision induction hardened jaws are designed with inwardly angled aggressive teeth
- Outer part of jaw is large toothed and used for maximum grip on large diameter pipes
- Inner part of jaw is fine toothed and used for maximum grip on small diameter pipes
- Commonly called a "Swedish Pipe Wrench", the small head makes them ideal for working in confined areas













COMBINATION SLIP-JOINT PLIERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Tip Width (Inches) |
|--------------|-------------------------|---------------------|--------------------|
| JHWPL-6C | 6 | 1 5/32 | 3/8 |
| JHWPL-8C | 8 | 1 13/32 | 3/8 |
| JHWPL-10C | 10 | 1 13/32 | 1/2 |

Features

- Multiple parallel jaw positions are locked in to proper groove for superior non-slip performance
- Serrated jaws for maximum gripping power
- · Polished heads resist rust and corrosion, extending the tool life
- . Shear type wire cutter extends tool use





Handles with Bi-Molded Grips and On/Off Return Spring

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Maximum Cutting Capacity (Inches) |
|--------------|-------------------------|------------------------|-----------------------------------|
| JHW2628G-6 | 6 1/4 | 1 5/16 | 1/16 Hard Steel |
| JHW2628G-7 | 7 | 1 ⁷ /16 | 5/64 Hard Steel |
| JHW2628G-8 | 8 | 1 1/2 | 7/64 Hard Steel |

Features

- On/off return spring for higher comfort and higher frequency cutting may be turned off when tool is kept in belt or pocket
- High-leverage joint placement to reduce the cutting force. Joint design ensures a smooth joint action
- Heavy-duty design high performance tool steel construction adds extra strength
- Comfortable two-component handles which combines durability and a secure non-slip grip



JHW2628G-6

NUT GRIPPING PLIERS

Heavy-Duty Design with PVC Grips

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Tip Width (Inches) |
|--------------|-------------------------|---------------------|--------------------|
| JHW2979D-7 | 7 | 1/2 | 7/16 |

- Conical jaws with teeth facing inward provide maximum gripping power
- Heavy-duty design combined with high performance tool steel construction adds extra strength



END CUTTING NIPPERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Cutting Blade Length (Inches) |
|--------------|-------------------------------|-------------------------------|
| JHWPLM-2C | 4 1/2 | 15/32 |
| JHWPL-167 | 7 1/2 | 13/16 |
| JHW527D-6 | 6 ¹ / ₄ | 1/4 |

Features

- · Ideal for cutting wire or nails that are close to the work
- · Polished heads resist rust and corrosion, extending the tool life
- The wide throat clearance, width of blades and angles of the cutting edges along with the handle leverage provide for easy, clean cutting or nipping

INDUSTRIAL GRADE LINESMAN'S PLIERS

Double-Dipped Plastic Handles

| Product Code | Description | Overall Length (Inches) | Jaw Length (Inches) |
|--------------|---------------|-------------------------|---------------------|
| JHWPL-204C | Electrician's | 7 | 1/2 |
| JHWPL205C | Electrician's | 8 1/2 | 17/32 |
| JHWPL-209X | New England | 9 1/2 | 3/4 |

Features

- Designed for wiring, electrical equipment installation and maintenance for utility linemen
- · Polished faces look good and resist corrosion
- Induction hardened cutting edges stay sharp longer
- · Diamond serrated jaws provide solid grip on wire
- . Double-dipped plastic handle grips are comfortable yet durable



INDUSTRIAL GRADE LINESMAN'S PLIERS

Supplied Without Grips

| Product Code | Description | Overall Length (Inches) | Jaw Length (Inches) |
|--------------|-------------|-------------------------|---------------------|
| JHWPL-208 | Linesman's | 8 1/2 | 17/32 |
| JHWPL-209 | New England | 9 1/2 | 3/4 |

- Designed for wiring, electrical equipment installation and maintenance for utility linemen
- · Polished heads resist rust and corrosion, extending the tool life
- · Induction hardened cutting edges stay sharp longer
- · Diamond serrated jaws provide solid grip on wire
- Supplied without grips handles are bare steel







JHWPL-209





HIGH LEVERAGE DIAGONAL CUTTING PLIERS

Double-Dipped Plastic Handles

| Product Code | Description | Overall Length (Inches) | Length (Inches) |
|--------------|--------------------------------|-------------------------|-------------------------------|
| JHWPL-57C | High Leverage Head | 7 1/4 | ¹⁵ / ₁₆ |
| JHWPL-411C | Extra Long Handle, Offset Head | 11 | 1 |

Features

- · Handles are designed to cut wire with ease
- · Polished heads resist rust and corrosion, extending the tool life
- · Induction hardened cutting edges



INDUSTRIAL GRADE DIAGONAL CUTTING PLIERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Cutting Blade Length (Inches) |
|--------------|-------------------------|-------------------------------|
| JHWPL-44C | 4 | 17/32 |
| JHWPL-45C | 5 | 11/16 |
| JHWPL-46C | 6 | 3/4 |
| JHWPL-47C | 7 | 11/16 |

Features

- · Handles are designed to cut wire with ease
- · Polished heads resist rust and corrosion, extending the tool life
- · Induction hardened cutting edges
- · Regular flush cutters are used for cutting hard wire



FLUSH CUT DIAGONAL CUTTING PLIERS WITH SPRING

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Cutting Blade Length (Inches) |
|--------------|-------------------------------|-------------------------------|
| JHWPLM-1CS | 4 ¹ / ₄ | 17/32 |
| JHWPL-40CS | 5 | 11/16 |

Features

- · Handles are designed to cut wire with ease
- Polished heads resist rust and corrosion, extending the tool life
- Induction hardened cutting edges
- Flush cutters are used for close cutting of medium wire



HEAVY DUTY SIDE CUTTING PLIERS

Handles with Bi-Molded Grips and On/Off Return Spring

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Maximum Cutting Capacity (Inches) |
|--------------|-------------------------------|------------------------|-----------------------------------|
| JHW21HDG-5.5 | 5 ¹ / ₂ | 5/8 | 5/64 Piano Wire |
| JHW21HDG-6 | 6 ¹ / ₄ | 3/4 | 3/32 Piano Wire |
| JHW21HDG-7 | 7 | 13/16 | 1/8 Piano Wire |
| JHW21HDG-8 | 7 3/4 | 13/16 | 1/8 Piano Wire |

- Distance from joint to center of cutting edges is reduced for greater leverage and increased cutting capacity
- Equipped with a patented return spring featuring an on/off function; turn on to reduce handle fatigue, off to store in tool belt or pocket
- · Phosphate finish, anti-corrosion treated
- Heavy-duty cutting edge
- Screw joint that provides excellent running and accurate alignment of the cutting edges
- Distance from the joint to the center of the cutting edges is reduced: giving greater leverage and increased cutting capacity
- . Metal frame designed to enhance accessibility in confined spaces
- Equipped with a patented return spring featuring an on/off function
- · Induction hardened cutting edges
- Maximum comfort with minimum effort due to the handle design
- · Comfortable two-component handles giving an excellent grip
- Self-opening handles when spring activated



FLAT NOSE PLIERS

Handles with Bi-Molded Grips and On/Off Return Spring

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Width at Tip (Inches) |
|--------------|-------------------------|------------------------|--------------------------|
| JHW2420G-5 | 5 | 7/8 | 5/8 |

Features

- Comfortable two-component handles which combines durability and a secure non-slip grip
- Unique on-off return spring: turn on to reduce hand fatigue, off to store in tool belt or pocket
- · High performance tool steel construction adds extra strength
- Saw-toothed shaped, serrated jaws provide maximum gripping surface

LONG NOSE PLIERS

Handles with Bi-Molded Grips and On/Off Return Spring

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Maximum Cutting Capacity (Inches) |
|--------------|-------------------------------|------------------------|-----------------------------------|
| JHW2430G-5.5 | 5 ¹ / ₂ | 1 1/2 | 3/64 Hard Steel |
| JHW2430G-6 | 6 ¹ / ₄ | 1 15/16 | 1/16 Hard Steel |
| JHW2430G-8 | 8 | 1 15/16 | 1/16 Hard Steel |

Features

- Comfortable two-component handles which combines durability and a secure non-slip grip
- Unique on-off return spring: turn on to reduce hand fatigue, off to store in tool belt or pocket
- · High performance tool steel construction adds extra strength

PLASTIC CUTTING DIAGONAL PLIERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Cutting Blade Length (Inches) |
|--------------|-------------------------------|-------------------------------|
| JHWPL-48C | 6 ³ / ₈ | 7/8 |
| JHWPL-49C | 7 1/2 | 1 1/8 |

Features

- · Polished heads resist rust and corrosion, extending the tool life
- · Induction hardened cutting edges



SIDE CUTTING PLIERS FOR PLASTIC

Handles with Bi-Molded Grips and On/Off Return Spring

| | | | Maximum Cutting |
|--------------|-------------------------|------------|-----------------|
| Product Code | Overall Length (Inches) | Jaw Length | Capacity |
| JHW2101PG-7 | 6 1/4 | 3/4 | 1 1/2 |

- Full flush cutting edge without beveling which is designed to smoothly cut all kinds of plastic parts such as the flash of plastic components
- · Suitable for bridle cutting
- Comfortable two-component handles which combines durability and a secure non-slip grip
- Extra wide handle two-component material reduces stress ans strain, and to increase comfort
- Lacquer finish protects against rust
- High Frequency hardened cutting edges hold their precision-sharpened cutting surfaces.
- Unique on-off return spring: turn on to reduce handle fatigue, off to store in tool belt or pocket







JHWPL-48C













Handles with Bi-Molded Grips and On/Off Return Spring

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Maximum Cutting Capacity (Inches) |
|--------------------------|-------------------------------|---|--------------------------------------|
| JHW2427G-6 JHW2427G-8 | 6 ¹ / ₄ | 1 ¹³ / ₁₆ 2 ³ / ₄ | 5/64 Hard Steel 5/64 Hard Steel |

Features

- Comfortable two-component handles which combines durability and a secure non-slip grip
- Unique on-off return spring: turn on to reduce hand fatigue, off to store in tool belt or pocket
- · High performance tool steel construction adds extra strength



ROUND NOSE PLIERS

Handles with Bi-Molded Grips and On/Off Return Spring

| Product Code | Overall Length (Inches) | Jaw Length (Inches) |
|--------------|-------------------------------|---------------------|
| JHW2521G-6 | 6 ¹ / ₄ | 1 1/4 |

Features

- Comfortable two-component handles which combine durability and a secure non-slip grip
- Unique on-off return spring: turn on to reduce handle fatigue, off to store in tool belt or pocket
- Perfect for wire bending



EXTRA LONG REACH CHAIN NOSE PLIERS

Double-Dipped Plastic Handles

| Description | (Inches) | Jaw Length (Inches) |
|---------------|--------------|------------------------|
| Straight Jaw | 11 | 2 13/16 |
| 45° Bent Nose | 11 | 2 9/16 |
| | Straight Jaw | Straight Jaw 11 |

Features

- · Polished heads resist rust and corrosion, extending the tool life
- Extra long handles provide access into confined areas and greater holding power at the tip
- Bent nose model provides access to obstructed areas





Double-Dipped Plastic Handles

| Product Code | | Overall Length (Inches) | Jaw Length (Inches) | Width at Tip (Inches) | |
|--------------|-----------|-------------------------|------------------------|--------------------------|--|
| | JHWPL-98C | 8 | 1 7/32 | 3/32 | |

- · Polished heads resist rust and corrosion, extending the tool life
- Longer handles for more convenient use and greater jaw gripping power







CHAIN NOSE PLIERS

Double-Dipped Plastic Handles

| Product Code | Description | Overall Length (Inches) | Jaw Length (Inches) |
|--------------|--------------------------|-------------------------------|--------------------------------|
| JHWPL-95C | Short Nose w/cutter | 5 ¹ / ₂ | 1 ⁵ / ₃₂ |
| JHWPL-75C | Long Nose | 6 ³ / ₄ | 2 ⁵ /16 |
| JHWPL76C | Long Nose w/cutter | 6 ¹ / ₂ | 1 ⁵ / ₁₆ |
| JHWPL-77C | Extra Long Nose w/cutter | 7 1/2 | 1 29/32 |

Features

- · Polished heads resist rust and corrosion, extending the tool life
- . Diamond serrated jaws with industrial hardened cutting edges





Double-Dipped Plastic Handles

| | 5 | Overall Length | Jaw Length |
|--------------|--------------------|----------------|------------|
| Product Code | Description | (Inches) | (Inches) |
| JHWPL-126C | 73° Bent Thin Nose | 6 1/4 | 1 1/4 |

Features

- · Polished heads resist rust and corrosion, extending the tool life
- Serrated jaws for extra gripping power
- 73° bent nose model featured thin jaws angled to reach around obstacles and hard-to-reach spaces





Double-Dipped Plastic Handles

| Product Code | Description | Overall Length (Inches) | Jaw Length (Inches) | |
|--------------|-------------|-------------------------|------------------------|--|
| JHWPL-114CS | Short Nose | 4 1/2 | 1 | |
| JHWPL116C | Long Nose | 7 | 2 3/16 | |

- · Polished heads resist rust and corrosion, extending the tool life
- Serrated jaws provide extra gripping power
- The JHWPL-114CS short nose model is supplied with a spring and is designed for close, fine electrical and mechanical work
- The JHWPL116C long nose model provides excellent gripping ability for use in tight, narrow places















JHW23503

JHW23524

DUCK BILL PLIERS

Double-Dipped Plastic Handles

| | Overall Length | | | |
|--------------|----------------|----------|---------------------|--|
| Product Code | Description | (Inches) | Jaw Length (Inches) | |
| JHWPL-146C | Standard Jaw | 6 1/2 | 2 1/16 | |
| JHWPL-149C | High Leverage | 8 | 1 1/4 | |

Features

- · Jaws are polished with rust-protective coating
- Flat wide nose provides a better grip than the regular needle nose models



MULTI-PURPOSE COMBINATION WIRE TOOLS

Double-Dipped Plastic Handles with Curved Wire Cutter

| Product Code | Description | Overall Length (Inches) | Nose Style |
|--------------|--------------------|-------------------------|-----------------|
| JHW23503 | Front-end Stripper | 8 1/4 | Serrated Pliers |
| JHW23524 | Front-end Crimper | 8 3/4 | Anvil Cutter |

- Crimp and strip wire sizes 10-22 AWG
- Double-dipped handles with air cushion pockets provide comfortable grip, reducing hand fatigue
- 23503 cuts 6 bolt sizes: 4-40 / 5-40 / 6-32 / 8-32 / 10-32 / 10-24
- 23524 cuts 5 bolt sizes: 4-40 / 6-32 / 8-32 / 10-32 / 10-24







HEAVY DUTY FRONT END WIRE STRIPPERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Capacity (AWG-solid wire) | Capacity (stranded wire) |
|--------------|-------------------------------|---------------------------|--------------------------|
| JHW23506 | 6 ¹ / ₄ | 10-20 | 12-20 |
| JHW23518 | 6 ¹ / ₄ | 14-24 | 16-26 |
| JHW23521 | 6 ¹ / ₄ | 22-30 | 24-32 |

Features

- Double-dipped handles with air cushion pockets provide comfortable grip, reducing hand fatigue
- . Spring-loaded handles speed work and reduce hand effort
- · Serrated gripping jaws in nose for use as pliers
- 2-piece hardened steel pivot for long life service
- · Lock protects cutting edges in storage



SUPER-DUTY FRONT END WIRE STRIPPERS WITH BOLT CUTTERS

Double-Dipped Plastic Handles with Curved Wire Cutter

| Product Code | Overall Length (Inches) | Capacity (AWG-solid wire) | Capacity (stranded wire) |
|--------------|---|---------------------------|--------------------------|
| JHW23533 | 7 ¹ / ₄ 7 ¹ / ₄ | 10-18 | 12-20 |
| JHW23535 | | 20-30 | 22-32 |

- Double-dipped handles with air cushion pockets provide comfortable grip, reducing hand fatigue
- . Longer, curved handles provide extra leverage and greater comfort
- Serrated gripping jaws in nose for use as pliers
- Built-in bolt cutters cleanly cut 6-32 and 8-32 screws















AVIATION SNIPS

Bi-Mold Comfort Grip Handles

| Product Code | Cutting Direction | Overall Length (Inches) | Cut Length (Inches) | Cutting Capacity (cold-rolled/stainless) |
|--------------|----------------------|-------------------------|------------------------|--|
| JHW28201 | Left | 9 3/4 | 1 3/8 | 18 ga. CR / 22 ga. SS |
| JHW28203 | Right | 9 3/4 | 1 % | 18 ga. CR / 22 ga. SS |
| JHW28205 | Straight | 9 13/16 | 1 1/2 | 18 ga. CR / 22 ga. SS |

JHW28251 3 Piece Aviation Snips Set in Pouch

Contents Include:

| Product Code | Description | Product Code | Description |
|----------------------|-----------------------------------|--------------|--------------------|
| JHW28201 JHW28203 | Left-cut snips Right-cut snips | JHW28205 | Straight-cut snips |

Features

- Color-coded handles help quickly identify the cutting direction
- . Bi-mold handles provide comfortable grip, reduces hand fatigue
- · Meet ANSI and DIN standards



OFFSET AVIATION SNIPS

Bi-Mold Comfort Grip Handles

| Product Code | Cutting Direction | Overall Length (Inches) | Cut Length (Inches) | Cutting Capacity (Cold-Rolled/Stainless) |
|-----------------|----------------------|-------------------------|------------------------|--|
| JHW28231 | Left and Straight | 9 1/4 | 1 3/16 | 18 ga. CR / 22 ga. SS |
| JHW28233 | Right and Straight | 9 1/4 | 1 3/16 | 18 ga. CR / 22 ga. SS |

JHW28253 2 Piece Offset Aviation Snips Set in Pouch

Contents Include:

| Product Code | Description | Product Code | Description |
|--------------|-----------------------|--------------|------------------------|
| JHW28231 | Left and Straight Cut | JHW28233 | Right and Straight Cut |

Features

- . Color-coded handles help quickly identify the cutting direction
- . Bi-mold handles provide comfortable grip, reduces hand fatigue
- . Meet ANSI and DIN standards
- Offset blades keeps user's hands above the work for safety and flow material away from blades for speed



Bi-Mold Comfort Grip Handles

| Product Code | Style | Overall Length (Inches) | Cut Length (Inches) | Cutting Capacity (Cold-Rolled/Stainless) |
|-----------------|---------------------|-------------------------|------------------------|--|
| JHW28211 | Bulldog - Notch | 9 | 1 3 | 16 ga. CR / 18 ga. SS |
| JHW28221 | Long Cut - Straight | 11 ¾ | | 20 ga. CR / 26 ga. SS |

JHW28255 2 Piece Specialty Aviation Snips Set in Pouch

JHW28255 2 Piece Specialty Snips Set. Includes one each Bulldog and Long Cut snips above.

Contents Include:

| JHW28211 Bulldog - Notch JHW28221 | Long Cut - Straight | |
|-----------------------------------|---------------------|--|

- Bulldog snips notches and cuts rolled edges, seams, and thick sheet metal up to 16 gauge cold-rolled steel
- Color-coded handles help quickly identify the cutting direction
- . Bi-mold handles provide comfortable grip, reduces hand fatigue
- Meet ANSI and DIN standards





STRAIGHT PATTERN TIN SNIPS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Cutting Length (Inches) | Cutting Capacity (Cold-Rolled/Stainless) |
|--------------|-------------------------|-------------------------|--|
| JHW28301 | 7 | 1 %16 | 24 ga. CR / 32 ga. SS |
| JHW28305 | 10 | 2 | 22 ga. CR / 28 ga. SS |
| JHW28307 | 12 | 2 3/4 | 20 ga. CR / 24 ga. SS |
| JHW28309 | 14 | 3 | 18 ga. CR /22 ga. SS |

JHW28351 2 Piece Straight Pattern Tin Snips Set in Pouch

| Product Code | Description | Product Code | Description |
|--------------|--------------|--------------|---------------|
| JHW28301 | 7" Tin Snips | JHW28307 | 12" Tin Snips |

Features

- · Forged steel blades
- Double-dipped handles provide comfortable grip, reducing hand fatigue
- . Cut straight lines and wide curves
- Meet ANSI and DIN standards

CABLE CUTTER FOR FERROUS MATERIALS

With Rubber Grips

| Product Code | Overall Length (Inches) | Cable Cutting Capacity (Inches) | Replacement Blade Kit |
|--------------|-------------------------|---|--------------------------|
| JHW2520 | 22 1/2 | 1 3/16 Aluminum/Copper with 1/4 Messenger Wire | 2520-SH |

Features

- · Lightweight handles provide ease of control while offering solid durability
- . Rubber grips offer control and comfort during working application
- Cutting notch below top cutting blades provided for cuts on ferrous material
- · Replacement blade kit includes blades, screws, and nuts

CABLE CUTTER FOR NON-FERROUS MATERIALS

With Rubber Grips

| | Overall Length | Cable Cutting Capacity |
|--------------|----------------|------------------------|
| Product Code | (Inches) | (Inches) |
| JHW2620-31 | 31 1/2 | 1 5/8 Aluminum/Copper |

- · For non-ferrous material cutting only
- . Lightweight handles provide ease of control while offering solid durability
- Rubber grips offer control and comfort during working application
- · Replacement blade kit includes blades, screws, and nuts















WIRE TWISTER / CUTTER

Produces Right Hand (clockwise) Twists

| | Overall Length | | Cutting Blade Length |
|--------------|----------------|---------------------|----------------------|
| Product Code | (Inches) | Jaw Length (Inches) | (Inches) |
| JHWWTC-11 | 8.5 | 1 1/16 | 1/4 |
| JHWWTC-45 | 9 | 1 1/16 | 1/16 |

Features

- Diamond-shaped, flat top jaw serrations hold wire firmly and resist nicking material being worked on
- Diagonal nose configurations & "mini" frame allows access in tight quarters
- Automatic return feature retracts automatically, speeding up operation use and reducing operator fatigue
- Heat-treated cutting edge holds it edge for cutting tough (up to .041) stainless steel and safety wire
- One hand operation allows for operator closing and locking with minimum of handle force
- High carbon alloy steel forging are used for maximum durability and long life



LOCKING PLIERS AND SET

| Bi-Mold Comfort Grip Handles | | | | |
|------------------------------|-------------------------|------------------------|--|--|
| Product Code | Overall Length (Inches) | Style | | |
| JHW23201 | 5 | Curved Jaw with Cutter | | |
| JHW23202 | 7 | Curved Jaw with Cutter | | |
| JHW23203 | 10 | Curved Jaw with Cutter | | |
| JHW23210 | 7 | Straight Jaw | | |
| JHW23211 | 10 | Straight Jaw | | |
| JHW23220 | 6 | Long Nose with cutter | | |
| JHW23221 | 9 | Long Nose with cutter | | |

| JIIWZJZZI | | Long 14036 With Cutter |
|-----------------------|------------|--------------------------------|
| Locking Pliers | Sets | |
| Product Code | | Description |
| JHW23070 | 3 Piece Lo | ocking Pliers Set with Bi-Mold |
| | C | Comfort Grip Handles |

| Contents Include: | |
|-------------------|---|
| Product Code | Description |
| JHW23201 | 5" Curved Jaw Locking Pliers with Cutter |
| JHW23202 | 7" Curved Jaw Locking Pliers with Cutter |
| JHW23203 | 10" Curved Jaw Locking Pliers with Cutter |
| Product Code | Description |
| JHW23071 | 3 Piece Locking Pliers Set with Bi-Mold |

Contents Include:

| Product Code | Description | |
|--------------|---|--|
| JHW23203 | 10" Curved Jaw Locking Pliers with Cutter | |
| JHW23210 | 7" Straight Jaw Locking Pliers | |
| JHW23220 | 6" Long Nose Locking Pliers with Cutter | |
| | | |

Comfort Grip Handles

- Bi-mold handles provide comfortable grip, reducing hand fatigue
- · Convenient one-hand release lever
- Heavy-duty jaw surfaces provide extra gripping power
- Packed in a pouch





LOCKING PLIERS

| Curved Jaw with Wire Cutter Locking Pliers | | |
|--|-------------|-------------------------|
| P | roduct Code | Overall Length (Inches) |
| JI | HW23301 | 5 |
| Jŀ | HW23302 | 7 |
| JI | HW23303 | 10 |
| | | |

Straight Jaw Locking Pliers

| Product Code | Overall Length (Inches) |
|--------------|-------------------------|
| JHW23304 | 7 |
| JHW23305 | 10 |

Long Nose with Wire Cutter Locking Pliers

| Product Code | Overall Length (Inches) |
|--------------|-------------------------|
| JHW23309 | 6 |
| JHW23310 | 9 |

Locking C-Clamps


| Product Code | Overall Length (Inches) | Throat Depth | Capacity (Lbs.) |
|--------------|-------------------------|--------------|-----------------|
| JHW23320 | 6 | 11/4" | 450 |
| JHW23321 | 11 | 21/4" | 900 |

Locking C-Clamps with Swivel Pad

| Product Code | Overall Length (Inches) | Throat Depth | Capacity (Lbs.) |
|--------------|-------------------------|--------------|-----------------|
| JHW23222 | 6 | 15/16" | 450 |
| JHW23223 | 9 | 23/16" | 900 |
| JHW23224 | 11 | 21/4" | 900 |
| JHW23225 | 14 | 41/2" | 700 |

Features

- · Convenient one-hand release lever
- · Heavy-duty jaw surfaces provide extra gripping power

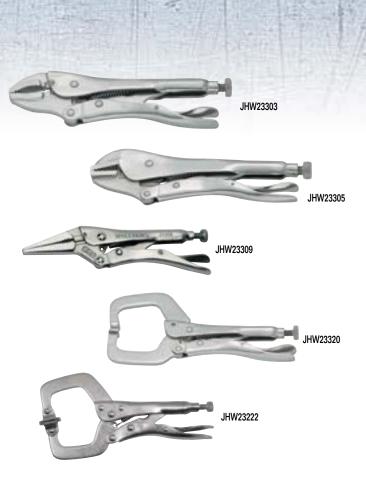

LOCKING PLIERS SETS

JHW23072 3 Piece Locking Pliers Set Contents Include:

| Product Code | Description |
|--------------|---|
| JHW23301 | 5" Curved Jaw Locking Pliers with Cutter |
| JHW23302 | 7" Curved Jaw Locking Pliers with Cutter |
| JHW23303 | 10" Curved Jaw Locking Pliers with Cutter |


JHW23074 4 Piece Locking Pliers Set Contents Include:

| Odittonto molado | |
|------------------|---|
| Product Code | Description |
| JHW23301 | 5" Curved Jaw Locking Pliers with Cutter |
| JHW23303 | 10" Curved Jaw Locking Pliers with Cutter |
| JHW23309 | 6" Long Nose with Wire Cutter |
| JHW23310 | 9" Long Nose with Wire Cutter |

JHW23076 5 Piece Locking Pliers Set Contents Include:

| Product Code | Description |
|--------------|--|
| JHW23301 | 5" Curved Jaw Locking Pliers with Cutter |
| JHW23302 | 7" Curved Jaw Locking Pliers with Cutter |
| JHW23305 | 10" Straight Jaw |
| JHW23310 | 9" Long Nose with Wire Cutter |
| JHW23320 | 6" Locking C-Clamp |

- Convenient one-hand release lever
- · Heavy-duty jaw surfaces provide extra gripping power

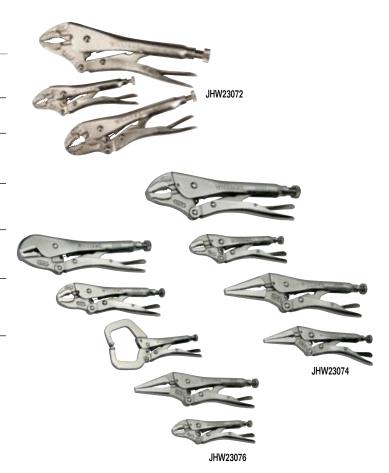

















JHWPL-1612

SNAP RING PLIERS

Double-Dipped Plastic Handles

| Product Code | Tip Size | Tip Angle (Degree) |
|--------------|----------|--------------------|
| JHWPL-1620 | 0.038 | 0° |
| JHWPL-1621 | 0.038 | 45° |
| JHWPL-1622 | 0.038 | 90° |
| JHWPL-1623 | 0.047 | 0 ° |
| JHWPL-1624 | 0.047 | 45° |
| JHWPL-1625 | 0.047 | 90° |
| JHWPL-1626 | 0.070 | 0 ° |
| JHWPL-1627 | 0.070 | 45° |
| JHWPL-1628 | 0.070 | 90° |
| JHWPL-1629 | 0.090 | 0 ° |
| JHWPL-1630 | 0.090 | 45° |
| JHWPL-1631 | 0.090 | 90° |

Combination Internal/External Snap Ring Pliers Set Pliers set in a plastic carrying case

Contents Include:

| Product Code | Description |
|-----------------------|---|
| JHWPL-1612 | 12 Piece Combination Internal/External Snap Ring Pliers Set |
| Set includes 1 each S | Snap Ring Plier listed above |

Combination Internal/External Snap Ring Pliers Set Pliers set in a plastic carrying case

Contents Include:

| Product Code | Description |
|-----------------------|---|
| JHWPL-1606 | 6 Piece Combination Internal/External Snap Ring Pliers Set |
| Sat includes 1 each S | nan Ring Dilare Di 1600 Di 1600 Di 1600 Di 1605 Di 1606 Di 1608 |

- · Cushioned grip handles
- · Pliers are convertible for use on internal and external snap rings
- Knurled center screw with spring for easy changing and secure hold





JHWPL-1606



RETAINING RING PLIERS AND SET

Double-Dipped Plastic Handles

| Product Code | Description | Minimum Opening (Ctr. To Ctr.) | Maximum Opening (Ctr. To Ctr.) | Tips Included (Each Plier Includes 2 of Each) |
|------------------------------|--|--|---|--|
| JHWPL-1600C1 JHWPL-1600C2 | Internal pliers with tips External pliers with tips | ³ / ₃₂ ³ / ₃₂ | ²⁵ / ₃₂ 1 ¹ / ₃₂ | 0.035" 90° 0.045" 45° 0.045" Straight 0.060" Straight |

Snap Ring Pliers Set

| Product Code | Description | |
|--------------|----------------------|--|
| JHWPL-1600C | Snap Ring Pliers Set | |

Contents Includes:

| Product Code | Description | |
|--------------|----------------------------|--|
| JHWPL-1600C1 | PL-1600C-1 Internal Pliers | |
| JHWPL-1600C2 | PL-1600C-2 External Pliers | |

Replacement Tip Set Contents Includes:

| Product Code | Description |
|--------------|------------------------------|
| JHWPL-1600C3 | 16 Piece Replacement tip set |

Features

- . Internal snap rings designed for use in housings, boxes, etc with bore diameters .375 to 1.750 inches
- . External snap rings designed for use in shafts, studs, etc with shaft diameters .250 to 1.438 inches
- $\bullet~$ JHWPL-1600C1 and JHWPL-1600C2 each supplied with 8 tips (2 each: 90° x .035 and 45° x .045 angle tips and .045 and .060 straight tips)
- . Made of high quality carbon steel with black-oxide finish to resist rust and other corrosions
- . Tips heat treated for a secure grip
- · Pliers provided with cushion grip handles
- . Set consists of one internal and one external snap ring pliers and 16 tips in a pouch
- Tip set includes 4 each of interchangeable tips: 90° x .035 and 45° x .045 angle tips and .045 and .060 straight tips



CONVERTIBLE RETAINING RING PLIERS AND SET

Double-Dipped Plastic Handles

| Product Code | Capacity (Max. Ring Dia.) | Tips Included (Includes 2 of Each) | |
|--------------|---------------------------|--|--|
| 23801 | 2" | 0.039" Straight Tips (Yellow) 0.038" 90° Tips (Yellow) 0.047" Straight Tips (Green) 0.047" 90° Tips (Green) | |
| JHW23803A | 1" | 0.074" Straight Tips (Copper) 0.023" Straight Tips (Red) 0.039" Straight Tips (Yellow) 0.038" 90° Tips (Yellow) 0.047" Straight Tips (Green) 0.047" 90° Tips (Green) | |

Retaining Ring Pliers Set

| Product Code | Description |
|--------------|---------------------------|
| JHW23092 | Retaining Ring Pliers Set |
| | |

Contents Includes:

| Product Code | Description | |
|--------------------|--|--|
| 23801 JHW23803A | 2" Capacity Retaining Ring Pliers 1" Capacity Retaining Ring Pliers | |

Replacement Tip Kits Contents Includes:

| ricpidocinent rip rate contente moladesi | | | |
|--|-------------------------------------|--|--|
| Product Code | Description | | |
| JHW23802A | Replacement Tip Kit Only for 23801A | | |
| JHW23804A | Replacement Tip Kit Only for 23803A | | |


- Easily convert for use on internal and external rings by moving convenient adjusting levers
- Each pliers includes five pairs of color-coded tips for maximum versatility
- Hex-shaped locking guides firmly hold tips in place
- Double-dipped handles with air cushion pockets provide comfortable grip, reducing hand fatigue
 Spring-loaded handles speed work









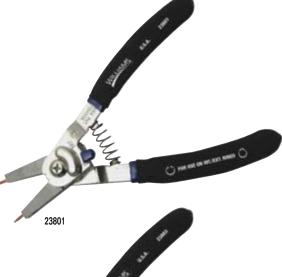



JHW23803A





JHWPL-529

HEAVY DUTY RETAINING RING PLIERS & TIPS

Double-Dipped Plastic Handles

| Product Code | Description | Minimum Opening (Ctr. To Ctr.) | Maximum Opening (Ctr. To Ctr.) |
|--------------|---------------------------|-----------------------------------|--|
| JHWPL-527 | Internal snap ring pliers | 5/ ₁₆ | 1 ¹³ / ₃₂ 1 ¹⁷ / ₃₂ |
| JHWPL-528 | External snap ring pliers | 11/32 | I ''/32 |

Tips for Heavy Duty Retaining Ring Pliers

| • | | |
|--------------|-------------------------------|--|
| Product Code | Description (Includes 2 each) | |
| JHWPL-529A | 0.108" Straight Tips | |
| JHWPL-529B | 0.108" 15° Tips | |
| JHWPL-529C | 0.108 45° Tips | |
| JHWPL-529D | 0.108 90° Tips | |
| JHWPL-530A | 0.120 Straight Tips | |
| JHWPL-530B | 0.120 15° Tips | |
| JHWPL-530C | 0.120 45° Tips | |
| JHWPL-530D | 0.120 90° Tips | |
| | | |

Heavy Duty Retaining Ring Pliers Set JHWPL-529

| Product Code | Contents Include: | |
|--------------|---------------------------|--|
| JHWPL-527 | Internal snap ring pliers | |
| JHWPL-528 | External snap ring pliers | |

Set includes 2 each of heavy duty tips listed above

- Internal snap rings designed for use in housings, boxes, etc
- External snap rings designed for use in shafts, studs, etc
- Pliers supplied with spring ratchet lock assembly which allows the ring to be compressed or expanded with gradual adjustments which lock at the desired size without continued pressure on the handles
- Made of high quality carbon steel with black-oxide finish to resist rust and other corrosions
- Tips heat treated for a secure grip
- Tips not provided with pliers when pliers are ordered individually







FIXED TIP RETAINING RING PLIERS

Double-Dipped Plastic Handles

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Tip Diameter (Inches) | Minimum Jaw Opening (Inches) | Maximum Jaw Opening |
|------------------------|--|--|-----------------------|--------------------------------------|--|
| Internal | | | | | |
| JHWPL-531 JHWPL-532 | 5 ¹ / ₂ 6 ¹ / ₂ | ⁷ / ₈ 1 | 0.038 0.070 | 3/ ₃₂ 3/ ₃₂ | 2 ³ / ₈ 2 ³¹ / ₃₂ |
| External | | | | | |
| JHWPL-533 JHWPL-534 | 6 ¹ / ₂ 7 | ⁷ / ₈ 2 ¹ / ₁₆ | 0.038 0.070 | 3/ ₃₂ 3/ ₃₂ | 1 ¹ / ₃₂ 1 ¹ / ₄ |

Features

- Internal used for installing and removing internal retaining rings in a bore without damage to the ring
- External used for installing and removing external retaining rings on a shaft without damage to the ring
- Manufactured from high carbon, heat treated steel
- Designed for accurate fit and long wear by precision forming and induction hardening.
- . Finished with black oxide coating







LOCKING RING PLIERS

Black Jaws

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Width at Tip (Inches) |
|--------------|-------------------------|---------------------|-----------------------|
| JHWPL-1515 | 8 | 1 3/8 | 5/16 |

Features

 For spreading horseshoe lock washers and steel lock rings used on gear and bearing shafts















DROP FORGED C-CLAMPS

Deep Throat Design, Copper Plated Screw

| Product Code | Capacity (Inches) | Throat Depth (Inches) | Screw Diameter (Inches) | Min Test Load (lbs) |
|--------------|-------------------|-----------------------|-------------------------|---------------------|
| JHW21002C | 2 | 2 1/8 | 0.47 | 3500 |
| JHW21003C | 3 | 2 3/8 | 0.55 | 3500 |
| JHW21004C | 4 | 3 1/4 | 0.75 | 6500 |
| JHW21006C | 6 | 4 1/4 | 0.75 | 6900 |
| JHW21008C | 8 | 5 | 0.75 | 6900 |
| JHW21010C | 10 | 6 | 0.75 | 8000 |
| JHW21012C | 12 | 6 % | 0.75 | 9500 |

Features

- Copper plated screw resists weld splatter
 Drop-forged and heat treated for maximum strength and greater rigidity
 I-Beam design for extra strength
 Highly resistant to "springing"
 Acme threading



DROP FORGED C-CLAMPS

Deep Throat Design, Standard Screw

| Product Code | Capacity (Inches) | Throat Depth (Inches) | Screw Diameter (Inches) | Min Test Load (lbs) |
|--------------|-------------------|-----------------------|-------------------------|---------------------|
| JHW21002S | 2 | 2 1/8 | 0.47 | 3500 |
| JHW21003S | 3 | 2 3/8 | 0.55 | 3500 |
| JHW21004S | 4 | 3 1/4 | 0.75 | 6500 |
| JHW21006S | 6 | 4 1/4 | 0.75 | 6900 |
| JHW21008S | 8 | 5 | 0.75 | 6900 |
| JHW21010S | 10 | 6 | 0.75 | 8000 |
| JHW21012S | 12 | 6 % | 0.75 | 9500 |

- Features
 Black threaded screw with T-handle
- Drop-forged and heat treated for maximum strength and greater rigidity
- I-Beam design for extra strength
- Highly resistant to "springing"
- Acme threading

HEAVY SERVICE C-CLAMPS

Deep Throat Design, Standard Screw

| | Maximum Capacity | Minimum Capacity | Throat Depth From Center | Exterior Body | Screw Diameter | Screw Length Under Head | Min Test Load |
|----------------|-------------------------------|--------------------------------|---------------------------------|----------------|-------------------|----------------------------|------------------|
| Product Code | (Inches) | (Inches) | (Inches) | Width (Inches) | (Inches) | (Inches) | (Lbs.) |
| JHW21001LHS | 1 ³ /8 | 0 | 15/16 | 2.8 | 0.44 | 2.38 | 5600 |
| JHW21112LHS | 1 7/8 | 0 | 1 ¹⁷ / ₁₆ | 3.87 | 0.63 | 3.56 | 8750 |
| JHW21002LHS | 2 3/8 | 0 | 1 ⁷ /8 | 4.53 | 0.75 | 4.25 | 12,500 |
| JHW21003HS | 3 5/16 | 1/8 | 2 ¹ / ₂ | 5.78 | 0.88 | 5.62 | 16,250 |
| JHW21003LHS ** | 3 5/16 | 0 | 2 ¹ / ₂ | 5.78 | 0.88 | 5 3/4 | 16,250 |
| JHW21004HS | 4 5/8 | 17/32 | 2 7/8 | 6.42 | 1 | 6.63 | 20,000 |
| JHW21004LHS ** | 4 5/8 | 0 | 2 ⁷ /8 | 6.42 | 1 | 7.17 | 20,000 |
| JHW21006HS | 6 5/8 | 1 ⁵ / ₃₂ | 3 ¹ / ₂ | 7.65 | 1.13 | 9.24 | 27,500 |
| JHW21006LHS ** | 6 5/8 | 0 | 3 ¹ / ₂ | 7.65 | 1.13 | 10.39 | 27,500 |
| JHW21008HS | 8 ¹ / ₄ | 4 | 4 ¹ /8 | 8.65 | 1.25 | 4.19 | 31,250 |
| JHW21008LHS ** | 8 1/4 | 0 | 4 1/8 | 8.65 | 1.25 | 12.19 | 31,250 |

 $^{^{\}star\star}$ Where zero capacity is desired, the clamps with long screws should be ordered. These are indicated with an "L" in the product code.

- Especially designed for heavy duty service, frames are drop-forged and heat-treated for maximum strength and reduced springing
 Screws are made of special grade steel and are heat-treated for added strength not

- found in typical case-hardened screws
 To tighten, the square headed screw must be turned with a wrench
 Ideal for the most demanding applications such as construction and heavy industry
 Square head screw allows tightening with wrench for extra heavy duty clamping requirements
 Creater partie under our create leaves under income and for greater partiells.
- Greater anvil surface for gripping larger work pieces and for greater stability







UNIVERSAL PLIERS WRENCHES

With Comfort Grip

| Product Code | Overall Length (Inches) | Maximum Jaw Opening (Inches) | Pipe Maximum Diameter (Inches) |
|--------------|--------------------------------|--------------------------------|--------------------------------|
| JHW140 | 8 ⁷ / ₁₆ | 1 3/16 | 3/4 |
| JHW141 | 11 | 1 ³ / ₈ | 1 |
| JHW142 | 14 ¹ / ₂ | 2 ¹ / ₁₆ | 1 1/2 |
| JHW143 | 21 ⁷ /8 | 3 ¹ / ₁₆ | 2 1/2 |
| JHW144 | 28 ³ / ₈ | 4 3/8 | 3 1/2 |

Features

- · Black oxide and anti-rust treated high alloy steel provide long life and durability
- · Precision induction hardened jaws are designed with inwardly angled aggressive teeth
- Outer part of jaw is large toothed and used for maximum grip on large diameter pipes
- Inner part of jaw is fine toothed and used for maximum grip on small diameter pipes
- Commonly called a "Swedish Pipe Wrench", the small head makes them ideal for working in confined areas



ALUMINUM STRAIGHT PIPE WRENCH

Aluminum, Heavy Duty

| , · | , - | , | | | | |
|--------------|-----|------|---------|--------|--------------------------------|-----|
| | S | ize | Pipe Ca | pacity | Weight | |
| Product Code | in. | mm | in. | mm | lb. | kg |
| RIG31090 | 10 | 250 | 1 1/2 | 40 | 1 | 0.4 |
| R47057 | 12 | 300 | 2 | 50 | 2 1/2 | 1.1 |
| R31095 | 14 | 350 | 2 | 50 | 2 1/2 | 1.1 |
| R31100 | 18 | 450 | 2 1/2 | 65 | 3 3/4 | 1.7 |
| R31105 | 24 | 600 | 3 | 80 | 6 | 2.7 |
| R31110 | 36 | 900 | 5 | 125 | 11 | 5.0 |
| RIG31115 | 48 | 1200 | 6 | 150 | 18 ¹ / ₂ | 8.4 |

- Professional strength in lightweight aluminum
- Offer durability and ease-of-use











STRAIGHT PIPE WRENCH

| | S | ize | Pipe (| Capacity | We | eight |
|--------------|-----|------|--------|----------|--------------------------------|-------|
| Product Code | in. | mm | in. | mm | lb. | kg |
| RIG31000 | 6 | 150 | 3/4 | 20 | 1/2 | 0.2 |
| R31005 | 8 | 200 | 1 | 25 | 3/4 | 0.3 |
| R31010 | 10 | 250 | 1 1/2 | 40 | 1 3/4 | 0.8 |
| R31015 | 12 | 300 | 2 | 50 | 2 3/4 | 1.2 |
| R31020 | 14 | 350 | 2 | 50 | 3 ½ | 1.6 |
| R31025 | 18 | 450 | 2 %16 | 65 | 5 3/4 | 2.6 |
| R31030 | 24 | 600 | 3 | 80 | 9 3/4 | 4.4 |
| R31035 | 36 | 900 | 5 | 125 | 19 | 8.7 |
| RIG31040 | 48 | 1200 | 6 | 150 | 34 1/4 | 15.6 |
| RIG31045 | 60 | 1500 | 8 | 200 | 51 ¹ / ₄ | 23.3 |

Features

- Sturdy, cast-iron housing and I-beam handle with full floating forged hook jaw, featuring self-cleaning threads with replaceable hook and heel jaws
- Heavy-duty pipe wrenches comply with federal specifications GGG-W65IE, Type II, Class A



PIPE WRENCHES

Aluminum, Heavy Duty

| | | • | | | |
|--------------|----------------|---------------------|----------|----------------|-----------|
| | Overall Length | Maximum Jaw Opening | | Spare Parts | |
| Product Code | (Inches) | (Inches) | Hook Jaw | Heel Jaw & Pin | Knurl Nut |
| JHW13500 | 8 | 1 5/16 | JHW13551 | JHW13567 | JHW13571 |
| JHW13502 | 10 | 1 % | JHW13552 | JHW13562 | JHW13572 |
| JHW13504 | 12 | 2 1/8 | JHW13553 | JHW13563 | JHW13573 |
| JHW13506 | 14 | 2 1/16 | JHW13554 | JHW13564 | JHW13574 |
| JHW13508 | 18 | 3 1/8 | JHW13555 | JHW13565 | JHW13575 |
| JHW13510 | 24 | 3 3/4 | JHW13556 | JHW13566 | JHW13576 |
| JHW13512 | 36 | 5 | JHW13557 | JHW13568 | JHW13577 |
| JHW13514 | 48 | 6 | JHW13558 | JHW13569 | JHW13578 |

Pipe Wrench Set

| Product Code | Contents Include: |
|--------------|--|
| JHW13542 | 3 Piece Aluminum Pipe Wrench Set. Includes 8", 12", and 18" wrenches |

Features

- Aluminum pipe wrenches are approximately 40% lighter than cast iron
- . Heavy duty construction for strength and durability
- Scale on wrench indicates pipe diameter



| Cast Iron, | neavy-Duty | | | | |
|--------------|----------------|---------------------|----------|----------------|-----------|
| | Overall Length | Maximum Jaw Opening | | Spare Parts | |
| Product Code | (Inches) | (Inches) | Hook Jaw | Heel Jaw & Pin | Knurl Nut |
| JHW13516 | 6 | 7/8 | JHW13550 | JHW13560 | JHW13570 |
| JHW13518 | 8 | 1 5/16 | JHW13511 | JHW13567 | JHW13571 |
| JHW13520 | 10 | 1 ⁵ ⁄8 | JHW13552 | JHW13562 | JHW13572 |
| JHW13522 | 12 | 2 1/8 | JHW13553 | JHW13563 | JHW13573 |
| JHW13524 | 14 | 2 %16 | JHW13554 | JHW13564 | JHW13574 |
| JHW13526 | 18 | 3 1/8 | JHW13555 | JHW13565 | JHW13575 |
| JHW13528 | 24 | 3 3/4 | JHW13556 | JHW13566 | JHW13576 |
| JHW13530 | 36 | 5 | JHW13557 | JHW13568 | JHW13577 |
| JHW13532 | 48 | 6 | JHW13558 | JHW13569 | JHW13578 |

Pipe Wrench Set

| Product Code | Contents Include: | | | |
|--------------|---|--|--|--|
| JHW13544 | 3 Piece Cast Iron Pipe Wrench Set. Includes 8", 12", and 18" wrenches | | | |

Features

- . Heavy duty construction for strength and durability
- Scale on wrench indicates pipe diameter



JHW13542



FLANGE-JACKS

Tremendous Pressure With Minimum Effort

| Product Code | * 125 Pound | * 150 Pound | * 250 Pound | * 300 Pound |
|--------------|-------------|-------------|-------------|-----------------------------------|
| | Cast Iron | Cast Iron | Cast Iron | Cast Iron |
| JHWFJ-20 | 2 to 20 | 2 to 20 | 1 to 12 | ³ / ₄ to 12 |
| JHWFJ-30 | 16 to 48 | 18 to 24 | 12 to 30 | 12 to 24 |
| JUAALY-20 | 10 10 40 | 10 10 24 | 12 10 30 | 121 |

Features

- · Ideal for working on pipe lines and other applications involving flanges
- Makes gasket removal fast and easy
- Flanges are separated smoothly and evenly without damage to flange faces
- Flange jacks are sold only in pairs
- . Eliminates danger from flying wedges and sparks caused by hammer blows
- Ideal for hard to reach locations







STRAP WRENCH

Aluminum Handle

| Product Code | Handle Length (Inches) | Maximum Diameter (Inches) | Strap Size (Inches) |
|--------------|---------------------------|---------------------------|------------------------|
| JHW40221 | 12 | 8 | 1 1/8 x 30 |

- Use on irregularly shaped objects where other wrenches won't work
- Useful for turning handwheels and other knurled handles
- · Reduces risk of damage on plastic pipe and tubing
- Strap is made out of cotton











45° SINGLE FLARING TOOL

For Soft Tubing

| Product Code | Description | O.D. Capacity (Inches) |
|--------------|-------------------------|--|
| JHW43631 | 45° Single Flaring Tool | ³ / ₁₆ , ¹ / ₄ , ⁵ / ₁₆ , ³ / ₈ , ⁷ / ₁₆ , ¹ / ₂ , & ⁵ / ₈ |

Features

- · For soft copper, aluminum, and brass tubing
- Forged steel yoke and hardened flaring bar for durability
- Positive clamping action prevents tube slippage
- Self-centering yoke with swivel-type, hardened steel, chrome-plated flaring cone forms better flares with less effort
- Chrome plated to resist rust and corrosion





Heat Treated

| Product Code | Pipe Diameter Minimum - Maximum (Pipe Size) | Handle Length (Inches) | Chain Length (Inches) |
|--------------|--|------------------------|-----------------------|
| JHWCW-4 | 3/8 - 4 | 11 | 15 |

Features

- Forged handle is fully heat-treated
- · Ideal for use in close quarters and where space is at a premium
- Successive "bites" can be taken without removal of wrench from the work piece
- · Fully adjustable to fit any shape pipe





JHWCW-4

PIPE CHAIN WRENCH

Heat Treated Handle Length Chain Length Pipe Diameter Capacity **Product Code** (Inches) (Inches) JHW40222 12 16 JHW40223 5 15 19 JHW40224 6 24 23

- Forged strong I Beam handle
- Designed for working in confined areas when regular pipe wrenches will not fit, excellent for pipe fittings
- Portable and lightweight can be used for overhead and underground work



5/8" CAPACITY MINI-TUBING CUTTER

| For Hard or | Soft Copper | Tubing, Brass, | Stainless | Steel, etc. |
|-------------|--------------------|----------------|------------------|-------------|
|-------------|--------------------|----------------|------------------|-------------|

| Product Code | Description | Cutting Capacity (Inches) | Overall Length (Inches) |
|--------------|--|---------------------------|-------------------------|
| JHW43603 | Mini-Tubing Cutter | 1/8 to 5/8 | 1 3/4 |
| JHW43613 | Replacement Cutter Wheel for 43603 (Pack of 5) | | |

Features

- Designed for use in tight access areas
- · Enclosed feed screw assures smooth operation by minimizing contamination
- · Corrosion resistant stainless steel rollers produce easier, smoother cuts





JHW43603

1-1/8" CAPACITY TUBING CUTTER

For Hard or Soft Copper Tubing, Brass, Stainless Steel, etc.

| Product Code | Description | Cutting Capacity (Inches) | Overall Length (Inches) |
|--------------|--|---------------------------|-------------------------|
| JHW43605 | 1 1/8" Tubing Cutter | 1/8 to 1 1/8 | 5 |
| JHW43611 | General Purpose Replacement Cutter Wheel (Pack of 10) | | |
| JHW43615 | Optional Cutter Wheel for Stainless Steel (Pack of 5) | | |

Features

- · Enclosed hardened steel thrust-bearing mechanism assures smooth cuts and reliable operation
- Rugged aluminum alloy body looks good and handles well
- · Foldaway hardened steel reamer removes inside burrs cleanly
- · Includes (2) general-purpose cutter wheels





JHW43605

2-5/8" CAPACITY TUBING CUTTER

For Hard or Soft Copper Tubing, Brass, Stainless Steel, etc.

| To hard of bott bopper rubing, brass, stanness steel, etc. | | | | | |
|--|---|---------------------------|-------------------------|--|--|
| Product Code | Description | Cutting Capacity (Inches) | Overall Length (Inches) | | |
| JHW43617 | General Purpose Replacement Cutter Wheel for JHW43607 (Pack of 5) | | | | |

Features

- · Ratchet feed mechanism speeds up cutting operations while extra-wide rollers stabilize the tubing
- · Light-weight aluminum body
- . Spare cutting wheel included under cap
- Cuts Schedule 40 PVC pipe up to 2" diameter with optional 43616 cutter wheel



PLASTIC AND RUBBER HOSE CUTTER

Compact and Light

| | 9 | |
|--------------|--------------------------------|--|
| Product Code | Description | |
| JHW43618 | Plastic and rubber hose cutter | |


- · Cuts plastic tubing and non-metal reinforced hose
- Cuts sizes 1/16" to 1/2" and 1mm to 13mm O.D
- Spring loaded for safety
- Weighs only one ounce





JHW43618



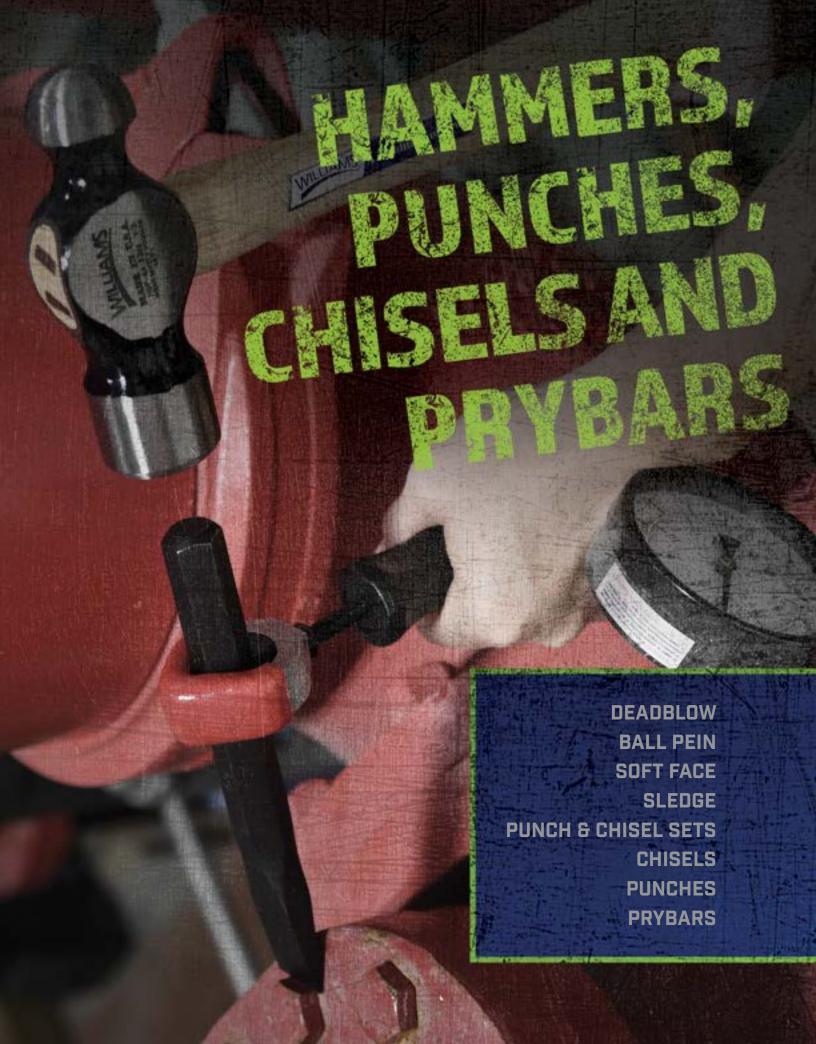



HAMMERS, PUNCHES, CHISELS AND PRYBARS





DEADBLOW HAMMERS

Ergonomically Designed Handles

| | | Overall Length | Head Length | |
|--------------|---------------|----------------|--------------|-------------------------------|
| Product Code | Weight (ozs.) | (Inches) | (Inches) | Face Diameter (Inches) |
| JHWJHW-16 | 16 | 12 | 3 1/4 | 1 %16 |
| JHWJHW-24 | 24 | 12 ¾ | 3 ¾ | 1 3/4 |
| JHWJHW-32 | 32 | 13 ½ | 4 1/4 | 2 |
| JHWJHW-48 | 48 | 15 | 4 ¾ | 2 1/4 |
| JHWJHW-56 | 56 | 15 ¾ | 5 ½16 | 2 ³ / ₄ |

Features

- Hard urethane construction resists cut damage to hammer head
- · Head provides a non-marring contact surface that will not damage equipment
- · Deadblow feature minimizes hammer bounce back, reducing fatigue and improving productivity





BALL PEIN HAMMERS

Fiberglass Handles with Cushion Grip

| Product Code | Weight (ozs.) | Handle Length (Inches) | Overall Length (Inches) | Face Diameter (Inches) |
|--------------|---------------|------------------------|-------------------------|------------------------|
| JHW20542 | 8 | 9 1/2 | 10 3/4 | 7/8 |
| JHW20543 | 12 | 10 1/4 | 11 3/4 | 7/8 |
| JHW20544 | 16 | 11 1/4 | 13 | 1 7/8 |
| JHW20545 | 24 | 13 | 15 | 1 1/4 |
| JHW20546 | 32 | 12 ¾ | 15 | 1 1/4 |

Features

- Ideal for driving punches, chisels and other metal work
- Fiberglass handle has a cushion grip for greater comfort and safety
- . Hammer heads are drop-forged from specially selected steel and carefully heat treated for dependable strength, hardness and uniformity



BRASS HAMMERS

Fiberglass Handles with Cushion Grip

| Product code | Weight (lbs.) | Handle Length (inches) | Overall length (Inches) | Face Diameter (Inches) |
|--------------|---------------|------------------------|-------------------------|------------------------|
| JHWHSB-1.5A | 1-1/2 | 10 | 12 | 1 |
| JHWHSB-2.6A | 2-1/2 | 10 | 12 | 1-1/4 |
| JHWHSB-3.8A | 3-3/4 | 10 | 12 | 1-5% |

- Ideal for applications which require non-sparking conditions
- The flat surface brass head absorbs impact blows, reduces rebound and helps eliminate marred work surfaces
- . Non-slip cushion grip provides greater comfort and safety



















BALL PEIN HAMMERS

Wood Handle

| | Head Weight | Handle Length | Overall length | Face Diameter |
|--------------|-------------|---------------------------------|----------------------------|---------------|
| Product code | (ozs.) | (inches) | (Inches) | (Inches) |
| JHWHBP-5-0A | 4 | 9 % | 10 7/16 | 3/4 |
| JHWHBP-3-0A | 8 | 10 ½ | 11 ¾ | 1 |
| JHWHBP-2-0A | 12 | 11 1/8 | 12 ½ | 1 1/8 |
| JHWHBP-0A | 16 | 12 1/8 | 13 % | 1 1/4 |
| JHWHBP-2A | 24 | 13 ¼ | 15 1/8 | 1 ½ |
| JHWHBP-4A | 32 | 13 1/4 | 15 ³ ⁄16 | 1 ½ |
| JHWHBP-6A | 40 | 13 ⁵ ⁄ ₁₆ | 15 ⁵ ∕₁6 | 1 5/8 |
| JHWHBP-8A | 48 | 13 ½ | 15 ¾ | 1 1/8 |

Features

- Ideal for driving punches, chisels and other metal work
- Wooden handles, which are made from white hickory and clear lacquered, are permanently wedged in to the heads
- Hammer heads are drop-forged from specially selected steel and carefully heat treated for dependable strength, hardness, and uniformity
- · Polished Face, Bevel & Pein



DRILLING HAMMER

Fiberglass Handles with Cushion Grip

| | | Handle Length | |
|--------------|---------------|---------------|-------------------------|
| Product Code | Weight (ozs.) | (Inches) | Overall Length (Inches) |
| JHW20678 | 32 | 8 1/2 | 10 1/4 |

Features

- Handles are durable and comfortable
- · Heavy duty construction for strength and durability

CROSS PEIN HAMMER

Fiberglass Handles with Cushion Grip

| | | Handle Length | |
|--------------|---------------|---------------|-------------------------|
| Product Code | Weight (ozs.) | (Inches) | Overall Length (Inches) |
| JHW20651 | 48 | 13 | 15 ¾ |

Features

- Handles are durable and comfortable
- · Heavy duty construction for strength and durability

CLAW HAMMERS

Fiberglass Handles with Cushion Grip

| | | | Handle Length | Overall Length |
|--------------|--------------|---------------|---------------|----------------|
| Product Code | Style | Weight (ozs.) | (Inches) | (Inches) |
| JHW20402 | Ripping Claw | 16 | 10 3/4 | 13 |
| JHW20401 | Curved Claw | 20 | 10 3/4 | 13 |

- Handles are durable and comfortable
- · Heavy duty construction for strength and durability



SOFT-FACE HAMMER TIPS

| Heavy Duty | | | |
|---------------------------------------|----------------------------------|--------------------------------------|-----------------------------|
| Product Code | Hardness | Tip Diameter (Inches) | Color |
| Brown: Working w JHWHSF-10S | rith soft composites, p Soft | lastics and soft alloy metals. Repla | aces vinyl hammer. Brown |
| | | | |
| Red: Working with | soft composites, plast | ics and soft alloy metals. Replaces | rawhide hammer. |
| Red: Working with s | soft composites, plast Medium | ics and soft alloy metals. Replaces | rawhide hammer. Red |
| JHWHSF-20M | Medium | , , | Red |

Features

· Heavy duty construction for strength and durability









JHWHSF-10S

JHWHSF-20M

JHWHSF-10T

SOFT-FACE AND SHOT FILLED SOFT-FACE HAMMER BODY

Fiberglass Handles with Cushion Grip

| | | | | Overall | |
|----------------|-------------|-------------|---------------------|----------|---------------|
| | Weight | Head Length | Handle Length | Length | Head Diameter |
| Product Code | Class (oz.) | (Inches) | (Inches) | (Inches) | (Inches) |
| JHWHSF-202A ** | 40 | 4 1/8 | 10 ¾ | 13 ½ | 2 |
| JHWHSF-205A | 32 | 2 1/2 | 11 ⁹ ⁄16 | 13 ½ | 2 |

- $\bullet~$ **Shot filled head reduces rebound for safety and transmits more force to the work
- Handles are durable and comfortable
- · Heavy duty construction for strength and durability
- Use with Soft-Face hammer tips below
- . Match head diameter with tip diameter for proper fit
- · Tips are not included with hammer body
- 5/16 18 thread size











2 %

2 3/4









SLEDGE HAMMERS

| Wood Han | dle | | | |
|--------------|---------------|------------------------|-------------------------|------------------------|
| Product Code | Weight (lbs.) | Handle Length (inches) | Overall length (Inches) | Face Diameter (Inches) |
| JHWSH-2A | 2 | 15 | 15 | 1 ½ |
| JHWSH-4A | 4 | 15 | 15 | 2 |
| JHWSH-6A | 6 | 36 | 36 | 2 1/8 |
| JHWSH-8A | 8 | 36 | 36 | 2 1/3 |
| JHWSH-10A | 10 | 36 | 36 | 2 1/2 |

36

36

16 Replacement Handle Service Kit

12

| Product code | Description | Weight (ozs.) | Length (Inches) |
|--------------|-------------|---------------|-----------------|
| JHWSHHW-14A | Handle | 14 | 15 |
| JHWSHHW-32A | Handle | 24 | 36 |

36

Features

JHWSH-12A

JHWSH-16A

· High carbon steel, heat treated and tempered head, with hickory handle



SLEDGE HAMMERS

| Fiberglass Ha | andle | | | |
|----------------|---------------------|---------------------------|-------------------------|---------------------------|
| Product Code | Weight Class (lbs.) | Handle Length (inches) | Overall length (Inches) | Face Diameter (Inches) |
| JHWSHF-4SA ** | 4 | 14 | 14 | 1 1/4 |
| JHWSHF-8SA ** | 8 | 32 | 32 | 2 |
| JHWSHF-12SA ** | 12 | 32 | 32 | 2 1/4 |
| JHWSHF-2A | 2 | 14 | 14 | 1 1/4 |
| JHWSHF-3A | 3 | 14 | 14 | 1 1/2 |
| JHWSHF-4A | 4 | 14 | 14 | 1 % |
| JHWSHF-6A | 6 | 32 | 32 | 1 ¾ |
| JHWSHF-8A | 8 | 32 | 32 | 2 |
| JHWSHF-10A | 10 | 16 | 16 | 2 1/8 |
| JHWSHF-10LA | 10 | 32 | 32 | 2 1/8 |
| JHWSHF-12A | 12 | 32 | 32 | 2 1/4 |
| JHWSHF-16A | 16 | 24 | 24 | 2 % |
| JHWSHF-16LA | 16 | 32 | 32 | 2 5/8 |

Replacement Handle Service Kit

| Product Code | Description | Weight (lbs) | Length (Inches) |
|--------------|-------------|--------------|-----------------|
| JHWSHHF-14A | Fiberglass | 2 to 4 | 14 |
| JHWSHHF-16A | Fiberglass | 6 to 8 | 16 |
| JHWSHHF-32A | Fiberglass | 6 to 16 | 32 |
| JHWSHHF-36 | Fiberglass | 20 | 36 |

Features

- ** Soft steel safety head is similar in hardness to brass
- ** Ideal replacement for Brass Head where non-sparking is not required
- . Double faced head is hardened and tempered forged for maximum strength and durability
- · All kits include replacement handle, pre-measured bonding mix, mix container and instructions



DEAD BLOW SLEDGE HAMMERS WITH REPLACEMENT TIPS

| Product Code | Weight (lbs) | Handle Length (Inches) | Overall length (Inches) | Face Diameter (Inches) |
|--------------|--------------|------------------------|-------------------------|------------------------|
| JHWSHSFDB8 | 8 | 29 | 32 | 2 |
| | | | | |

Includes Two 4" Black Tips

4" Replacement Tip

| Product code | Hardness | Color | Product code | Hardness | Color |
|--------------|----------|-------|--------------|----------|-------|
| JHWSHSFDB40S | Soft | Brown | | | |
| | | | | | |
| | | | | | |

- . Shot loaded dead blow heads deliver the impact of a steel hammer with little or no rebound
- · Oversized head and striking face minimizes miss hits, applying force with greater impact and repeatability
- Strong yet light weight handles provide 90% of the total hammer weight at the head
- 4" Non-marring removable tips can be replaced when worn



27 PIECE PUNCH & CHISEL SET

| D | II | • | _ | n. | I- |
|-----|------|----|---|----|-----|
| Pac | :kea | ın | а | 20 | uch |

| Product Code | Description |
|--------------|-----------------------------|
| JHWPC-27 | 27 Piece Punch & Chisel Set |

Contents Include:

| Product Code | Description | Point Diameter (Inches) | Product Code | Description | Blade Width (Inches) |
|-----------------|------------------|-------------------------------|-----------------|---------------|----------------------------|
| JHWP-3 | Pin Punch | 3/32 | JHWC-8 | Cold Chisel | 1/4 |
| JHWP-4 | Pin Punch | 1/8 | JHWC-10 | Cold Chisel | 5/16 |
| JHWP-5 | Pin Punch | 5/32 | JHWC-12 | Cold Chisel | 3/8 |
| JHWP-6 | Pin Punch | 3/16 | JHWC-16 | Cold Chisel | 1/2 |
| JHWP-8 | Pin Punch | 1/4 | JHWC-20 | Cold Chisel | 5/8 |
| JHWP-10 | Pin Punch | 5/16 | JHWC-24 | Cold Chisel | 3/4 |
| JHWP-13 | Solid Punch | 3/32 | JHWC-28 | Cold Chisel | 7∕8 |
| JHWP-14 | Solid Punch | 1/8 | JHWC-32 | Cold Chisel | 1 |
| JHWP-15 | Solid Punch | 5/32 | JHWC-36 | Cold Chisel | 1 1/8 |
| JHWP-16 | Solid Punch | 3/16 | | | |
| JHWP-17 | Solid Punch | 1/4 | JHW28449 | Punch and Chi | isel Holder |
| JHWP-25 | Long Taper Punch | 5/32 | | 7%" Capa | acity |
| JHWP-26 | Long Taper Punch | 3/16 | | | • |
| JHWP-28 | Long Taper Punch | 1/4 | | | |
| JHWP-30 | Prick Punch | |] | | |
| JHWP-40 | Center Punch | | | | |
| JHWP-42 | Center Punch | - | | | |
| | | | | | |

Features

- · Heavy duty construction for strength and durability
- Includes punch and chisel holder for safety





17 PIECE PUNCH & CHISEL SET

Product Code Description JHWPC-17 17 Piece Punch & Chisel Set

Contents Include:

| Product Code | Description | Point Diameter (Inches) | Product Code | Description | Blade Width (Inches) |
|-----------------|------------------|-------------------------------|-----------------|---------------|----------------------------|
| JHWP-4 | Pin Punch | 1/8 | JHWC-10 | Cold Chisel | 5/16 |
| JHWP-6 | Pin Punch | ³ / ₁₆ | JHWC-12 | Cold Chisel | 3/8 |
| JHWP-8 | Pin Punch | 1/4 | JHWC-16 | Cold Chisel | 1/2 |
| JHWP-14 | Solid Punch | 1/8 | JHWC-20 | Cold Chisel | 5/8 |
| JHWP-15 | Solid Punch | 5/32 | JHWC-24 | Cold Chisel | 3/4 |
| JHWP-16 | Solid Punch | 3/16 | JHWC-42 | Cape Chisel | 1/4 |
| JHWP-25 | Long Taper Punch | 5/32 | JHWC-62 | Diamond Point | 3/8 |
| JHWP-28 | Long Taper Punch | 1/4 | | Chisel | |
| JHWP-32 | Prick Punch | | | | |
| JHWP-40 | Center Punch | - | | | |

Features

· Heavy duty construction for strength and durability





JHWPC-17












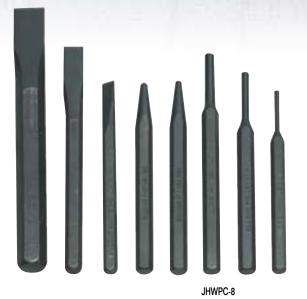

8 PIECE PUNCH & CHISEL SET

Packed in a Pouch

| Product Code | Description | |
|--------------|----------------------------|--|
| JHWPC-8 | 8 Piece Punch & Chisel Set | |


Contents Include:

| Product Code | Description | Point Diameter (Inches) | Product Code | Description | Blade Width (Inches) |
|--|--|----------------------------|-------------------------------|---|--|
| JHWP-4 JHWP-6 JHWP-8 JHWP-15 JHWP-40 | Pin Punch Pin Punch Pin Punch Solid Punch Center Punch | 1/8 3/16 1/4 5/32 | JHWC-10 JHWC-16 JHWC-24 | Cold Chisel Cold Chisel Cold Chisel | ⁵ /16 ¹ /2 ³ / ₄ |

Features

Heavy duty construction for strength and durability



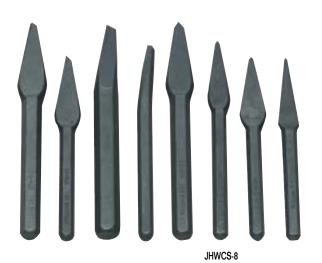

8 PIECE CHISEL SET

Packed in a Pouch

| Product Code | Description | |
|--------------|--------------------|--|
| JHWCS-8 | 8 Piece Chisel Set | |
| | | |

Contents Include:


| Product Code | Description | Blade Width (Inches) | Product Code | Description | Blade Width (Inches) |
|-----------------|-------------|----------------------|-----------------|----------------------|----------------------|
| JHWC-40 | Cape Chisel | 3/16 | JHWC-60 | Diamond Point Chisel | 1/4 |
| JHWC-42 | Cape Chisel | 1/4 | JHWC-62 | Diamond Point Chisel | 3/8 |
| JHWC-44 | Cape Chisel | 5/16 | JHWC-72 | Round Nose Chisel | 1/4 |
| JHWC-46 | Cape Chisel | 3/8 | JHWC-74 | Round Nose Chisel | 3/8 |

Features

Heavy duty construction for strength and durability

9 PIECE COLD CHISEL SET



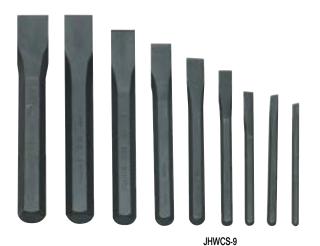

.

Product Code

JHWCS-9

Packed in a Pouch

| Contents | Include: | | | | |
|----------|-------------|-------------|---------|-------------|-------------|
| Product | | Blade Width | Product | | Blade Width |
| Code | Description | (Inches) | Code | Description | (Inches) |
| JHWC-8 | Cold Chisel | 1/4 | JHWC-24 | Cold Chisel | 3/4 |
| JHWC-10 | Cold Chisel | 5/16 | JHWC-28 | Cold Chisel | 7/8 |
| JHWC-12 | Cold Chisel | 3/8 | JHWC-32 | Cold Chisel | 1 |
| JHWC-16 | Cold Chisel | 1/2 | JHWC-36 | Cold Chisel | 1 1/8 |
| JHWC-20 | Cold Chisel | 5/8 | | | |

Description

9 Piece Cold Chisel Set

Features

Heavy duty construction for strength and durability





17 PIECE PUNCH SET

| Packed in a Pouch | | |
|-------------------|--------------------|---|
| Product Code | Description | |
| JHWPS-17 | 17 Piece Punch Set | _ |

Contents Include:

| Product | | Tip Diameter | Product | | Tip Diameter |
|---------|-------------|------------------------------|---------|------------------|--------------|
| Code | Description | (Inches) | Code | Description | (Inches) |
| PJHW-3 | Pin Punch | 3/32 | JHWP-16 | Solid Punch | 3/16 |
| JHWP-4 | Pin Punch | 1/8 | JHWP-17 | Solid Punch | 1/4 |
| JHWP-5 | Pin Punch | 5/32 | JHWP-25 | Long Taper Punch | 5/32 |
| JHWP-6 | Pin Punch | ³ ⁄ ₁₆ | JHWP-26 | Long Taper Punch | 3/16 |
| JHWP-8 | Pin Punch | 1/4 | JHWP-28 | Long Taper Punch | 1/4 |
| JHWP-10 | Pin Punch | 5/16 | JHWP-30 | Prick Punch | - |
| JHWP-13 | Solid Punch | 3/32 | JHWP-40 | Center Punch | - |
| JHWP-14 | Solid Punch | 1/8 | JHWP-42 | Center Punch | - |
| JHWP-15 | Solid Punch | 5/32 | | | |

Features

· Heavy duty construction for strength and durability





4 PIECE CENTER PUNCH SET

| Packed in a Pouch | |
|-------------------|--------------------------|
| Product Code | Description |
| JHWPS-4 | 4 Piece Center Punch Set |

Contents Include:

| Product Code | Description | Stock Diameter (Inches) | Product Code | Description | Stock Diameter (Inches) |
|-----------------|--------------|-------------------------|-----------------|--------------|-------------------------|
| JHWP-38 | Center Punch | 1/4 | JHWP-40 | Center Punch | 3/8 |
| JHWP-39 | Center Punch | 5/16 | JHWP-42 | Center Punch | 1/2 |

Features

Heavy duty construction for strength and durability





12 PIECE PILOT PUNCH SET

Packed in a Pouch

| Product Code | Description | | | |
|-------------------|--------------------------|--------------|----------------|--|
| JHWPS-12 | 12 Piece Pilot Punch Set | | | |
| Contents Include: | | | | |
| Product Code | Point Diameter | Product Code | Point Diameter | |
| 11 BA/D = 4 | - 47 | 11 DATE == | 7, | |

| Product Code | Point Diameter | Product Code | Point Diameter |
|--------------|----------------|--------------|------------------------------|
| JHWP-51 | 1/16 | JHWP-57 | 7/32 |
| JHWP-52 | 5/64 | JHWP-58 | 1/4 |
| JHWP-53 | 3/32 | JHWP-59 | ⁵ ⁄ ₁₆ |
| JHWP-54 | 1/8 | JHWP-60 | 3/8 |
| JHWP-55 | 5/32 | JHWP-61 | 7/16 |
| JHWP-56 | 3/16 | JHWP-62 | 1/2 |

- Designed to apply equal pressure to the end of a pin driving it straight through the hole
 The ball on the center of the point end assures proper contact with the pin eliminating damage to the pin or hole wall























8 PIECE PILOT PUNCH SET

Packed in a Pouch

| Product Code | Description |
|--------------|-------------------------|
| JHWPS-8 | 8 Piece Pilot Punch Set |

Contents Include:

| Product Code | Point Diameter | Product Code | Point Diameter |
|--------------|----------------|--------------|----------------|
| JHWP-51 | 1/16 | JHWP-55 | 5/32 |
| JHWP-52 | 5/64 | JHWP-56 | 3/16 |
| JHWP-53 | 3/32 | JHWP-57 | 7/32 |
| JHWP-54 | 1/8 | JHWP-58 | 1/4 |

Features

- Designed to apply equal pressure to the end of a pin driving it straight through the hole
 The ball on the center of the point end assures proper contact with the pin eliminating damage to the pin or hole wall



3 PIECE BRONZE DRIFT PUNCH SET

Packed in a Pouch

| . action in a rough | | |
|---------------------|--------------------------------|--|
| Product Code | Description | |
| JHWPS-3A | 3 Piece Bronze Drift Punch Set | |
| | | |

Contents Include:

| Product Code | Point Diameter | |
|--------------|----------------|--|
| JHWP-63A | 3/8 | |
| JHWP-64A | 1/2 | |
| JHWP-65A | 3/4 | |

Features

· For aligning unhardened steel or aluminum



PUNCH AND CHISEL HOLDER

Comfort Grip Handle

| Product Code | Description |
|--------------|-------------|
| JHW28449 | 7/8 |

Features

- Holds chisel and punch securelyProtect user from hand injury



COLD CHISELS

Heavy Duty Industrial Grade

| Product Code | Stock Size | Blade Width (Inches) | Length (Inches) |
|--------------|------------|----------------------|-----------------|
| JHWC-8 | 1/4 | 1/4 | 5 |
| JHWC-10 | 1/4 | 5/16 | 5 |
| JHWC-12 | 5/16 | 3/8 | 5 ½ |
| JHWC-15 | 3/8 | 7/16 | 6 |
| JHWC-16 | 7/16 | 1/2 | 6 |
| JHWC-20 | 1/2 | 5/8 | 6 ½ |
| JHWC-24 | 5/8 | 3/4 | 7 |
| JHWC-28 | 3/4 | 7/8 | 7 1/2 |
| JHWC-32 | 7/8 | 1 | 8 |
| JHWC-36 | 7/8 | 1 1/8 | 8 |

- . The most commonly used chisels in the chisel line
- For cutting, shaping and removing metal softer than the cutting edge of the chisel





EXTRA-LONG COLD CHISELS

Heavy Duty Industrial Grade

| Product Code | Stock Size | Blade Width (Inches) | Length (Inches) |
|--------------|---------------|----------------------|--------------------|
| JHWC-120 | 1/2 | 5/8 | 12 |
| JHWC-124 | 5/8 | 3/4 | 12 |
| JHWC-125 | 5/8 | 3/4 | 14 |
| JHWC-126 | 5/8 | 3/4 | 18 |
| JHWC-132 | 3/4 | 1 | 12 |
| JHWC-133 | 3/4 | 1 | 18 |

Features

. Designed for cutting, shaping and removing metal softer than the cutting edge of the chisel





Heavy Duty Industrial Grade

| | Stock | Blade Width | Length |
|--------------|-------|-------------|----------|
| Product Code | Size | (Inches) | (Inches) |
| JHWC-422 | 5/8 | 3/4 | 12 |

Features

. Designed for shearing bolt heads and rivets



CAPE CHISELS

Heavy Duty Industrial Grade

| Product Code | Stock Size | Blade Width (Inches) | Length (Inches) |
|--------------|---------------|----------------------|--------------------|
| JHWC-40 | 3/8 | 3/16 | 5 % |
| JHWC-42 | 3/8 | 1/4 | 5 % |
| JHWC-44 | 1/2 | 5/16 | 6 1/4 |
| JHWC-46 | 5/8 | 3/8 | 7 |

Features

. Designed for cutting or grooving keyholes or slots



DIAMOND POINT CHISELS

Heavy Duty Industrial Grade

| Product Code | Stock Size | Square Cut | Length (Inches) |
|--------------|---------------|---------------|--------------------|
| JHWC-60 | 3/8 | 1/4 | 5 ¾ |
| JHWC-62 | 5/8 | 3/8 | 7 |

Features

• Designed for making a V-groove in metal and to clean out inside corners



ROUND NOSE CHISELS

Heavy Duty Industrial Grade

| Product Code | Stock Size | Blade Width (Inches) | Length (Inches) |
|--------------|------------|-------------------------|--------------------|
| JHWC-72 | 3/8 | 1/4 | 5 ¾ |
| JHWC-73 | 1/2 | 5/16 | 6 1/4 |
| JHWC-74 | 5/8 | 3/8 | 7 |
| JHWC-75 | 3/4 | 1/6 | R |

Features

· Designed for cutting or grooving keyholes or slots












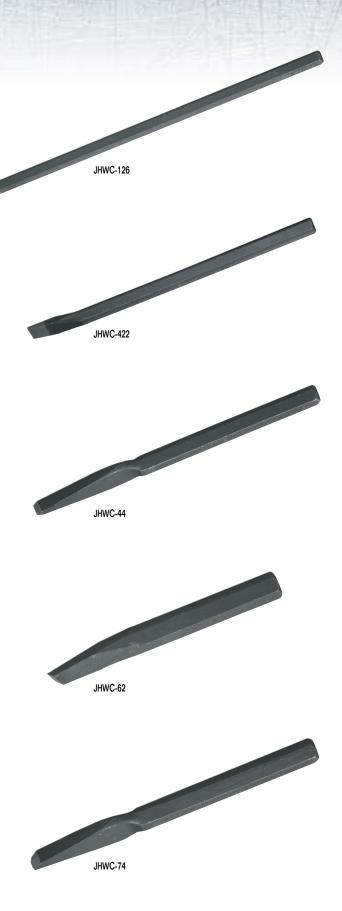



PILOT PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Point Diameter | Length (Inches) |
|--------------|---------------|------------------------------|--------------------|
| JHWP-51 | 1/4 | 1/16 | 2 3/4 |
| JHWP-52 | 1/4 | 5/64 | 3 1/4 |
| JHWP-53 | 1/4 | 3/32 | 3 1/2 |
| JHWP-54 | 1/4 | 1/8 | 4 |
| JHWP-55 | 1/4 | 5/32 | 4 1/2 |
| JHWP-56 | 3/8 | ³ / ₁₆ | 4 1/2 |
| JHWP-57 | 3/8 | 7/32 | 5 |
| JHWP-58 | 7/16 | 1/4 | 5 ½ |
| JHWP-59 | 7/16 | 5/16 | 6 |
| JHWP-60 | 1/2 | 3/8 | 6 |
| JHWP-61 | 5/8 | 7/16 | 6 |
| JHWP-62 | 5/8 | 1/2 | 6 |

Features

- Designed to apply equal pressure to the end of a pin driving it straight through the hole
- The ball on the center of the point end assures proper contact with the pin eliminating damage to the pin or hole wall





JHWP-57

JHWP-6

PIN PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Point Diameter | Length (Inches) |
|--------------|---------------|------------------------------|--------------------|
| JHWP-3 | 5/16 | 3/32 | 4 1/2 |
| JHWP-4 | 5/16 | 1/8 | 4 3/4 |
| JHWP-5 | 5/16 | 5/32 | 5 |
| JHWP-6 | 3/8 | ³ / ₁₆ | 5 1/4 |
| JHWP-8 | 3/8 | 1/4 | 5 ¾ |
| JHWP-10 | 7/16 | 5/16 | 6 |

Features

 For driving out and removing already loosened pins and keys after initial movement by a solid or starter punch





Heavy Duty Industrial Grade

| , , | | | |
|--------------|---------------|------------------------------|--------------------|
| Product Code | Stock Size | Point Diameter | Length (Inches) |
| JHWP-12 | 3/8 | 1/16 | 5 |
| JHWP-13 | 3/8 | 3/32 | 5 |
| JHWP-14 | 3/8 | 1/8 | 5 |
| JHWP-15 | 3/8 | 5/32 | 5 |
| JHWP-16 | 3/8 | ³ / ₁₆ | 5 |
| JHWP-18 | 3/8 | 7/32 | 5 |
| JHWP-17 | 3/8 | 1/4 | 5 |

- . For loosening frozen or tight pins and keys or knocking out rivets
- Also called starter punches because they are ideal for loosening frozen pins







LONG TAPER PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Point Diameter | Length (Inches) |
|--------------|---------------|-------------------|--------------------|
| JHWP-24 | 5/16 | 1/8 | 8 |
| JHWP-25 | 3/8 | 5/32 | 9 |
| JHWP-26 | 1/2 | 3/16 | 10 |
| JHWP-28 | 5/8 | 1/4 | 12 |
| JHWP-28A | 3/4 | 1/4 | 15 |
| JHWP-29 | 5/8 | 5/16 | 16 |
| JHWP-27 | 3/4 | 3/8 | 15 |

Features

- Designed for aligning the holes in metal pieces through which rivets, bolts, or screws will be inserted
- · Not intended for driving pins as punch may become stuck in work
- . Also called line-up aligning or drift punches



CENTER PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Blade Width (Inches) |
|--------------|------------|----------------------|
| JHWP-38 | 1/4 | 4 |
| JHWP-39 | 5/16 | 4 ½ |
| JHWP-40 | 3/8 | 5 |
| JHWP-42 | 1/2 | 6 |

Features

· Pierces or marks work by indentation for starting pilot drills in metal or other materials



PRICK PUNCHES

Heavy Duty Industrial Grade

| Product Code | Stock Size | Length (Inches) |
|--------------|------------|-----------------|
| JHWP-30 | 3/8 | 5 |
| JHWP-32 | 1/2 | 6 |

Features

- · For scribing lines into metal before cutting or riveting, and for punching starting holes for short metal screws
- · Point is more tapered than center punch



BRONZE DRIFT PUNCHES

Packed in a Pouch

| Product Code | Body Size | Overall Length (Inches) |
|--------------|-----------|-------------------------|
| JHWP-63A | 3/8 | 6 |
| JHWP-64A | 1/2 | 7 |
| JHWP-65A | 3/4 | 8 |

Features

• For aligning unhardened steel or aluminum












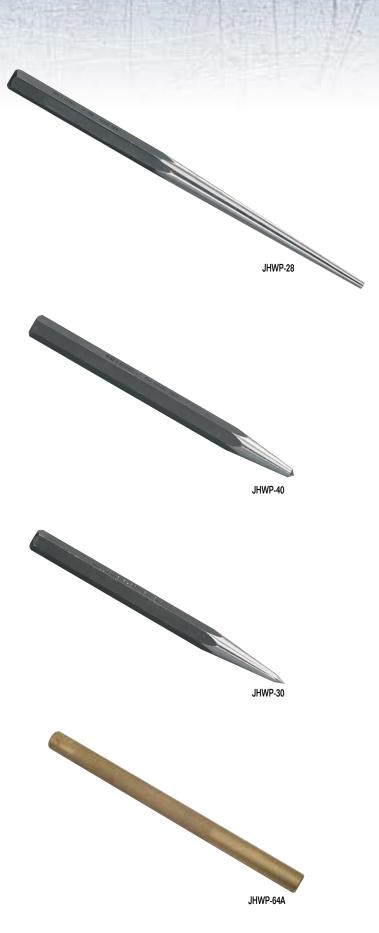





4 PIECE PINCH & ROLL BAR SET

Heavy Duty Industrial Grade

| Product Code | Description | |
|-----------------|------------------------------|--|
| JHWPBS-7 | 4 Piece Pinch & Roll Bar Set | |

Contents Include:

| Product Code | Description | Stock Diameter (Inches) |
|--------------|-------------|-------------------------|
| JHWC-80A | Pinch Bar | 3/4 |
| JHWC-82A | Pinch Bar | 3/4 |
| JHWC-715 | Roll Bar | 1/2 |
| JHWC-718 | Roll Bar | 5/8 |

Features

· Heavy duty construction for strength and durability



PRYBARS - SCREWDRIVER TYPE

Contents Include:

| Product Code | Size | Overall Length (Inches) | Product Code | Size | Overall Length (Inches) |
|-----------------|------|-------------------------|--------------|------|-------------------------|
| JHWC-807 | 3/8 | 12 | JHWC-836 | 5/8 | 36 |
| JHWC-812 | 3/8 | 17 | JHWC-842 | 5/8 | 42 |
| JHWC-818 | 1/2 | 25 | JHWC-844 | 7/8 | 44 |
| .IHWC-824 | 1/2 | 31 | JHWC-858 | 3/4 | 58 |

| Product Code | Description | |
|-----------------|--------------------|--|
| JHWC-803 | 3 Piece Prybar Set | |

Contents Include:

| Product Code | Overall Length (Inches) |
|--------------|-------------------------|
| JHWC-807 | 12 |
| JHWC-812 | 17 |
| JHWC-818 | 25 |

Features

JHWC-803

JHWC-90

JHWC-100

- Blade is heat-treated the entire length.
- · Handle is ergonomically designed to provide a more comfortable and secure grip
- Curved blade style gives extra leverage
- Capped end allows for striking without damage to handle





Single Curved Tip

| Product Code | Overall Length (Inches) | Product Code | Overall Length (Inches) |
|--------------|-------------------------|--------------|-------------------------|
| JHWC-90 | 30 | JHWC-92 | 41 ½ |
| JHWC-91 | 35 ½ | JHWC-93 | 48 ½ |

Double End

| Product code | Overall length (Inches) | Product code | Overall length (Inches) |
|--------------|-------------------------|--------------|-------------------------|
| JHWC-100 | 33 | JHWC-102 | 44 |
| JHWC-101 | 38 | JHWC-103 | 50 |

- Designed with drop forged hardened steel point & wedge ends
- Rust resistant black finish
- Prybar is chemically bonded to the fiberglass handle
- Half the weight of steel prybars
- Handle resists heat & cold less flex than a steel bar
- Non-Conductive fiberglass provides insulation from electrical shock
- Used by:
 - Contractors & mechanics for construction & auto repair
 - Municipalities for safe prying, lifting & digging
 - Fire & Police Forcible entry



LADYFOOT PRYBARS

| Product Code | Stock Size | Overall Length (Inches) |
|--------------|------------|-------------------------|
| JHWC-612 | 1/2 | 12 |
| JHWC-616 | 5/8 | 16 |
| JHWC-621 | 3/4 | 21 |

Features

- · Curved end ensures better leverage in small areas
- · Other end for aligning work



PINCH BARS

Heavy Duty Industrial Grade

| Product Code | Overall Length (Inches) | Stock Size | Width of Flat (Inches) |
|--------------|-------------------------|------------|------------------------|
| JHWC-80 | 14 | 1/2 | 5/8 |
| JHWC-82 | 16 | 5/8 | 3/4 |
| JHWC-82A | 18 | 3/4 | 7/8 |
| JHWC-83 | 20 | 3/4 | 7/8 |
| JHWC-80A | 24 | 3/4 | 7/8 |
| JHWC-84 | 30 | 7/8 | 1 |
| JHWC-85 | 38 | 3/4 | 7/8 |
| JHWC-86 | 42 | 7/8 | 1 |

Features

• Used for aligning, prying and positioning



ROLL BARS

Heavy Duty Industrial Grade

| Product Code | Overall Length (Inches) | Stock Size |
|--------------|-------------------------|------------|
| JHWC-709 | 9 | 3/8 |
| JHWC-715 | 16 | 1/2 |
| JHWC-718 | 18 | 5/8 |

Features

Aligning and prybar with long tapered body and 90° rolling head



2 PIECE COMFORT GRIP PRYBAR SET

Bi-Mold Comfort Grip Handles


| Product Code | Description | | | | |
|-------------------|---------------------------------|--|--|--|--|
| JHW21661 | 2 Piece Comfort Grip Prybar Set | | | | |
| Contents Include: | | | | | |
| Size | Overall Length (Inches) | | | | |
| Small | 8 | | | | |
| Large | 18 | | | | |

- . Bi-mold handles provide comfortable grip, reducing hand fatigue
- . Thumb stop on handle provides control during use
- · Fulcrum end provides extra prying power

















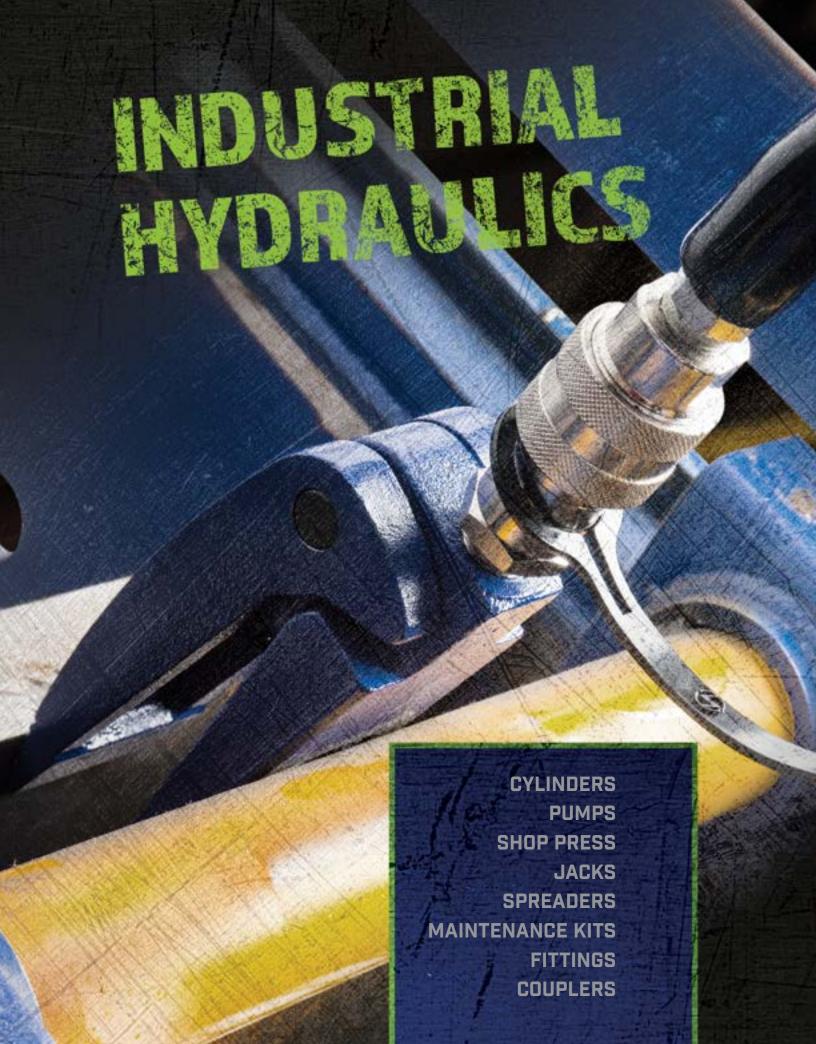



LOW PROFILE MINI JACKS







Release valve for a overload protection



CYLINDERS

Heavy-duty, heat-treated, grooved saddle provides better surface traction during operation

Rod wiper seals out dirt and contamination

Hard, chrome-plated rod prevents scratching and corrosion

1-Piece steel rod stopper for extra strength prevents over-travel

Polyurethane cup seal provides optimum performance

Rectangular return spring design eliminates spring breakage and provides quicker retraction **Steel stop ring** for rod over-travel protection

Collar fixture threads

Burnish-rolled cylinders for smoother finish than honing which reduces scoring and prolongs seal life

1-Piece high grade alloy bearing for side load protection and long life

High flow ball coupler provides more flow than conventional couplers



TOE JACKS

INDUSTRIAL HYDRAULICS



Return spring

Heat treated and chrome plated medium-carbon steel

Chrome plated ram promotes longer seal life and optimum performance

Side carry handle

Toe saddle

U.S. Patented by-pass device protects hydraulic system from over traveling damage

SUPERIOR QUALITY. MORE RELIABILITY.



MAINTENANCE KITS

Portable for easy use in the plant or on the job site

Custom fitted, rugged, blow-molded storage case (10-ton set has wheels for easy movement)

Extension tubes

Cylinder

Hand pumps are rated from 8,000 to 10,000 PSI

Williams® Hydraulics are interchangeable with other manufacturers. All pumps and cylinders are marathon tested to 10,000 cycles.

Accessories


Spreader



SINGLE ACTING CYLINDERS

- 39 models
- Internal plunger threads
- Snap in grooved saddles
- Rod wiper seals out dirt and contamination
- Collar fixture threads
- Two base mounting holes on most models
- High strength steel construction from gun drilled solid bar
- High flow 3/8" NPTF couplers
- · Collar thread protector
- One piece high grade alloy bearing for side load protection and long life

- Polyurethane cup seal provides optimum performance
- Industrial hard chrome plated ram helps prevent rust and corrosion
- Solid steel cylinder body
- Heavy duty return spring provides quicker retraction
- Ideal for lifting and pressing
- Maximum working pressure: 10,000 psi / 700 bar
- See page 421 for Cylinder accessories

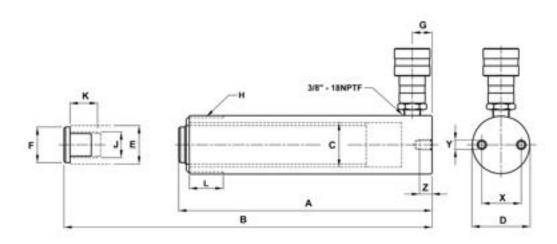

CYLINDER DIMENSIONS

| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | Pressure at Capacity | Oil Capacity | Collapsed Height | Extended Height | Cylinder Bore Dia. | Outside Dia. | Plunger Dia. | | | | | | | | | | |
|----------------------|--------|--------------|-------------------------------|----------------------------|-----------------|---------------------|--------------------|--------------------------|-----------------|-----------------|-------|--|--|------|------|------|------|------|------|--|
| (tons) | (in) | | (in²) | (psi) | (in³) | A (in) | B (in) | C (in) | D (in) | E (in) | | | | | | | | | | |
| | 0.63 | JHW6C05T00 | 1.10 | 9,090 | 0.69 | 1.61 | 2.24 | 1.18 | 2.36 x 1.58 | 0.98 | | | | | | | | | | |
| | 1.00 | JHW6C05T01 | | | 1.00 | 4.58 | 5.58 | | 1.50 | | | | | | | | | | | |
| 5 | 3.07 | JHW6C05T03 | | | 3.07 | 6.65 | 9.72 | | | | | | | | | | | | | |
| " | 5.08 | JHW6C05T05 | 1.00 | 10,000 | 5.08 | 8.70 | 59.50 | 1.13 | | 1.00 | | | | | | | | | | |
| | 7.09 | JHW6C05T07 | | | | | | 7.09 | 10.71 | 17.80 | | | | | | | | | | |
| | 9.09 | JHW6C05T09 | | | | 9.09 | 12.72 | 21.81 | | | | | | | | | | | | |
| | 1.00 | JHW6C10T01 | | | | | | | | | | | | 2.24 | 3.62 | 4.62 | 1.69 | 2.26 | 1.49 | |
| | 2.01 | JHW6C10T02 | | | | | 4.50 | 4.84 | 6.85 | | | | | | | | | | | |
| | 4.02 | JHW6C10T04 | | | | | | | 9.00 | 6.85 | 10.87 | | | | | | | | | |
| 10 | 5.94 | JHW6C10T06 | 2.24 | 8,930 | 13.31 | 9.84 | 15.78 | | 2.26 | | | | | | | | | | | |
| | 7.95 | JHW6C10T08 | 2.24 | 0,330 | 17.81 | 11.85 | 19.80 | 1.69 | | 1.49 | | | | | | | | | | |
| | 9.96 | JHW6C10T10 | | | 22.31 | 13.86 | 23.82 | | | | | | | | | | | | | |
| | 11.97 | JHW6C10T12 | | | 26.81 | 15.87 | 27.84 | | | | | | | | | | | | | |
| | 14.02 | JHW6C10T14 | | | 31.40 | 17.72 | 31.74 | | | | | | | | | | | | | |










JHW6C10T06

JHW6C10T02

| Saddle | Base to | Collar | Collar | Plunger | Plunger | В | Base Mounting H | | | |
|--------|------------|---------|------------------|--------------------|------------------------------------|----------------|-----------------|-----------------|--------------|------------|
| Dia. | Inlet Port | Thread | Thread Length | Internal Thread | Thread Length | Bolt Circle | Thread | Thread Depth | Product Code | |
| F (in) | (in) | (in) | (in) | (in) | (in) | (in) | (in) | (in) | | |
| N/A | 0.75 | N/A | N/A | N/A | N/A | 1.10 | 0.2 | N/A | JHW6C05T00 | |
| | | | | | | | | | | JHW6C05T01 |
| | | | | | | | | | JHW6C05T03 | |
| 0.98 | 0.79 | 1 ½ -16 | 1.10 | ¾"-16UNF | 0.63 | 1.00 | 1⁄4" - 20UNC | | JHW6C05T05 | |
| | | | | | | | | | JHW6C05T07 | |
| | | | | | | | | | JHW6C05T09 | |
| N/A | 0.77 | 2 ¼ -14 | 1.30 | #10-24UNC | 0.24 | 1.56 | ⁵∕16" - 18UNC | 0.55 | JHW6C10T01 | |
| | | | | | | | | JHW6C10T02 | | |
| | | | | | | | | | JHW6C10T04 | |
| | | | | | | | | | JHW6C10T06 | |
| 1.38 | 0.77 | 2 ¼ -14 | 1.30 | 1"-8UNC | 1"-8UNC 0.79 1.56 5/16"-18UNC 0.55 | 0.55 | JHW6C10T08 | | | |
| | | | | | | | | | JHW6C10T10 | |
| | | | | | | | | | JHW6C10T12 | |
| | | | | | | | | | JHW6C10T14 | |



SINGLE ACTING CYLINDERS

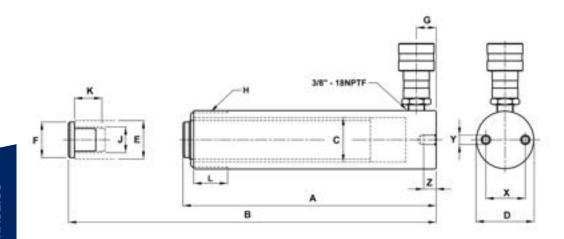



JHW6C30T08

CYLINDER DIMENSIONS

| OTEMBER | DIMENSI | | | | | | | | | | | |
|----------------------|--------------|--------------------------|-------------------------------|----------------------------|-----------------|---------------------|--------------------|--------------------------|-----------------|-----------------|----------------|--|
| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | Pressure at Capacity | Oil Capacity | Collapsed Height | Extended Height | Cylinder Bore Dia. | Outside Dia. | Plunger Dia. | Saddle Dia. | |
| | <i>(</i> ;) | | c: 22 | | (in³) | A (in) | B (in) | C (in) | D (in) | E (in) | F (in) | |
| (tons) | (in) | | (in²) | (psi) | | | | | | | | |
| | 0.99 | JHW6C15T01 | | | 3.11 | 4.88 | 5.87 | | | | | |
| | 2.01 | JHW6C15T02 | | | 6.31 | 5.87 | 7.88 | | | | | |
| | 3.98 | JHW6C15T04 | | | 12.50 | 7.87 | 11.85 | | | | | |
| 15 | 5.87 7.87 | JHW6C15T06 JHW6C15T08 | 3.14 | 9,550 | 18.43 | 10.67 | 16.54 | 2.00 | 2.75 | 1.63 | 1.50 | |
| | 9.88 | JHW6C15T10 | | | 24.71 31.02 | 12.68 14.69 | 20.55 24.57 | | | | | |
| | 12.01 | JHW6C15T12 | | | 37.71 | 16.65 | 28.66 | | | | | |
| | 14.02 | JHW6C15T14 | | | 44.02 | 18.66 | 32.68 | | | | | |
| | 1.02 | JHW6C25T01 | | | 5.24 | 5.84 | 6.86 | | | | | |
| | 2.01 | JHW6C25T02 | | 9,730 | 10.33 | 6.82 | 8.83 | | | | | |
| | 3.94 | JHW6C25T04 | | | 20.25 | 8.78 | 12.72 | | | | | |
| | 5.94 | JHW6C25T06 | | | 30.53 | 10.79 | 16.73 | 2.56 | 3.35 | | 1.97 | |
| 25 | 7.95 | JHW6C25T08 | 5.14 | | 40.86 | 12.80 | 20.75 | | | 2.24 | | |
| | 9.96 | JHW6C25T10 | | | 51.19 | 14.80 | 24.76 | | | | | |
| | 12.24 | JHW6C25T12 | | | 62.91 | 16.73 | 28.97 | | | | | |
| | 14.25 | JHW6C25T14 | | | 73.25 | 18.74 | 32.99 | | | | | |
| 30 | 8.27 | JHW6C30T08 | 6.49 | 9,240 | 53.67 | 15.24 | 23.51 | 2.87 | 4.00 | 2.24 | 2.13 | |
| | 2.01 | JHW6C55T02 | | | 22.09 | 6.93 | 8.94 | | | | | |
| | 3.98 | JHW6C55T04 | 10.00 | 10.000 | 43.74 | 8.94 | 12.92 | | - 00 | 0.15 | | |
| 55 | 6.22 | JHW6C55T06 | 10.99 | 10,000 | 68.36 | 11.14 | 17.36 | 3.74 | 5.00 | 3.15 | 2.76 | |
| | 13.27 | JHW6C55T13 | | | 145.84 | 18.15 | 31.42 | | | | | |
| | 6.14 | JHW6C75T06 | | | 98.85 | 11.22 | 17.36 | | | | | |
| 75 | 13.11 | JHW6C75T13 | 16.10 | 9,320 | 211.07 | 19.37 | 32.48 | 4.53 | 5.79 | 3.74 | 2.76 | |
| 100 | 6.61 | JHW6C100T06 | 20.57 | 0.720 | 135.97 | 14.06 | 20.67 | - 10 | 6 07 | 4.13 | 2.76 | |
| 100 | 10.24 | JHW6C100T10 | 20.37 | 9,720 | 210.64 | 17.68 | 27.92 | 5.12 | 6.97 | | | |







| Base | Collar | Collar | Plunger | Plunger | В | ase Mounting H | lole | |
|------------------|------------------------|------------------|--------------------|------------------|----------------|----------------|-----------------|--|
| to Inlet Port | Thread | Thread Length | Internal Thread | Thread Length | Bolt Circle | Thread | Thread Depth | Product Code |
| G (in) | H (in) | L (in) | J (in) | K (in) | X (in) | Y (in) | Z (in) | |
| 0.98 | 2 ¾ -16 | 1.18 | 1"-8UNC | 0.98 | 1.88 | %"-16UNC | 0.51 | JHW6C15T01 JHW6C15T02 JHW6C15T04 JHW6C15T06 JHW6C15T08 JHW6C15T10 JHW6C15T12 |
| 0.98 | 3 %16 -12 | 1.93 | 1 ½ -16 | 1.18 | 2.31 | ½"-13UNC | 0.75 | JHW6C15T14 JHW6C25T01 JHW6C25T02 JHW6C25T04 JHW6C25T06 JHW6C25T08 JHW6C25T10 JHW6C25T12 JHW6C25T14 |
| 1.97 | 3 ⁵ ⁄16 -12 | 2.17 | 1 ½ -16 1.18 | | 3.75 ½"-13UNC | | 0.75 | JHW6C30T08 JHW6C55T02 JHW6C55T04 JHW6C55T06 JHW6C55T13 |
| 1.18 | 5 ¾ - 12 | 1.73 | | | N/A | | | JHW6C75T06 JHW6C75T13 |
| 1.57 | 6 1/8 - 12 | 1.73 | N/A | A | 5.50 | 3/4"-10UNC | 1 | JHW6C100T06 JHW6C100T10 |



DOUBLE ACTING CYLINDERS

- Rod wiper seals out dirt and contamination
- High strength steel construction from gun drilled solid bar
- High flow 3/8" NPTF couplers
- One piece high grade alloy bearing for side load protection and long life
- Ideal for pushing and pulling
- Maximum working pressure: 10,000 psi / 700 bar
- See page 421 for Cylinder accessories



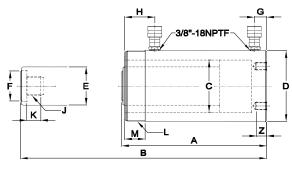



DOUBLE ACTING CYLINDER SPECIFICATIONS

| Cylinder Capacity | Stroke | Product Code | Maxir Cylin Capa | ıder Effectiv | | | Oil Capacity | | Collapsed Height | Extended Height | Cylinder Bore Dia. | Outside Dia. |
|----------------------|----------------|----------------------------|------------------------|---------------|------------|------------|------------------|----------------|---------------------|--------------------|-----------------------|-----------------|
| (tons) | (in) | | Push (ton) | Pull (ton) | Push (in²) | Pull (in²) | Push (in³) | Pull (in) | A (in) | B (in) | C (in) | D (in) |
| 10 | 10.04 | JHW6CD10T10 | 11.4 | 2.0 | 2.23 | 0.74 | 22.41 | 7.47 | 16.14 | 26.18 | 1.69 | 2.87 |
| 10 | 11.97 | JHW6CD10T12 | 11.4 | 3.8 | | 0.74 | 26.71 | 8.90 | 18.03 | 30.00 | | |
| 30 | 8.15 | | 32.9 | 16.2 | 6.49 | 3.19 | | | | | 2.87 | 3.98 |
| 30 | 14.49 | JHW6CD30T15 | | | | | 94.09 | 46.26 | 21.65 | 36.14 | | |
| | 6.18 | JHW6CD55T06 | | 16.2 | 10.99 | 3.19 | 67.93 | 19.74 | 13.03 | 19.21 | 3.74 | 5.00 |
| 55 | 13.19 20.12 | JHW6CD55T13 JHW6CD55T20 | 55.7 | | | | 144.94 221.09 | 42.11 64.24 | 20.04 28.86 | 33.23 49.98 | | |
| | 6.10 | JHW6CD75T06 | | | | | 98.1 | 31.21 | 13.70 | 19.80 | 4.53 | |
| 75 | 13.11 | JHW6CD75T13 | 81.7 | 25.9 | 16.09 | 5.12 | 210.93 | 67.06 | 20.71 | 33.82 | | 5.75 |
| | 6.57 | JHW6CD100T06 | | 48.6 | 20.57 | | 135.23 | 62.98 | 14.06 | 20.63 | 5.12 | 6.97 |
| 100 | 13.11 | JHW6CD100T13 | 104.4 | | | 9.58 | 269.66 | 125.58 | 20.63 | 33.74 | | |
| | 18.15 | JHW6CD100T18 | | | | | 373.31 | 173.86 | 27.05 | 45.20 | | |

DOUBLE ACTING CYLINDER DIMENSIONS

| DOUBLE A | OTHING! | OILIND | LII DIIV | FIASIO | 110 | | | • | | | | | | | | | | | | | | | | | | |
|--------------|---------|--------|-----------------|------------------|---------------------|-------------------|-------------|------------------|-------------|---------------|--------------|--------|------|------|------|------|------|------|--------|------|--------|------|-----|--|--|-------|
| Product | Plunger | Saddle | Base to Adv. | Top to Return | Plunger Internal | Plunger Thread | Collar | Collar Thread | Ва | se Mountin | g Hole | Weight | | | | | | | | | | | | | | |
| Code | Dia. | Dia. | Port | Port | Thread | Length | Thread | Length | Bolt Circle | Thread | Thread Depth | (lbs) | | | | | | | | | | | | | | |
| | E (in) | F (in) | G (in) | H (in) | J (in) | K (in) | L (in) | M (in) | X (in) | Y (in) | Z (in) | | | | | | | | | | | | | | | |
| JHW6CD10T10 | | 1.00 | 1.40 | 0.00 | | 0.00 | 01/ 14 | 1.00 | | B1 /B | 26.7 | | | | | | | | | | | | | | | |
| JHW6CD10T12 | 1.37 | 1.38 | 1.42 | 2.09 | 1 - 8 | 0.98 | 2¼ - 14 | 1.02 | | N/A | | | | | | | | | | | | | | | | |
| | 2.13 | 1.97 | 1.65 | 2.91 | 1½ - 16 | 0.98 | 3 ⁵⁄ıs - 12 | 1.93 | N/A | | | 43.0 | | | | | | | | | | | | | | |
| JHW6CD30T15 | 2.13 | 1.57 | 1.03 | 2.51 | 1 /2 - 10 | U.30 | 3 716 - 1Z | 1.55 | | N/A | | | | | | | | | | | | | | | | |
| JHW6CD55T06 | | | | | | | | | | | | 70.5 | | | | | | | | | | | | | | |
| JHW6CD55T13 | 3.14 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 2.76 | 1.14 | 2.87 | 1 - 12 | 0.98 | 5 - 12 | 1.73 | N/A | | | 104.0 |
| JHW6CD55T20 | ł | | 2.48 | | | | | | | | | 146.2 | | | | | | | | | | | | | | |
| JHW6CD75T06 | | | | | | | | | | | | 93.7 | | | | | | | | | | | | | | |
| JHW6CD75T13 | 3.75 | 2.76 | 1.18 | 2.80 | 1 - 12 | 1.50 | 5¾ - 12 | 1.50 | N/A | | | 136.8 | | | | | | | | | | | | | | |
| JHW6CD100T06 | | | 1.22 | | | | | | | | | 138.6 | | | | | | | | | | | | | | |
| JHW6CD100T13 | 3.75 | 2.95 | | 2.95 | 1% - 12 | 1.38 | 6 1/8 - 12 | 1.97 | 5.47 | ¾ - 10 | 0.98 | 193.6 | | | | | | | | | | | | | | |
| JHW6CD100T18 | | | 1.50 | | | | | | | | | 248.3 | | | | | | | | | | | | | | |





LOCK NUT CYLINDERS


- Single acting cylinder with mechanical safety lock nut
- Designed to support load for extended periods without hydraulic pressure.
- Overflow port prevents cylinders from over travel
- Load return
- Solid steel cylinder body
- Ideal for lifting and holding loads
- Maximum working pressure: 10,000 psi / 700 bar
- See page 421 for Cylinder accessories

LOCK NUT CYLINDERS SPECIFICATIONS

| | O I EIII O I | ING SPECIFI | OAHOHO | | | | | | | |
|----------------------|--------------|-----------------|-------------------------------|-----------------|---------------------|--------------------|------------------------------|---------------------|------------------------------|--|
| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | Oil Capacity | Collapsed Height | Extended Height | Cylinder Bore Diameter | Outside Diameter | Plunger Outside Thread | |
| (tons) | (in) | | (in²) | (in³) | A (in) | B (in) | C (in) | D (in) | E | |
| | 1.97 | JHW6CN55T02 | | 21.65 | 6.5 | 8.4 | | | | |
| | 3.94 | JHW6CN55T04 | | 43.27 | 8.4 | 12.4 |] | 4.9 | Tw95-6N | |
| | 5.91 | JHW6CN55T06 | | 64.90 | 10.4 | 16.3 | | | | |
| 55 | 7.87 | JHW6CN55T08 | 10.99 | 86.54 | 12.4 | 20.2 | 3.7 | | | |
| | 9.84 | JHW6CN55T10 | | 108.17 | 14.3 | 24.2 | | | | |
| | 11.81 | JHW6CN55T12 | | 129.80 | 16.3 | 28.1 | | | | |
| | 1.97 | JHW6CN100T02 | | 40.49 | 7.4 | 9.3 | | | | |
| | 3.94 | JHW6CN100T04 | | 80.98 | 9.3 | 13.3 | | | | |
| 100 | 5.91 | JHW6CN100T06 | | 121.48 | 11.3 | 17.2 | 5.1 | | Tw130-4N | |
| 100 | 7.87 | JHW6CN100T08 | 20.57 | 161.97 | 13.3 | 21.1 | J. I | 6.5 | IW I 30-4N | |
| | 9.84 | JHW6CN100T10 | | 202.46 | 15.2 | 25.1 | | | | |
| | 11.81 | JHW6CN100T12 | | 242.95 | 17.2 | 29.0 | | | | |

LOCK NUT CYLINDERS DIMENSIONS


| Product Code | Saddle Diameter | Depth of Plunger Hole | Saddle Protrusion from Plunger | Lock Nut Length | Base to Inlet Port | Weight (lbs) |
|-----------------|--------------------|-----------------------------|---|--------------------|-----------------------|-----------------|
| | F (in) | G1 (in) | G2 (in) | H (in) | l (in) | |
| JHW6CN55T02 | | | | | | 34.0 |
| JHW6CN55T04 | | | | | 1.1 | 44.5 |
| JHW6CN55T06 | | | | 1.4 | | 55.1 |
| JHW6CN55T08 | | | | 1.4 | | 65.9 |
| JHW6CN55T10 | | | | | | 76.5 |
| JHW6CN55T12 | 2.8 | 0.08 | 0.51 | | | 87.1 |
| JHW6CN100T02 | 2.0 | 0.00 | | | "" | 67.2 |
| JHW6CN100T04 | | | | | | 85.8 |
| JHW6CN100T06 | | | | | | 104.3 |
| JHW6CN100T08 | | | | 1.8 | | 122.6 |
| JHW6CN100T10 | | | | | | 141.1 |
| JHW6CN100T12 | | | | | | 159.6 |

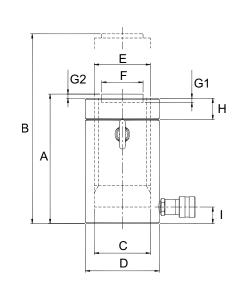



ALUMINUM CYLINDERS

- Lightweight aluminum alloy construction
- Up to 60 percent lighter than comparable tonnage steel rams
- Convenient carry handle
- Hard anodized aluminum piston rod provides extra protection against corrosion and wear
- Maximum working pressure: 10,000 psi / 700 bar
- See page 421 for Cylinder accessories

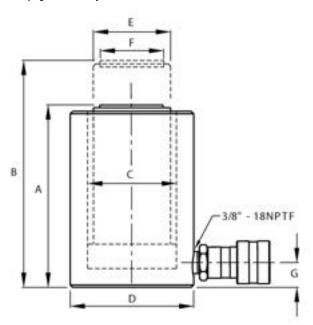



JHW6CA30T06

ALUMINUM CYLINDER DIMENSIONS

| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | | Oil Capacity | Collapsed Height | Extended Height | Cylinder Bore Dia. | Outside Dia. | Plunger Dia. | Saddle Dia. | Base to Inlet Port | Weight |
|----------------------|--------|-----------------|-------------------------------|--------|-----------------|---------------------|--------------------|-----------------------|-----------------|-----------------|----------------|--------------------------|--------|
| (tons) | (in) | | (in²) | (psi) | (in³) | A (in) | B (in) | C (in) | D (in) | E (in) | F (in) | G (in) | (lbs) |
| | 2.00 | JHW6CA30T02 | | | 13.00 | 6.50 | 8.50 | | | | 2.00 | | 11.0 |
| 30 | 4.00 | JHW6CA30T04 | 6.50 | 9,231 | 26.00 | 8.50 | 12.50 | 2.90 | 4.50 | 2.50 | | | 14.0 |
| | 6.00 | JHW6CA30T06 | | | 39.00 | 10.50 | 16.50 | | | | | | 17.0 |
| | 2.00 | JHW6CA50T02 | 11.00 | | 22.00 | 6.50 | 8.50 | | 5.50 | | 2.50 | 1.5 | 17.0 |
| 50 | 4.00 | JHW6CA50T04 | | 9,091 | 44.00 | 8.50 | 12.50 | 3.70 | | 3.10 | | | 21.0 |
| 30 | 6.00 | JHW6CA50T06 | | | 66.00 | 10.50 | 16.50 | | | 3.10 | | | 25.0 |
| | 10.00 | JHW6CA50T10 | | | 110.00 | 14.50 | 24.50 | | | | | | 34.0 |
| 75 | 4.00 | JHW6CA75T04 | 15.00 | 10 000 | 60.00 | 8.50 | 12.50 | 4.40 | 6.50 | 3.90 | 3.00 | | 29.0 |
| 75 | 6.00 | JHW6CA75T06 | 15.00 | 10,000 | 90.00 | 10.50 | 16.50 | 4.40 | | | | | 35.0 |
| | 2.00 | JHW6CA100T02 | | | 41.40 | 6.50 | 8.50 | | | | 3.50 | | 36.0 |
| 100 | 4.00 | JHW6CA100T04 | 20.70 | 0 662 | 82.80 | 8.50 | 12.50 | 5.10 | 8.00 | 4.30 | | | 43.0 |
| 100 | 6.00 | JHW6CA100T06 | | 9,662 | 124.40 | 10.50 | 16.50 | | | | | | 51.0 |
| | 10.00 | JHW6CA100T10 | | | 207.0 | 14.50 | 24.50 | | | | | | 68.0 |





- Made of high quality steel
- Extremely low collapsed height for applications with minimal clearance at the lift point
- Great for areas of low clearance
- Maximum working pressure 10,000 psi / 700 bar
- See page 421 for Cylinder accessories



JHW6CF05T03









FLAT BODY CYLINDER DIMENSIONS

| C | ylinder Moun | ting Hole Dim | ensions (in) | |
|--------------|--------------|---------------|-------------------------|--------------------------|
| Product Code | Hole Pitch | Hole Dia | Counter Bore Dia. | Counter Bore Depth |
| | X (in) | Y (in) | (in) | (in) |
| JHW6CF05T03 | 1.12 | 0.2 | 0.31 | 0.17 |
| JHW6CF10T05 | 1.44 | 0.28 | 0.42 | 0.31 |
| JHW6CF20T05 | 1.94 | 0.4 | 0.59 | 0.39 |
| JHW6CF30T05 | 2.06 | 0.4 | 0.62 | 0.44 |
| JHW6CF50T05 | 2.62 | 0.43 | 0.75 | 0.50 |

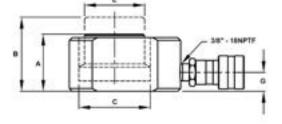



FLAT BODY CYLINDER DIMENSIONS


| ILAIDO | D 1 O 11 | FINADELL DIM | | | | | | | | | | | |
|----------------------|----------|-----------------|-------------------------------|----------------------------|-----------------|---------------------|--------------------|----------------------------|-----------------------|-----------------|-----------------|-----------------------|----------------------------|
| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | Pressure at Capacity | Oil Capacity | Collapsed Height | Extended Height | Outside Dim. D1 x D2 | Cylinder Bore Dia. | Plunger Dia. | Base to Port | Plunger to Base | Plunger to Mtg. Hole |
| (tons) | (in) | | (in²) | (psi) | (in³) | A (in) | B (in) | (in) | C (in) | E (in) | G (in) | L (in) | M (in) |
| 5 | 0.24 | JHW6CF05T03 | 1.10 | 9,090 | 0.26 | 1.26 | 1.5 | 2.4 x 1.6 | 1.18 | 0.98 | 0.69 | 0.80 | 0.87 |
| 10 | 0.43 | JHW6CF10T05 | 2.36 | 8,470 | 1.01 | 1.69 | 2.12 | 3.3 x 2.2 | 1.73 | 1.50 | 0.77 | 1.12 | 1.32 |
| 20 | 0.43 | JHW6CF20T05 | 4.38 | 9,130 | 1.88 | 2.01 | 2.44 | 4.0 x 3.0 | 2.36 | 2.00 | 0.75 | 1.54 | 1.56 |
| 30 | 0.51 | JHW6CF30T05 | 6.49 | 9,240 | 3.31 | 2.31 | 2.82 | 4.6 x 3.8 | 2.87 | 2.50 | 0.79 | 1.88 | 1.75 |
| 50 | .63 | JHW6CF50T05 | 9.86 | 10,140 | 6.21 | 2.64 | 3.27 | 4.5 x 4.5 | 3.54 | 2.76 | 0.79 | 2.25 | 2.13 |




FLAT BODY CYLINDER KITS

- Various height magnetic adapters
- Perfect for low clearance areas needing a cylinder height boost
- Maximum working pressure: 10,000 psi / 700 bar
- Kits include magnetic adapters and carrying case
- See page 421 for Cylinder accessories

Flat Body Kit Spacers







FLAT BODY CYLINDER KIT DIMENSIONS

| Cylinder Capacity | Stroke | Product | Cylinder Model | Oil Capacity | Collapsed Height | Includes | | | Adapter | r Dimensi | ons (in) | | | | | | | | | | |
|----------------------|--------|---------------|--|-----------------|---------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------|--|-----|------|--|------|--|--|-------|
| (tons) | (in) | Code | | (in³) | (in) | Adapter | A | В | C | D | E | F | G | | | | | | | | |
| | | | | | | I | 0.25 | | | | | | | | | | | | | | |
| 5 | 0.24 | JH6CF05T03TB | JHW6CF05T03 | 0.26 | 1.26 | II | 0.5 | 1.61 | 2.56 | 2.32 | 0.48 | 1.10 | 0.24 | | | | | | | | |
| | 0.24 | 3110010310310 | 3114700103103 | 0.20 | 1.20 | III | 1 | 1.01 | 2.30 | 2.32 | 0.70 | 1.10 | 0.24 | | | | | | | | |
| | | | | | | IV | 1.25 | | | | | | | | | | | | | | |
| | | | | | | 1 | 0.39 | | | | 0.81 | 1.46 | 0.28 | | | | | | | | |
| 10 | 0.43 | JH6CF1OTO5TB | JHW6CF10T05 | JHW6CF10T05 | 1.02 | 1.69 | II | 0.79 | 2.20 | 3.54 | 3.23 | | N/A | | | | | | | | |
| | | | | | | | | | | | | III | 1.57 | | | | | IV/A | | | |
| | | | | | | I | 0.39 | | | | 1.08 | 1.93 | 0.39 | | | | | | | | |
| 20 | 0.43 | JH6CF2OT05TB | JHW6CF20T05 | 1.90 | 2.01 | II | 0.79 | 2.99 | 4.25 | 3.94 | | N/A | | | | | | | | | |
| | | | | | | III | 1.57 | | | | | IV/A | | | | | | | | | |
| | | | | | | I | 0.39 | | | | 1.32 | 2.06 | 0.39 | | | | | | | | |
| 30 | 0.51 | JH6CF3OTO5TB | JHW6CF30T05 3.32 2.31 II 0.79 III 1.57 | 0.79 | 3.75 4.76 | 4.76 4.45 | 45 N/A | | | | | | | | | | | | | | |
| | | | | JHW6CF30T05 | JHW6GF3U1U5 | JUMOPLIANIO | JHW6GF3UIU5 | JHW6GF3U1U5 | JHW6CF30T05 | JHW6CF30T05 | JHW6GF3U1U5 | JHW6CF30T05 | | | III | 1.57 | | | | | IV/ A |






JHW6CH30T06

HOLLOW HOLE CYLINDERS

- 6 standard models
- Ideal for some pulling and pushing applications
- Heavy duty compression spring
- Dual wipers help prevent contamination
- Collar thread protector
- High flow coupler with dust cap
- See page 421 for Cylinder accessories

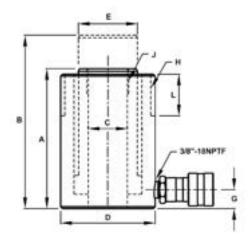

HOLLOW HOLE CYLINDER DIMENSIONS

| | | | Cylinder | Pressure | | | | | | Plun | ger | |
|----------------------|--------|-----------------|-------------------|----------------|----------|----------------|----------------|--------|--------|--------|---------------------------|------------------------------|
| Cylinder Capacity | Stroke | Product Code | Effective Area | at Capacity | Oil Cap. | Min. Height | Max. Height | O.D. | I.D. | O.D. | Internal Thread | Internal Thread Length |
| (tons) | (in) | | (in²) | (psi) | (in³) | A (in) | B (in) | D (in) | C (in) | E (in) | J (in) | K (in) |
| 12 | 3.00 | JHW6CH12T03 | 2.91 | 8,236 | 8.72 | 7.24 | 10.24 | 2.760 | 0.770 | 1.38 | - | - |
| 20 | 2.01 | JHW6CH2OTO2 | 4.90 | 8,167 | 9.83 | 6.38 | 8.39 | 3.92 | 1.063 | 2.15 | 1 %16"-16UN | 0.75 |
| 20 | 6.06 | JHW6CH2OTO6 | 4.30 | 0,107 | 29.70 | 12.05 | 18.11 | 3.32 | 1.003 | 2.13 | 1 716 - 10UN | 0.75 |
| 30 | 2.52 | JHW6CH30T02 | 6.32 | 9,488 | 15.93 | 7.05 | 9.57 | 4.50 | 1.311 | 2.48 | 1 ¹³ /16"-16UN | 0.87 |
| 30 | 6.11 | JHW6CH30T06 | 0.32 | 3,700 | 38.67 | 13.02 | 19.13 | 7.30 | 1.311 | 2.70 | 1 /16 -10014 | 0.07 |
| 60 | 3.00 | JHW6CH6OTO3 | 13.05 | 9,195 | 39.10 | 9.77 | 12.77 | 6.252 | 2.126 | 3.66 | 2 ¾"-16UN | 0.75 |
| 100 | 3.00 | JHW6CH100T03 | 22.13 | 9,036 | 66.31 | 10.00 | 13.00 | 8.386 | 3.110 | 4.92 | 4"-16UN | 0.98 |


HOLLOW HOLE CYLINDER SPECIFICATIONS

| IIOLLOW IIOL | Collar 1 | | | Ва | se Mounting Ho | ole | |
|-----------------|------------|--------|-----------------------|----------------|----------------|-----------------|---------|
| Product Code | Dia. | Lgth. | Base to Inlet Port | Bolt Circle | Thread | Thread Depth | Weights |
| | H (in) | L (in) | G (in) | X (in) | Y (in) | Z (in) | (lbs) |
| JHW6CH12T03 | 2 ¾"-16 | 1.81 | 0.75 | 2.00 | ⁵⁄16"-18UNC | 0.35 | 8.6 |
| JHW6CH2OTO2 | 9.7/ 19 | 1.50 | 0.75 | 0.05 | 3/8"-16UNC | 0.07 | 15.9 |
| JHW6CH2OTO6 | 3 1/8 -12 | 1.30 | 0.75 | 3.25 | %"-16UNG | 0.37 | 29.5 |
| JHW6CH30T02 | 4 ½ -12 | 1.75 | 0.01 | | 3/8"-16UNC | 0.55 | 22.9 |
| JHW6CH30T06 | 4 1/2 - 12 | 1.75 | 0.81 | | %"-16UNG | 0.55 | 43.0 |
| JHW6CH6OTO3 | 6 ¼ -12 | 2 | 1.00 | | ½"-13UNC | 0.55 | 65.7 |
| 311440011001103 | U /4 - 12 | | 1.00 | | /z -130NG | 0.33 | 81.1 |
| JHW6CH100T03 | 6 % -12 | 2.38 | 1.06 | 7.01 | %"-11UNC | 0.75 | 113.3 |



PULL CYLINDERS

- High strength steel construction
- One piece high grade alloy bearing for side load protection and longer life
- Polyurethane cup seal helps provide optimum performance
- External plunger threads
- Internal base threads
- Used for pulling and tensioning
- Maximum working pressure: 10,000 psi / 700 bar
- See page 421 for Cylinder accessories

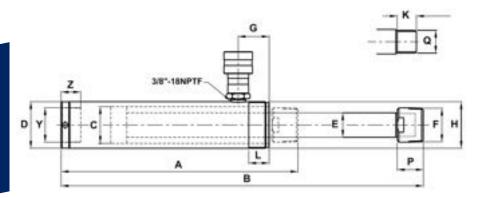



PULL CYLINDER DIMENSIONS

| | | | | | | | | | | | Colla | ar |
|----------------------|--------|-----------------|-------|-------------------------|--------------|---------------------|--------------------|-----------------|-----------------------|-------------------------|---------|------------------|
| Cylinder Capacity | Stroke | Product Code | | Pressure at Capacity | Oil Capacity | Collapsed Height | Extended Height | Outside Dia. | Cylinder Bore Dia. | Top to Inlet Port | Thread | Thread Length |
| (tons) | (in) | | (in²) | (psi) | (in³) | A (in) | B (in) | D (in) | C (in) | G (in) | H (in) | L (in) |
| 2.5 | 5.00 | JHW6CP02T05 | 0.56 | 8,930 | 2.78 | 10.55 | 15.55 | 1.89 | 1.13 | 1.65 | 1 ½"-16 | 0.98 |
| 5 | 5.55 | JHW6CP05T05 | 1.14 | 8,770 | 6.34 | 11.85 | 17.35 | 2.25 | 1.69 | 1.50 | 2 ¼"-14 | 1 |
| 10 | 5.95 | JHW6CP10T06 | 2.44 | 8,200 | 14.48 | 11.75 | 17.7 | 3.35 | 2.17 | 1.50 | M85x2 | 1 |

| | Adapter | | | Plunger | | Base Mounting H | lole |
|-----------------|---------------|--------|--------|------------------|---------|-----------------|--------|
| Product Code | Thread | Length | Dia. | Thread Length | Thread | Thread | Depth |
| | F (in) | P (in) | E (in) | K (in) | Q (mm) | Н | Z (in) |
| JHW6CP02T05 | 3/4"-14NPTF | 1.13 | 0.75 | 0.76 | M16x1.5 | 3⁄4"-14NPTF | 0.72 |
| JHW6CP05T05 | 1 ¼"-11.5NPTF | 1.25 | 1.18 | 0.93 | M28x1.5 | 1 ¼"-11.5NPTF | 0.95 |
| JHW6CP10T06 | - | - | 1.26 | 1.02 | M30x2 | M30x2 | 0.98 |








THREADED HOLE CYLINDERS

- High quality threaded single acting cylinders
- Removable threaded plunger adapter allows for the use of a variety of threaded attachments
- Used to attach accessories to rod end and base
- Maximum working pressure: 10,000 psi / 700 bar
- See page 421 for Cylinder accessories

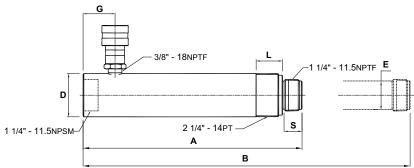

THREADED HOLE CYLINDER DIMENSIONS

| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | Pressure at Capacity | Oil Capacity | Collapsed Height | Extended Height | Outside Dia. | Plunger Dia. | Base to Inlet Port | Collar Thread Length | Saddle Height |
|----------------------|--------|-----------------|-------------------------------|-------------------------|-----------------|---------------------|--------------------|-----------------|-----------------|-----------------------|----------------------------|------------------|
| (tons) | (in) | | (in²) | (psi) | (in³) | A (in) | B (in) | D (in) | E (in) | G (in) | L (in) | S (in) |
| 10 | 5.95 | JHW6CT10T06 | 2.24 | 8,930 | 13.33 | 11.46 | 17.41 | 2.26 | 1.49 | 1.67 | 1.13 | 0.04 |
| 10 | 9.96 | JHW6CT10T10 | 2.24 | 0,330 | 22.31 | 15.47 | 25.43 | 2.20 | 1.43 | 1.0/ | 1.13 | 0.94 |




LOW PROFILE CYLINDERS


- Compact design for use in confined spaces
- Rod wiper helps seal out dirt and contamination
- Specially designed return spring ensures a quick retraction and extends the life of the spring
- Industrial hard chrome plated ram helps prevent scratching and corrosion
- Plunger end is grooved to reduce load slippage
- Includes high flow ball coupler and dust cap
- Coupler is tilted upward for added clearance
- Maximum working pressure: 10,000 psi/700 bar
- See page 421 for Cylinder accessories





JHW6CL20T02

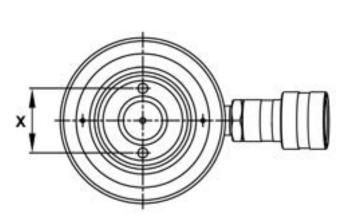

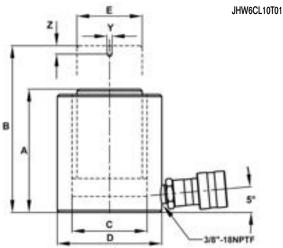

LOW PROFILE CYLINDER DIMENSIONS


| | | | Culindor | Internal | | Collapsed | Extended | Outside | Culindor | Diunger | Plu | nger Mour | iting |
|----------------------|--------|--------------|-------------------------------|-------------|-----------------|-----------|----------|---------|-----------------------|-----------------|----------------|-----------|-----------------|
| Cylinder Capacity | Stroke | Product Code | Cylinder Effective Area | Droceuro at | Oil Capacity | Height | Height | Dia. | Cylinder Bore Dia. | Plunger Dia. | Bolt Circle | Thread | Thread Depth |
| | | | Aicu | oupdoity | | A | В | D | C | E | Х | Y | Z |
| (tons) | (in) | | (in²) | (psi) | (in³) | (in) | (in) | (in) | (in) | (in) | (in) | (mm) | (in) |
| 10 | 1.50 | JHW6CL10T01 | 2.35 | 8,511 | 3.53 | 3.48 | 4.98 | 2.75 | 1.73 | 1.50 | 1.03 | M4 | 0.32 |
| 20 | 1.75 | JHW6CL2OTO2 | 4.37 | 9,153 | 7.65 | 3.90 | 5.65 | 3.63 | 2.36 | 2.00 | 1.56 | M4 | 0.32 |
| 30 | 2.44 | JHW6CL30T02 | 6.49 | 9,245 | 15.84 | 4.61 | 7.05 | 4.00 | 2.87 | 2.50 | 1.56 | M5 | 0.32 |
| 50 | 2.36 | JHW6CL50T02 | 9.87 | 10,132 | 23.29 | 4.8 | 7.17 | 4.88 | 3.54 | 2.76 | 1.56 | M5 | 0.32 |




HAND PUMPS

- JHW5HS2S35, JHW5HS2S100 and JHW5HS2S200 feature 2 speed operation
- Pressure relief valve for overload protection
- Load release valve for single acting cylinder usage
- Large oil capacities to power a wide range of cylinders and tools
- JHW5HS2S35 and JHW5HS2S100 are constructed of high strength lightweight aluminum alloy for easy handling and corrosion resistance that resists cracks and leaking
- All hand pumps function in horizontal positions and will also function in some vertical positions
- Maximum working pressure: 10,000 psi / 700 bar



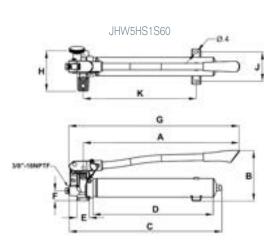

JHW5HS1S60

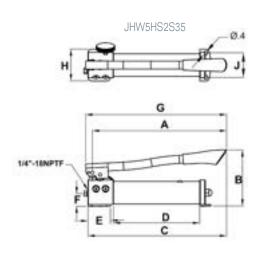


HAND PUMP SPECIFICATIONS


| Used with | Ритр Туре | Usable Oil Capacity | Product Code | Pressure | | | acement troke 1 ³ 1 | Max. Operating Force | Piston Stroke | Oil Outlet Port |
|------------------|--------------|---------------------------|-----------------|-----------|-----------|-----------|--------------------------------------|-------------------------|------------------|-----------------|
| Cylinder | | (in³) | Gone | 1st Stage | 2nd Stage | 1st Stage | 2nd Stage | (lbs) | (in) | |
| | Cinula anad | 36.5 | JHW5HS1S60 | | | | 0.15 | 109 | 0.79 | 3/8"-18NPTF |
| | Single-speed | 67.0 | JHW5HS1S120 | | | | 0.13 | 89 | 0.82 | 3/8"-18NPTF |
| Single Acting | | 21.4 | JHW5HS2S35 | | 10,000 | 0.18 | 0.05 | 88 | 0.38 | 1/4"-18NPTF |
| | Two-speed 61 | 61.0 | JHW5HS2S100 | 200 | | 0.01 | 0.14 | 132 | 0.82 | 3/8"-18NPTF |
| | | 128.0 | JHW5HS2S200 | | | 0.81 0.14 | | 132 | U.0Z | J/O -IONPIF |



HAND PUMPS



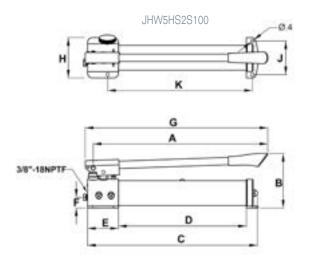


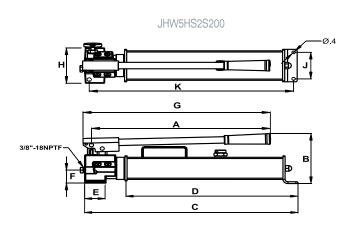

HAND PUMP DIMENSIONS

| Product | | | | | Dimensi | ions (in) | | | | |
|-------------|-------|------|-------|-------|---------|-----------|-------|------|------|-------|
| Code | A | В | G | D | E | F | G | Н | J | K |
| JHW5HS1S60 | 18.94 | 6.46 | 19.53 | 15.35 | 1.57 | 1.26 | 20.79 | 5.20 | 3.74 | 14.45 |
| JHW5HS1S120 | 20.50 | 6.50 | 21.75 | 17.50 | 2.13 | 1.75 | 22.63 | 5.25 | 3.74 | 21.25 |
| JHW5HS2S35 | 13.43 | 5.91 | 13.89 | 9.09 | 2.36 | 1.34 | 14.13 | 3.35 | 2.56 | - |
| JHW5HS2S100 | 19.69 | 6.38 | 19.88 | 14.96 | 3.62 | 1.26 | 20.63 | 4.72 | 3.94 | 16.93 |
| JHW5HS2S200 | 19.75 | 6.64 | 23.69 | 18.37 | 2.36 | 1.73 | 20.71 | 4.72 | 3.54 | 22.56 |



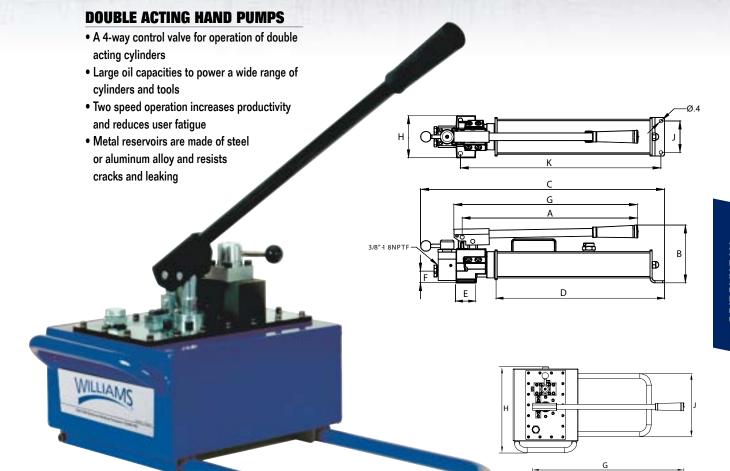

DOUBLE ACTING HAND PUMP SPECIFICATIONS

JHW5HD2S500

| Acting | Speed | 476.0 | JHW5HD2S500 | 290 | 10,000 | 7.31 | 0.29 | 143 | 1.67 | 3.8"-18NPTF | 77.4 |
|-----------|-------|---------------|-----------------|--------------------|--------------------|--------------------|--------------------|----------------------------|------------------|--------------------|--------|
| Double | Two | 128.0 | JHW5HD2S100 | 200 | | 0.81 | 0.14 | 132 | 0.82 | | 32.2 |
| Cylinder | Туре | Capacity | Coue | 1st Stage (psi) | 2nd Stage (psi) | 1st Stage (in³) | 2nd Stage (in³) | (lbs) | (in) | Purt | (lbs) |
| Used with | | Usable Oil | Product Code | Pressur | e Rating | | acement troke | Max. Operating Force | Piston Stroke | Oil Outlet Port | Weight |

DOUBLE ACTING HAND PUMP DIMENSIONS

| 7007117 | 011110111 | THE TAKE I CHIL PHILLICION | | | | | | | | | | | | | |
|-------------|-----------|----------------------------|-------|-------|-------|------------|-------|-------|-------|-------|--|--|--|--|--|
| Product | | | | | Dimen | sions (in) | | | | | | | | | |
| Code | A | ABCDEFGHJK | | | | | | | | | | | | | |
| JHW5HD2S100 | 19.75 | 6.64 | 23.69 | 18.37 | 2.36 | 1.73 | 20.71 | 4.72 | 3.54 | 22.56 | | | | | |
| JHW5HD2S500 | 25.79 | 11.61 | 30.35 | 11.54 | 24.17 | 8.25 | 26.94 | 15.24 | 11.18 | - | | | | | |



AIR PUMPS

- High strength reinforced aluminum alloy reservoir is lightweight and corrosion resistant that resists cracks and leaking
- Pressure relief valve for overload protection
- Suggested air pressure range: 90-175 psi / 6-12 bar
- Designed to be used with single acting cylinders
- Dust cover protection for the release control valve
- Dual stage release control valve
- 5AS200 offers a turbo function that features high flow at high pressure condition
- 5AD150M offers a 4-way control valve for operation of double acting cylinders
- Maximum working pressure: 10,000 psi / 700 bar









AIR PUMP SPECIFICATIONS


| Used with | Usable Oil | | Pressure | Oil Output | Flow Rate | Input Air Pressure | | Din | nensions (i | in) | |
|---------------|------------|--------------|----------|------------|-----------|-----------------------|-------|------|-------------|------|------|
| Cylinder | Capacity | Product Code | Rating | (in³/ | min) | Range | | | | | |
| | (in³) | | (psi) | No Load | Load | (psi) | A | В | G | U | E |
| | 36.6 | JHW5AS60 | | 61 | 9 | | 16.54 | 9.84 | 7.01 | 6.18 | 5.59 |
| | 91.5 | JHW5AS150 | | 66 | 11 | - 100-200 | 10.35 | 5.00 | 7.28 | 5.16 | 5.35 |
| Single | 122.1 | JHW5AS200 | 10.000 | 65 | 12 | | 11.57 | 6.02 | 7.91 | 6.18 | 5.98 |
| Acting | 231.9 | JHW5AS380 | 10,000 | 65 | 11 | | 12.64 | 5.08 | 7.36 | 5.24 | 7.36 |
| | 91.5 | JHW5AS150L | | 61 | 10 | | 10.98 | 6.30 | 8.03 | 5.12 | 5.35 |
| | 231.9 | JHW5AS380L | | 61 | 10 | | 12.64 | 6.42 | 8.15 | 5.20 | 7.36 |
| Double Acting | 91.5 | JHW5AD150M | 10,000 | 66 | 11 | 100-200 | 10.35 | 5.00 | 7.99 | 5.35 | 5.35 |

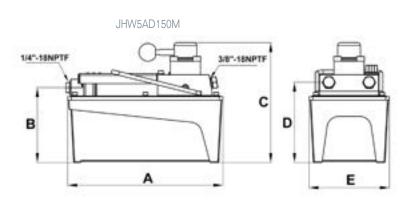










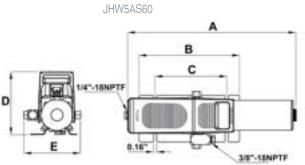

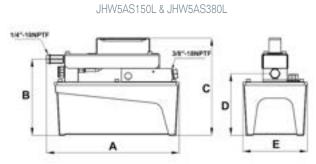

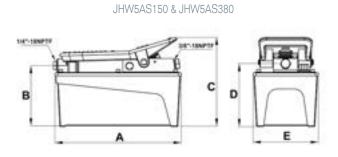

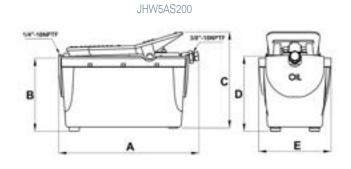




ELECTRIC PUMPS

- Quiet operation meets OSHA regulations (80dBA)
- 2 speed operation allows for faster cylinder advance
- Full load starting capacities
- Internal filter keeps contamination from damaging pump
- Rugged durable design meets the demands of industrial applications
- Precision components to minimize wear and improve overall dependability

 Designed to minimize the number of moving parts and maximize overall pump efficiency


 Ideal for on site construction as well as maintenance


 Metal reservoirs are made of steel or aluminum alloy and resists cracks and leaking

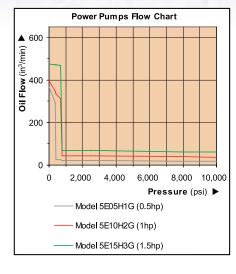




JHW5E05H1G





JHW5E10H2G & JHW5E15H3G

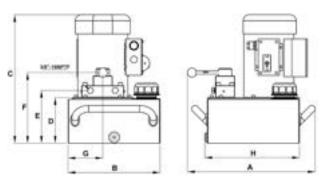





ELECTRIC PUMP DIMENSIONS

| Product Code | | | | Dimens | ions (in) | | | | | | | |
|--------------|-------|-----------------|-------|--------|-----------|-------|------|-------|--|--|--|--|
| | A | A B C D E F G H | | | | | | | | | | |
| JHW5E05H1G | 15.43 | 10.28 | 19.09 | 4.72 | 5.67 | 7.99 | 8.07 | 12.36 | | | | |
| JHW5E10H2G | 16.65 | 12.01 | 17.83 | 5.94 | 6.89 | 9.21 | 4.53 | 12.36 | | | | |
| JHW5E15H3G | 16.65 | 12.01 | 19.72 | 7.24 | 8.19 | 10.51 | 4.53 | 12.36 | | | | |


ELECTRIC PUMP SPECIFICATIONS

| | 110 1 01111 | SPECIFICA | 110110 | | | | | | | | |
|-------|-------------|------------|-------------------------------|------------------------------------|--------------|--------------|------------------|------------------------|--------|---------|-------|
| Motor | Usable Oil | Product | Product Code with | note Control Dressure 1st 2nd Type | | Valve | Current | Motor | Sound | | |
| Size | Capacity | Code | Remote Control Pendant Switch | Pressure | 1st Stage | 2nd Stage | Туре | Function | Draw | Voltage | Level |
| (hp) | (gal) | | | (psi) | Cir | 13] | | | (amps) | (volts) | (dBA) |
| 0.5 | 1.0 | JHW5E05H1G | JHW5E05H1GR | | 293 | 18 | _ | | 8 | | |
| 1.0 | 2.0 | JHW5E10H2G | JHW5E10H2GR | 10,000 | 311 | 37 | 4-way, 3-pos. | Advance Hold Return | 15 | 115 | 80 |
| 1.5 | 3.0 | JHW5E15H3G | JHW5E15H3GR | | 470 | 61 | о роз. | noiu noturn | 17 | | |



ELECTRIC PUMPS WITH SOLENOID VALVE

- Quiet operation meets OSHA regulations (80dBA)
- Ideal for applications where a remote control is required
- 2 speed operations allows for faster cylinder advance
- Full load starting capabilities
- Internal filter keeps contamination from damaging pump
- 10 foot hand held remote controls the solenoid valve
- Metal reservoirs are made of steel or aluminum alloy and resists cracks and leaking

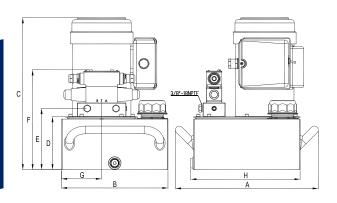




ELECTRIC PUMP WITH SOLENOID VALVE SPECIFICATIONS

| Used with | Motor Size | Usable Oil Capacity | Product | Pressur | e Rating | Oil Output | Flow Rate | Valve | Valve | Current Draw | Motor Voltage | Weight |
|------------------|---------------|------------------------|--------------|--------------------|--------------------|------------------------|------------------------|----------------------|-----------------|-----------------|------------------|--------|
| Cylinder | (hp) | (gal) | Code | 1st Stage (psi) | 2nd Stage (psi) | 1st Stage (in³/min) | 2nd Stage (in³/min) | Туре | Function | (amps) | (volts) | (lbs) |
| | 0.5 | 1 | JHW5ES05H1G | 350 | | 293 | 18 | | | 9 | | 61.5 |
| | 0.5 | 2 | JHW5ES05H2G | 330 | | 293 | 10 | | | 9 | | 65.3 |
| Single Actina | 1 | 2 | JHW5ES10H2G | | 700 | 311 | 37 | 3-way, 3-position | | 12 |] | 72.6 |
| | 1.5 | 3 | JHW5ES15H3G | 700 | | 470 | 61 | Poormon | | 17 | | 90.4 |
| | 1.5 | 5 | JHW5ES15H5G | | 10.000 | 4/0 61 | | 61 | | '' | 115 | 98 |
| | 0.5 | 1 | JHW5ES05H1GR | 350 | 10,000 | 293 | 18 | | Hold/ Return | 9 | 113 | 61.5 |
| | 0.5 | 2 | JHW5ES05H2GR | | | 293 | 10 | | | 3 | | 65.3 |
| Double Actina | 1 | 2 | JHW5ES10H2GR | | | 311 | 37 | 4-way, 3-position | | 12 | | 72.6 |
| 9 | 1.5 | 3 | JHW5ES15H3GR | 700 | | 470 | 61 | | | 17 | | 72.6 |
| | 1.3 | 5 | JHW5ES15H5GR | | | 470 | 01 | 61 | | 17 | | 98 |

ELECTRIC PUMP WITH SOLENOID VALVE DIMENSIONS


| Product Code | | | Din | nensions (| (in) | | | |
|--------------|-------|-------|-------|------------|-------|-------|------|-------|
| Frounct cone | A | В | C | D | E | F | G | Н |
| JHW5ES05H1G | 12.74 | 10.26 | 19.10 | 4.72 | 5.65 | 10.00 | 8.07 | 12.32 |
| JHW5ES05H2G | 12.74 | 10.26 | 19.10 | 4.72 | 5.65 | 10.00 | 8.07 | 12.32 |
| JHW5ES10H2G | 17.88 | 12.01 | 17.88 | 5.98 | 6.90 | 11.26 | 4.51 | 12.32 |
| JHW5ES15H3G | 17.88 | 12.01 | 17.88 | 5.98 | 6.90 | 11.26 | 4.51 | 12.32 |
| JHW5ES15H5G | 16.10 | 12.01 | 17.13 | 5.98 | 6.90 | 11.26 | 4.51 | 12.32 |
| JHW5ES05H1GR | 16.10 | 12.01 | 17.13 | 5.98 | 6.90 | 11.26 | 4.51 | 12.32 |
| JHW5ES05H2GR | 16.10 | 12.01 | 19.78 | 7.28 | 8.20 | 12.56 | 4.51 | 12.32 |
| JHW5ES10H2GR | 16.10 | 12.01 | 19.78 | 7.28 | 8.20 | 12.56 | 4.51 | 12.32 |
| JHW5ES15H3GR | 16.10 | 12.01 | 24.78 | 12.28 | 13.20 | 17.56 | 4.51 | 12.32 |
| JHW5ES15H5GR | 16.10 | 12.01 | 24.78 | 12.28 | 13.20 | 17.56 | 4.51 | 12.32 |




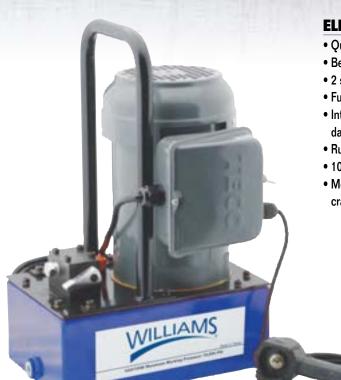


ELECTRIC PUMP WITH AUTO RETURN VALVE

- Quiet operation meets OSHA regulations (80dBA)
- Best suited for punching, crimping and cutting applications
- 2 speed operation allows for faster cylinder advance
- Full load starting capabilities
- Internal filter keeps contamination from damaging pump
- Rugged durable design meets the demands of industrial applications
- 10 ft. remote pendant switch to control motor on/off
- Metal reservoirs are made of steel or aluminum alloy and resists cracks and leaking

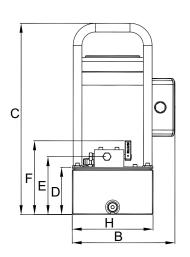

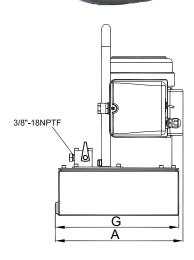



ELECTRIC PUMP WITH AUTO RETURN VALVE SPECIFICATIONS

JHW5EA05H1G

| Motor | Usable Oil | Duaduat | Pressur | e Rating | | utput Rate | Valve | Valve | Current | Motor | Sound | Weight |
|-------|------------|-----------------|--------------|--------------|--------------|---------------|----------------------|---------------------|---------|---------|-------|--------|
| Size | Capacity | Product Code | 1st Stage | 2nd Stage | 1st Stage | 2nd Stage | Type | Function | Draw | Voltage | Level | weight |
| (hp) | (gal) | | (р | si) | (in³/ | min) | | | (amps) | (volts) | (dBA) | (lbs) |
| 0.5 | 1.0 | JHW5EA05H1G | 350 | 10,000 | 233 | 18 | 2-way, 2-position | *Advance/ Return | 9 | 115 | 80 | 66.2 |

^{*} Holds pressure in advance position when motor is off.

ELECTRIC PUMP WITH AUTO RETURN VALVE DIMENSIONS

| Product Code | | | Dir | nensions (| in) | | |
|--------------|-------|-------|-------|------------|------|------|-------|
| Floundt Gone | A | В | C | D | E | F | G |
| JHW5EA05H1G | 12.76 | 10.28 | 19.09 | 4.72 | 5.79 | 7.36 | 12.36 |





ELECTRIC PUMPS WITH PENDANT SWITCH


- Quiet operation meets OSHA regulations (80dBA)
- 2 speed operation allows for faster cylinder advance
- Full load starting capacities
- Internal filter keeps contamination from damaging pump
- 10 foot hand held remote control allows user to control cylinder in up or down position

 Metal reservoirs are made of steel or aluminum alloy and resists cracks and leaking



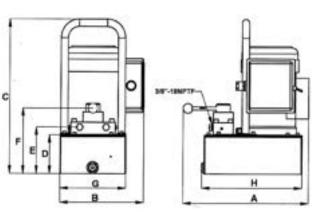





ELECTRIC PUMP WITH SOLENOID VALVE SPECIFICATIONS

| | | | | LEITOID TA | LVL OI L | 711 1 0 7 11 1 4 | 7110 | | | | | | |
|---|--------------------------|---------------|------------------------|-------------|--------------------|--------------------|------------------------|------------------------|----------------------|----------|-----------------|------------------|--------|
| | Used with Cylinder | Motor Size | Usable Oil Capacity | Product | Pressur | e Rating | Oil Output | Flow Rate | Valve | Valve | Current Draw | Motor Voltage | Weight |
| | Cylinder | (hp) | (gal) | Code | 1st Stage (psi) | 2nd Stage (psi) | 1st Stage (in³/min) | 2nd Stage (in³/min) | Туре | Function | (amps) | (volts) | (lbs) |
| I | Single 1.0 Acting 1.5 | 1.0 | JHW5E05H1GR | 350 | | 293 | 18 | | Advance/ | 9 | | 59.5 | |
| | | 1.0 | 2.0 | JHW5E10H2GR | 700 | 10,000 | 397 | 37 | 3-way, 3-position | Hold/ | 12 | 115 | 70.5 |
| | | 1.5 | 3.0 | JHW5E15H3GR | / 00 | | 476 | 61 | c position | Return | 17 | | 88.5 |

ELECTRIC PUMP WITH SOLENOID VALVE DIMENSIONS

| Product Code | | | Dir | nensions (| (in) | | | |
|--------------|-------|-------|-------|------------|------|-------|------|-------|
| Floundt Gone | A | В | C | D | E | F | G | Н |
| JHW5E05H1GR | 14.92 | 10.28 | 19.10 | 4.72 | 5.67 | 7.99 | 8.07 | 12.36 |
| JHW5E10H2GR | 16.65 | 12.01 | 17.83 | 5.94 | 6.89 | 9.21 | 4.53 | 12.36 |
| JHW5E15H3GR | 16.65 | 12.01 | 19.72 | 7.24 | 8.19 | 10.51 | 4.53 | 12.36 |





GAS ENGINE PUMP

- Gas pump will provide 10,000 psi hydraulic force at remote locations
- Industrial grade 5.5 hp Honda gas engine
- Manual control valve for use with single or double acting cylinders or tools
- Two speed pump designed for rapid cylinder advance
- Gas pump features a sturdy protective roll cage for use in the toughest environments
- Metal reservoirs are made of steel or aluminum alloy and resists cracks and leaking



DIESEL ENGINE PUMP

- Diesel engine pumps will provide 10,000 psi at remote locations
- Industrial grade 5.5 hp Honda gas engine
- Locking solenoid control valve for use with single or double acting cylinders or tools
- Two speed pump designed for rapid cylinder advance
- Ideal for application when diesel fuel in remote environments is required
- Comes standard with electric start
- Metal reservoirs are made of steel or aluminum alloy and resists cracks and leaking

ENGINE PUMP SPECIFICATIONS

| Motor Size | Usable Oil Capacity | Product Code | | re Rating | Flow | utput Rate n³) | Valve Type | Valve Function | Rotation Speed | Sound Level |
|---------------|------------------------|-------------------------|-----------|-----------|------|----------------------|---------------------|---------------------|-------------------|----------------|
| (hp) | (gal) | | 1st Stage | | | 2nd Stage | | | (rpm) | (dBA) |
| 10.2 | 10.0 | JHW5G102H5G (Gas) | 700 | 10,000 | 600 | 200 | 4-way 3-position | Advance/Hold/Return | 3600 | 93 |
| 7.3 | 10.0 | JHW5D73H10G (Diesel) | 700 | 10,000 | 600 | 200 | 4-way 3-position | Advance/Hold/Return | 3600 | 93 |



AIR & HAND PUMPS AND SINGLE-ACTING CYLINDER MATCHING CHART

| Capacity (Tons) ► Stroke (Inches) ▼ | 5 | 10 | 15 | 25 | 30 | 55 | 75 | 100 |
|--|----------|----|----|--------|-----|-----------|----|-----|
| <1.00 | | | | | | | | |
| 1.00 | | | | | | | | |
| 2.00 | | | | | | | | |
| 3.00 | | | | | | | | |
| 4.00 | | | | | | | | |
| 5.00 | | | | | | | | |
| 6.00 | | | | | | | | |
| 7.00 | | | | | | | | |
| 8.00 | | | | | | | | |
| 9.00 | | | | | | | | |
| 10.00 | | | | | | | | |
| 12.00 | | | | | | | | |
| 13.00 | | | | | | | | |
| 14.00 | | | | | | | | |
| | JHW5AS60 | | | JHW5AS | 150 | JHW5AS380 | | 3 |

Note: Selection based on oil capacity requirements of cylinders.

HAND PUMP / E-PUMP AND SINGLE-ACTING CYLINDER MATCHING CHART

| HAND PUMP / E-PUM | P AND SING | LE-ACTING (| CYLINDER M. | ATCHING CH | IART | | | |
|--|------------|-------------|-------------|-------------|--|------------|-----|-----|
| Capacity (Tons) ► Stroke (Inches) ▼ | 5 | 10 | 15 | 25 | 30 | 55 | 75 | 100 |
| <1.00 | | | | | | | | |
| 1.00 | | | | | | | | |
| 2.00 | | | | | | | | |
| 3.00 | | | | | | | | |
| 4.00 | | | | | | | | |
| 5.00 | | | | | | | | |
| 6.00 | | | | | | | | |
| 7.00 | | | | | | | | |
| 8.00 | | | | | | | | |
| 9.00 | | | | | | | | |
| 10.00 | | | | | | | | |
| 12.00 | | | | | | | | |
| 13.00 | | | | | | | | |
| 14.00 | | | | | | | 100 | |
| | JHW5HS2S35 | JHW5HS2S100 | | JHW5HS2S200 | Name of the last o | JHW5E10H2G | | |

Not Recommended


Note: Selection based on oil capacity requirements of cylinders.





55/100 TON SHOP PRESS

- Heavy steel welded construction
- Multi-position bed for work height adjustment
- Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs
- Excellent for bending, bonding or straightening applications
- Pump, cylinder, hose and fittings are included

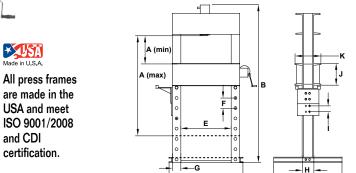

55/100 TON SHOP PRESS SPECIFICATIONS

| Product Code | Capacity (Tons) | Pump Model | Pump Type | Stroke Length | Bed Position | Product Size (H X L X W) | Working Space (A Min. / A Max.) (in) | Weight (lbs) |
|--------------|--------------------|---------------|--------------|------------------|-----------------|-----------------------------|--|-----------------|
| JHW9A55T06 | | JHW5AS150 | AIR | 6 | | | | |
| JHW9E55T06 | | JHW5E05H1GR | ELECTRIC | 6 | | | | |
| JHW9H55T06 | 55 | JHW5HS25200 | MANUAL | 6 | 9 | 79" X 56" X 30" | 14" ~ 55-1/2" | 760 |
| JHW9A55T13 | | JHW5AS380 | AIR | 13 |] | | | |
| JHW9E55T13 | | JHW5E05H1GR | ELECTRIC | 13 | | | | |
| JHW9E100T10 | 100 | JHW5E10H2GR | ELECTRIC | 10 | 8 | 89" X 63" X 30" | 11-¼" ~ 51" | 1550 |

55/100 TON SHOP PRESS DIMENSIONS

| Product | | Dimensions (in) | | | | | | | | | | |
|-------------|----------|-----------------|----|----|----|------|---|-----|----|-----|----|------|
| Code | A (Min.) | A (Max.) | В | C | D | E | F | G | Н | 1 | J | K |
| JHW9A55T06 | | | | | | | | | | | | |
| JHW9E55T06 | | | | | | | | | | | | |
| JHW9H55T06 | 14 | 55.5 | 79 | 56 | 30 | 35.4 | 6 | 4 | 9 | 3 | 10 | 14.8 |
| JHW9A55T13 | | | | | | | | | | | | |
| JHW9E55T13 | | | | | | | | | | | | |
| JHW9E100T10 | 11.3 | 51 | 89 | 63 | 30 | 35.5 | 8 | N/A | 10 | N/A | 12 | 16 |

SHOP PRESS ACCESSORIES



55 Ton Press Accessory Kit S/A

Product Code

JHW55TKSA

Contents Include: (1) Ram forcing cap (1) Threaded adapter (1) 1-1/2" push adapter (1) 1-1/4" push adapter (1) V push adapter (1pair) 55T Arbor plates



55 Ton & 100 Ton Shop Press Guard

Product Code
JHW55100SPG



V-Blocks 100 Ton - Pair

Product Code
JHW100TAP

V-Blocks 55 Ton - Pair Product Code JHW55TAP



MINI JACKS

- · Low profile mini jack
- · Compact and lightweight
- Convenient for storage
- Interchangeable saddle on model JHW3M05T75 and JHW3M05T150







JHW3M05T150

JHW3M10T160

MINI JACK DIMENSIONS

| Capacity | Product Code | Minimum Height | Maximum Height | Hydraulic Lifting | Base Size (L x W) | Weight |
|----------|-----------------|-------------------|-------------------|----------------------|----------------------|--------|
| (tons) | | (in) | (in) | (in) | (in) | (lbs) |
| 5 | JHW3M05T75 | 2.37 | 3.13 | 0.76 | 4.13 x 4.00 | 4.6 |
| 3 | JHW3M05T150 | 3.37 | 4.88 | 1.51 | 4.13 x 4.00 | 5.3 |
| 10 | JHW3M10T160 | 4.75 | 6.25 | 1.63 | 4.88 x 4.38 | 12.5 |
| 20 | JHW3M20T160 | 5.13 | 6.75 | 1.63 | 5.38 x 4.75 | 16.7 |





TOE JACKS

- Heat treated and chrome plated medium-carbon steel cylinder
- Chrome plated ram promotes longer seal life and optimum performance
- U.S. Patented by-pass device protects hydraulic system from over traveling damage

TOE JACK DIMENSIONS

| | | | ldle | Head | Saddle | Undroulie | |
|----------|-----------------|-------------|-------------|-------------|-------------|----------------------|--|
| Capacity | Product Code | Min. Height | Max. Height | Min. Height | Max. Height | Hydraulic Lifting | |
| (tons) | | (in) | (in) | (in) | (in) | (in) | |
| 6 | JHW4T06T | 0.88 | 6.00 | 10.50 | 15.63 | 5.13 | |
| 10 | JHW4T10T | 1.13 | 6.25 | 11.00 | 16.13 | J.13 | |

WALLAMS IN THE PROPERTY OF THE

JHW3S20TV

SIDE PUMP BOTTLE JACK

- Hydraulic system is protected from internal damage by apatented by-pass mechanism
- Machined and polished cylinders with die-cut threads provide non-abrasive leak-free, durable performance
- Fabricated from hard-cast steel with heat-treated critical stress areas
- Serrated heat-treated saddle provides generous lifting area and secure grip
- Heat-treated extension screw allows low pick-up height adjustment and maximum lift height
- U.S. patented built-in by-pass device protects hydraulic system from overpumping damage
- Unique cross-type forged release valve assures positive control
- · A wide, rugged base provides stability and strength
- Critical stress points are reinforced in all models for added durability and dependability
- Economically priced for maximum value

SIDE PLIMP BOTTLE JACK DIMENSIONS

| SIDE FUMP BOTTLE JACK DIMENSIONS | | | | | | | |
|----------------------------------|-----------------|-------------|-------------|--------------------|----------------------|----------------------|--|
| Capacity | Product Code | Min. Height | Max. Height | Extension Screw | Hydraulic Lifting | Base Size (L x W) | |
| (tons) | | (in) | (in) | (in) | (in) | (in) | |
| 12 | JHW3T12TV | 9.50 | 18.63 | 3.13 | 6.00 | 5.25 x 5.13 | |
| 12 | JHW3S12TV | 6.00 | 10.63 | 1.63 | 3.00 | J.23 X J.13 | |
| 20 | JHW3T20TV | 9.50 | 18.63 | 3.13 | 6.00 | 6.25 x 5.88 | |
| 20 | JHW3S20TV | 6.50 | 11.25 | 1.63 | 3.13 | 0.23 X 3.00 | |



HYDRAULIC NUT SPLITTERS

Hydraulic Nut Splitters REMOVES NUTS WITHOUT THE HASSLE OF TORCHES, HAMMERS & CHISELS

FAST - To remove a 3-1/2" nut with a torch or hammer and chisel might take up to 20 minutes. But you only need 20-30 seconds with the Hydraulic Nut Splitter. Set-up is fast as well, goes from the toolbox to use in less than five minutes.

SAFE - No hammers or flame are used. Hydraulic Nut Splitter cuts smoothly, so there is no danger to the operator or the surrounding equipment.

VERSATILE - Cuts through even the hardest nuts, including ASTM A194 2H from 11/16" to 6-1/8" (17 - 156 mm) across the flats. You can use it for both inch and metric sizes and with virtually any shape nut. Round, square, 12-point, and other special nuts will require the use of an adapter. Competing nut splitters require up to 17 models to cover the same size range the Hydraulic Nut Splitter does in 9 models (and even as few as four models if the Duo and Trio packages are purchased!)

PRECISE - You can easily calibrate the cutting chisel, so only the nut is cut, with no damage to the bolt or stud threads.

DURABLE - Hydraulic Nut Splitter is made to last. Our special metallurgy, geometry, and hardening process make our chisels suitable for dozens of cuts before resharpening and many resharpenings before replacing! Because of its unique compound angle chisel design, the Hydraulic Nut Splitter even cuts stainless steel nuts!

- Cut through the largest frozen nuts in just seconds, with virtually no risk of injury or accident
- One cut frees even the most corroded nuts so it can be turned
- Two cuts, 180 degrees apart, will cleanly cut the nut away
- Cutting chisel is easily calibrated, so only the nut is cut with no damage to bolt or stud threads
- Fast set-up; goes from toolbox to ready-to-use in less than 5 minutes
- Reduces danger to operator or nearby equipment
- Nine models available for cutting fractional and metric sizes and nuts of virtually any shape; can be used on stainless steel



AS105STR

Hydraulic Nut Splitters


| Stock No. | Stud Dia. inches . (metric) | Nut Size ATF inches . (metric) | Weight lb. (Kg) | Replacement Chisel Stock No. | DUO/TRIO Kits |
|-----------|--------------------------------|--------------------------------|-----------------|---------------------------------|---------------|
| AS105STR | 5/16 - 7/8 (M8 - M22) | 5/8 – 1-7/16 (16 – 36) | 20 (9) | B86216 | AS-DUO-25 |
| AS200STR | 7/8 - 1-1/4 (M22 - M33) | 1-5/16 – 2 (36 – 55) | 21 (10) | B86216 | AS-DUO-25 |
| AS204STR | 1-1/4 - 1-1/2 (M30 - M39) | 1-7/8 – 2-3/8 (50 –65) | 61 (28) | B87090 | AS-DUO-55 |
| AS210STR | 1-3/8 - 1-3/4 (M36 - M45) | 2-3/16 - 2-3/4 (60 - 75) | 62 (28) | B87090 | AS-DUO-55 |
| AS308STR | 1-3/4 - 2-1/4 (M45 - M56) | 2-5/8 – 3-1/2 (75 – 90) | 95 (43) | B2K1052 | AS-DUO-100 |
| AS314STR | 2- 2-1/2 (M52 - M64) | 3 – 3-7/8 (85 – 100) | 100 (45) | A92036 | AS-DUO-100 |
| AS404STR | 2-1/2 - 2-3/4 (M64 - M72) | 3-3/4 – 4-1/4 (95 – 110) | 205 (93) | A91003 | AS-TRIO |
| AS500STR | 3 - 3-1/4 (M76 - M85) | 4-7/8 – 5 (115 – 135) | 210 (95) | A92015 | AS-TRIO |
| AS506STR | 3-1/4 - 3-1/2 (M85 - M90) | 4-7/8 – 5-3/8 (125 – 135) | 215 (98) | A2K1069 | AS-TRIO |
| AS608STR | 3-3/4 - 4 (M95 - M100) | 5-3/4 - 6-1/8 (140 - 155) | 387 (176) | B95019 | - |

Hydraulic Nut Splitters Angle Head

| Stock No. | Stud Dia. inches . (metric) | Nut Size ATF inches . (metric) | Weight lb. (Kg) | Replacement Chisel Stock No. | DUO Kits |
|-----------|--------------------------------|--------------------------------|-----------------|---------------------------------|--------------|
| AS105AH | 5/16 - 7/8 (M8 - M22) | 5/8 - 1-7/16 (16 - 36) | 20 (9) | A94057 | AS-DUO-25AH |
| AS200AH | 7/8 - 1-1/4 (M22 - M33) | 1-5/16 – 2 (36 – 55) | 21 (10) | A94057 | AS-DUO-25AH |
| AS204AH | 1-1/4 - 1-1/2 (M30 - M39) | 1-7/8 - 2-3/8 (50 -65) | 61 (28) | A92031 | AS-DUO-55AH |
| AS210AH | 1-3/8 - 1-3/4 (M36 - M45) | 2-3/16 - 2-3/4 (60 - 75) | 62 (28) | A92031 | AS-DUO-55AH |
| AS308AH | 1-3/4 - 2-1/4 (M45 - M56) | 2-5/8 - 3-1/2 (75 - 90) | 95 (43) | A92032 | AS-DUO-100AH |
| AS314AH | 2- 2-1/2 (M52 - M64) | 3 – 3-7/8 (85 – 100) | 100 (45) | A92032 | AS-DUO-100AH |

Manual Hydraulic Power Unit (Hand Pump)

• For use on products that require a 10,000 PSI hydraulic pump

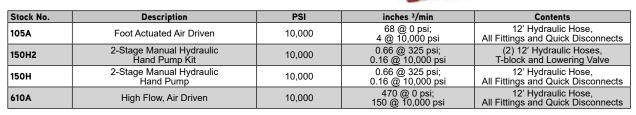



HYDRAULIC NUT SPLITTERS / FLANGE SPREADERS

| Product Code | Stud Diameter, inches (metric) | | ze ATF, (metric) | Weight lb. (Kg) | Replacement Chisel Stock No. (advancing/ stationary) |
|--------------|-----------------------------------|------|---------------------|--------------------|--|
| AS105DC | Couplings | 1.18 | 1.02 | Female 1/4"-18NPTF | Female 3/8"-18NPTF |
| JHW8FC38F | Couplings | 1.18 | 1.02 | Female 3/8"-18NPTF | Female 3/8"-18NPTF |
| JHW8FN25M | Male Connectors | 1.50 | 0.67 | Male ¼"-18NPTF | Male ¼"-18NPTF |
| JHW8FN38M | Male Connectors | 1.50 | 0.75 | Male 3/8"-18NPTF | Male 3/8"-18NPTF |
| JHW8FN25M38M | Male Connectors | 1.45 | 0.75 | Male ¼"-18NPTF | Male 3/8"-18NPTF |

AS105DC

Hydraulic Nut Splitter - Double Cutting

| Stock No. | Stud Diameter, inches (metric) | Nuts Size ATF, inches (metric) | Weight lb. (Kg) | Replacement Chisel Stock No. (advancing/stationary) |
|-----------|--------------------------------|--------------------------------|-----------------|--|
| AS105DC | 5/16 - 3/4 (M8-M20) | 11/16 - 1-1/4 (16-36) | 20 (9) | A2K646 |
| AS200DC | 7/8 - 1-1/8 (M22-M30) | 1-7/16 - 1-11/16 (36-41) | 21 (10) | A94057/B2K1001 |
| AS204DC | 1-1/4 - 1-/8 (M33-M36) | 1-13/16 - 2-3/16 (46-60) | 61 (28) | A92031/B2K978 |
| AS210DC | 1-3/8 - 1-1/2 (M36-M39) | 2-3/16 - 2-3/8 (55-65) | 62 (28) | A92031/A97058 |
| AS308DC | 1-3/4 - 2 (M45-M52) | 2-5/8 - 3-1/8 (65-90) | 95 (43) | A92032/A2K705 |
| AS314DC | 2 - 2-1/4" (M52-M56) | 3 – 3-5/8 (80 – 90) | 100 (45) | - |
| AS404DC | 2-3/4 - 3-1/4 | 3-3/4 – 4-1/4 (95 – 110) | 206 (94) | A91003 |



Hydraulic Nut Splitter Stationary and Advancing Chisels

| Description |
|------------------------------------|
| Fixed Chisel for AS105AH-DC |
| Fixed Chisel for AS210AH-DC |
| Fixed Chisel for AS308AH-DC |
| Front Chisel for AS200AH-DC |
| Huck® Bolt Adapter for AS105AH |
| Cutting Chisel for AS105 and AS200 |
| Chisel for AS105AH and AS200AH |
| Cutting Chisel for AS204 and AS210 |
| Chisel for AS204AH and AS210AH |
| Cutting Chisel for AS308 |
| Chisel for AS308AH and AS314AH |
| Cutting Chisel for AS314 |
| Cutting Chisel for AS404 |
| Cutting Chisel for AS500 and AS50 |
| Cutting Chisel for AS608 |
| |



- Flange Spreaders
 Simple to use; place the Flange Spreader jaws between the flange faces and turn the ratchet handle to apply
- 10,000 lbs. of spreading force in one pass
 Serrated jaws allow creation of a gap up to 3" wide with no slipping

 Requires only 3/16" insertion gap

 One size fits all flanges

- No loose wedges or parts; stays put (no drift)
 Jaws open parallel and can be remotely operated; safety blocks included
- Lightweight (12 lbs.) allow easy, one-person operation


Gasket maintenance, separating manways, bearing removal, lifting, lowering, turning blinds, opening vessels, impeller removal, leveling and aligning

| Stock No. | Description | | | | |
|-----------|----------------|--|--|--|--|
| HS10K | Hydraulic | | | | |
| HS10K-DUO | Hydraulic Pair | | | | |
| MS10K | Manual | | | | |
| MS10K-DU0 | Manual Pair | | | | |
| S10K-SB | Safety Blocks | | | | |










JHW6S.5T03



SPREADER DIMENSIONS

| Cylinder Capacity | Product Code | Cylinder Effective Area | Oil Capacity | Dimensions (in) | | | | | |
|----------------------|-----------------|----------------------------|-----------------|-----------------|------|------|------|------|--|
| (tons) | | (in²) | (in³) | A | В | C | D | E | |
| 0.5 | JHW6S.5T03 | 1.22 | 0.58 | 3.54 | 7.57 | 0.51 | 2.05 | 2.36 | |
| 1 | JHW6S01T03 | 1.09 | 0.86 | 3.90 | 6.57 | 0.47 | 2.17 | 2.20 | |



MAINTENANCE KITS

- Sets are portable for easy use in the plant or on the job site
- Custom fitted, rugged blow molded storage case
- 10 ton set has wheels for easy movement
- Designed for applications of pushing, spreading, pressing and more
- Pumps are rated from 8,000 to 10,000 psi

MAINTENANCE KITS

| | Produc | t Code | |
|-----------------------------|----------|----------|--|
| Contents of Kit | JHW4M04T | JHW4M10T | |
| Hand Pump | Х | Х | |
| Ram | X | X | |
| Hose Assembly | Х | Х | |
| Hose Coupler | Х | Х | |
| Ram Coupler | Х | X | |
| Case | Х | Х | |
| Hydraulic Spreader | X | Х | |
| Combination Head (90°) | X | Х | |
| Rubber Head | Х | X | |
| Ram Toe | X | X | |
| Plunger Toe | Х | Х | |
| Flat Base | Х | X | |
| Serrated Saddle | Х | X | |
| Wedge Head | X | X | |
| Male Connector | Х | X | |
| | 3" | 4" | |
| Futural and Futura | 6 1/8" | 10" | |
| Extension Tubes Included | 8 ½" | 18" | |
| inciaucu | 16 ½" | 27" | |
| | 19 ½" | | |

| | | R | | | |
|----------|----------|-----------|----------|-------------|--|
| Capacity | Product | Collapsed | Extended | Number of | |
| | Code | Height | Height | Attachments | |
| (tons) | | (in²) | (in³) | | |
| 4 | JHW4M04T | 11.00 | 15.75 | 14 | |
| 10 | JHW4M10T | 13.63 | 19.75 | 13 | |

^{*}When extension tubes and/or offset attachments are used, the capacity is reduced.



GAUGES, ADAPTERS, HOSES & HYDRAULIC OIL




GAUGE SPECIFICATIONS

| | | Face | Face | | Pressure | | Graduation | | | |
|---------------|-----------------|------|-------------|----------|----------|-------|------------|-------|-------|--|
| Gauge Type | Product Code | Dia. | Thread | Range | | Major | Minor | Major | Minor | |
| | | (in) | (in) | (psi) | (bar) | ίр | si) | (bar) | | |
| Wet | JHW8G025W | 2.50 | 1⁄4"-18NPTF | 0-10,000 | 0-700 | 1,000 | 100 | 100 | 10 | |
| wet | JHW8G04W | 4.00 | 74 -10NPIF | | | 2,000 | 200 | 100 | 10 | |



GAUGE ADAPTER SPECIFICATIONS

| Product | | Dimensions (in) | | | | | | | |
|------------|------|-----------------|-------------|-----------|-------------|------|--|--|--|
| Code | A | В | C | D | E | F | | | |
| JHW8FG38MF | 5.12 | 1.38 | 1/4"-18NPTF | ¾"-18NPTF | 3/8"-18NPTF | 1.25 | | | |







JHW8FB25F38M JHW8FR38M25F

ADAPTER SPECIFICATIONS

| Description | Product Code | Male Thread | Female Thread | Dimensi | ons (in) |
|-------------|--------------|-------------|---------------|---------|----------|
| | | C | D | A | В |
| Adapter | JHW8FR38M25F | 1⁄4"-18NPTF | 3∕8"-18NPTF | 1.39 | 0.91 |
| Bushing | JHW8FB25F38M | 3∕8"-18NPTF | 1⁄4"-18NPTF | 0.87 | 0.67 |





HOSE SPECIFICATIONS

| Hose I.D. | Product Code | Hose End Fittings | Operating Pressure | Hose Length | Weight |
|-----------|-----------------|----------------------|-----------------------|----------------|--------|
| (in) | Coue | rittings | (psi) | (ft) | (lbs) |
| | JHW8H2525D06 | 1⁄4"-18NPTF | | 6 | 2.5 |
| 1/4" | JHW8H3825D06 | | | 6 | 3.0 |
| /4 | JHW8H3825D10 | | | 10 | 5.0 |
| | JHW8H3825D20 | | 10,000 | 20 | 10.5 |
| | | | | | |
| 3/8" | JHW8H3838D06 | | | 6 | 3.5 |
| 78 | JHW8H3838D10 | 3∕8"-18NPTF | | 10 | 6.5 |
| | JHW8H3838D20 | | | 20 | 13.5 |



HYDRAULIC OIL

| Volume | Product | Viscosity Index | Viscosity @ 100°F | Viscosity @ 210°F | ASTM | Flash Point | Pour Point | API |
|--------|---------|--------------------|----------------------|-------------------|-------|----------------|---------------|---------|
| (gal) | Code | (min) | (S.U.S.) | (S.U.S.) | Grade | (°F) | (°F) | Gravity |
| 1 | JHW8H1G | 168 | 215 | 47 | 215 | 410 | -54 | 31.4 |

JHW8H1G



COUPLERS

COUPLINGS/MALE CONNECTORS



COUPLING/MALE CONNECTOR DIMENSIONS

| Product Code | Туре | Dimensions | | | | | | | |
|--------------|------------------------|------------|--------|--------------------|--------------------|--|--|--|--|
| Troudot couc | | A (in) | B (in) | C | D | | | | |
| JHW8FC25F38F | JHW8FC25F38F Couplings | | 1.02 | Female 1/4"-18NPTF | Female 3/8"-18NPTF | | | | |
| JHW8FC38F | Couplings | 1.18 | 1.02 | Female 3/8"-18NPTF | Female 3/8"-18NPTF | | | | |
| JHW8FN25M | Male Connectors | 1.50 | 0.67 | Male 1/4"-18NPTF | Male 1/4"-18NPTF | | | | |
| JHW8FN38M | Male Connectors | 1.50 | 0.75 | Male 3/8"-18NPTF | Male 3/8"-18NPTF | | | | |
| JHW8FN25M38M | Male Connectors | 1.45 | 0.75 | Male ¼"-18NPTF | Male 3/8"-18NPTF | | | | |



JHW8FN25M38M

JHW8RH38D (JHW8RH38DM & JHW8RH38DF)


JHW8R38D (JHW8R38DM & JHW8R38DF)


COUPLER DIMENSIONS

| | Product code | | | Dimensions (in) | | | | |
|-------------------------------|--------------|------------|-------------|-----------------|------|-------------|-----------------------|------|
| Coupler Type | Complete Set | Male Half | Female Half | A* | В | C | D | E |
| High-Flow Coupler | JHW8RH38D | JHW8RH38DM | JHW8RH38DF | 3.35 | 2.84 | 3/8"-18NPTF | 1 3/16"-16 | 1.10 |
| Regular-Flow Coupler | JHW8R38D | JHW8R38DM | JHW8R38DF | 3.15 | 2.2 | 3/8"-18NPTF | ¹⁵ ⁄16"-20 | 1.04 |
| Zinc Regular- Flow Coupler | JHWZCS1418 | JHWZCM1418 | JHWZCF1418 | 2.42 | 1.67 | 14"-18NPTF | 0.95 | 0.83 |

^{*} Value A is total length when male and female valves are connected.









JHWCPB05T / JHWCPB10T

CYLINDER ACCESSORIES


CYLINDER DIMENSIONS

| Product Code | Clevis Type | For use with Cylinder Capacity (Tons) | | |
|--------------|----------------|--|--|--|
| JHWCP05T | Plunger | 5 | | |
| JHWCP15T | Plunger | 10 | | |
| JHWCP25T | Plunger | 25 | | |
| JHWCPB05T | Plunger & Base | JHW6CP05T05 | | |
| JHWCPB10T | Plunger & Base | JHW6CP10T06 | | |




FLOW CONTROL VALVES



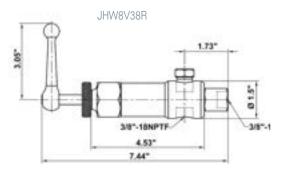






VALVE SPECIFICATIONS


| Valve Type | ype Product Code Ports Application | | | |
|--------------------------|------------------------------------|-------------|--|---|
| Needle Valve | JHW8V38N | 3/8"-18NPTF | Controls cylinder speed and treats as temporary shut-off valve for load holding. | # |
| Pressure Relief Valve | JHW8V38R | 3/8"-18NPTF | Controls pressure developed by the pump in hydraulic loop. By-pass occurred when pre-set pressured is reached. Turns clockwise to increase pressure, counter clockwise to decrease. | |


MANIFOLDS



| Manifold Type | Product Code | Number of Parts | Port Size | Mounting Hole |
|-------------------|--------------|-----------------|---------------|---------------|
| 7" Long Manifold | JHW8M7L7P | 7 | 3/8" - 18NPTF | 1/4" - 20UNC |
| 14" Long Manifold | JHW8M14L7P | 7 | 3/0 - IONFIF | 1/4 - 200NG |



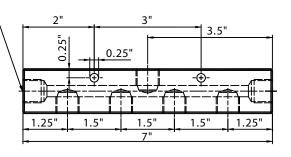

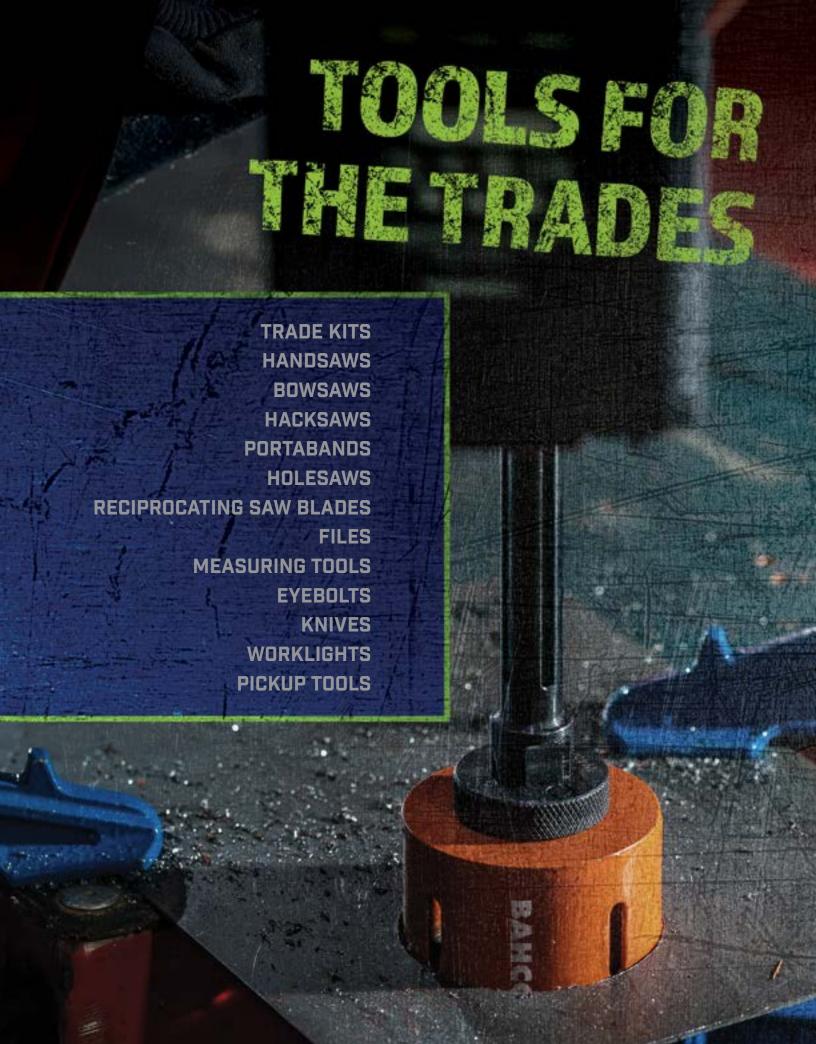



BI-METAL SANDFLEX HOLESAWS

Made with 8% cobalt to ensure a longer Range 9/16" to 6" has a 6° positive tooth angle for aggressive cutting shatterproof bi-metal body for more safety

Simple holesaw selection thanks to the printed material information

CARBIDE-TIPPED HOLESAWS

Ideal for making high-precision holes in hard material such as ceramic tiles, stone, fiberglass, laminate, hardwood and high demanding steel materials



Easily cuts through abrasive material, such as concrete and brick

Precision-ground carbide tipped teeth at a 6° positive tooth angle

Simple holesaw selection thanks to the printed material information

QUICK-EJECT ARBOR

MULTI-CONSTRUCTION SUPERIOR™ HOLESAWS

Permanent laser marking of the size in millimeters and inches

Wide qullets for fast and effective chip removal

Special coating minimizes heat and friction

holesaw life



Cutting depth of 2 13/16"

Printed material information makes holesaw selection simple **Precision tooth** geometry provides instant penetration



TOOLSFORTHETRADES

FAST, CLEAN, ACCURATE CUTS.

RECIPROCATING SAW BLADES

BLADES FOR METAL

Virtually unbreakable

Sandflex® bi-metal blades



Simple saw blade selection thanks to the printed material information

Sharp long-life teeth (HSS 8% Cobalt)

Easier penetration thanks to precision-ground tooth geometry

BLADES FOR WOOD AND METAL

Virtually unbreakable Sandflex® bi-metal blades




Simple saw blade selection thanks to the printed material information

Specially made for aggressive straight cuts

Long-life teeth (HSS 8% Cobalt)

BLADES FOR WOOD AND PLASTIC

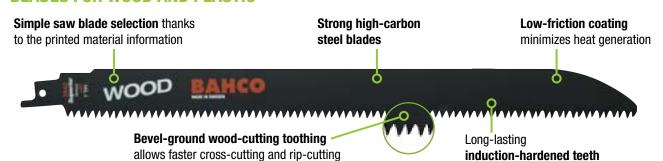

SABRE SAW BLADES FOR SPECIAL APPLICATIONS





ELECTRICIAN'S KIT TOOL BACKPACK

Features

- Portable and lightweight, allows the electrical technician on-the-go to safely and securely take tools to the job
- Rigid plastic bottom and heavy duty zippers
- Water resistant 1680D heavy duty material
- Padded shoulder straps and rear panel
- Tape measure clip and tape loop
- 2 sturdy carrying handles
- 32 internal pockets & 4 external pockets
- Includes common tools needed for electrical installation, repair and maintenance:

(2) slotted screwdrivers, (1) Phillips screwdriver, (1) 16oz. claw hammer, (1) HD side-cutting combo pliers, (2) adjustable joint pliers, (1) wire stripper, (1) 9" torpedo level, (1) 25ft tape measure, (1) retractable utility knife, (1) 12" professional hack saw, (1) 150 lumen LED work light and (1) AC voltage tester

BAHCO® 42 PIECE ELECTRICIAN'S KIT

| Product Code | Description |
|---------------|----------------------------------|
| 4750FB3-12TS4 | 42 Piece Large Electrician's Kit |

Contents Include:

12" Electrician's Bag with Hard Bottom, Flat File Ergo™ 8" Second 36 TPI, Round File Ergo™ 8" Second 36 TPI, 10mm Combination Wrench, 13mm Combination Wrench, Long Ball End Hexagon Key Set, Metric, Diagonal Cutting Plier 6 1/4", Wire stripping pliers, Cable cutting and stripping pliers, Nose Plier 6 ¹/4", Side Cutting Combo Plier 7", Junior Hacksaw Plastic Handle 6", Professional Light Hacksaw Frame, Center Punch, Flat Chisel, Chisel, Spirit Level, Claw Hammer, Warrington Hammer, Precision Screwdrivers slotted, Black Adjustable Wrench 6", Black Adjustable Wrench 8", Quick Adjust Water Pump Plier, Insulated Slotted Screwdriver (6), Insulated Pozidriv Screwdriver (2), Multipurpose Knife, Screwdrivers Robertson #1, Robertson #2, Robertson #3.

Features

- This Electrician's kit provides the tools necessary for many electrical applications
- · Kit contains an assortment of pliers, screwdrivers, adjustable wrench, combination wrenches, files and knife
- · Packed in an Electrician's bag with a hard bottom and double stitching reinforcement that is 100% waterproof and easy to clean

BAHCO® 13 PIECE BASIC MAINTENANCE KIT

| Product Code 4750-UP-1TS5 | Description 13 Piece Basic Maintenance Kit | |
|--|--|--|
| Contents Include: | | |
| Universal Pouch Diagonal Cutting Plier 6 1/4" Side Cutting Combo Plier 7" Nose Plier Grips 6 1/4" Slotted Screwdriver Phillips PH1 Screwdriver Black Adjustable Wrench 10" | 10mm Combination Wrench 11mm Combination Wrench 13mm Combination Wrench Screwdriver Robertson # 1 Screwdriver Robertson # 2 Screwdriver Robertson # 3 | |

- This basic maintenance kit provides the tools necessary for many general service and maintenance applications
- Kit contains an assortment of pliers, screwdrivers, adjustable wrench and combination wrenches
- Packed in a universal pouch with leather slots and two deep multi purpose open pockets





4750-UP-1TS5











BAHCO® 30 PIECE PLUMBERS KIT

| Product Code | Description |
|--------------|-----------------------|
| 3100TBTS4 | 30 Piece Plumbers Kit |

Contents Include:

17" Open Tote Caddy Tool Bag Organizer Screwdriver Slotted Ergo™ 8 ³/4 x 4 x ⁵/₃²" Screwdriver Ergo™ Pozidriv® #2 Screwdriver Slotted Ergo™ 9 ³/4 x 5 x ¹/4" Screwdriver Phillips® Ergo™ #1

Hex Keys Stubby Awl

Junior Hacksaw Non-Slip Handles 12"
Junior Hacksaw Plastic Handle 6"
Homeowner's File Ergo^{TMTMTM} 8" 41 & 36 TPI

Spirit Level

Claw Hammer

Universal Pipe Wrench 11"
Universal Pipe Wrench 14 1/2"

Adjustable Joint Pliers 10"

Tube Cutter

Tube Cutter

Wheel Reemer

Multipurpose Knife Wrecking Knife

Black Adjustable Wrench 8"

Black Adjustable Wrench 6"

Cold Chisel Pencil

Features

- This plumbers kit provides the tools necessary for many plumbing applications
- This set is geared for industrial plumbers. It includes an assortment of hand tools such as screwdrivers, wrenches, hacksaws and tube cutters
- · Packed in a open tote caddy tool bag organizer, ideal for storing and carrying tools, parts and supplies



BAHCO® 52 PIECE GENERAL PURPOSE KIT

| Product Code | Description |
|--------------|------------------------------|
| 4750PTB65TS4 | 52 Piece General Purpose Kit |

Contents Include:

Plastic Tool Box

Knife

Wrecking Knife
Torpedo Level
Ergo™ Claw Hammer
31 Piece Bit set in Plastic Case

Screwdriver Set 6 Pieces

Square

Sliding Bevel

Prize Cut 22" Handsaw, (Qty. 2)

Tape Measure

Pencil

Nail Punches

Snap-off Knife

Screwdriver Robertson # 1 Screwdriver Robertson # 2

Screwdriver Robertson # 3

- . This general purpose kit provides the tools necessary for many general service and repair applications
- · Kit contains an assortment of screwdrivers, hammer, tape measure and knives
- · Packed in a heavy duty plastic tool box that is perfect for organizing items



BAHCO® LAPLANDER FOLDING SAW AND MULTIPURPOSE KNIFE

General Purpose Folding Saw

| Product Code | Blade Length (Inch) | Teeth Per Inch |
|--------------|---------------------|----------------|
| 396-LAP | 9 | 7 |

Saw and Knife Set

| Product Code | Description |
|--------------|----------------------------------|
| LAP-KNIFE | Folding saw & Multipurpose Knife |

Features

- A general purpose folding saw for cutting both green and dry wood, plastic, bone etc.
- Specially designed for wild-life enthusiasts, hunting and campers.
- XT toothing, 7TPI. Blade specially coated for rust protection and low friction
- Two-component plastic handle for perfect grip, with leather strap.
- · Safety lock, locked also when folded



BAHCO® JAPANESE STYLE PULL SAWS

Cut on Pull Stroke

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| PC-12-14-PS | 12 | 14 |
| PC-11-19-PS | 11 | 19 |
| PC-9-9/17-PS | 9 | 9/17 |

Features

- · Razor sharp teeth allows this pull saw to make clean cuts with little effort.
- Perfect for rip and cross-cut to flush-cutting moldings, treated lumber, door casings, PVC, ABS pipe, hard and soft woods, plywood, drywall and plastic pipe.
- This pull-to-cut saw allows undercutting with fast and accurate cuts.

BAHCO® PRIZECUT TOOLBOX HANDSAW

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|------------------|---------------------|----------------------|
| 300-14-F15/16-HP | 14 | 15/16 |

Features

- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- . Hard Point for longer life, rust protection lacquered
- One-component solid handle
- . Comes with reusable plastic patented tooth protector

BAHCO® PROFCUT TOOLBOX HANDSAW

Special-purpose Handsaw

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| PC-15-TBX | 15 | 11 |

Features

- . Toolbox saw for fine cutting
- Fine GT toothing, 11 TPI
- . Super sharp GT-toothing is specially developed for high cutting performance
- . The 3-sided ground tooth form ensures excellent results in all types of wood
- Comfortable-two component handle
- Comes with reusable plastic patented tooth protector



Tillii

PC-15-TBX











BAHCO® ERGO™ SUPERIOR LAMINATOR SAW

Ergo™ handle - Unique XT toothing -Low Friction Coating

| | Blade Length | Teeth Per Inch | |
|--------------|--------------|----------------|-------------|
| Product Code | (Inch) | (TPI) | Type of cut |
| SUP-20-LAM | 20 | 11/12 | Fine |

Features

- A handsaw for cutting laminate and wooden floors
- Bevel ground teeth on thick blade for high precision and straight cutting with exceptionally good stability
- Screwed, one piece two-component Ergo™ handle
- Handle placement provides even distribution of power along the tooth line
- · Low-friction, rust-protective coating
- . Comes with reusable plastic patented tooth protector



BAHCO® PROFCUT GENERAL PURPOSE HANDSAWS

Comfortable two-component handle

| | Blade Length | Teeth Per Inch |
|---------------|--------------|----------------|
| Product Code | (Inch) | (TPI) |
| PC-19-GT7 | 19 | 7 |
| PC-22-GT7 | 22 | 7 |
| PC-22-FILE-U7 | 22 | 7 (Fileable) |

Features

- Super sharp GT-toothing is specially developed for high cutting performance
- The 3-sided ground tooth form ensures excellent results in all types of wood
- Comfortable-two component handle
- Comes with reusable plastic patented tooth protector



BAHCO® PRIZECUT UNIVERSAL SAW

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|---------------|------------------------|-------------------------|
| NP-16-U7/8-HP | 16 | 7 |
| NP-19-U7/8-HP | 19 | 7 |
| NP-22-U7/8-HP | 22 | 7 |

Features

- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- Hard Point for longer life, rust protection lacquered
- Two-component solid handle
- · Comes with reusable plastic patented tooth protector



BAHCO® SUPERIOR HANDSAWS WITH XT TOOTHING

Ergo™ handle - Unique XT toothing - Low Friction Coating

| J | | | | |
|-----------------|---|----------------------|--------------|--|
| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) | Type of cut | |
| Fine Tooth Patt | Fine Tooth Pattern for smooth, consistent cuts through most materials | | | |
| 2600-16-XT11-HP | 16 | 11 | Fine | |
| 2600-22-XT-HP | 22 | 9 | Medium | |
| Aggressive too | th pattern for fast | er cuts through th | ick material | |
| 2700-22-XT7-HP | 22 | 7 | Aggressive | |
| 2700-24-XT7-HP | 24 | 7 | Aggressive | |

Features

- Hard point saw with substantially thicker blade which results in less powerconsuming side vibrations
- Bevel ground teeth on thick blade for height precision and straight cutting with exceptionally good stability
- Screwed, one piece two-component Ergo[™] handle
- Handle placement provides even distribution of power along the tooth line
- . Comes with reusable plastic patented tooth protector



Ergo™ handle - Unique XT toothing - Low Friction Coating

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) | Type of cut |
|-----------------|---------------------|----------------------|-------------|
| 3090-20-XT11-HP | 20 | 11 | Fine |

Features

- Bevel ground teeth on thick blade for high precision and straight cutting with exceptionally good stability
- Screwed, one piece two-component Ergo[™] handle
- . Handle placement provides even distribution of power along the tooth line
- Comes with reusable plastic patented tooth protector

BAHCO® PROFESSIONAL HANDSAWS WITH XT TOOTHING

Ergo™ handle - Unique XT toothing - Low Friction Coating

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) | Type of cut |
|---------------|---------------------|----------------------|-------------|
| 2500-16-XT-HP | 16 | 9 | Medium |
| 2500-19-XT-HP | 19 | 9 | Medium |
| 2500-22-XT-HP | 22 | 9 | Medium |

Features

- For medium thick materials, such as plywood, ordinary wood, fiber and chipboard or plastics
- Hard point saw with substantially thicker blade which results in less powerconsuming side vibrations
- Screwed, one piece two-component Ergo™ handle
- . Handle placement provides even distribution of power along the tooth line
- Comes with reusable plastic patented tooth protector

BAHCO® PROFCUT TOOLBOX HANDSAW

Comfortable two-component handle

| Product Code | Blade Length (Inches) | Teeth Per Inch (TPI) |
|--------------|-----------------------|----------------------|
| PC-15-GNP | 15 | 15 |

Features

- . Toolbox saw for general purpose cutting
- . Fine FT toothing, 15 TPI
- Saw blade for cutting plastics, laminates, wood and soft metals like aluminum Fleam toothing, hardpoint teeth for long lasting sharpness
- Comfortable-two component handle
- Comes with reusable plastic patented tooth protector





2500-16-XT-HP



















BAHCO® SUPERIOR BACKSAW WITH XT TOOTHING

Ergo™ handle - Unique XT toothing -Low Friction Coating

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) | Type of cut |
|-----------------|---------------------|----------------------|-------------|
| 3180-14-XT11-HP | 14 | 11 | Fine |

Features

- Specially adapted for cutting of small-diameter timber and miter guide sawing of all sizes of materials
- Bevel ground teeth on thick blade for high precision and straight cutting with exceptionally good stability
- Screwed, one piece two-component Ergo[™] handle
- · Handle placement provides even distribution of power along the tooth line
- . Comes with reusable plastic patented tooth protector

BAHCO® PROFCUT BACKSAW

For Straight and Miter Cuts

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| PC-12-TEN | 12 | 11 |

Features

- Specially adapted for cutting of small-diameter timber and miter guide sawing of all sizes of materials
- . Fine UT toothing with 11 TPI
- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- 3-sided ground tooth form ensures excellent results in all types of wood
- Comfortable-two component handle
- . Comes with reusable plastic patented tooth protector

BAHCO® PRIZECUT BACKSAW

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| NP-12-TEN | 12 | 13 |

Features

- Specially adapted for cutting of small-diameter timber and miter guide sawing, all sizes of materials
- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- · Hard Point for longer life, rust protection lacquered
- One-component solid handle
- Comes with reusable plastic patented tooth protector

BAHCO® PROFCUT DOVETAIL HANDSAWS

Fine Cut Detail Saws

| | | Blade Length | |
|--------------|---|--------------|----------------------|
| Product Code | Style | (Inch) | Teeth Per Inch (TPI) |
| PC-10-DTF | Reversible handle for left / right sawing | 10 | 15/16 |
| PC-10-DTR | Angled / flush cutting | 10 | 13/14 |

Features

- Special-purpose saw for wood and plastic materials
- Fine universal toothing with hard point teeth and light steel back for rigidity
- Blade width is 2-3/8"
- . Comes with reusable plastic patented tooth protector



BAHCO® SUPERIOR VENEER SAW WITH XT TOOTHING

Ergo™ handle - Unique XT toothing -Low Friction Coating

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) | Type of cut |
|-----------------|---------------------|----------------------|-------------|
| 3240-14-XT11-HP | 14 | 11 | Fine |

Features

- . For fine and medium thick materials, such as plywood, laminates and plastics
- Bevel ground teeth on thick blade for high precision and straight cutting with exceptionally good stability
- Curved, toothed nose for starting cuts in the middle of the surface of the work piece
- Screwed, one piece two-component Ergo[™] handle
- · Handle placement provides even distribution of power along the tooth line
- . Comes with reusable plastic patented tooth protector



BAHCO® PROFCUT VENEER SAW

For Veneer and Other Fine Sawing

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| PC-12-VEN | 12 | 11 |

Features

- . For fine and medium thick materials, such as plywood, laminates and plastics
- Fine UT toothing with 11 TPI
- · Rounded cutting nose for pocket cuts
- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- · 3-sided ground tooth form ensures excellent results in all types of wood
- · Comfortable-two component handle
- Comes with reusable plastic patented tooth protector



BAHCO® PRIZECUT VENEER SAW

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| NP-12-VEN | 12 | 13 |

Features

- . For fine and medium thick materials, such as plywood, laminates and plastics
- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- Hard Point for longer life, rust protection lacquered
- Two-component solid handle
- Comes with reusable plastic patented tooth protector













BAHCO® SUPERIOR COMPASS SAW WITH XT TOOTHING

Unique XT toothing - Low Friction Coating

| | Teeth Per Inch | | |
|----------------|---------------------|-------|-------------|
| Product Code | Blade Length (Inch) | (TPI) | Type of cut |
| 3150-12-XT9-HP | 12 | 9 | Medium |

Features

- For all kinds of woods and plastics
- Bevel ground teeth on thick blade for high precision and straight cutting
- . Exceptionally good stability, working more on pull than on push
- Handle placement provides even distribution of power along the tooth line
- · Comes with reusable plastic patented tooth protector



BAHCO® PROFCUT COMPASS HANDSAWS

For Contour Cuts

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| PC-12-COM | 12 | 9 |

Features

- For all kinds of wood and plastic material
- Long lasting sharpness from the unique XT-toothing, hardpoint teeth
- Handle placement provides even distribution of power along the tooth line
 - Comfortable-two component handle
 - Comes with reusable plastic patented tooth protector



BAHCO® PRIZECUT COMPASS HANDSAWS

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| NP-12-COM | 12 | 7 |
| | | |

Features

- For all kinds of wood and plastic material
- The universal toothing is strong and hard wearing, suitable for both rip and cross cutting in all types of wood
- Hard Point for longer life, rust protection lacquered
- · One-component solid handle
- . Comes with reusable plastic patented tooth protector



BAHCO® DRY WALL SAW

Jab Saw Product Code Blade Length (Inch) PC-6-DRY 6

- Cuts drywall, wallboard, plywood, and plastic
- . Blade cuts in both directions (push and pull)
- Sturdy blade with sharp point for punching through drywall



BAHCO® PROFCUT INSULATION SAW

Special Purpose Saw

| Product Code | Blade Length (Inch) | Teeth Per Inch |
|--------------|---------------------|----------------|
| PC-22-INS | 22 | WT Toothing |

Features

- Specially designed for cutting insulation material
- Mineral wood
- Cuts plastic up to 3/4" thick
- Cuts Styrofoam up to ¾" thick
- Handsaw has a wave formed sharpened edge (WT toothing) that allows it to slice through the material creating minimal wast
- Should be stored in sleeve for rust protection



BAHCO® PROFCUT TIMBER SAW

Comfortable two-component handle with Fileable Blade

| Product Code | Blade Length (Inch) | Teeth Per Inch |
|--------------|---------------------|--------------------------------------|
| PC-24-TIM | 24 | 3 ¹ / ₂ |

Features

- . A handsaw for cutting Timber
- · Fleam-toothed, non-hardpoint
- Can be re-sharpened by using the file 272
 Effective on the push as well as on the pull stroke
- Comfortable-two component handle
- . Comes with reusable plastic patented tooth protector



BAHCO® PROFCUT POLYSTYRENE, FOAM HANDSAW

Special-purpose handsaw

| Product Code | Blade Length (Inch) | Teeth Per Inch (TPI) |
|--------------|---------------------|----------------------|
| PC-16-DECO | 16 | Special |

Features

- Special toothing for cutting polystyrene and foam
- Specially developed toothing with very fine ground teeth and gullets designed to combine excellent finish with minimized clogging
- Comfortable-two component handle
- Comes with reusable plastic patented tooth protector



BAHCO® PROFCUT LAMINATOR SAW

Special-purpose handsaw

| Product Code | Blade Length (Inch) | Teeth Per Inch |
|--------------|---------------------|----------------|
| PC-20-LAM | 20 | 11/12 |

- A handsaw for cutting laminate and wooden floors
- . Long lasting sharpness from the unique XT-toothing, hardpoint teeth
- · Comfortable-two component handle
- . Comes with reusable plastic patented tooth protector













BAHCO® PROFCUT PLASTER SAW

Special-purpose Handsaw

| Product Code | Blade Length (Inch) | Teeth Per Inch |
|--------------|---------------------|----------------|
| PC-24-PLS | 24 | 7 |

Features

- A handsaw for cutting plaster
- Super sharp GT-toothing is specially developed for high cutting performance
- The 3-sided ground tooth form ensures excellent results in all types of wood
- Comfortable-two component handle
- . Comes with reusable plastic patented tooth protector



BAHCO® STRADIVARIUS - MUSICAL SAW

Specially made for musical applications

| • | • • |
|--------------|---------------------|
| Product Code | Blade Length (Inch) |
| 296 | 30 |

Features

- $\bullet~$ Polished blade with flat back and un-ground teeth, total length 34 $^{1/4}{}^{\rm H}$
- Specially made for musical applications
- Traditional wood handle with brass hardware



BAHCO® COPING SAW

Wooden beech handle

| Product Code | Description | Blade Length (Inch) | Teeth Per Inch |
|--------------|----------------------------|-------------------------------|----------------|
| 301 | Coping Saw | 6 1/2 | 14 |
| 303-5P | Coping Saw Blades (5 Pack) | 6 ¹ / ₂ | 14 |
| 216-150-R | Rod Blade | 6 | Grit |

- Nickel-plated steel frame. Orange-lacquered, wooden beech handle
- Interchangeable blade fitted on retaining pins, turnable 360°
- Blade of hardened and tempered carbon steel, teeth milled and set, 14 TPI



BAHCO® MINI BOWHACK

Durable Metal Handle

| Product Code | Blade Length (Inch) | Type of Wood |
|-----------------|---------------------|---------------------|
| 9-12-51/3806-KP | 12 | Dry Wood and Lumber |

Features

- Toolbox sized mini-bow saw is easy to stow away and is ideal for plumbers and electricians
- Made of lightweight, high quality steel tubing for durability and easy handling
- High impact orange enamel paint protects from rust and corrosion
- . Comes with 12" blade for wood cutting and a bi-metal hacksaw blade
- Equipped with durable metal handle



BAHCO® ECONOMY BOW SAWS

Durable Metal Handle

| Product Code | Blade Length (Inch) |
|--------------|---------------------|
| SE-16-21 | 21 |
| SE-15-24 | 24 |
| SE-15-30 | 30 |
| | |

Features

- Made of lightweight, quality steel tubing for durability and easy handling
- High impact orange enamel paint protects from rust and corrosion
- Pointed nose on 21" model ideal for use in tight spaces
- Durable metal handle



BAHCO® BOW SAW BLADES

Replacement blades

| Product Code | Blade Length (Inch) | Type of Wood | Type of Toothing |
|--------------|---------------------|---------------------|------------------|
| 23-21 | 21 | Green Wood | Raker |
| 23-24 | 24 | Green Wood | Raker |
| 23-30 | 30 | Green Wood | Raker |
| 23-36 | 36 | Green Wood | Raker |
| 51-12 | 12 | Dry Wood and Lumber | Peg |
| 51-21 | 21 | Dry Wood and Lumber | Peg |
| 51-24 | 24 | Dry Wood and Lumber | Peg |
| 51-30 | 30 | Dry Wood and Lumber | Peg |
| 51-36 | 36 | Dry Wood and Lumber | Peg |
| 51-42 | 42 | Dry Wood and Lumber | Peg |
| 333-5 | 14 | Dry Wood | Raker |

- Rust-prevention treated
- Packed in individual sleeve printed with graphically illustrated text for correct blade selection













BAHCO® ERGO™ BOW SAWS

| Ergonomica | ally designed handle | е |
|--------------|----------------------|---------------------|
| Product Code | Blade Length (Inch) | Type of Wood |
| 10-21-51 | 21 | Dry Wood and Lumber |
| 10-24-51 | 24 | Dry Wood and Lumber |
| 10-24-23 | 24 | Green Wood |
| 10-30-23 | 30 | Green Wood |
| 10-30-51 | 30 | Dry Wood and Lumber |
| 9-36-23-KP* | 36 | Dry Wood and Lumber |

^{*} Equipped with non-Ergo™ metal handle

Features

- Designed for demanding applications and tough environments of construction sites
- Innovative tensioning mechanism for high blade tension and straight cutting
- Ergo[™] handle with knuckle protector provides comfort and safety
- Made of lightweight, high quality steel tubing for durability and easy handling
- High impact orange enamel paint protects from rust and corrosion
- Strong blade fitting for easy and safe blade storage



BAHCO® BOW SAWS - POINTED NOSE

Durable Handle

| Product Code | Blade Length (Inch) | Type of Wood | Handle |
|--------------|---------------------|---------------------|----------|
| 332-21-51 | 21 | Dry Wood and Lumber | Ergo™ |
| 331-21-51-KP | 21 | Dry Wood and Lumber | Standard |

Features

- Small and handy bow saw for all around use
- Pointed nose makes the saw ideal for use in tight spaces
- Used for pruning and roofing work
- Model 332 is equipped with an Ergo™ handle

BAHCO® BOW SAW - QUICK CHANGE

Equipped With Raker Blade for Cutting Dry Wood

| Product Code Blade Length (Inch) | | |
|----------------------------------|-------------------|--|
| 333 | 14 | |
| 333-5 | Replacement Blade | |

- The steel frame has special blade holders with a extra strong blade attachment mechanism
- Reversible blade, hardened for durability which can be rotated around its long axis
- Equipped with durable plastic handle
- · Handle releases for quick blade changes





BAHCO® ERGO™ PROFESSIONAL HAND HACKSAW

Ergonomic Handles Maximize Cutting Control and Power

| Product Code | Description | Blade Length (Inches) | |
|--------------|--------------------|-----------------------|--|
| 325 | Ergo™ Hand Hacksaw | 12 | |

Features

- Ergonomically designed with extremely high blade tension for straight, accurate and fast cuts
- · Centered blade for correct balance and reduced cutting effort
- . Alternative 55° blade mounting for flush cutting
- Supplied with reliable and shatterproof 12 inch bi-metal blade, 24 TPI
- Single touch spring loaded blade release mechanism for fast blade changes
- . Winner of the Silver Award from the Industrial Designers Society of America



BAHCO® PROFESSIONAL HAND HACKSAW

Non-Slip Handles Ensures a Solid and Secure Grip.

| Product Code | Description | Blade Length (Inches) |
|--------------|---------------------------|-----------------------|
| 319 | Professional Hand Hacksaw | 12 |

Features

- Alternative 55° blade mounting for flush cutting
- . Offers a strong steel frame that is covered with a protective dual component plastic
- Comfortable, non-slip back handle and front grip ensures a solid, secure grip
- Tension mechanism is fully integrated into the handles so there is no obstruction during use
- . Supplied with reliable and shatterproof 12 inch bi-metal blade, 24 TPI



BAHCO® TRADESMAN'S HAND HACKSAW

Durable Aluminum Handle

| Product Code | Description | Blade Length (Inches) |
|--------------|--------------------------|-----------------------|
| 317 | Tradesman's Hand Hacksaw | 12 |

Features

- . Alternative 90° blade mounting
- · Light and comfortable frame for difficult-to-reach applications
- · Durable aluminum handle
- · Metal tensioning lever designed to be comfortable and unobtrusive
- . Supplied with BAHCO® Bimetal blade for safety and efficiency



BAHCO® TRADITIONAL HAND HACKSAW

Heavy Duty Frame with Blade Storage

| Product Code | Description | Blade Length (Inches) |
|--------------|--------------------------|-----------------------|
| 225-PLUS | Traditional Hand Hacksaw | 12 |

- · Allows very high blade tension for accurate and fast cuts
- Strong rectangular back section for blade storage with easy-to-handle retaining screws
- · Can also be used as a compass saw
- Alternative 55° blade mounting for flush cutting
- Supplied with reliable and shatterproof 12 inch bi-metal blade, 24 TPI





















BAHCO® LIGHTWEIGHT HAND HACKSAW

Durable Aluminum Handle

| Product Code | Description | Blade Length (Inches) |
|--------------|--------------------------|-----------------------|
| 306 | Lightweight Hand Hacksaw | 10 & 12 |

Features

- Alternative 90° blade mounting.
- Accepts both 10" and 12" blades.
- Ultra light, only 11 ounces.
 Supplied with BAHCO® Bimetal blade for safety and efficiency.

BAHCO® MINI HACKSAW

Frame with Solid Steel Profile **Product Code** Description Blade Length (Inches) 268 Mini Hacksaw

Features

- . Chrome filled and fitted with a fiberglass handle to give a good and comfortable grip
- Supplied with reliable and shatterproof 10 inch bi-metal blade, 24 TPI
- Practical and simple blade-tensioning screw

BAHCO® MINI HACKSAW

| Blade-Tensioning Handle | | | |
|-------------------------|--------------|-----------------------|---|
| Product Code | Description | Blade Length (Inches) | |
| 228 | Mini Hacksaw | 6 | _ |

Features

- · Simple and quick, twist-action, blade-tensioning handle, made of beech wood and orange lacquered
- . Complete with 6 inch, 32 TPI blade for metal cutting

BAHCO® MINI HACKSAW

| Metal Cutting | | |
|---------------|--------------|-----------------------|
| Product Code | Description | Blade Length (Inches) |
| 218 | Mini Hacksaw | 6 |
| | | |

Features

. Complete with 6 inch, 32 TPI blade for metal cutting

| Pertect for Difficult to Reach Work | | | | |
|-------------------------------------|-------------------------|-----------------------|--|--|
| Product Code | Description | Blade Length (Inches) | | |
| 208 | Mini Extendable Hacksaw | 10 | | |

- . A mini-hacksaw frame for difficult to reach positions
- Supplied with reliable and shatterproof 10 inch bi-metal blade, 24 TPI
- Blade position adjusts for maximum versatility



BAHCO® TUNGSTEN CARBIDE HACKSAW BLADE

Metal Cutting

| Product Code | Description | Blade Length (Inches) |
|--------------|----------------------------|-----------------------|
| 3816-300 | Carbide grit hacksaw blade | 12 |

Features

- . Anti-corrosion treated, carbon steel blade back
- . Tungsten carbide grit toothing
- Fits all 12" metal saw frames

BAHCO® BIMETAL HAND HACKSAW BLADES

Virtually Unbreakable and Shatterproof Bimetal Blades for all Metal Sawing

Blades per Package (To order, add Pack Quantity to End of Product Code) Teeth **Product Code** Per Inch 100 10P 5P 3P 2P Length 3818-300-PROG-18/24/32 ** X 12 3906-250-18-10 18 X X 3906-250-24-10 24 X Χ 3906-250-32-10 32 X Χ 3906-300-14-Χ X 12 14 X 3906-300-18-12 18 X X X X 3906-300-24-24 X X X X 12 3906-300-32-12 32 X X X X 3906-300-12 1 ea 18/24/32

Features

- Blade back made of strong, flexible spring steel with a tooth line of high-alloyed super high speed steel
- Bimetal construction guarantees the blade to keep its sharpness for a long time
- Precision ground teeth for all kinds of metal sawing
- Combine extreme cutting performance and wear resistance with a high degree of flexibility
- · Vastly superior to all-hard high speed blades or conventional, flexible blades
- **Progressive tooth hacksaw blade features 3-tooth patterns for fast starting and cutting
- Improved painting techniques allows for better cutting from the start with no paint in the gullets

BAHCO® MINI HACKSAW BLADES

Anti-corrosion Treated, Carbon Steel Blades

| Product Code | Blades per Package | Blade Length (Inches) | TPI | For Cutting |
|--------------|-----------------------|--------------------------|-----|-------------|
| 228-15-5P | 5 | 6 | 15 | Wood |
| 228-32-5P | 5 | 6 | 32 | Metal |

Features

- · Made of hardened and tempered carbon steel
- · Teeth milled and set

BAHCO® ROD SAW BLADE

| Suitable for Cutting | g Glass, | Ceramics, | Porcelain | and Steel |
|----------------------|----------|-----------|------------------|-----------|
|----------------------|----------|-----------|------------------|-----------|


| Product Code | Blades per Package | Blade Length (Inches) | Fits |
|--------------|--------------------|-----------------------|------------------|
| 215-150 | 1 | 6 | Mini Hacksaws |
| 216-300-R | 1 | 12 | All 12" Hacksaws |

Features

Base steel rod coated with cemented carbide





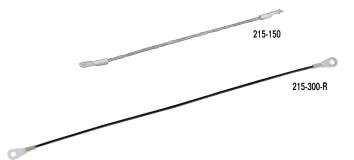













BI-METAL PORTABLE BANDSAW BLADES FOR HAND HELD MACHINES

| | Dimer | nsions | Ler | ngth | Tooth | Teeth | |
|------------------------|-----------|-----------|--------------------------------|------|---------|----------|--------|
| Product Code | (inch) | (mm) | (inch) | (mm) | Туре | per inch | 5 Pack |
| Loops | | | | | | | |
| PB13-0.5-R-10-1140-5P | ½ x 0.020 | 13 x 0.50 | 44 ⁷ / ₈ | 1140 | Regular | 10 | Х |
| PB13-0.5-R-14-1140-5P | ½ x 0.020 | 13 x 0.50 | 44 1/8 | 1140 | Regular | 14 | Х |
| PB13-0.5-R-18-1140-5P | ½ x 0.020 | 13 x 0.50 | 44 ⁷ / ₈ | 1140 | Regular | 18 | Х |
| PB13-0.5-R-24-1140-5P | ½ x 0.020 | 13 x 0.50 | 44 ⁷ / ₈ | 1140 | Regular | 24 | Х |
| PB13-0.5-10/14-1140-5P | ½ x 0.020 | 13 x 0.50 | 44 ⁷ / ₈ | 1140 | Combo | 10/14 | Х |
| PB13-0.5-14/18-1140-5P | ½ x 0.020 | 13 x 0.50 | 44 ⁷ / ₈ | 1140 | Combo | 14/18 | Х |

- A unique design for multipurpose and jobshop use that provides hand-held machines with fast cutting, easy feeding, exceptional control, and precision cutting on a variety of materials
- Perfect for cutting stainless steel, angle iron, bronze, copper, galvanized pipe, mild steel, aluminum, brass, chrome





BAHCO® HOLESAWS

BAHCO® Holesaws set the standard in precision, quality, durability and versatility. Whatever the job, you will find the Holesaws and accessories you need.

Each part of the Holesaw is designed to boost productivity and craftsmanship, from the design of the cutting edges to the technologies used in production. There is consistent quality and total control from making the Bi-Metal all the way to the finished Holesaw. In our own R&D department, we test and develop innovations to ensure that we stay ahead of the market. Our wide range of Holesaws and accessories will meet your needs for almost any material. They are compatible with all machine brands.

Complete Holesaw System

Looking for maximum performance and flexibility? BAHCO®'s line of arbors, extensions, pilot drills, ejector springs and adaptors are designed as a fully interchangeable system.

CUTTING SPEED RECOMMENDATIONS

To get maximum result out of each Holesaw, we recommend the following cutting speeds (RPM).

BI-METAL SANDFLEX HOLESAW

| | FE | 18/8 | Cast iron | CuZn | Alu | Wood |
|----------------|---------|---------|-----------|---------|---------|-----------|
| 9/16-3/4" | 580-460 | 300-240 | 400-300 | 790-600 | 900-690 | 3000 |
| 25/32-1 3/16" | 435-285 | 230-145 | 290-190 | 580-380 | 660-425 | 3000-2400 |
| 1 1/4-1 7/8" | 275-180 | 140-90 | 180-120 | 360-240 | 410-270 | 2400-2100 |
| 2 - 3" | 170-115 | 85-55 | 115-75 | 230-150 | 255-170 | 2000-1500 |
| 3 1/8 - 4 1/8" | 110-80 | 55-40 | 70-55 | 140-110 | 165-120 | 1500-1000 |
| 4 1/4-6" | 80-55 | 40-25 | 55-35 | 110-75 | 120-75 | 900-800 |

CARBIDE TIPPED HOLESAW

| | Fiberglass | Laminate | Brick | Tiles |
|---------------|------------|-----------|-----------|---------|
| 19/16-3/4" | 2380-1790 | 1360-1020 | 1705-1280 | 680-510 |
| 25/32-1 3/16" | 1700-1130 | 970-640 | 1210-810 | 480-320 |
| 1 1/4-1 7/8" | 1070-710 | 610-410 | 770-510 | 310-205 |
| 2-3" | 670-450 | 380-260 | 480-320 | 190-130 |
| 3 1/8-4 1/8" | 430-320 | 250-185 | 310-235 | 125-92 |
| 4 1/4-6" | 310-220 | 180-130 | 230-160 | 90-65 |











HOLESAW RANGE

| | Multi-Construction Superior Holesaws | BI-Metal Sandflex Holesaws | Carbide tipped holesaw | | |
|---------------------------------|--|---------------------------------------|---------------------------|--|--|
| Range | 3/4"-6" | 9/16"-6" | 9/16"-6" | | |
| Application | | | | | |
| Sets | ~ | ✓ | | | |
| Quick-Eject Arbors | 3834-ARBR-930EL 3834-ARBR-9100EL | 3834-ARBR-930ESM 3834-ARBR-9100ESM | | | |
| Standard Arbors | 3834-ARBR-630 3834-ARBR-730 3834-ARBR-930 3834-ARBR-1130 | | | | |
| Quick Change Arbors | 3834-ARBR-9100QC 3834-ARBR-11152QC 3834-ARBR-16152QC | | | | |
| Power Driver™ Arbors | 3834-ARBR-9 | 100 3834-ARBR-11152 3834 | -ARBR-16152 | | |
| Arbors with SDS+ shank | 3834 | -ARBR-SD30 3834-ARBR-SD15 | 2QC | | |
| Pilot Drills Quick-Eject Arbors | 3834-DRL-EL | 3834-DRL-EL | 3834-DRL-ES | | |
| Pilot Drills Standard Arbors | 3834-DRL-L | 3834-DRL | 3834-DRL-CT | | |
| Upsize Adaptor | | 3834-UPSIZE | | | |
| Ejector Spring | | 3834-ES | | | |
| Arbor Adaptor | | 3834-ADP | | | |
| Arbor Extensions | | 3834-EXT | | | |

ARBOR SELECTION DEPENDS ON THE SIZE OF THE HOLESAW. LOOK FOR THE OVER VIEW ON PAGE 450



MULTI-CONSTRUCTION SUPERIOR™ HOLESAWS

GO STRAIGHT THROUGH A WALL IN ONE GO! Wide gullets for fast and effective chip removal Instant penetration thanks to precision tooth Special coating geometry minimizes heat and friction Simple holesaw selection thanks to the printed material Permanent laser information marking of the size in millimetres and inches **Cutting depth** of 71mm!

BAHCO[®] Superior[™] Holesaws 3/4" (19mm) to 6-17/64" (159mm)

The Superior holesaw from BAHCO® is perfect for making holes in wood, including manufactured wooden materials like MDF, as well as brick, lightweight concrete, plasterboard and hard plastics. The holesaws have an extreme cutting depth of 2-3/4" (71mm) which allows the user to go through many materials such as studs in one cut! The precision ground carbide tips and the superior low friction coating cut smoothly and require less pressure. The multi construction assortment offers a wide range of sizes and is a perfect match with the Quick-eject arbor.

BAHCO® QUICK EJECT ARBORS

| Product Code | Fits Holesaws | Drill |
|------------------|---------------------------|-------------|
| 3834-ARBR-930EL | Superior up to 30 mm | 3834-DRL-EL |
| 3834-ARBR-9100EL | Superior 32 mm and larger | 3834-DRL-EL |

- Allows the user to save time by releasing the core from the holesaw in one simple, fast and efficient operation without burning your fingers on a hot holesaw or release adapter
- Quick eject arbors provides stable drilling in challenging environments
- Arbor comes with a solid round carbide tipped drill and there is no need to change the drill between applications



For Superior™ holesaw in combination with standard arbor.















BAHCO® 10 PIECE SUPERIOR™ HOLESAW SET

| Product Code | Description |
|--------------|-------------------------------|
| 3833-SET-101 | 10 Piece Superior Holesaw Set |

Contents Include:

- \bullet Superior Holesaw: $^3/_4,\,^7/_8,\,1\,^1/_8,\,1\,^3/_8,\,1\,^3/_4,\,2,\,2\,^1/_2$
- Arbors: 3834-ARBR-930EL, 3834-ARBR-9100EL
- Pilot Drill: 3834-DRL-EL

BAHCO® 13 PIECE SUPERIOR™ HOLESAW SET

| Product Code | Description | |
|--------------|-------------------------------|--|
| 3833-SET-201 | 10 Piece Superior Holesaw Set | |

Contents Include:

- Superior Holesaw: $^3/_4$, $^{25}/_{32}$, 1, 1 $^1/_4$, 1 $^5/_8$, 2, 2 $^7/_8$, 3, 3 $^1/_4$, 3 $^3/_8$
- Arbors: 3834-ARBR-930EL, 3834-ARBR-9100EL
- Pilot Drill: 3834-DRL-EL

BAHCO® INDIVIDUAL SUPERIOR™ HOLESAWS

| | Dian | neter |
|------------------------|--|----------|
| Product Code | (inch) | (mm) |
| 3833-19-C | 3/4 | 19 |
| 3833-20-C | 25/32 | 20 |
| 3833-22-C | 7/8 | 22 |
| 3833-25-C | 1 | 25 |
| 3833-27-C | 1 1/16 | 27 |
| 3833-29-C | 1 1/8 | 29 |
| 3833-30-C | 1 ¾16 | 30 |
| 3833-32-C | 1 1/4 | 32 |
| 3833-35-C | 1 ³ / ₈ | 35 |
| 3833-38-C | 1 ½ | 38 |
| 3833-40-C | 1 9/16 | 40 |
| 3833-41-C | 1 5/8 | 41 |
| 3833-44-C | 1 3/4 | 44 |
| 3833-48-C | 1 7/8 | 48 |
| 3833-51-C | 2 | 51 |
| 3833-54-C | 2 1/8 | 54 |
| 3833-57-C | 2 1/4 | 57 |
| 3833-60-C | 2 ³ / ₈ | 60 |
| 3833-64-C | 2 1/2 | 64 |
| 3833-65-C | 2 9/16 | 65 |
| 3833-67-C | 2 ⁵ / ₈ 2 ¹¹ / ₁₆ | 67 |
| 3833-68-C 3833-70-C | 2 11/16 2 3/4 | 68 70 |
| 3833-73-C | 2 ⁹ /4 2 ⁷ /8 | 70 73 |
| 3833-76-C | 3 | 73 76 |
| 3833-77-C | 3 1/32 | 77 |
| 3833-79-C | 3 ¹ / ₈ | 77 79 |
| 3833-83-C | 3 1/4 | 83 |
| 3833-86-C | 3 3/8 | 86 |
| 3833-89-C | 3 ¹ / ₂ | 89 |
| 3833-92-C | 3 5/8 | 92 |
| 3833-95-C | 3 3/4 | 95 |
| 3833-98-C | 3 ⁷ /8 | 98 |
| 3833-102-C | 4 | 102 |
| 3833-105-C | 4 1/8 | 105 |
| 3833-108-C | 4 1/4 | 108 |
| 3833-109-C | 4 ¹⁹ / ₆₄ | 109 |
| 3833-111-C | 4 3/8 | 111 |
| 3833-114-C | 4 1/2 | 114 |
| 3833-121-C | 4 3/4 | 121 |
| 3833-127-C | 5 | 127 |
| 3833-140-C | 5 ¹ / ₂ | 140 |
| 3833-152-C | 6 | 152 |
| 3833-159-C | 6 17/64 | 159 |

- SUPERIOR Holesaws are perfect for cutting holes in wood, brick, concrete, plasterboard and hard plastics
- $\bullet~$ The holesaws have an extreme cutting depth of 2 $^3/_4$ " (71mm)
- The precision ground carbide tips and superior low friction coating cut smoothly and require less pressure



BI-METAL SANDFLEX HOLESAWS

RESEARCHED, DEVELOPED AND MANUFACTURED BI-METAL HOLESAWS BY BAHCO®

BAHCO® Bi-Metal Holesaws

BAHCO® was the first to create a successful bi-metal blade that combines a flexible, shatter-resistant spring steel back with a high speed steel cutting edge to provide faster, more durable cutting power. With the latest generation of bi-metal holesaws, we take the technology even further.

The cutting edge (with 4 to 6 teeth per inch) is electron beam-welded to a tough alloy back, and then the teeth are precision ground to further increase cutting efficiency. The result is a holesaw that can cut clean, accurate holes in virtually any machinable material. Vertical slots allow easy core removal.

shatterproof bimetal body for
more safety

Simple holesaw
selection
thanks to the
printed material
information

Made with 8% cobalt to ensure a longer holesaw life

Range 14-152 mm has a 6° positive tooth angle for aggressive cutting

Range 168-210 mm has a **0° tooth angle** to simplify cutting

BAHCO® INDIVIDUAL BI-METAL HOLESAWS

| Product Code | Dia. (inch) | Dia. (mm) | Product Code | Dia. (inch) | Dia. (mm) |
|-----------------|-------------------|-----------|--------------|---------------------------------|-----------|
| Individual Pack | | | 3830-41-VIP | 1 5/8 | 41 |
| 3830-14-VIP | 9/16 | 14 | 3830-43-VIP | 1 11/16 | 43 |
| 3830-16-VIP | 5/8 | 16 | 3830-44-VIP | 1 3/4 | 44 |
| 3830-17-VIP | 11/16 | 17 | 3830-46-VIP | 1 ¹³ / ₁₆ | 46 |
| 3830-19-VIP | 3/4 | 19 | 3830-48-VIP | 1 ⁷ /8 | 48 |
| 3830-20-VIP | 25/32 | 20 | 3830-51-VIP | 2 | 51 |
| 3830-21-VIP | 13/16 | 21 | 3830-52-VIP | 2 ¹ / ₁₆ | 52 |
| 3830-22-VIP | 7/8 | 22 | 3830-54-VIP | 2 1/8 | 54 |
| 3830-24-VIP | 15/16 | 24 | 3830-56-VIP | 2 3/16 | 56 |
| 3830-25-VIP | 1 | 25 | 3830-57-VIP | 2 1/4 | 57 |
| 3830-27-VIP | 1 1/16 | 27 | 3830-59-VIP | 2 ⁵ /16 | 59 |
| 3830-29-VIP | 1 1/8 | 29 | 3830-60-VIP | 2 ³ / ₈ | 60 |
| 3830-30-VIP | 1 3/16 | 30 | 3830-64-VIP | 2 ¹ / ₂ | 64 |
| 3830-32-VIP | 1 1/4 | 32 | 3830-65-VIP | 2 ⁹ /16 | 65 |
| 3830-33-VIP | 1 5/16 | 33 | 3830-67-VIP | 2 ⁵ /8 | 67 |
| 3830-35-VIP | 1 ³ /8 | 35 | 3830-68-VIP | 2 11/16 | 68 |
| 3830-37-VIP | 1 7/16 | 37 | 3830-70-VIP | 2 3/4 | 70 |
| 3830-38-VIP | 1 1/2 | 38 | 3830-73-VIP | 2 7/8 | 73 |
| 3830-40-VIP | 1 9/16 | 40 | 3830-76-VIP | 3 | 76 |

| Product Code | Dia. (inch) | Dia. (mm) |
|--------------|--------------------------------------|-----------|
| 3830-79-VIP | 3 1/8 | 79 |
| 3830-83-VIP | 3 ¹ / ₄ | 83 |
| 3830-86-VIP | 3 3/8 | 86 |
| 3830-89-VIP | 3 ¹ / ₂ | 89 |
| 3830-92-VIP | 3 ⁵ /8 | 92 |
| 3830-95-VIP | 3 ³ / ₄ | 95 |
| 3830-98-VIP | 3 ⁷ /8 | 98 |
| 3830-102-VIP | 4 | 102 |
| 3830-105-VIP | 4 ¹ / ₈ | 105 |
| 3830-108-VIP | 4 ¹ / ₄ | 108 |
| 8830-111-VIP | 4 ³ / ₈ | 111 |
| 3830-114-VIP | 4 ¹ / ₂ | 114 |
| 8830-121-VIP | 4 3/4 | 121 |
| 8830-127-VIP | 5 | 127 |
| 8830-133-VIP | 5 ¹ / ₄ | 133 |
| 8830-140-VIP | 5 ¹ / ₂ | 140 |
| 3830-146-VIP | 5 ³ / ₄ | 146 |
| 3830-152-VIP | 6 | 152 |

BAHCO® 9 PIECE PLUMBER'S HOLESAW SET

The sizes that plumbers need most, with the cutting power that produces faster, cleaner holes.

| Product Code | Description |
|--------------|-------------------------------|
| 862209 | 9 Piece Plumber's Holesaw Set |

Contents Include:

 $\bullet \quad \text{Holesaws: $\frac{3}{4}$", $\frac{7}{8}$", 1 $\frac{1}{8}$", 1 $\frac{1}{2}$", 1 $\frac{3}{4}$", 2 $\frac{1}{4}$"}$

Arbors: 3834-ARBR-730 and 3834-ARBR-1152QC

Fits holesaws %16"-13/16", 1 1/4"-6"

• Extension: 3834-EXT-1

BAHCO® 9 PIECE ELECTRICIAN'S HOLESAW SET

The holesaws electrician's use every day. Offering superior performance and convenience.

| Product Code | Description |
|--------------|-----------------------------------|
| 862109 | 9 Piece Electrician's Holesaw Set |

Contents Include:

• Holesaws: 7/8", 1 1/8", 1 3/8", 1 3/4", 2", 2 1/2"

• Arbors: 3834-ARBR-730 and 3834-ARBR-1152QC

• Fits holesaws %16"-13/16", 1 1/4"-6"

• Extension: 3834-EXT-1

















862007

Assortments of holesaws and accessories most commonly used by the trades, especially electricians and plumbers. Each packed in a durable plastic carrying case for convenience.

BAHCO® 7 PIECE HOLESAW SET

BAHCO® Bimetal Holesaw Sets

Product Code 862007

Contents Include:

• Holesaws: ½", 1", 1 ½", 1 ½", 1 ½"

Arbor: 3834-ARBR-730Adapter: 3834-ADP

• Fits holesaws %16"-13/16", 1 1/4"-6"



862017



862021

BAHCO® 17 PIECE HOLESAW SET

Product Code 862017

Contents Include:

- Holesaws: 5/8", 3/4", 7/8", 1", 1 1/4", 1 1/4", 1 3/8", 1 1/2", 1 3/4", 2", 2 1/2", 3"
- Arbors: 3834-ARBR-730 and 3834-ARBR-11152QC
- Fits holesaws %6"-13/16", 1 1/4"-6"
- Adapter: 3834-ADP
- Pilot Drill: 3834-DRL-1 (3 pcs)

BAHCO® 21 PIECE HOLESAW SET

Product Code 862021

Contents Include:

- Holesaws: ¾", 7%", 1", 1 ½", 1 ¾", 1 ½", 1 ¾", 2", 2 ¼", 2 ½", 3 ¾", 3 ¼", 3 ¾", 4 ½", 4 ¾"
- Arbors: 3834-ARBR-1130 and 3834-ARBR-11152QC
- Fits holesaws 9/16"-13/16", 1 1/4"-6"
- Pilot Drill: 3834-DRL-1 (3 pcs)



CARBIDE-TIPPED HOLESAWS

HIGHLY WEAR RESISTANT

BAHCO® Carbide-Tipped Holesaws

BAHCO® carbide holesaws are designed to quickly and cleanly cut precise holes in ceramics, bricks, slate, laminate, fiberglass and hardwood.

With 4 precision ground carbide tips per inch—fusion-welded to an alloy steel back—these holesaws provide an impressive combination of strength, cutting power and durability.

Equipped with vertical slots for easy core removal, carbide-tipped holesaws are available in diameters from 9/10" to 6"; cutting depth for all holesaws is 1 1/2".

Ideal for making highprecision holes in hard material such as ceramic tiles, stone, fiberglass, laminate and hardwood

Simple holesaw selection thanks to the

printed material information



Easily cuts through abrasive material, such as concrete and brick

Precision-ground carbide tipped teeth at a 6° positive tooth angle

BAHCO® Carbide Tipped Holesaw Sets

For the professional who works with a wide variety of non-metallic surfaces, this set will cut through anything from hardwood to bricks.

BAHCO® 7 PIECE HOLESAW SET

Product Code

863307

Contents Include:

• Holesaws: 1/8", 1", 1 1/8", 1 1/4", 1 1/2"

• Arbor: 3834-ARBR-730 • Fits holesaws %6"-13/6"

· Adapter: 3834-ADP



863307















BAHCO® INDIVIDUAL CARBIDE-TIPPED HOLESAWS

| ВАПСО | INDIVIDUAL | CANDIDE- |
|----------------|--|----------|
| | Di | ameter |
| Product Code | (inch) | (mm) |
| Individual Pac | k | |
| 3832-14 | 9/16 | 14 |
| 3832-16 | 5/8 | 16 |
| 3832-17 | 11/16 | 17 |
| 3832-19 | 3/4 | 19 |
| 3832-20 | 25/32 | 20 |
| 3832-21 | 13/16 | 21 |
| 3832-22 | 7/8 | 22 |
| 3832-24 | 15/16 | 24 |
| 3832-25 | 1 | 25 |
| 3832-27 | 1 1/16 | 27 |
| 3832-29 | 1 1/8 | 29 |
| 3832-30 | 1 3/16 | 30 |
| 3832-32 | 1 1/4 | 32 |
| 3832-33 | 1 5/16 | 33 |
| 3832-35 | 1 ³ / ₈ | 35 |
| 3832-37 | 1 7/16 | 37 |
| 3832-38 | 1 1/2 | 38 |
| 3832-40 | 1 9/16 | 40 |
| 3832-41 | 1 ⁵ / ₈ | 41 |
| 3832-43 | 1 11/16 | 43 |
| 3832-44 | 1 3/4 | 44 |
| 3832-46 | 1 13/16 | 46 |
| 3832-48 | 1 7/8 | 48 |
| 3832-51 | 2 | 51 |
| 3832-52 | 2 ¹ / ₁₆ | 52 |
| 3832-54 | 2 1/8 | 54 |
| 3832-56 | 2 ³ / ₁₆ | 56 |
| 3832-57 | 2 1/4 | 57 |
| 3832-59 | 2 ⁵ / ₁₆ | 59 |
| 3832-60 | 2 ³ / ₈ | 60 |
| 3832-64 | 2 1/2 | 64 |
| 3832-65 | 2 ⁹ / ₁₆ | 65 |
| 3832-67 | 2 ⁵ / ₈ | 67 |
| 3832-68 | 2 11/16 | 68 |
| 3832-70 | 2 ³ / ₄ | 70 |
| 3832-73 | 2 7/8 | 73 |
| 3832-76 | 3 | 75 76 |
| 3832-79 | 3 ¹ /8 | 70 79 |
| 3832-83 | 3 1/ ₄ | 83 |
| 3832-86 | 3 ³ / ₈ | 86 |
| 3832-89 | 3 1/2 | 89 |
| 3832-92 | 3 ⁷² 3 ⁵ /8 | 92 |
| 3832-95 | 3 ³ / ₄ | 95 |
| 3832-98 | 3 ⁷ / ₈ | 98 |
| 3832-102 | 3 ·/8 4 | 102 |
| 3832-105 | 4 1/8 | |
| 3832-108 | 4 1/8 4 1/4 | 105 |
| | 4 '/4 4 ³ /8 | 108 |
| 3832-111 | 4 ⁹ /8 4 ¹ / ₂ | 111 |
| 3832-114 | 4 ¹ / ₂ 4 ³ / ₄ | 114 |
| 3832-121 | | 121 |
| 3832-127 | 5 5 ¹ / ₄ | 127 |
| 3832-133 | | 133 |
| 3832-140 | 5 ¹ / ₂ | 140 |
| 3832-146 | 5 3/4 | 146 |
| 3832-152 | 6 | 152 |



ARBORS & PILOT DRILLS ADAPT TO EACH SITUATION FOR THE BEST RESULTS

| | | | 111 | | |
|------------------|---|-----------------|----------|----------|----------|
| | Arbors | Pilot Drills | | | |
| | Arbors with Quick-Eject function for easily removing the core | | | | |
| | 3834-ARBR-930EL | 3834-DRL-EL | ✓ | | |
| 3/16" | 3834-ARBR-930ESM | 3834-DRL-HSS-ES | | ✓ | |
| TO 1 3 | 3834-ARBR-930ES | 3834-DRL-ES | | | ✓ |
| P | Standard Arbors 3834-ARBR-630 | 3834-DRL-L | ~ | | |
| HOLE SIZE | 3834-ARBR-730 3834-ARBR-930 3834-ARBR-1130 | 3834-DRL | | ~ | |
| 10LE | 3004-AKBK-1100 | 3834-DRL-CT | | | ~ |
| | Arbors with SDS+ shank For machines with Quick-Change chucks | 3834-DRL-L | ✓ | | |
| | 3834-ARBR-SD30 | 3834-DRL | | ✓ | |
| | | 3834-DRL-CT | | | ✓ |
| | Arbors with Quick-Eject function for taking out the core easily | | | | |
| | 3834-ARBR-9100EL | 3834-DRL-EL | ✓ | | |
| | 3834-ARBR-9100ESM | 3834-DRL-HSS-ES | | ~ | |
| ER | | | | | |
| BIGG | Quick-Change Arbors for easy Holesaw changes | 3834-DRL-L | ~ | | |
| AND BIGGER | 3834-ARBR-9100QC 3834-ARBR-11152QC 3834-ARBR-16152QC | 3834-DRL | | ~ | |
| | 3034-ARBR-10132UC | 3834-DRL-CT | | | ~ |
| HOLE SIZE 1 1/4" | Power Driver™ Arbors for optimal stability | 3834-DRL-L | ~ | | |
| S = C | 3834-ARBR-9100 3834-ARBR-11152 | 3834-DRL | | ~ | |
| H | 3834-ARBR-16152 | 3834-DRL-CT | | | ~ |
| | Arbors with SDS+ shank For machines with | 3834-DRL-L | ~ | | |
| | Quick-Change chucks 3834-ARBR-SD152QC | 3834-DRL | | ~ | |
| | | 3834-DRL-CT | | | ✓ |









BAHCO® PILOT DRILLS

| Product Code | Description |
|-----------------|---|
| 3834-DRL | For Non Quick Eject Arbors for Bi-Metal Holesaws |
| 3834-DRL-CT | For Non Quick Eject Arbors for Carbide Holesaws |
| 3834-DRL-L | For Non Quick Eject Arbors for Superior Holesaws |
| 3834-DRL-ES | Carbide Tipped for Quick Eject Arbors (ES & ESM) & Carbide Holesaws |
| 3834-DRL-HSS-ES | High Speed Steel for Bi-metal Holesaws |
| 3834-DRL-EL | All Round Carbide Tipped for Quick Eject Arbors & Superior Holesaws |

Features

 Pilot drills make a hole in the workpiece before the teeth of the holesaw become engaged, guiding and keeping the holesaw in the correct position duuring the sawing operation

BAHCO® UPSIZE ADAPTOR

| Product Code | Description |
|--------------|------------------------------|
| 3834-UPSIZE | For enlarging existing holes |

Features

- · Attached to the pilot drill with the hexagon screw
- To be use on both small and large holesaws
- Works excellent with the Quick-Eject arbors

BAHCO® ARBOR ADAPTOR

| Product Code | Description |
|--------------|---------------------------------|
| 3834-ADP | Fits arbors 630, 730, 930, 1130 |

Feature

Adapts small arbor threads to accommodate large holesaw threads

BAHCO® CORE EJECTION SPRING

| Product Code | Description |
|--------------|--|
| 3834-ES | For Pilot drills, to facilitate core removal |



BAHCO® QUICK EJECT ARBORS

| Product Code | Fits Holesaws | |
|-------------------|---------------------------------|--|
| 3834-ARBR-930ES | Carbide Tipped up to 1 3/16 | |
| 3834-ARBR-930EL | Superior up to 1 3/16 | |
| 3834-ARBR-930ESM | Bimetal up to 1 3/16 | |
| 3834-ARBR-9100ES | Carbide Tipped 1 1/4 and Larger | |
| 3834-ARBR-9100EL | Superior 1 1/4 and Larger | |
| 3834-ARBR-9100ESM | Bimetal 1 1/4 and Larger | |
| | | |

Features

- Allows the user to save time by releasing the core from the holesaw in one simple, fast and efficient operation without burning your fingers on a hot holesaw or release adapter
- · Quick eject arbors provides stable drilling in challenging environments
- ESM Arbors include HSS drills, ES & EL Arbors include all round carbide drills

BAHCO® ARBORS

| Standard Arbors - | Fits holesaw 9/16" to 1-3/16" |
|-------------------|-------------------------------|
| Product Code | Dia. (Inch) |
| | |

| Floudet Code | Dia. Wilcip | |
|----------------|-----------------------|--|
| 3834-ARBR-630 | 1/4 HEX | |
| 3834-ARBR-730 | %32 TRI | |
| 3834-ARBR-930 | 11/ ₃₂ HEX | |
| 3834-ARBR-1130 | 7/16 HEX | |
| | | |

Features

- Includes HSS drill be use for Metal & Wood Applications
- Arbors can be used for Carbide and Multi-Construction holesaw but requires changing the drill

Quick-Change Arbor - Fits holesaw 1-1/4" and bigger

| 3834-ARBR-9100OC | 11/ ₃₂ HEX | |
|-------------------|-----------------------|--|
| • | | |
| 3834-ARBR-11152QC | 7∕16 HEX | |
| 2024 ADDD 464E2OC | 5/ LIEV | |
| 3834-ARBR-16152QC | % HEX | |

Features

- Arbors have a quick-change mechanism where no additional tools are needed to change the holesaw
- Includes HSS drill be use for Metal & Wood Applications
- Arbors can be used for Carbide and Multi-Construction holesaw but requires changing the drill

Power Driver™ Arbors for Optimal Stability - Fits holesaws 1-1/4" and bigger

| , . una biggoi | | |
|-----------------|-----------------------|--|
| 3834-ARBR-9100 | 11/ ₃₂ HEX | |
| 3834-ARBR-11152 | 7/16 HEX | |
| 3834-ARBR-16152 | % HEX | |

Features

- Includes HSS drill be use for Metal & Wood Applications
- Power Driver™ increases the strength and eliminates play of the holesaw by redistributing the load from the thread to the solid cap
- Arbors can be used for Carbide and Multi-Construction holesaw but requires changing the drill

Arbors with SDS+ shank - for Quick Change Chucks

| 3834-ARBR-SD30 | Fits holesaws up to 1-3/16" |
|-------------------|---------------------------------------|
| 3834-ARBR-SD152QC | Fits holesaws up to 1-1/4" and larger |

Features

• All arbors are hardened for maximum strength. Pilot drill is included.

BAHCO® ARBOR EXTENSIONS

| Product Code | Fits Arbors | Length (Inches) |
|--------------|----------------------|-----------------|
| 3834-EXT-1 | 1130, 11152, 11152QC | 12 |
| 3834-EXT-2 | 930, 9100, 9100QC | 12 |

Features

• For reach in difficult to cut surroundings



BAHCO® RECIPROCATING SAW BLADES

FULL OF POWER

BAHCO® has an exceptional range of reciprocating saw blades. Each category has a wide range of shapes, lengths and toothing, with one for every application.

Our Bi-Metal (Sandflex®) blades are famous for their high quality and time-saving performance, and are highly respected by professionals. Our tough carbide tipped blades deliver impressive cutting power in any situation. Whatever the task, you will produce faster, cleaner and more accurate cuts, time after time.



SELECT THE RIGHT TOOTHING (TPI)

TEETH PER INCH

| Material thickness | ≤ 1/8" | 1/8" to 3/8" | 3/8" to 3/4" | 3/4" to 2" | ≥ 2" |
|---------------------------|--------|--------------|----------------|------------|------|
| Metal Saw Blades | 24 | 18 | 14 - 10 - 8/12 | 8/12 | |
| Metal and Wood Saw Blades | | 10/14 | 10 - 8/12 | 6 - 5/8 | 4/6 |
| Wood Saw Blades | | 11 | 7 | 7 - 5 | 5 |
| Special Saw Blades | | GRIT | 6 | 6 | 3 |

SAW BLADE SHAPES

Our range of reciprocating saw blades includes a variety of blade shapes for different styles of cutting.

STANDARD (ST)

For fast and aggressive straight cuts, but still flexible for narrow cutting.

SCROLL (SC)

For contour sawing and sawing in difficult-to-reach places.

DEMOLITION (DSL)

Extra thick and wide saw blades for demolition and heavy-duty work.

HIGH SLOPE (HSL)

The wide body makes it highly resistant to bending, allowing straight cuts in wood.

HEAVY STANDARD (HST)

The wide body makes it highly resistant to bending, allowing straighter cuts.

SLOPE (SL)

Thick blades with a narrow nose for sawing in tight spots, but highly resistant to bending.

PALLET REPAIR (PR)

The rounded front design prevents the blade from getting stuck.










FULL RANGE OF RECIPROCATING SAW BLADES AVAILABLE

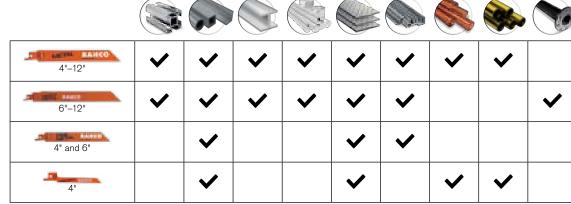

RECIPROCATING SAW BLADES FOR METAL

RECIPROCATING SAW BLADES FOR WOOD & METAL

| 6"-12" | ~ | ~ | ~ | | | |
|--------|----------|---|----------|----------|---|----------|
| 6"-12" | ~ | | ~ | ~ | | |
| 9" | ~ | | ~ | ~ | ~ | ~ |
| 9" | ~ | ~ | | | | |

RECIPROCATING SAW BLADES FOR WOOD

| 9" and 12" | | ~ | ~ | | | |
|------------|----------|----------|---|----------|---|---|
| 9" and 12" | ~ | ~ | | | | |
| 9" | | | ~ | ~ | | ~ |
| 6"-12" | | | ~ | | ~ | |

RECIPROCATING SAW BLADES FOR SPECIAL APPLICATIONS

| 6"-12" | ~ | ~ | ~ | | | |
|-----------|----------|----------|----------|-------------|----------|----------|
| 12" | | | | > | | |
| 4" and 6" | | | | | ~ | ~ |



BAHCO® RECIPROCATING SAW BLADES FOR METAL

METAL

Improved blade design based on the application

Virtually unbreakable Sandflex® bi-metal blades

Simple saw blade selection thanks to the printed material information

Sharp long-life teeth (HSS 8% Cobalt)

BAHCO

Easier penetration thanks to precision-ground tooth geometry

BAHCO® BI-METAL BLADES FOR CUTTING METAL

| | Diage- | length | Blade-th | ickness | Teeth | Pack |
|---------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-100-14-ST-2P | 4 | 100 | 0.035 | 0.9 | 14 | 2 |
| 3940-100-14-ST-5P | 4 | 100 | 0.035 | 0.9 | 14 | 5 |
| 3940-100-14-ST-10P | 4 | 100 | 0.035 | 0.9 | 14 | 10 |
| 3940-100-18-ST-2P | 4 | 100 | 0.035 | 0.9 | 18 | 2 |
| 3940-100-18-ST-5P | 4 | 100 | 0.035 | 0.9 | 18 | 5 |
| 3940-100-18-ST-10P | 4 | 100 | 0.035 | 0.9 | 18 | 10 |
| 3940-150-14-ST-2P | 6 | 150 | 0.035 | 0.9 | 14 | 2 |
| 3940-150-14-ST-5P | 6 | 150 | 0.035 | 0.9 | 14 | 5 |
| 3940-150-14-ST-10P | 6 | 150 | 0.035 | 0.9 | 14 | 10 |
| 3940-150-14-ST-100P | 6 | 150 | 0.035 | 0.9 | 14 | 100 |
| 3940-150-18-ST-2P | 6 | 150 | 0.035 | 0.9 | 18 | 2 |
| 3940-150-18-ST-5P | 6 | 150 | 0.035 | 0.9 | 18 | 5 |
| 3940-150-18-ST-10P | 6 | 150 | 0.035 | 0.9 | 18 | 10 |
| 3940-150-18-ST-100P | 6 | 150 | 0.035 | 0.9 | 18 | 100 |
| 3940-228-14-ST-2P | 9 | 228 | 0.035 | 0.9 | 14 | 2 |
| 3940-228-14-ST-5P | 9 | 228 | 0.035 | 0.9 | 14 | 5 |
| 3940-228-14-ST-10P | 9 | 228 | 0.035 | 0.9 | 14 | 10 |
| 3940-228-14-ST-100P | 9 | 228 | 0.035 | 0.9 | 14 | 100 |
| 3940-228-18-ST-2P | 9 | 228 | 0.035 | 0.9 | 18 | 2 |
| 3940-228-18-ST-5P | 9 | 228 | 0.035 | 0.9 | 18 | 5 |
| 3940-228-18-ST-10P | 9 | 228 | 0.035 | 0.9 | 18 | 10 |
| 3940-228-18-ST-100P | 9 | 228 | 0.035 | 0.9 | 18 | 100 |
| 3940-300-14-ST-2P | 12 | 300 | 0.035 | 0.9 | 14 | 2 |
| 3940-300-14-ST-5P | 12 | 300 | 0.035 | 0.9 | 14 | 5 |
| 3940-300-14-ST-10P | 12 | 300 | 0.035 | 0.9 | 14 | 10 |
| 3940-300-14-ST-100P | 12 | 300 | 0.035 | 0.9 | 14 | 100 |
| 3940-300-18-ST-2P | 12 | 300 | 0.035 | 0.9 | 18 | 2 |
| 3940-300-18-ST-5P | 12 | 300 | 0.035 | 0.9 | 18 | 5 |
| 3940-300-18-ST-10P | 12 | 300 | 0.035 | 0.9 | 18 | 10 |
| 3940-300-18-ST-100P | 12 | 300 | 0.035 | 0.9 | 18 | 100 |

Features

- . The metal blade family is designed for demanding metal cutting
- The standard-shaped (ST) blades with high performance and precisionground teeth
- Standard-shape (ST) for fast and aggressive straight cuts but still flexible for narrow cutting



BAHCO® BI-METAL BLADES FOR METAL PRECISION CUTTING

| | Blade | Blade-length Blade-thick | | ickness | Teeth | Pack |
|-------------------|--------|--------------------------|--------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-100-14-SC-2P | 4 | 100 | 0.035 | 0.9 | 14 | 2 |
| 3940-100-14-SC-5P | 4 | 100 | 0.035 | 0.9 | 14 | 5 |
| 3940-100-18-SC-2P | 4 | 100 | 0.035 | 0.9 | 18 | 2 |
| 3940-100-18-SC-5P | 4 | 100 | 0.035 | 0.9 | 18 | 5 |
| 3940-100-24-SC-2P | 4 | 100 | 0.035 | 0.9 | 24 | 2 |
| 3940-100-24-SC-5P | 4 | 100 | 0.035 | 0.9 | 24 | 5 |

- The Precision Metal scroll-shaped blades with high performance and precision-ground teeth
- Scroll (SC) shape for contour sawing and in difficult-to-reach places











BAHCO® BI-METAL BLADES FOR CUTTING FINE METAL

| | | | | Blade-thickness | | Pack |
|---------------------|--------|------|--------|-----------------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-100-24-ST-2P | 4 | 100 | 0.035 | 0.9 | 24 | 2 |
| 3940-100-24-ST-5P | 4 | 100 | 0.035 | 0.9 | 24 | 5 |
| 3940-100-24-ST-10P | 4 | 100 | 0.035 | 0.9 | 24 | 10 |
| 3940-150-24-ST-2P | 6 | 150 | 0.035 | 0.9 | 24 | 2 |
| 3940-150-24-ST-5P | 6 | 150 | 0.035 | 0.9 | 24 | 5 |
| 3940-150-24-ST-10P | 6 | 150 | 0.035 | 0.9 | 24 | 10 |
| 3940-150-24-ST-100P | 6 | 150 | 0.035 | 0.9 | 24 | 100 |

Features

- The Fine Metal blade family is designed for metal cutting in thin materials
- The standard-shaped (ST) blades with high performance and precisionground teeth
- Standard-shape (ST) for fast and aggressive straight cuts but still flexible for narrow cutting
- Slope-shaped nose for various types of cuts

BAHCO® BI-METAL BLADES FOR CUTTING HEAVY METAL

| | | length | Blade-th | ickness | Teeth | Pack |
|-----------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-150-10-ST-2P | 6 | 150 | 0.035 | 0.9 | 10 | 2 |
| 3940-150-10-ST-5P | 6 | 150 | 0.035 | 0.9 | 10 | 5 |
| 3940-150-10-ST-10P | 6 | 150 | 0.035 | 0.9 | 10 | 10 |
| 3940-150-10-ST-100P | 6 | 150 | 0.035 | 0.9 | 10 | 100 |
| 3940-150-8/12-ST-2P | 6 | 150 | 0.035 | 0.9 | 8/12 | 2 |
| 3940-150-8/12-ST-5P | 6 | 150 | 0.035 | 0.9 | 8/12 | 5 |
| 3940-150-8/12-ST-10P | 6 | 150 | 0.035 | 0.9 | 8/12 | 10 |
| 3940-150-8/12-ST-100P | 6 | 150 | 0.035 | 0.9 | 8/12 | 100 |
| 3940-150-10-HST-2P | 6 | 150 | 0.042 | 1.07 | 10 | 2 |
| 3940-150-10-HST-5P | 6 | 150 | 0.042 | 1.07 | 10 | 5 |
| 3940-150-10-HST-10P | 6 | 150 | 0.042 | 1.07 | 10 | 10 |
| 3940-150-14-HST-2P | 6 | 150 | 0.042 | 1.07 | 14 | 2 |
| 3940-150-14-HST-5P | 6 | 150 | 0.042 | 1.07 | 14 | 5 |
| 3940-150-14-HST-10P | 6 | 150 | 0.042 | 1.07 | 14 | 10 |
| 3940-150-18-HST-2P | 6 | 150 | 0.042 | 1.07 | 18 | 2 |
| 3940-150-18-HST-5P | 6 | 150 | 0.042 | 1.07 | 18 | 5 |
| 3940-150-18-HST-10P | 6 | 150 | 0.042 | 1.07 | 18 | 10 |
| 3940-228-10-ST-2P | 9 | 228 | 0.035 | 0.9 | 10 | 2 |
| 3940-228-10-ST-5P | 9 | 228 | 0.035 | 0.9 | 10 | 5 |
| 3940-228-10-ST-10P | 9 | 228 | 0.035 | 0.9 | 10 | 10 |
| 3940-228-10-ST-100P | 9 | 228 | 0.035 | 0.9 | 10 | 100 |
| 3940-228-10-HST-2P | 9 | 228 | 0.042 | 1.07 | 10 | 2 |
| 3940-228-10-HST-5P | 9 | 228 | 0.042 | 1.07 | 10 | 5 |
| 3940-228-10-HST-10P | 9 | 228 | 0.042 | 1.07 | 10 | 10 |
| 3940-228-14-HST-2P | 9 | 228 | 0.042 | 1.07 | 14 | 2 |
| 3940-228-14-HST-5P | 9 | 228 | 0.042 | 1.07 | 14 | 5 |
| 3940-228-14-HST-10P | 9 | 228 | 0.042 | 1.07 | 14 | 10 |
| 3940-228-18-HST-2P | 9 | 228 | 0.042 | 1.07 | 18 | 2 |
| 3940-228-18-HST-5P | 9 | 228 | 0.042 | 1.07 | 18 | 5 |
| 3940-228-18-HST-10P | 9 | 228 | 0.042 | 1.07 | 18 | 10 |
| 3940-228-8/12-ST-2P | 9 | 228 | 0.050 | 1.3 | 8/12 | 2 |
| 3940-228-8/12-ST-5P | 9 | 228 | 0.050 | 1.3 | 8/12 | 5 |
| 3940-228-8/12-ST-10P | 9 | 228 | 0.050 | 1.3 | 8/12 | 10 |
| 3940-228-8/12-ST-100P | 9 | 228 | 0.050 | 1.3 | 8/12 | 100 |
| 3940-300-10-HST-2P | 12 | 300 | 0.042 | 1.07 | 10 | 2 |
| 3940-300-10-HST-5P | 12 | 300 | 0.042 | 1.07 | 10 | 5 |
| 3940-300-10-HST-10P | 12 | 300 | 0.042 | 1.07 | 10 | 10 |
| 3940-300-14-HST-2P | 12 | 300 | 0.042 | 1.07 | 14 | 2 |
| 3940-300-14-HST-5P | 12 | 300 | 0.042 | 1.07 | 14 | 5 |
| 3940-300-14-HST-10P | 12 | 300 | 0.042 | 1.07 | 14 | 10 |
| 3940-300-18-HST-2P | 12 | 300 | 0.042 | 1.07 | 18 | 2 |
| | | | | | | |
| 3940-300-18-HST-5P | 12 | 300 | 0.042 | 1.07 | 18 | 5 |

- The Heavy Metal blade family is designed for demanding metal cutting in thick materials
- Heavy standard (HST) Bi-Metal blades with precision ground teeth are a series of extra thick blades with a wider body that makes it more rigid and has a higher resistance to fracturing and bending, allowing straighter cuts
- Standard (ST) Bi-Metal blades with coarse precision ground teeth are a series of flexible blades with a standard body that makes it more flexible and easy to bend into position



BAHCO® RECIPROCATING SAW BLADES FOR WOOD & METAL

MADE FOR BOTH THE EMERGENCY SERVICES AND PROFESSIONAL CRAFTSMEN



BAHCO® BI-METAL BLADES FOR CUTTING WOOD AND METAL

| | Blade-length | | Blade-th | ickness | Teeth | Pack |
|-----------------------|--------------|------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-150-6-ST-2P | -6 | 150 | 0.035 | 0.9 | 6 | 2 |
| 3940-150-6-ST-5P | 6 | 150 | 0.035 | 0.9 | 6 | 5 |
| 3940-150-6-ST-10P | 6 | 150 | 0.035 | 0.9 | 6 | 10 |
| 3940-150-4/6-SC-2P | 6 | 150 | 0.050 | 1.3 | 4/6 | 2 |
| 3940-150-4/6-SC-5P | 6 | 150 | 0.050 | 1.3 | 4/6 | 5 |
| 3940-150-4/6-SC-10P | 6 | 150 | 0.050 | 1.3 | 4/6 | 10 |
| 3940-150-5/8-SL-2P | 6 | 150 | 0.050 | 1.3 | 5/8 | 2 |
| 3940-150-5/8-SL-5P | 6 | 150 | 0.050 | 1.3 | 5/8 | 5 |
| 3940-150-5/8-SL-10P | 6 | 150 | 0.050 | 1.3 | 5/8 | 10 |
| 3940-150-5/8-SL-100P | 6 | 150 | 0.050 | 1.3 | 5/8 | 100 |
| 3940-228-6-SL-2P | 9 | 228 | 0.050 | 1.3 | 6 | 2 |
| 3940-228-6-SL-5P | 9 | 228 | 0.050 | 1.3 | 6 | 5 |
| 3940-228-6-SL-10P | 9 | 228 | 0.050 | 1.3 | 6 | 10 |
| 3940-300-6-SL-2P | 12 | 300 | 0.050 | 1.3 | 6 | 2 |
| 3940-300-6-SL-5P | 12 | 300 | 0.050 | 1.3 | 6 | 5 |
| 3940-300-6-SL-10P | 12 | 300 | 0.050 | 1.3 | 6 | 10 |
| 3940-300-8/12-SL-2P | 12 | 300 | 0.050 | 1.3 | 8/12 | 2 |
| 3940-300-8/12-SL-5P | 12 | 300 | 0.050 | 1.3 | 8/12 | 5 |
| 3940-300-8/12-SL-10P | 12 | 300 | 0.050 | 1.3 | 8/12 | 10 |
| 3940-300-8/12-SL-100P | 12 | 300 | 0.050 | 1.3 | 8/12 | 100 |

- The Wood and Metal blade family is designed for demanding cutting in wood, even with embedded nails, but it can also be used for thick metal materials
- Slope-shaped (SL) Bi-Metal blades with precision ground teeth are a series of thicker blades with a narrow nose that makes it accessible in narrow places but still rigid and has a higher resistance to fracturing and bending, allowing straighter cuts
- Standard (ST) Bi-Metal blades with coarse precision ground teeth are a series of flexible blades with standard body that makes it more flexible and easy to bend into position











BAHCO® BI-METAL BLADES FOR FIRE AND RESCUE

| | Blade-length | | Blade-th | ickness | Teeth | Pack |
|---------------------|--------------|------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-228-10-DSL-2P | 9 | 228 | 0.062 | 1.6 | 10 | 2 |
| 3940-228-10-DSL-5P | 9 | 228 | 0.062 | 1.6 | 10 | 5 |
| 3940-228-10-DSL-10P | 9 | 228 | 0.062 | 1.6 | 10 | 10 |

Features

 The Fire & Rescue bi-metal blade with precision ground teeth is an extra heavy duty blade for metal/demolition applications, to be used in extreme conditions

BAHCO® BI-METAL BLADES FOR DEMOLITION

| | Blade-length | | Blade-th | Blade-thickness | | Pack |
|----------------------|--------------|------|----------|-----------------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-150-5/8-DSL-2P | 6 | 150 | 0.062 | 1.6 | 5/8 | 2 |
| 3940-150-5/8-DSL-5P | 6 | 150 | 0.062 | 1.6 | 5/8 | 5 |
| 3940-150-5/8-DSL-10P | 6 | 150 | 0.062 | 1.6 | 5/8 | 10 |
| 3940-228-5/8-DSL-2P | 9 | 228 | 0.062 | 1.6 | 5/8 | 2 |
| 3940-228-5/8-DSL-5P | 9 | 228 | 0.062 | 1.6 | 5/8 | 5 |
| 3940-228-5/8-DSL-10P | 9 | 228 | 0.062 | 1.6 | 5/8 | 10 |
| 3940-300-5/8-DSL-2P | 12 | 300 | 0.062 | 1.6 | 5/8 | 2 |
| 3940-300-5/8-DSL-5P | 12 | 300 | 0.062 | 1.6 | 5/8 | 5 |
| 3940-300-5/8-DSL-10P | 12 | 300 | 0.062 | 1.6 | 5/8 | 10 |

Features

- The Sandflex® Demolition slope (DSL) Bi-Metal blades are a series of extra thick and wide saw blades for demolition and heavy-duty work
- Perfect for nail-embedded wood

BAHCO® BI-METAL BLADES FOR PALLET REPAIR

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|--------------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3940-228-10/14-PR09-10P | 9 | 228 | 0.035 | 0.9 | 10/14 | 10 |
| 3940-228-10/14-PR09-100P | 9 | 228 | 0.035 | 0.9 | 10/14 | 100 |
| 3940-228-10/14-PR13-100P | 9 | 228 | 0.035 | 0.9 | 10/14 | 100 |
| 3940-228-8/12-PR13-100P | 9 | 228 | 0.050 | 1.3 | 8/12 | 100 |

Features

- The pallet repair blade is developed in close co-operation with pallet repair shops
- The unique front design prevents the blade front from getting stuck in close by wood beams when cutting nails in damaged parts of the pallet
- By increasing the shank radius we have improved the fatigue strength
- 10/14 TPI has proved to be the most popular toothing amongst users in pallet repair shops. This toothing has good material removal rate in wood with nails and high strength to tooth breakage



The Book of the State of the St

A PALLET BALLET



BAHCO® RECIPROCATING SAW BLADES FOR WOOD & PLASTIC

SPECIAL TOOTHING FOR FAST CROSS-CUTTING AND RIPPING



BAHCO® HIGH CARBON STEEL BLADES FOR CUTTING WOOD

| | Blade | Blade-length | | Blade-thickness | | Pack | |
|--------------------|--------|--------------|--------|-----------------|----------|------|--|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY | |
| 3942-228-7-HSL-2P | 9 | 228 | 0.039 | 1 | 7 | 2 | |
| 3942-228-7-HSL-5P | 9 | 228 | 0.039 | 1 | 7 | 5 | |
| 3942-228-7-HSL-10P | 9 | 228 | 0.039 | 1 | 7 | 10 | |
| 3942-300-7-HSL-2P | 12 | 300 | 0.039 | 1 | 7 | 2 | |
| 3942-300-7-HSL-5P | 12 | 300 | 0.039 | 1 | 7 | 5 | |
| 3942-300-7-HSL-10P | 12 | 300 | 0.039 | 1 | 7 | 10 | |

Features

- Unique bevel-ground teeth provide a quick cut and deliver the best results in wood
- The blade is made of High Carbon Steel and the teeth are induction hardened for a very long life before being coated for minimum friction
- The toothing allows considerably faster cutting compared to traditional blades; 7 for all-round wood cut

BAHCO® HIGH CARBON STEEL BLADES FOR CUTTING COARSE WOOD

| | Blade-length | | Blade-thickness | | Teeth | Pack |
|--------------------|--------------|------|-----------------|------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3942-228-5-HSL-2P | 9 | 228 | 0.039 | 1 | 5 | 2 |
| 3942-228-5-HSL-5P | 9 | 228 | 0.039 | 1 | 5 | 5 |
| 3942-228-5-HSL-10P | 9 | 228 | 0.039 | 1 | 5 | 10 |
| 3942-300-5-HSL-2P | 12 | 300 | 0.039 | 1 | 5 | 2 |
| 3942-300-5-HSL-5P | 12 | 300 | 0.039 | 1 | 5 | 5 |
| 3942-300-5-HSL-10P | 12 | 300 | 0.039 | 1 | 5 | 10 |

Features

- . Unique bevel-ground teeth provide a quick cut and deliver the best results in coarse wood
- The toothing allows considerably faster cutting compared to traditional blades; 5 for coarse and very fast cuts

BAHCO® HIGH CARBON STEEL BLADES FOR CUTTING WOOD & PLASTIC

| | Blade-length | | Blade-th | ickness | Teeth | Pack |
|---------------------|--------------|------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3942-228-11-HSL-2P | 9 | 228 | 0.039 | 1 | 11 | 2 |
| 3942-228-11-HSL-5P | 9 | 228 | 0.039 | 1 | 11 | 5 |
| 3942-228-11-HSL-10P | 9 | 228 | 0.039 | 1 | 11 | 10 |

- The blade is made of High Carbon Steel and the teeth are induction hardened for a very long life before being coated for minimum friction
- Unique bevel-ground teeth provide a quick cut and deliver the best results in wood and plastic
- The toothing allows considerably faster cutting compared to traditional blades; 11 for fine cut













BAHCO® BI-METAL BLADES FOR CUTTING PLASTER AND BOARDS

| | Blade | length | Blade-th | Blade-thickness Teeth | | Pack |
|-------------------|--------|--------|----------|-----------------------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3942-150-7-SL-2P | 6 | 150 | 0.043 | 1.1 | 7 | 2 |
| 3942-150-7-SL-5P | 6 | 150 | 0.043 | 1.1 | 7 | 5 |
| 3942-150-7-SL-10P | 6 | 150 | 0.043 | 1.1 | 7 | 10 |
| 3942-228-7-SL-2P | 9 | 228 | 0.043 | 1.1 | 7 | 2 |
| 3942-228-7-SL-5P | 9 | 228 | 0.043 | 1.1 | 7 | 5 |
| 3942-228-7-SL-10P | 9 | 228 | 0.043 | 1.1 | 7 | 10 |
| 3942-300-7-SL-2P | 12 | 300 | 0.043 | 1.1 | 7 | 2 |
| 3942-300-7-SL-5P | 12 | 300 | 0.043 | 1.1 | 7 | 5 |
| 3942-300-7-SL-10P | 12 | 300 | 0.043 | 1.1 | 7 | 10 |

Features

- The Plaster and Board Bi-Metal blade is designed for demanding cutting in both plaster and different types of wooden chip boards
- Slope (SL) shape for various types of cuts
- . The toothing allows considerably faster cutting compared to traditional blades
- The blade is coated for minimum friction

BAHCO® RECIPROCATING SAW BLADES FOR FOR SPECIAL APPLICATIONS

SPECIALIZED BLADES FOR INDUSTRY-SPECIFIC APPLICATIONS



BAHCO® STAINLESS STEEL BLADES FOR CUTTING MEAT AND ICE

| | Blade-length | | Blade-th | ickness | Teeth | Pack |
|--------------------|--------------|------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3944-300-3-MEAT-1P | 12 | 300 | 0.049 | 1.25 | 3 | 1 |

Features

Reciprocating blade made for cutting meat/bone and frozen materials

BAHCO® BI-METAL CAR BODY SAW BLADES

| | Length | Material Thickness | Teeth | Pack |
|---------------------|--------|--------------------|----------|------|
| Product Code | (inch) | Capacity (Inches) | per inch | QTY |
| 3845-18-10P | 3 1/2 | Over 0.20 | 18 | 10 |
| 3845-18-100P - Bulk | 3 ½ | Over 0.20 | 18 | 100 |
| 3845-24-10P | 3 1/2 | 0.08 to 0.20 | 24 | 10 |
| 3845-24-100P - Bulk | 3 1/2 | 0.08 to 0.20 | 24 | 100 |
| 3845-32-10P | 3 1/2 | 0 to 0.08 | 32 | 10 |
| 3845-32-100P - Bulk | 3 1/2 | 0 to 0.08 | 32 | 100 |

- Car-body saw blades for pneumatic or electric reciprocating body shop saws
- Mainly used in automotive body shops
- Bulk packed for heavy usage applications



BAHCO® RECIPROCATING CARBIDE-TIPPED SAW BLADES

BLADES FOR HEAVY-DUTY APPLICATIONS

Simple saw blade selection thanks to the printed material information

Highly-resistant body allows straighter cuts even at heavy-duty work

Improved blade design based on the application



Carbide teeth withstand heat and can work long under extreme conditions

Sharp, long-life teeth carbide technology

BAHCO® CARBIDE TIPPED BLADES FOR WOOD WITH NAIL AND WALL DEMOLITION

| | Blade-length | | Blade-th | ickness | Teeth | Pack |
|-------------------|--------------|------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-150-6-DSL-1P | 6 | 150 | 0.050 | 1.3 | 6 | 1 |
| 3946-228-6-DSL-1P | 9 | 228 | 0.050 | 1.3 | 6 | 1 |
| 3946-300-6-DSL-1P | 12 | 300 | 0.050 | 1.3 | 6 | 1 |

Features

- Demolition shape extra thick and wide saw blades for demolition and heavy duty work
- Long life with high performance due to the carbide teeth design, making it suitable for work in extreme conditions
- . Universal shank fits any type reciprocating saw
- Carbide tipped blades withstand heat and work long under extreme conditions

BAHCO® CARBIDE TIPPED BLADES FOR DEMANDING METAL CUTTING

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|-------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-150-8-HST-1P | 6 | 150 | 0.050 | 1.3 | 8 | 1 |
| 3946-228-8-HST-1P | 9 | 228 | 0.050 | 1.3 | 8 | 1 |
| 3946-300-8-HST-1P | 12 | 300 | 0.050 | 1.3 | 8 | 1 |

Features

- Heavy standard shape's wide body makes it highly resistant to bending, allowing straighter cuts even in heavy duty work
- Long life with high performance due to the carbide teeth design, making it suitable for work in extreme conditions
- Universal shank fits any type reciprocating saw
- Blades are suitable for applications with high-strength steel and for tubes or profiles 5/32 to 1/2" thick

BAHCO® CARBIDE TIPPED BLADES FOR DEMANDING STAINLESS STEEL CUTTING

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|--------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-150-10-HST-1P | 6 | 150 | 0.050 | 1.3 | 10 | 1 |
| 3946-228-10-HST-1P | 9 | 228 | 0.050 | 1.3 | 10 | 1 |
| 3946-300-10-HST-1P | 12 | 300 | 0.050 | 1.3 | 10 | 1 |

- Heavy standard shape's wide body makes it highly resistant to bending, allowing straighter cuts even in heavy duty work
- Long life with high performance due to the carbide teeth design, making it suitable for work in extreme conditions
- · Universal shank fits any type reciprocating saw
- Blades are suitable for cutting stainless steel and tubes or profiles 3/16 to 3/8" thick











BAHCO® DIAMOND GRIT BLADES FOR CUTTING WOOD, CAST IRON AND CERAMIC

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|-------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-100-DG-ST-2P | 4 | 100 | 0.050 | 1.2 | Grit | 1 |
| 3946-150-DG-ST-2P | 6 | 150 | 0.050 | 1.2 | Grit | 11 |

Features

- Standard Shep for fast and aggressive straight cuts, but still flexible for narrow cutting
- Special design to cut Cement Cast Iron and the only blade that can cut pipes from cemented case iron
- . Diamond grip blades withstand heat and can work in extreme conditions
- · Universal shank fits any type reciprocating saw

BAHCO® CARBIDE GRIT BLADES FOR CUTTING TILE AND GLASS

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-100-G-ST-2P | 4 | 100 | 0.035 | 0.9 | Grit | 2 |

Features

 Carbide Grit for cutting hard materials such as tiles, ceramics and glass Shape Standard (ST)

BAHCO® CARBIDE TIPPED BLADES FOR DEMANDING BRICK CUTTING

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-300-2-CB-1P | 6 | 300 | 0.06 | 1.5 | СВ | 1 |
| 3946-457-2-CB-1P | 18 | 457 | 0.06 | 1.5 | CB | 1 |

Features

- Special blade design with an extra wide body that makes it highly resistant to bending, allowing straight cuts
- Designed for cutting through the roughest abrasive materials such as bricks, LECA and aerated concrete
- · Universal shank fits any type reciprocating saw

BAHCO® CARBIDE TIPPED BLADES FOR CUTTING STONE MATERIALS

| | Blade- | length | Blade-th | ickness | Teeth | Pack |
|------------------|--------|--------|----------|---------|----------|------|
| Product Code | (inch) | (mm) | (inch) | (mm) | per inch | QTY |
| 3946-150-6-SL-1P | 6 | 150 | 0.035 | 0.9 | 6 | 1 |
| 3946-228-3-ST-1P | 9 | 228 | 0.035 | 0.9 | 3 | 1 |
| 3946-228-6-ST-1P | 9 | 228 | 0.050 | 1.3 | 6 | 1 |
| 3946-300-6-ST-1P | 12 | 300 | 0.050 | 1.3 | 6 | 1 |

- A new wide range of 3 and 6 TPI carbide tipped blades for cutting of nonferrous materials such as lightweight concrete, bricks, fiberglass
- Comes in two shapes, Slope (SL) shape for various types of cuts and Standard (ST) shape for fast and aggressive straight cuts
- . Universal shank fits any type reciprocating saw





BAHCO® 7 PIECE SOFT GRIP PUNCH AND CHISEL SET

Soft Grip

| Product Code | Description |
|--------------|--|
| 3654BMS/7 | 7 Piece Soft Grip Punch and Chisel Set |

Contents Include:

| | Point | | Point |
|-------------|----------|-------------|----------|
| Description | Diameter | Description | Diameter |
| Pin Punch | 1/16 | Chisels | 5/8 |
| Pin Punch | 1/8 | Chisels | 3/4 |
| Pin Punch | 3/16 | Center | 1/4 |
| Pin Punch | 1/4 | | |

BAHCO® 7 PIECE SOFT GRIP PIN PUNCH SET

Soft Grip

| Product Code | Description |
|--------------|---------------------------------|
| 3734BMS/7 | 7 Piece Soft Grip Pin Punch Set |

Contents Include:

| Description | Point Diameter | Description | Point Diameter |
|-------------|-------------------|-------------|-------------------|
| Pin Punch | 1/16 | Pin Punch | 1/4 |
| Pin Punch | 1/8 | Pin Punch | 5/16 |
| Pin Punch | 3/16 | Pin Punch | 3/8 |
| Pin Punch | 3/16 | | |

Features

- Soft grip handle provides a powerful grip, is more comfortable in cold work environments and reduces strike vibration
- Semispherical striking area controls mushrooming to help reduce chipping and splitting
- Cutting edges on chisels are hand ground to consistently produce a quality edge
- Black oxide coated
- Manufactured from special alloy steel that is differentially heat treated to increase durability

BAHCO® POINTED CHISELS

Safety impact head

| Product Code | Length (Inches) |
|--------------|-----------------|
| 3739H-250 | 10 |
| 3739H-300 | 12 |
| 3739H-400 | 15 ½ |

Features

Safety impact head with plastic hand protection

BAHCO® SLITTING CHISEL

Safety impact head

| Product Code | Length (Inches) |
|--------------|-----------------|
| 3750H | 10 |

Features

· Safety impact head with plastic hand protection

BAHCO® MASON'S CHISEL

Safety impact head

| Product Code | Length (Inches) | Tip Width (Inches) |
|--------------|-----------------|--------------------|
| 3736MH-250 | 10" | 1" |
| 3736MH-300 | 12 | 1" |
| 3736MH-400 | 15 ½ | 1" |

Features

Safety impact head with plastic hand protection









3654BMS/7



3734BMS/7





Description



BAHCO® ERGO™ 6 PIECE ENGINEERING FILE SET

With Bi-Molded ERGO™ Handle

| 1-476-04-3-2 | 6 Piece Engineering File Set | | |
|---------------------|------------------------------|-------------|--|
| Contents Include: | | | |
| Description | Length (Inch) | Type of Cut | |
| Hand Smooth | 4 | Smooth | |
| Warding Smooth | 4 | Smooth | |
| Square Smooth | 4 | Smooth | |
| Three Square Smooth | 4 | Smooth | |
| Half Round Smooth | 4 | Smooth | |
| Round Smooth | 4 | Smooth | |

Features

Product Code

- Files are smooth, double cut and designed for the fine filing and polishing applications
- Supplied with pouch



BAHCO® ERGO™ 5 PIECE ENGINEERING FILE SET

With Bi-Molded ERGO™ Handle

| Product Code | Description | |
|--------------|------------------------------|--|
| 1-478-08-1-2 | 5 Piece Engineering File Set | |
| | | |

Contents Include:

| Description | Length (Inch) | Type of Cut | |
|--------------------|---------------|-------------|--|
| Hand Bastard | 8 | Bastard | |
| Hand Second | 8 | Second | |
| Square Bastard | 8 | Bastard | |
| Half Round Bastard | 8 | Bastard | |
| Round Bastard | 8 | Bastard | |

Features

- Files are coarse, double cut and designed for high removal rate
- Supplied with pouch



BAHCO® ERGO™ 3 PIECE ENGINEERING FILE SET

With Bi-Molded ERGO™ Handle

| Product Code | Description | |
|--------------|------------------------------|--|
| 1-473-06-2-2 | 3 Piece Engineering File Set | |
| | | |

Contents Include:

| Description | Length (Inch) | Type of Cut |
|-------------------|---------------|-------------|
| Hand Second | 8 | Second |
| Half Round Second | 8 | Second |
| Round Second | 8 | Second |

- Files are medium coarse, double cut and designed for high removal rate
- Supplied with pouch



BAHCO® NEEDLE FILE SETS

| Product Code | # of Pieces | Length (Inch) | Teeth Per Inch (TPI) | Type of Cut |
|-----------------|-------------|------------------|-------------------------|----------------|
| | | | | |
| 2-472-14-2-0 | 12 | 5 ½ | 97 | Smooth |
| 2-472-16-0-0 | 12 | 6 1/4 | 64 | Bastard |
| 2-472-16-1-0 | 12 | 6 1/4 | 79 | Second |
| 2-472-16-2-0 | 12 | 6 1/4 | 97 | Smooth |
| 2-471-16-1-0 | 9 | 6 1/4 | 79 | Second |
| 2-470-14-2-0 | 6 | 5 ½ | 97 | Smooth |
| 2-470-14-4-0 | 6 | 5 ½ | 142 | Dead Smooth |
| 2-470-16-1-0 | 6 | 6 1/4 | 79 | Second |
| | | | | |

Features

- Files in snap shut plastic wallet with hanging hole
- Includes one handle 9-488-02-10
- 12 Piece contains one file each of: hand, flat, three square, square, half round, crossing, round, knife, barrette, slitting, round-edge joint and marking
- 9 Piece contains one file each of: hand, flat, half round, round, three square, square, oval, crossing, knife
- 6 Piece contains one file each of: hand, flat, half round, round, three square and square



BAHCO® ERGO™ HOMEOWNER'S FILE SET

With Bi-Molded ERGO™ Handle

| Product Code | Length | Width | Height | Type |
|--------------|--------|--------|--------|------------------|
| | (Inch) | (Inch) | (Inch) | of Cut |
| 4-154-08-2-2 | 8 | 1 | 5/32 | Bastard + Second |

Features

 Set contains one 4-152 Homeowner's file for wood and one 4-153 Homeowner's file for metal













BAHCO® ERGO™ MILL FILE (USA TYPE)-**TWO FLAT EDGES**

| Hand File | | | | | |
|-----------------|------------------|--------------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Mo | Ided ERG | O™ Handle | • | | |
| 1-100-06-1-2 | 6 | 5/8 | 5/32 | 30 | Bastard |
| 1-100-06-2-2 | 6 | 5/8 | 5/32 | 43 | Second |
| 1-100-08-1-2 | 8 | 25/32 | 13/64 | 25 | Bastard |
| 1-100-10-1-2 | 10 | 1 | 7/32 | 23 | Bastard |
| 1-100-10-2-2 | 10 | 1 | 7/32 | 30 | Second |
| Without ha | ndle | | | | |
| 1-100-04-1-0 | 4 | 15/32 | 1/8 | 38 | Bastard |
| 1-100-04-2-0 | 4 | 15/32 | 1/8 | 53 | Second |
| 1-100-04-3-0 | 4 | 15/32 | 1/8 | 74 | Smooth |
| 1-100-06-1-0 | 6 | 5/8 | 5/32 | 30 | Bastard |
| 1-100-06-2-0 | 6 | 5/8 | 5/32 | 43 | Second |
| 1-100-06-3-0 | 6 | 5/8 | 5/32 | 61 | Smooth |
| 1-100-08-1-0 | 8 | 25/32 | 13/64 | 25 | Bastard |
| 1-100-08-2-0 | 8 | 25/32 | 13/64 | 38 | Second |
| 1-100-08-3-0 | 8 | 25/32 | 13/64 | 53 | Smooth |
| 1-100-10-1-0 | 10 | 1 | 7/32 | 23 | Bastard |
| 1-100-10-2-0 | 10 | 1 | 7/32 | 30 | Second |
| 1-100-10-3-0 | 10 | 1 | 7/32 | 45 | Smooth |
| 1-100-12-1-0 | 12 | 1 3/16 | 5/64 | 18 | Bastard |
| 1-100-12-2-0 | 12 | 1 3/16 | 5/64 | 25 | Second |
| 1-100-12-3-0 | 12 | 1 ³ /16 | 5/64 | 38 | Smooth |
| 1-100-14-1-0 | 14 | 1 ¾ | 15/64 | 15 | Bastard |
| 1-100-14-2-0 | 14 | 1 3/8 | 15/64 | 23 | Second |
| 1-100-14-3-0 | 14 | 1 ¾ | 15/64 | 30 | Smooth |

Features

- · For filing flat surfaces, sharp corners and shoulders as well as for deburring
- To work in high-alloy tool steels, for sharpening of heavy implements
- File surfaces are double cut while the edges have one side single cut and one side uncut

BAHCO® LATHE FILE

| Engineering File | | | | | | | |
|------------------|------------------|-----------------|------------------|-------------------------|-------------|--|--|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut | | |
| 1-104-10-2-0 | 10 | 31/32 | 7/32 | 30 | Second | | |
| 1-104-10-3-0 | 10 | 31/32 | 7/32 | 43 | Smooth | | |
| 1-104-12-2-0 | 12 | 15/32 | 1 11/64 | 25 | Second | | |
| 1-104-12-3-0 | 12 | 15/32 | 15/64 | 36 | Smooth | | |
| 1-104-14-3-0 | 14 | 13/8 | 15/64 | 30 | Smooth | | |

Features

- For polishing and deburring work in lathes
- Releases chips easily and produces smooth surfaces
- File surface is single cut while edges are uncut

BAHCO® ERGO™ HAND FILE



1-104-10-2-0

1-106-08-1-0

| Engineerin | g File | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Mo | Ided ERG | O™ Handle | • | | |
| 1-106-08-1-2 | 8 | 25/32 | 13/64 | 25 | Bastard |
| 1-106-10-1-2 | 10 | 31/32 | 13/64 | 23 | Bastard |
| Without ha | ndle | | | | |
| 1-106-08-1-0 | 8 | 25/32 | 13/64 | 25 | Bastard |
| 1-106-10-1-0 | 10 | 31/32 | 13/64 | 23 | Bastard |
| 1-106-12-1-0 | 12 | 3/16 | 13/16 | 18 | Bastard |

- · For polishing and deburring work in lathes
- Releases chips easily and produces smooth surfaces
- File surface is oberg cut while the edges have one side single cut and one side uncut



BAHCO® ERGO™ FLAT FILE

| Engineerin | ng File | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Me | olded ER | GO™ Ha | ndle | | |
| 1-110-08-1-2 | 8 | 25/32 | 13/64 | 25 | Bastard |
| 1-110-08-2-2 | 8 | 25/32 | 13/64 | 38 | Second |
| 1-110-10-1-2 | 10 | 1 | 7/32 | 23 | Bastard |
| 1-110-10-2-2 | 10 | 1 | 7/32 | 30 | Second |
| 1-110-10-3-2 | 10 | 1 | 7/32 | 43 | Smooth |
| Without ha | andle | | | | |
| 1-110-04-1-0 | 4 | 15/32 | 1/8 | 38 | Bastard |
| 1-110-04-2-0 | 4 | 15/32 | 1/8 | 53 | Second |
| 1-110-04-3-0 | 4 | 15/32 | 1/8 | 74 | Smooth |
| 1-110-06-1-0 | 6 | 5/8 | 5/32 | 30 | Bastard |
| 1-110-06-2-0 | 6 | 5/8 | 5/32 | 43 | Second |
| 1-110-06-3-0 | 6 | 5/8 | 5/32 | 61 | Smooth |
| 1-110-08-1-0 | 8 | 25/32 | 13/64 | 25 | Bastard |
| 1-110-08-2-0 | 8 | 25/32 | 13/64 | 38 | Second |
| 1-110-08-3-0 | 8 | 25/32 | 13/64 | 53 | Smooth |
| 1-110-10-1-0 | 10 | 1 | 7/32 | 23 | Bastard |
| 1-110-10-2-0 | 10 | 1 | 7/32 | 30 | Second |
| 1-110-10-3-0 | 10 | 1 | 7/32 | 43 | Smooth |
| 1-110-12-1-0 | 12 | 1 3/16 | 15/64 | 18 | Bastard |
| 1-110-12-2-0 | 12 | 1 3/16 | 15/64 | 25 | Second |
| 1-110-12-3-0 | 12 | 1 3/16 | 15/64 | 38 | Smooth |
| 1-110-14-1-0 | 14 | 1 % | 15/64 | 38 | Bastard |

Features

- Pointed shape enables user to reach into angles and corners
- Edges are tapered towards the point with surfaces being parallel
- File surfaces is double cut while the edges are single cut



BAHCO® WARDING FILE

| Engineering File | | | | | | |
|------------------|------------------|-----------------|---------------|-------------------------|-------------|--|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut | |
| Without ha | andle | | | | | |
| 1-111-04-1-0 | 4 | 25/64 | 3/64 | 43 | Bastard | |
| 1-111-04-2-0 | 4 | 25/64 | 3/64 | 53 | Second | |
| 1-111-04-3-0 | 4 | 25/64 | 3/64 | 74 | Smooth | |
| 1-111-06-1-0 | 6 | 19/32 | 5/64 | 38 | Bastard | |
| 1-111-06-2-0 | 6 | 19/32 | 5/64 | 43 | Second | |
| 1-111-06-3-0 | 6 | 19/32 | 5/64 | 61 | Smooth | |
| 1-111-08-1-0 | 8 | 3/4 | 3/32 | 30 | Bastard | |
| 1-111-08-2-0 | 8 | 3/4 | 3/32 | 38 | Second | |
| 1-111-08-3-0 | 8 | 3/4 | 3/32 | 53 | Smooth | |

- Designed for filing narrow grooves, and passages such as filing cuts on keys
- Edges are tapered towards the point with surfaces being parallel
- File surfaces is double cut while the edges are single cut













BAHCO® ERGO™ MILL FILE (USA TYPE)-TWO FLAT EDGES

| Engineerin | ng File | | | | | | | |
|------------------------------|-----------------------------|------------------------------------|------------------|-------------------------|--------------------|--|--|--|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut | | | |
| With Bi-M | With Bi-Molded ERGO™ Handle | | | | | | | |
| 1-143-06-1-2 | 6 | 5/8 | 7/64 | 48 | Bastard | | | |
| 1-143-08-1-2 1-143-10-1-2 | 8 10 | ²⁵ / ₃₂ 1 | 1/8 1 43/64 | 44 40 | Bastard Bastard | | | |
| Without ha | andle | | | | | | | |
| 1-143-04-1-0 | 4 | 7/16 | 5/64 | 53 | Bastard | | | |
| 1-143-04-2-0 | 4 | 7/16 | 5/64 | 62 | Second | | | |
| 1-143-04-3-0 | 4 | 7/16 | 5/64 | 75 | Smooth | | | |
| 1-143-06-1-0 | 6 | 5/8 | 7/64 | 48 | Bastard | | | |
| 1-143-06-2-0 | 6 | 5/8 | 7/64 | 53 | Second | | | |
| 1-143-06-3-0 | 6 | 5/8 | 7/64 | 62 | Smooth | | | |
| 1-143-08-1-0 | 8 | ²⁵ / ₃₂ | 1/8 | 44 | Bastard | | | |
| 1-143-08-2-0 | 8 | ²⁵ / ₃₂ | 1/8 | 48 | Second | | | |
| 1-143-08-3-0 | 8 | ²⁵ / ₃₂ | 1/8 | 57 | Smooth | | | |
| 1-143-10-1-0 | 10 | 1 | 5/32 | 40 | Bastard | | | |
| 1-143-10-2-0 | 10 | 1 | 5/32 | 44 | Second | | | |
| 1-143-10-3-0 | 10 | 1 | 5/32 | 53 | Smooth | | | |
| 1-143-12-1-0 | 12 | 1 ¹³ / ₁₆ | 3/16 | 37 | Bastard | | | |
| 1-143-12-2-0 | 12 | 1 ¹³ / ₁₆ | 3/16 | 40 | Second | | | |
| 1-143-12-3-0 | 12 | 1 ¹³ /16 | 3/16 | 48 | Smooth | | | |

Features

- Surfaces and edges are single cut
- Suitable for engineering and sharpening file applications
- Can be used for polishing and deburring work in lathes
- Widely used for sharpening tools and implements such as spades, shovels, hoes, scrapers, etc.



BAHCO® PLASTIC CUT FILE

| Engineering File | | | | | | | |
|------------------|------------------|-----------------|------------------|-------------------------|-------------|--|--|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut | | |
| Without ha | andle | | | | | | |
| 1-145-12-0-0 | 12 | 31/32 | 13/64 | 39 | Smooth | | |
| 1-145-14-0-0 | 14 | 1 11/64 | 3/16 | 23 | Second | | |

- Designed for fast and easy cutting on plastic laminates
- Excellent for edge finishing
- Single cut



BAHCO® ERGO™ SQUARE FILE

| Engineerin | ng File | | | | |
|-----------------|------------------|-------------------------------|-------------------------------|-------------------------|----------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Me | olded ER | GO™ Ha | andle | | |
| 1-160-06-1-2 | 6 | 15/32 | 15/64 | 33 | Bastard |
| 1-160-06-2-2 | 6 | 15/32 | 15/64 | 46 | Second |
| 1-160-08-1-2 | 8 | 5/16 | 5/16 | 25 | Bastard |
| 1-160-08-2-2 | 8 | 5/16 | ⁵ /16 | 36 | Second |
| 1-160-10-1-2 | 10 | ²⁵ / ₆₄ | ²³ / ₆₄ | 23 | Bastard |
| Without ha | andle | | | | |
| 1-160-04-1-0 | 4 | 11/64 | 11/64 | 43 | Bastard |
| 1-160-04-2-0 | 4 | 11/64 | 11/64 | 56 | Second |
| 1-160-04-3-0 | 4 | 11/64 | 11/64 | 71 | Smooth |
| 1-160-06-1-0 | 6 | 15/32 | 15/64 | 33 | Bastard |
| 1-160-06-2-0 | 6 | 15/32 | 15/64 | 46 | Second |
| 1-160-06-3-0 | 6 | 15/32 | 15/64 | 56 | Smooth |
| 1-160-08-1-0 | 8 | 5/16 | ⁵ /16 | 25 | Bastard |
| 1-160-08-2-0 | 8 | 5/16 | 5/16 | 36 | Second |
| 1-160-08-3-0 | 8 | 5/16 | 5/16 | 46 | Smooth |
| 1-160-10-1-0 | 10 | ²⁵ / ₆₄ | 23/64 | 23 | Bastard |
| 1-160-10-2-0 | 10 | ²⁵ / ₆₄ | 23/64 | 30 | Second |
| 1-160-10-3-0 | 10 | ²⁵ / ₆₄ | 23/64 | 41 | Smooth |
| 1-160-12-1-0 | 12 | 15/32 | 15/32 | 20 | Bastard |
| 1-160-12-2-0 | 12 | 15/32 | 15/32 | 28 | Second |

Features

- Designed for filing grooves, rectangular holes, inside corners and for fine-adjustments of cutting tools
- . Surfaces are tapered towards the point and has a double cut

BAHCO® ERGO™ THREE SQUARE FILE

Engineering File

| gcc | .9 | | | | | | |
|-----------------------------|------------------|-----------------|------------------|-------------------------|-------------|--|--|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut | | |
| With Bi-Molded ERGO™ Handle | | | | | | | |
| 1-170-06-1-2 | 6 | 7/16 | 7/16 | 33 | Bastard | | |
| 1-170-06-2-2 | 6 | 7/16 | 7/16 | 46 | Second | | |
| 1-170-08-1-2 | 8 | 5/8 | 5/8 | 25 | Bastard | | |
| 1-170-08-2-2 | 8 | 5/8 | 5/8 | 36 | Second | | |
| 1-170-10-1-2 | 10 | 11/16 | 11/16 | 23 | Bastard | | |
| 1-170-10-3-2 | 10 | 11/16 | 11/16 | 41 | Smooth | | |
| Without handle | | | | | | | |
| 1-170-04-3-0 | 4 | 1/4 | 1/4 | 71 | Smooth | | |
| 1-170-06-1-0 | 6 | 7/16 | 7/16 | 33 | Bastard | | |
| 1-170-06-2-0 | 6 | 7/16 | 7/16 | 46 | Second | | |
| 1-170-06-3-0 | 6 | 7/16 | 7/16 | 56 | Smooth | | |
| 1-170-08-1-0 | 8 | 5/8 | 5∕8 | 25 | Bastard | | |
| 1-170-08-2-0 | 8 | 5/8 | 5/8 | 36 | Second | | |
| 1-170-08-3-0 | 8 | 5/8 | 5/8 | 46 | Smooth | | |
| 1-170-10-1-0 | 10 | 11/16 | 11/16 | 23 | Bastard | | |
| 1-170-10-2-0 | 10 | 11/16 | 11/16 | 30 | Second | | |
| 1-170-10-3-0 | 10 | 11/16 | 11/16 | 41 | Smooth | | |

- Ideal for deburring and filing angles and inner corners. Can be used for filing of holes, large fillets and concave surfaces
- Shaped in an equilateral triangle that tapers towards the point and has double surface cuts













1-230-10-1-0



BAHCO® ERGO™ HALF-ROUND FILE

| Engineerin | ng File | | | | |
|--------------|----------|--------------------------------|-------------------|----------------|---------|
| Product | Length | Width | Height | Teeth Per Inch | Type |
| Code | (Inch) | (Inch) | (Inch) | (TPI) | of Cut |
| With Bi-Me | olded ER | GO™ Han | dle | | |
| 1-210-06-1-2 | 6 | 5/8 | 3/16 | 33 | Bastard |
| 1-210-06-2-2 | 6 | 5/8 | 5/8 | 46 | Second |
| 1-210-06-3-2 | 6 | 5/8 | 5/8 | 56 | Smooth |
| 1-210-08-1-2 | 8 | 13/16 | 13/16 | 25 | Bastard |
| 1-210-08-2-2 | 8 | ¹³ / ₁₆ | 13/16 | 36 | Second |
| 1-210-10-1-2 | 10 | 1 3/64 | 1 3/64 | 23 | Bastard |
| 1-210-10-2-2 | 10 | 1 3/64 | 1 3/64 | 30 | Second |
| 1-210-12-1-2 | 12 | 1 7/32 | 1 7/32 | 20 | Bastard |
| 1-210-12-2-2 | 12 | 17/32 | 17/32 | 28 | Second |
| Without ha | andle | | | | |
| 1-210-04-1-0 | 4 | 25/64 | 1/8 | 43 | Bastard |
| 1-210-04-2-0 | 4 | 25/64 | 1/8 | 56 | Second |
| 1-210-04-3-0 | 4 | ²⁵ / ₆₄ | 1/8 | 71 | Smooth |
| 1-210-06-1-0 | 6 | 5/8 | 3/16 | 33 | Bastard |
| 1-210-06-2-0 | 6 | 5/8 | 5/8 | 46 | Second |
| 1-210-06-3-0 | 6 | 5/8 | 5/8 | 56 | Smooth |
| 1-210-08-1-0 | 8 | 13/16 | ¹³ /16 | 25 | Bastard |
| 1-210-08-2-0 | 8 | ¹³ /16 | ¹³ /16 | 36 | Second |
| 1-210-08-3-0 | 8 | ¹³ /16 | 13/16 | 46 | Smooth |
| 1-210-10-1-0 | 10 | 1 ³ / ₆₄ | 1 3/64 | 23 | Bastard |
| 1-210-10-2-0 | 10 | 1 3/64 | 1 3/64 | 30 | Second |
| 1-210-10-3-0 | 10 | 1 3/64 | 1 3/64 | 41 | Smooth |
| 1-210-12-1-0 | 12 | 1 7/32 | 1 7/32 | 20 | Bastard |
| 1-210-12-2-0 | 12 | 1 7/32 | 1 7/32 | 28 | Second |
| 1-210-12-3-0 | 12 | 1 7/32 | 1 7/32 | 36 | Smooth |
| 1-210-14-1-0 | 14 | 1 % | 1 % | 18 | Bastard |

Features

- Used for filing concave and flat surfaces as well as large holes and deburring requirements
- Edges and surfaces are tapered towards the point and has double surface cuts

BAHCO® ERGO™ ROUND FILE

| Engineering | ; File | | | | |
|-----------------|------------------|-------------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Mol | Ided ERGC |)™ Hand | le | | |
| 1-230-06-1-2 | 6 | 15/32 | | 33 | Bastard |
| 1-230-06-2-2 | 6 | 15/32 | | 46 | Second |
| 1-230-08-1-2 | 8 | 5/16 | | 25 | Bastard |
| 1-230-08-2-2 | 8 | 5/16 | | 36 | Second |
| 1-230-10-1-2 | 10 | 25/64 | | 23 | Bastard |
| 1-230-10-2-2 | 10 | 25/64 | | 30 | Second |
| 1-230-10-3-2 | 10 | 25/64 | | 41 | Smooth |
| Without har | ndle | | | | |
| 1-230-04-1-0 | 4 | 9/64 | | 43 | Bastard |
| 1-230-04-2-0 | 4 | 9/64 | | 56 | Second |
| 1-230-04-3-0 | 4 | 9/64 | | 71 | Smooth |
| 1-230-06-1-0 | 6 | 15/32 | | 33 | Bastard |
| 1-230-06-2-0 | 6 | 15/32 | | 46 | Second |
| 1-230-06-3-0 | 6 | 15/32 | - | 56 | Smooth |
| 1-230-08-1-0 | 8 | 5/16 | | 25 | Bastard |
| 1-230-08-2-0 | 8 | 5/16 | | 36 | Second |
| 1-230-08-3-0 | 8 | 5/16 | | 46 | Smooth |
| 1-230-10-1-0 | 10 | 25/64 | | 23 | Bastard |
| 1-230-10-2-0 | 10 | ²⁵ /64 | | 30 | Second |
| 1-230-10-3-0 | 10 | 25/64 | - | 41 | Smooth |
| 1-230-12-1-0 | 12 | 15/32 | | 20 | Bastard |
| 1-230-12-2-0 | 12 | 15/32 | | 28 | Second |
| 1-230-12-3-0 | 12 | 15/32 | | 36 | Smooth |

Features

 Regularly used for filing holes, large fillets and concave surfaces File is tapered to a point and has a double cut



BAHCO® HAND NEEDLE FILES

| Product Code | Length (Inch) | Teeth Per Inch (TPI) | Type of Cut |
|--------------|---------------|----------------------|-------------|
| Without ha | ndle | | |
| 2-300-14-0-0 | 5 ½ | 56 | Bastard |
| 2-300-14-2-0 | 5 ½ | 86 | Smooth |
| 2-300-14-4-0 | 5 ½ | 122 | Dead Smooth |
| 2-300-16-0-0 | 6 1/4 | 56 | Bastard |
| 2-300-16-1-0 | 6 1/4 | 66 | Second |
| 2-300-16-2-0 | 6 1/4 | 86 | Smooth |
| 2-300-16-4-0 | 6 1/4 | 122 | Dead Smooth |
| 2-300-18-0-0 | 7 | 56 | Bastard |
| 2-300-18-2-0 | 7 | 86 | Smooth |

Features

- Perfect for fine filing and polishing jobs
- Used by engravers, precision engineers, instrument makers, watchmakers and goldsmiths
- Edges and surfaces are parallel
- · Surfaces double cut, edges single cut

BAHCO® FLAT NEEDLE FILES

| Product Code | Length (Inch) | Teeth Per Inch (TPI) | Type of Cut |
|-----------------|------------------|-------------------------|-------------|
| Without hand | lle | | |
| 2-301-14-0-0 | 5 ½ | 56 | Bastard |
| 2-301-14-2-0 | 5 ½ | 86 | Smooth |
| 2-301-14-4-0 | 5 ½ | 122 | Dead Smooth |
| 2-301-16-0-0 | 6 1/4 | 56 | Bastard |
| 2-301-16-1-0 | 6 1/4 | 66 | Second |
| 2-301-16-2-0 | 6 1/4 | 86 | Smooth |
| 2-301-16-4-0 | 6 1/4 | 122 | Dead Smooth |
| 2-301-18-2-0 | 7 | 86 | Smooth |

Features

- Perfect for fine filing and polishing jobs
- . Used by engravers, precision engineers, instrument makers, watchmakers and goldsmiths
- Surfaces parallel, edges taper to a point
- Surfaces double cut, edges single cut

BAHCO® THREE SQUARE NEEDLE FILES

| Product Code | Length (Inch) | Teeth Per Inch (TPI) | Type of Cut |
|-----------------|------------------|-------------------------|----------------|
| Without hand | lle | | |
| 2-302-14-0-0 | 5 ½ | 56 | Bastard |
| 2-302-14-2-0 | 5 1/2 | 86 | Smooth |
| 2-302-14-4-0 | 5 1/2 | 102 | Dead Smooth |
| 2-302-16-0-0 | 6 1/4 | 56 | Bastard |
| 2-302-16-1-0 | 6 ½ | 66 | Second |
| 2-302-16-2-0 | 6 ½ | 86 | Smooth |
| 2-302-16-4-0 | 6 ½ | 122 | Dead Smooth |
| 2-302-18-0-0 | 7 | 56 | Bastard |
| 2-302-18-2-0 | 7 | 86 | Smooth |

- Perfect for fine filing and polishing jobs. Used by engravers, precision engineers, instrument makers, watchmakers and goldsmiths
- Triangular, surfaces taper to a point
- Surfaces double cut













4-150-07-3-0

BAHCO® SQUARE NEEDLE FILES

| Product Code Length (Ir | nch) Teeth Per Inch (TPI) | Type of Cut |
|-------------------------|---------------------------|-------------|
| Without handle | | |
| 2-303-14-2-0 5 ½ | 86 | Smooth |
| 2-303-14-4-0 5 ½ | 122 | Dead Smooth |
| 2-303-16-0-0 6 1/4 | 56 | Bastard |
| 2-303-16-1-0 6 1/4 | 66 | Second |
| 2-303-16-2-0 6 1/4 | 86 | Smooth |
| 2-303-16-4-0 6 1/4 | 122 | Dead Smooth |
| 2-303-18-0-0 7 | 56 | Bastard |
| 2-303-18-2-0 7 | 86 | Smooth |

Features

- Perfect for fine filing and polishing jobs. Used by engravers, precision engineers, instrument makers, watchmakers and goldsmiths
- Square shape, surface tapered to a point. Surfaces double cut

BAHCO® HALF ROUND NEEDLE FILES

| Product Code | Length (Inch) | Teeth Per Inch (TPI) | Type of Cut |
|--------------|---------------|----------------------|-------------|
| Without han | dle | | • |
| 2-304-14-0-0 | 5 ½ | 56 | Bastard |
| 2-304-14-2-0 | 5 ½ | 86 | Smooth |
| 2-304-14-4-0 | 5 ½ | 122 | Dead Smooth |
| 2-304-16-0-0 | 6 1/4 | 56 | Bastard |
| 2-304-16-1-0 | 6 1/4 | 66 | Second |
| 2-304-16-2-0 | 6 1/4 | 86 | Smooth |
| 2-304-16-4-0 | 6 1/4 | 122 | Dead Smooth |
| 2-304-18-0-0 | 7 | 56 | Bastard |
| 2-304-18-2-0 | 7 | 86 | Smooth |

Features

- Perfect for fine filing and polishing jobs. Used by engravers, precision engineers, instrument makers, watchmakers and goldsmiths
- Surfaces taper to a point. Flat and convex surfaces double cut

BAHCO® MILL SAW FILE

| Engineerir | ng Files | | | | |
|-----------------|------------------|---------------------------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| Without ha | andle - Or | e Round I | Edges | | |
| 4-138-08-1-0 | 8 | 25/32 | 1/8 | 46 | Bastard |
| 4-138-10-1-0 | 10 | 1 | 5/32 | 41 | Bastard |
| 4-138-12-1-0 | 12 | 1 ¹³ / ₁₆ | 3/16 | 36 | Bastard |
| Without ha | andle - Tw | o Round I | Edges | | |
| 4-140-06-1-0 | 6 | 5/8 | 7/64 | 46 | Bastard |
| 4-140-08-1-0 | 8 | 25/32 | 1/8 | 41 | Bastard |
| 4-140-10-1-0 | 10 | 1 | 5/32 | 36 | Bastard |

Features

- Designed for circular, felling and gang saws with fine toothing, including bandsaws
- · Excels at draw and fine filing, polishing and deburring work
- Used in the engineering industry as a lathe and deburring file
- File is parallel and thin with surface and edge having single cut and one round edge

BAHCO® FLAT CHISEL BIT FILE

| Engineering File Product Code | Length (Inch) | Width (Inch) | Height (Inch) |
|----------------------------------|---------------|--------------|---------------|
| 4-150-07-3-0 | 7 | 1/2 | 1/8 |

- Designed for filing of square ground cutters
- · File is flat



BAHCO® ERGO™ HOMEOWNER'S FILE -FOR WOOD OR METAL

With Bi-Molded ERGO™ Handle

| Product Code | Length (Inch) | Teeth Per Inch (TPI) | Type of Cut | Туре | |
|--------------|------------------|-------------------------|--------------------------------|-------|--|
| 4-152-08-2-2 | 8 | 41 + 36 | Bastard Rasp & Double Second | Wood | |
| 4-153-08-1-2 | 8 | 25 + 41 | Bastard Double & Single Second | Metal | |

Features

- Wood file has both rasp and double cut
- Wood file is flat and parallel with two flat, uncut edges one side bastard rasp cut and the other side double second cut
- Metal file has both bastard double and single second cut
- Metal file is flat and parallel with two flat, uncut edges

BAHCO® FARMER'S DOUBLE DUTY FILE

Handle has a hole for hanging.

| Product | Length | Width | Height | Teeth Per Inch | Type |
|--------------|--------|---------------------------------|------------------------------|----------------|--------|
| Code | (Inch) | (Inch) | (Inch) | (TPI) | of Cut |
| 4-155-08-2-0 | 8 | 1 | ⁵ / ₃₂ | 23 | Second |
| 4-155-10-2-0 | 10 | 1 ¹³ / ₁₆ | ⁷ / ₃₂ | 18 | Second |

Features

- File is both double and single cut
- Double cut is for filing flat surfaces and for rough sharpening of edges on spades, hoes, etc.
- Single cut is for fine filing of flat surfaces and for fine sharpening of tools and implements
- File has parallel edges with one being uncut one side is double cut bastard and the other side is single cut bastard

BAHCO® ERGO™ SHARPENING FILES -TAPER SAW FILE

| Sharpenin | g File | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Me | olded ER | GO™ Ha | ndle | | |
| 4-183-04-2-2 | 4 | 21/64 | | 50 | Second |
| 4-183-05-2-2 | 5 | 13/32 | | 46 | Second |
| 4-183-06-2-2 | 6 | 15/32 | - | 43 | Second |
| Without ha | andle | | | | |
| 4-183-06-2-0 | 6 | 15/32 | | 43 | Second |
| 4-183-07-2-0 | 7 | 1/2 | | 41 | Second |
| 4-183-08-2-0 | 8 | 19/32 | | 41 | Second |
| 4-183-10-2-0 | 10 | 21/32 | | 38 | Second |

- . Designed for sharpening saws with cross toothing and teeth at 60° angle
- File is triangular with edges tapering towards the point with surface and edges single cut














| Sharpenin | g File | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-Mo | olded ER | GO™ Ha | ndle | | |
| 4-186-04-2-2 | 4 | 9/64 | | 58 | Second |
| 4-186-05-2-2 | 5 | 3/16 | | 54 | Second |
| 4-186-06-2-2 | 6 | 15/64 | | 50 | Second |
| Without Ha | andle | | | | |
| 4-186-04-2-0 | 4 | 9/64 | | 58 | Second |
| 4-186-05-2-0 | 5 | 3/16 | | 54 | Second |
| 4-186-06-2-0 | 6 | 15/64 | | 50 | Second |
| 4-186-07-2-0 | 7 | 17/64 | - | 46 | Second |
| 4-186-08-2-0 | 8 | 21/64 | | 42 | Second |

Features

- Used for sharpening of all types of saws with fine cross toothing
- File is triangular with edges tapering towards the point with surface and edges single cut

BAHCO® ERGO™ EXTRA SLIM TAPER FILE

| Sharpenir | g File | | | |
|-----------------|------------------|-----------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-M | olded EF | GO™ H | andle | |
| 4-187-06-2-2 | 6 | 3/16 | 54 | Second |
| Without H | andle | | | |
| 4-187-04-2-0 | 4 | 9/64 | 64 | Second |
| 4-187-06-2-0 | 6 | 3/16 | 54 | Second |
| 4-187-07-2-0 | 7 | 15/64 | 50 | Second |
| 4-287-06-2-0 | 6 | 13/64 | 54 | Second |

Features

- Used for sharpening of all types of saws with fine cross toothing
- File is triangular with edges tapering towards the point
- Surfaces are single cut on 4-187 and double cut on 4-287
- Edges are single cut
- Section figures indicate the largest width of the file section

BAHCO® DOUBLE EXTRA SLIM TAPER

| Sharpening File | | | | |
|-----------------|------------------|-----------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| Without Handle | | | | |
| 4-188-05-2-0 | 5 | 11/64 | 58 | Second |
| 4-188-06-2-0 | 6 | 11/64 | 58 | Second |
| 4-288-06-2-0 | 6 | 11/64 | 58 | Second |

- Used for sharpening of all types of saws with fine cross toothing
- Triangular, with edges tapering towards the point
- Surfaces are single cut on 4-188 and double cut on 4-288
- · Edges are single cut
- Width figures indicate the largest width of the file section





BAHCO® DOUBLE EDGE SAW FILE - "WASA"

| Sharpenin | g Files | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| Without ha | andle | | | | |
| 4-272-06-3-0 | 6 | 5/8 | 5/32 | 58 | Smooth |

Features

- For sharpening saws with straight, fine toothing
- Note that saws with hardened tooth points cannot be sharpened with a file
- · Parallel, rhombic
- . Surfaces and edges single cut

BAHCO® ERGO™ HALF ROUND RASPS

| Rasps | | | | | |
|--|------------------|---|---------------------|-------------------------|----------------------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-M | olded EF | RGO™ H | andle | | |
| 6-342-08-1-2 6-342-08-2-2 | 8 8 | ⁵³ / ₆₄ ⁵³ / ₆₄ | 5/16 5/16 | 64 104 | Coarse Medium |
| Without h | andle | | | | |
| 6-342-08-1-0 6-342-10-1-0 6-342-12-1-0 | 8 10 12 | ⁵³ / ₆₄ ¹⁵ / ₁₆ 1 ¹ / ₁₆ | 5/16 5/16 3/8 | 64 51 38 | Coarse Coarse Coarse |

Features

- Designed for work in wood, plywood, wall board, plastics and other soft materials
- File's edges and surfaces are tapered towards the point with surfaces rasp cut and edges single cut

BAHCO® CABINET RASPS

| Rasps | | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| Without ha | andle | | | | |
| 6-343-08-3-0 | 8 | 7/8 | 7/32 | 142 | Fine |
| 6-343-10-3-0 | 10 | 1 1/16 | 15/64 | 117 | Fine |

- Designed for work in wood, plywood, wall board, plastics and other soft materials
- File is thin and half round edges and surfaces tapered towards the point Surface is rasp cut and edges are single cut













BAHCO® ERGO™ HAND RASPS

| Rasps | | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-M | olded El | RGO™ ŀ | landle | | |
| 6-344-08-2-2 | 8 | 25/32 | 1/4 | 104 | Medium |

Features

- Designed for work in wood, plywood, wall board, plastics and other soft materials
- File's edges and surfaces are parallel with surface rasp cut and one edge single cut

BAHCO® ERGO™ ROUND RASP

| Rasps | | | | | |
|-----------------|------------------|-----------------|------------------|-------------------------|-------------|
| Product Code | Length (Inch) | Diameter (Inch) | Height (Inch) | Teeth Per Inch (TPI) | Type of Cut |
| With Bi-M | old ERG | GO™ Han | dle | | |
| 6-345-08-2-2 | 8 | 9/32 | 23/64 | 104 | Medium |

Features

- Designed for work in wood, plywood, wall board, plastics and other soft materials
- File surface is rasp cut
- File is round and tapered towards the point

BAHCO® ERGO™ FILEMASTER

| Rasps | | | | |
|--------------|---------------|--------------|---------------|-------------------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) |
| With Bi-Mo | olded ERGO | ™ Handle | | |
| FM10 | 10 | 29/32 | 7/32 | 9 + 13 |

- Designed for shear cuts on steel, plastics, laminates and hard woods.
 Also good for finishing in most materials
- Has curved teeth for fast removal of soft metals, lead, aluminum, soft woods and fillers
- The edges are parallel and uncut, and the surface has milled teeth one side shear cut and one side curved teeth
- File coated with a protective layer of paint



BAHCO® ERGO™ HALF ROUND FILEMASTER

| Rasps | | | | |
|--------------|---------------|--------------|---------------|----------------------|
| Product Code | Length (Inch) | Width (Inch) | Height (Inch) | Teeth Per Inch (TPI) |
| With Bi-Mo | olded ERGO | ™ Handle | | |
| HRFM10 | 10 | 29/32 | 1/8 | 12 |

Features

- · Designed for filing concave and flat surface, and large holes
- Has curved teeth for fast removal of soft metals, lead, aluminum, soft woods and fillers
- Edges are tapered towards the point and are uncut
- Half round surface are milled, curved teeth and concave back is uncut
- File coated with a protective layer of paint

BAHCO® FILE CLEANER

Accessories

Product Code

9-467-00-0-0

Features

- In order to ensure a good filing result, files should periodically be cleaned during use
- . Has bristles on one side and a card of steel wire on the other
- · Use the brush to clear clogged teeth
- Doing this regularly will improve the stock removal efficiency of the file, and extend its
 useful life

BAHCO® ROUND CHAIN SAW FILES

Chain Saw Files

Product Code Length Diameter (Inch)

Each file is packed in a skin-pack, which can be used as a protective sleeve.

| 168-6-3.2-1P | 6 | 1/8 |
|--------------|---|-------|
| 168-6-3.5-1P | 6 | 9/64 |
| 168-8-4.0-1P | 8 | 5/32 |
| 168-8-4.5-1P | 8 | 11/64 |
| 168-8-4.8-1P | 8 | 3/16 |
| 168-8-5.2-1P | 8 | 13/64 |
| 168-8-5.5-1P | 8 | 7/32 |
| 168-8-6.3-1P | 8 | 1/4 |

Files are packed in 3 piece protective skin-pack, with perforation for easy separation.


| - | | |
|--------------|---|------|
| 168-8-4.0-3P | 8 | 5/32 |
| 168-8-4.8-3P | 8 | 3/16 |
| 168-8-5.5-3P | 8 | 7/32 |

Files are packed in 6 per paper box.

| i nos are paek | ou o poi pupoi b | OA: | |
|----------------|------------------|-------|--|
| 168-8-4.0-6 | 8 | 5/32 | |
| 168-8-4.5-6 | 8 | 11/64 | |
| 168-8-4.8-6 | 8 | 3/16 | |
| 168-8-5.2-6 | 8 | 13/64 | |
| 168-8-5 5-6 | 8 | 7/32 | |

Features

. For sharpening of the cutting tooth on the saw chain

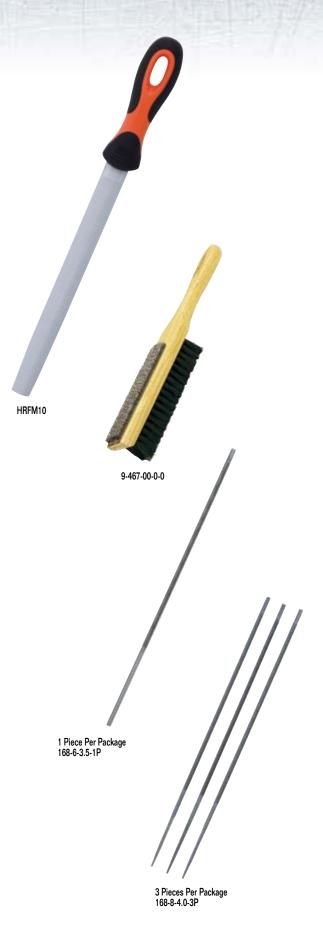















| ile | | |
|---------------|---------------|--|
| Length (Inch) | Width (Inch) | Height (Inch) |
| I ERGO® Hand | dle | |
| 6 | 5/8 | 3/32 |
| | Length (Inch) | Length (Inch) Width (Inch) I ERGO® Handle |

Features

- Designed for filing of depth gauges on saw chains and for sharpening of brush cutter blades
- Files are packed 12 pieces per box
- File is flat with single cut surface, edges are round and uncut

BAHCO® ERGO™ ROUND CHAIN SAW FILE HANDLES

| Product Code | Handle Number | Туре | Packaging |
|--------------|---------------|-------|--------------|
| 9-486-C-10 | С | ERGO™ | 10 Pack |
| 9-486-C-1P | С | ERGO™ | 1 Individual |
| PH-6604-1P | | | 1 Individual |
| PH-6604-25 | | | 25 Pack |

Features

- Handle 9-486 is ergonomically shaped bi-molded plastic handle that provides soft, textured grip for comfort and control
- Handle 9-486 can hold both round chain saw files (type 168) and flat chain saw file (type 166)
- Handle PH-6604 is an all plastic handle designed for 8 inch round chain saw files with 3 integrated angle guides



BAHCO® PLASTIC FILE HANDLES

| Comfortable | Grip | |
|---------------|-----------------------|------------|
| Product Code | Handle Number | Packaging |
| Files are pac | ked in 6 per paper be | DX. |
| 9-484-3.2-1P | 3.2 | Individual |
| 9-484-5.2-1P | 5.2 | Individual |
| 9-484-3.2-10 | 3.2 | 10 Pack |
| 9-484-5.2-10 | 5.2 | 10 Pack |
| 9-488-02-10 | Needle/Pansar | 10 Pack |

- The end covers the file tang and shoulder for safe and comfortable grip
- Plastic file handles designed for small sized files



PATENTED DESIGN IMPROVES SAFETY AND COMFORT





BAHCO® ERGO™ FILE HANDLES

Bi-Molded ERGO™ Handles

comfort

Product Code Handle Number Packaging

Designed for files of rectangular shape (flat, hand, etc) and for half round files.

| 9-485-04-1P | 04 | Individual |
|-------------|----|------------|
| 9-485-05-1P | 05 | Individual |
| 9-485-06-1P | 06 | Individual |
| 9-485-09-1P | 09 | Individual |
| 9-485-13-1P | 13 | Individual |
| 9-485-06-10 | 06 | 10-Pack |
| 9-485-09-10 | 09 | 10-Pack |
| 9-485-13-10 | 13 | 10-pack |

Designed for shaped files (round, square, three square, etc.)

| 9-486-3.2-1P | 3.2 | Individual |
|--------------|-----|------------|
| 9-486-04-1P | 04 | Individual |
| 9-486-05-1P | 05 | Individual |
| 9-486-07-1P | 07 | Individual |
| 9-486-04-10 | 04 | 10-Pack |
| 9-486-05-10 | 05 | 10-Pack |
| 9-486-08-10 | 08 | 10-Pack |

- Ergonomically shaped bi-molded plastic handle provides soft, textured grip for comfort and control
- The end covers the file tang and shoulder for safe and comfortable grip











FILE SELECTION GUIDE ENGINEERING AND RASPS

| Shape | Code | 4" | 6" | 8" | 10" | 12" | 14" |
|------------------------|-------|-----|----|----|-----|-----|-----|
| | 1-100 | 5,2 | 06 | 09 | 09 | 13 | 13 |
| | 1-104 | | | | 09 | 13 | 13 |
| | 1-106 | | | 09 | 09 | 13 | |
| | 1-110 | 5,2 | 06 | 09 | 09 | 13 | 13 |
| *********** | 1-111 | 5,2 | 04 | 05 | | | |
| | 1-143 | 5,2 | 04 | 05 | 09 | 13 | 13 |
| | 1-210 | 5,2 | 06 | 09 | 09 | 13 | |
| | 1-320 | | | 09 | 09 | 13 | |
| | 6-342 | 5,2 | 06 | 09 | 09 | 13 | |
| AND THE REAL PROPERTY. | 6-343 | | | 08 | 09 | | |
| | 6-344 | | | 09 | 09 | | |
| # | 1-160 | 3,2 | 04 | 07 | 07 | 08 | |
| * | 1-170 | 3,2 | 04 | 07 | 07 | | |
| • | 1-230 | 3,2 | 04 | 07 | 07 | 08 | |
| * | 6-345 | | | 07 | 07 | | |

| | Insert type | Handle tip | Handle size |
|------------------------------------|---------------|--------------|-------------|
| Yellow field = Handle 9-484-XX- | 3.2 5.2 | Round shape | Small |
| Blue field = Handle 9-485-XX- | 4, 5, 6, 8, 9 | Overlada e e | Medium |
| | 13 | Oval shape | Large |
| Orange field = | 4, 5, 6, 8 | Developer | Medium |
| Handle 9-486-XX- | 5, 8 | Round shape | Large |



Example: Ergo Handle for file 1-100-12-1-0 should be 9-485-13-1P (1-pack) or 9-485-13-10 (10-pack)



FILE SELECTION GUIDE SHARPENING FILES AND CHAIN SAW FILES

| Shape | Code | 4" | 5" | 6" | 7" | 8" | 10" | 12" |
|---|-------|----|----|----|----|----|-----|-----|
| +++++++++++++++++++++++++++++++++++++++ | 166 | | | 04 | | | | |
| ********** | 4-138 | | | 04 | | 05 | 09 | 13 |
| | 4-140 | | | 04 | | 05 | 09 | |
| | 4-152 | | | | | 08 | | |

| | Insert type | Handle tip | Handle size | |
|------------------|---------------|------------|-------------|--|
| Handle O 40E VV | 4, 5, 6, 8, 9 | Oval abana | Medium | |
| Handle 9-485-XX- | 13 | Oval shape | Large | |



Example: Ergo Handle for file 166-6-16-2.5-12 should be 9-485-04-1P (1-pack) or 9-485-04-10 (10-pack)

FILE SELECTION GUIDE NEEDLE FILES AND PANSAR FILES

| Shape | Code | 140mm | 160mm | 180mm | 12" | 14" |
|-------|---------|-------|-------|-------|-----|-----|
| | 2-300 | Х | Х | Х | | |
| | 2-301 | Х | Х | | | |
| * | 2-302 | Х | Х | Х | | |
| # | 2-303 | Х | Х | Х | | |
| | 2-304 | Х | Х | Х | | |
| | 2-304-D | Х | Х | | | |



Handle 9-488-02-10

Example: Handle for file 2-300-14-0-0 should be 9-488-02-10 (10-pack)









BAHCO® ROTARY BURRS

| Cylindrical | | | | |
|---------------|------------------|----------------|----------|--|
| Product Code | Diameter Of Head | Length of Head | Toothing | |
| HSSG-A1225M | 1/2 | 1 | Medium | |
| Cylindrical R | ound Nose | | | |
| Product Code | Diameter Of Head | Length of Head | Toothing | |
| HSSG-C1020M | 3/8 | 3/4 | Medium | |
| Spherical | | | | |
| Product Code | Diameter Of Head | Length of Head | Toothing | |
| HSSG-D0606M | 1/4 | 1/4 | Medium | |

Features

HSSG-A1225M

- High Speed Steel burrs used for deburring soft steel, bronze, and brass
- Used to deburr irregular objects and finishing work inside a confined space
- Medium Toothing for machining unhardened steel and other moderately hard materials under normal conditions
- Extra Coarse Toothing for soft materials when good stock removal is required. Counteracts chip build-up between teeth



BAHCO® WIRE BRUSH

| Product Code | Description |
|--------------|-------------|
| 782-U | Wire brush |

Features

General purpose utility wire brush for cleaning off durt, rust, paint etc....



BAHCO® ERGO™ SCRAPERS

ERGO™ Carbide Blade Scrapers

| Product Code | Length (Inch) | Blade Included: |
|--------------|---------------|-------------------------------------|
| 625 | 11 | # 449 Triangle Shaped Carbide Blade |
| 650 | 12 | # 442 - 2" Carbide Blade |
| 665 | 12 | # 451 -2 1/2" Carbide Blade |

Features

- . Two-component handle provides better grip and comfort during use
- Scrapers for use on all kinds of surfaces for removal of paint, glue, varnish, rust, gaskets, chalk, grout, mortar, etc.
- Four interchangeable carbide blades for precision work are available for different surface applications
- . 625 Scraper comes with convenient plastic holder
- The heavy duty scraper head for models 650 and 665 is designed for wide material removal when extra strength is required
- Scraper 665 comes with large plastic knob for two-handed operation for heavy duty use
- . Blades stays sharp up to 50 times longer than conventional steel blades

BAHCO® REPLACEMENT CARBIDE SCRAPER BLADES

Carbide Blades Product Code Length (Inch) Description 449 Triangle Shape, for 625 Scraper 625-DROP Drop Shape, for 625 Scraper 625-PEAR Pear Shape, For 625 Scraper 625-ROUND Round Shape, For 625 Scraper For 650 and 665 Scrapers 442 451 2 1/2 For 650 and 665 Scrapers 850-1 Wavy for 650 and 665 Scrapers 2 865-1 Wavy for 650 and 665 Scrapers

Features

. Blades stays sharp up to 50 times longer than conventional steel blades

GASKET SCRAPER

Plastic Handle

| Product Code | Blade Length (Inch) | Overall Length | Blade Width |
|--------------|-------------------------------|----------------|-------------|
| JHWGSC-12 | 8 ⁷ / ₈ | 13 | 1 1/2 |

Features

- Designed for removing gaskets and carbon
- · Comfortable four-sided yellow plastic handle
- · Blade coated to resist corrosion



GASKET SCRAPER

Bi-Mold Comfort Grip Handle

| Product Code | Blade Length (Inch) | Overall Length | Blade Width |
|--------------|---------------------|----------------|-------------|
| JHW40000 | 6 | 9 3/4 | 7/8 |

- Bi-mold handle provides comfortable grip, reducing hand fatigue
- · Ideal for gasket removal and cleaning rust and corrosion



















474





BAHCO® CABINET SCRAPERS

For Carpentry Work

| Product Code | Length (Inch) |
|--------------|---------------|
| 474-125-0.60 | 5 |
| 474-125-0.80 | 5 |
| 474-150-0.80 | 6 |

Features

- Blade of cold-rolled, hardened and tempered chrome-nickel steel
- White plastic edge protector

BAHCO® WOODWORKING CHISELS

Comfort Grip

| Product Code | Overall Length (Inch) | Blade Length (Inch) | Tip Width (Inch) |
|--------------|-----------------------|---------------------|------------------|
| 424P-6 | 10 ½ | 5 ½ | 1/4 |
| 424P-10 | 10 ½ | 5 ½ | 3/8 |
| 424P-12 | 10 ½ | 5 ½ | 1/2 |
| 424P-18 | 10 ½ | 5 ½ | 3/4 |
| 424P-25 | 10 ½ | 5 ½ | 1 |
| 424P-32 | 10 ½ | 5 ½ | 1 1/4 |

Chisel Sets

| Product Code | Description |
|--------------|---|
| 424P-S6-PP | Includes chisel sizes: 1/4, 3/8, 1/2, 3/4, 1, 11/4 in Polyester Pouch |
| 424P-S6-LR | Includes sizes: 1/4, 3%, 1/2, 3/4, 1, 11/4 in Leather Pouch |

Features

- Specially designed two-component handle maximizes control and comfort, giving an excellent grip
- Precision ground blade for maximum sharpness
- Varnished blade for increased rust resistance
- Hardened and tempered high quality steel for long lasting performance with 4 mm to 40 mm (5/32" to 1-9/16") size range
- Protective holster and tip protector included
- Comfortable two-component handle fits comfortably into the hand, and provides a nonslip grip
- · Perfect for fine carpentry
- . Blade guard protects working edges of blade when not in use

BAHCO® ERGO™ CHISELS

High-Quality Steel

| Product Code | Overall Length (Inch) | Blade Length (Inch) | Tip Width (Inch) |
|--------------|-----------------------|---------------------|------------------|
| 434-6 | 10 ¾ | 5 ½ | 1/4 |
| 434-10 | 10 ¾ | 5 ½ | 3/8 |
| 434-12 | 10 ¾ | 5 ½ | 1/2 |
| 434-18 | 10 ¾ | 5 ½ | 3/4 |
| 434-25 | 10 ¾ | 5 ½ | 1 |
| 434-28 | 10 ¾ | 5 ½ | 1 1/4 |
| 434-38 | 10 ¾ | 5 ½ | 1 1/2 |

Chisel Sets

| Product Code | Description |
|--------------|--|
| 434-S3-EUR | Includes chisel sizes: ½, ¾, 1 in a Cardboard Box |
| 434-S6-EUR | Includes chisel sizes: 1/4, 3/8, 1/2, 3/4, 1, 11/4 in a Wooden Box |

- Two component ergonomic grip handle
- Splitproof handle allows repeated hammer blows
- Safety guard and rounded shoulders for added security
- Precision ground blade for maximum sharpness
- Hardened and tempered for long lasting performance
- · Honed and ready to use
- Polished blade for rust resistance
- · Protective holster included



BAHCO® QUICK CLAMPS - QCB SERIES

Power Lever System

| Product Code | Capacity (Inches) | Clamping Force |
|--------------|-------------------|----------------|
| QCB-150 | 6 | 450 lbs |
| QCB-300 | 12 | 450 lbs |
| QCB-450 | 16 | 450 lbs |
| QCB-600 | 23 | 450 lbs |
| QCB-900 | 35 | 450 lbs |
| QCB-1250 | 49 | 450 lbs |

Features

- Variable speed mechanism, which makes it easier to reach high clamping force
- · Removable pads, with V-groove

BAHCO® QUICK CLAMPS - OCG SERIES

| Product Code | Capacity Inches) | Clamping Force |
|--------------|------------------|----------------|
| QCG-150 | 6 | 275 lbs |
| QCG-300 | 12 | 275 lbs |

Features

- Easy access in more confined spaces thanks to the smaller body
- Easy to turn in to a spreader with the Spreader button
- Easy access release mechanism
- Comfortable handle from ALL angles, you can use upside down, front to back

BAHCO® SPRING CLAMPS

| Product Code | Capacity (Inches) |
|--------------|-------------------|
| 420SC-25 | 1 |
| 420SC-50 | 2 |

Features

Handy spring clamps with a movable gripping surface for odd shapes

BAHCO® SCREW CLAMPS

Professional

| Product Code | Overall Length (Inches) | Maximum Capacity (Inches) |
|----------------|-------------------------|---------------------------|
| 420SH-50-100 | 4 | 2 |
| 420SH-50-200 | 8 | 2 |
| 420SH-60-120 | 5 | 2 |
| 420SH-60-300 | 12 | 2 |
| 420SH-80-160 | 6 | 3 |
| 420SH-100-200 | 8 | 4 |
| 420SH-120-250 | 10 | 5 |
| 420SH-120-300 | 12 | 5 |
| 420SH-120-400 | 16 | 5 |
| 420SH-120-500 | 20 | 5 |
| 420SH-120-600 | 24 | 5 |
| 420SH-120-800 | 31 | 5 |
| 420SH-120-1000 | 39 | 5 |
| 420SH-120-1250 | 49 | 5 |
| 420SH-120-1500 | 59 | 5 |
| 420SH-140-400 | 16 | 6 |
| 420SH-175-400 | 16 | 7 |

- Professional F clamp with one fixed and one sliding bracket, fitted to a galvanized profiled steel rail.
- Zinc plated screw with special, plastic covered ball swivel foot for secure and easy clamping of odd shapes.
- Tough and weather resistant, square shaped plastic grip



















BAHCO® MULTI-PURPOSE SNIPS

Bi-Mold Comfort Grip Handles

| Product Code | Overall Length (Inches) |
|--------------|-------------------------|
| 2744 | 7 ½ |

Features
• Lightweight yet strong multi-purpose snip for cutting light sheet metal, leather, wire, plastic, wood, etc.

BAHCO® MINI BOLT CUTTER

Bi-Mold Comfort Grip Handles

| Product Code | Overall Length (Inches) |
|--------------|-------------------------|
| 1520G | 8 |

Features

- · Access tough to reach work
- Bi-mold comfort grips combine durability and a secure non-slip grip
- Cuts nails and bolts up to 1/4 diameter

BAHCO® BOLT CUTTERS

Comfort Grip Handles

| Product Code | Overall Length | Maximum Cutting Capacity For Rebar (Inch) | Replacement Jaw Kit (Includes Jaws, Bolts, and Steel Plates) |
|--------------|----------------|---|--|
| 4559-12 | 12 | 1/4 | 4559-12B JC |
| 4559-18 | 18 | 5/16 | 4559-18B JC |
| 4559-24 | 24 | 3/8 | 4559-24B JC |
| 4559-30 | 30 | 1/2 | 4559-30B JC |
| 4559-36 | 36 | 5/8 | 4559-36B JC |
| 4559-42 | 42 | 5/8 | 4559-42B JC |

- Comfortable rubber grips combine durability and a secure non-slip grip
- Lightweight steel tube handles provide ease of control while offering solid durability
- . Unique manufacturing method results in high-precision cutting edges



BAHCO° PUTTY KNIFE

| Two | component | handle for | better | arip |
|-----|-----------|------------|--------|------|
| | | | | |

| Product Code | Overall Length (Inches) | |
|--------------|-------------------------|--|
| 2489 | 9 | |

Features

- For the application and smoothing of adhesives, putties and body dent fillers
- Two component handle for better grip
- · Hardened stainless steel blade that extends through the handle



BAHCO® STUD REMOVER

| Chrome Finish | | |
|---------------|-------------------------|-----------------------|
| Product Code | Overall Length (Inches) | Head Thickness |
| 4553 | 12 | 3/8 |

Features

- For holding and removing studs
- · High-performance alloy steel
- Chrome plated finishing
- · Thick and round handle to increase strength
- Electrode cap remover at the handle end of the wrench



BAHCO® NAIL PULLER/NAIL PUNCH

Nail Punch

| Product Code | Description | Overall Length (Inches) |
|------------------|-------------|-------------------------|
| 36 | Nail Puller | 9 |
| SB-3732-2.5-1.25 | Nail Punch | 5 |

Features

- For fast easy removal of nails
- Black Industrial Finish
- Comfortable non-slip thermoplastic grip handle
- Patented internal spring to keep the jaws open
- Wide striking area
- To be used with a claw hammer



TAPE MEASURE

Construction Grade Tape Rule


| Product Code | Blade Length (Width and Length Inch) |
|--------------|--------------------------------------|
| JHWTM25X1 | 1 x 25 |
| JHWTM16X1 | 1 x 16 |

Features

- · Measurements on both sides of the blade
- Auto lock feature
- Triple riveted stainless steel magnetic hook on the end of the blade



Measurements on both sides of the blade













CS400





BAHCO® LONG TAPE

Professional Construction Grade

| Product Code | Blade Length |
|--------------|----------------|
| LTS-30-E | 100 ft (30 M) |
| LTS-50-E | 164 ft (50 M) |
| LTS-100-E | 328 ft (100 M) |

Features

- . SAE & Metric markings
- 5/8" (16 mm) Blade Width
- Strong fiberglass tape bonded with over 16,000 strands
- Double nylon blade coating for extra wear resistance

BAHCO® SLIDING COMBINATION SQUARES WITH METAL SCRIBER

Durable Polyester

| Product Code | Overall Length (Inch) | |
|--------------|-----------------------|--|
| CS150 | 6 | |
| CS300 | 12 | |
| CS400 | 16 | |

Features

- Easy to use combination square with both metric and imperial markings
- Adjustable depth for repeated marking and scribing
- Built-in level bubble for approximate marking. Includes a metal scriber housed in the handle

BAHCO® RULERS, SQUARE, SLIDING BEVEL, PENCIL

Construction Grade SAE and Metric

| Product Code | Overall Length (Inches) | Description |
|--------------|-------------------------|---------------------|
| SR150-E | 6 | Ruler |
| SR200-E | 8 | Ruler |
| SR300-E | 12 | Ruler |
| SR600-E | 24 | Ruler |
| SR1000-E | 40 | Ruler |
| 9045-B-250 | 10 | Square, Metric Only |
| 9572-200 | 8 | Sliding bevel |
| P-HB | | Pencil |

BAHCO® LEVELS

Precision

| FICUSION | | | |
|----------|--------------|-----------------------|--|
| | Product Code | Description | |
| | 426TOR9 | 9" Torpedo level | |
| | 416-400 | 16 ["] Level | |
| | 416-600 | 24" Level | |

- Solid aircraft grade aluminum
- 3 vials: plumb, horizontal and 45 degree
- V Groove base for use on pipes
- Rare earth magnets on base
- Accurate to 0.5 mm/m



BAHCO® THREE POUCH BELT SET

| Product Code | Dimensions W x H (Inches) | |
|--------------|---------------------------|--|
| 4750-3PB-1 | 27 x 10 | |

Features

- · Strong construction with riveted reinforcement
- . Easy to adjust comfortable nylon belt with 2 inch quick release buckle

BAHCO® UNIVERSAL POUCH

| Product Code | Dimensions W x H (Inches) | |
|--------------|---------------------------|--|
| 4750-UP-1 | 12 x 11 | |

Features

- Riveted for unbreakable strength
- Measuring tape clip
- Leather slots ideal for holding longer tools.
- Two deep multi purpose open pockets provide for quick tool recognition.

BAHCO® ELECTRICIANS POUCH

| Product Code | Dimensions W x H (Inches) | |
|--------------|---------------------------|--|
| 4750-EP-1 | 10 x 12 | |

Features

- Universal tool loop for larger tools to keep them organized
- · Chain hook for easy access to insulated tapes
- · Additional pocket for smaller tools
- · Main deep pocket for safe storage
- Real leather slots on the sides

BAHCO® TWO POCKET POUCH

| Product Code | Dimensions Wx H (Inches) | |
|--------------|--------------------------|--|
| 4750-2PP-1 | 9 x 11 | |

Features

- Wide pockets hold plenty of tools
- Pocket position prevents tools from falling out

BAHCO® HEAVY DUTY LEATHER BELT

| Product Code | Description |
|--------------|-----------------------|
| 4750-HDLB-1 | Fits waist 28" to 50" |

BAHCO® HAMMER HOLDER

| Product Code | Dimensions Wx H (Inches) |
|--------------|--------------------------|
| 4750-HHO-2 | 4 x 11 |

Features

- Fits BAHCO® heavy duty leather belt
- · Quick access to hammer

BAHCO® ANTI SLIP KNEE PADS

| Product Code | Dimensions Wx H (Inches) | |
|--------------|--------------------------|--|
| 4750-KP-1 | 4 x 7 | |

Features

- Universal lightweight knee pads for different kinds of surfaces
- Heavy duty cups ensure comfort and safety when used in difficult conditions













4750-EP-1





4750-KP-1

4750-HHO-2













4750FB4-18



| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| | | | |
| 4750PTB60 | 23 1/2 | 11 ½ | 12 |
| 4750PTB65 | 25 ½ | 11 ½ | 12 |

Features

- When lifted the aluminum handle blocks the bottom from accidentally opening
- Small Transparent detachable boxes are perfect for organizing small items
- Portable tray
- Heavy duty boxes made of virgin polypropylene are resistant to hot and cold temperatures
- Strong and sturdy boxes, 2 mm thick, can take high load capacity, even allowing the user to stand on them
- Metallic latches are galvanized making them durable and rust resistant
- Pad lock can be added to the box

BAHCO® PLASTIC TOOL BOX ON WHEELS

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750PTW47 | 24 ¾ | 11 ½ | 18 ½ |

Features

- The upper box can be used as a regular tool box and the bottom box is perfect for heavier tools
- Wheels are made of PP and EVA, for smooth and silent rolling and absorbing of impacts
- Two small transparent detachable boxes are perfect for organizing small items
- Portable tray
- Heavy duty boxes made of virgin polypropylene are resistant to hot and cold temperatures
- Strong and sturdy boxes, 2 mm thick, can take high load capacity, even allowing the user to stand on them
- Metallic latches are galvanized making them durable and rust resistant
- Top and bottom sections are connected with latches

BAHCO® LAPTOP AND TOOL BAG WITH HARD BOTTOM

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750FB4-18 | 17 | 6 | 13 ¾ |

- Material is a combination of Denier 600 and 1680 polyester that prevents the bag from damage and provides lightweight flexibility
- Plastic hard bottom and double stitching reinforcement is 100% waterproof and easy to clean
- Pockets provide easy access to tools
- Detachable compartments
- Padded compartment is ideal for laptop
- Tools not included



BAHCO® 24" OPEN TOOL BAG WITH WHEELS

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750FB2W-24A | 24 | 12 | 15 ¾ |

Features

- Material is a combination of Denier 600 and 1680 polyester that prevents the bag from damage and provides lightweight flexibility
- Plastic hard bottom and double stitching reinforcement is 100% waterproof and easy to clean
- . Heavy duty PVC zippers makes closing and opening quick and easy
- · Pockets provide easy access to tools
- · Big side pouches: left side is detachable and right side is fixed
- Special size pocket for 10" tablet
- Telescopic handle max 38"
- . Wheels provide easy quiet rolling



BAHCO® 19" OPEN TOOL BAG WITH HARD BOTTOM

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750FB1-19A | 19 | 9 | 14 |

Features

- Material is a combination of Denier 600 and 1680 polyester that prevents the bag from damage and provides lightweight flexibility
- Plastic hard bottom and double stitching reinforcement is 100% waterproof and easy to clean
- Heavy duty PVC zippers makes closing and opening quick and easy
- . Velcro straps store long tools on both upper sides of the bag
- Soft grip handles made of rubberized material provides a user friendly grip and isolates against cold temperature



BAHCO® 19" TOOL BAG WITH HARD BOTTOM

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750FB1-19B | 19 | 9 | 14 |

- Material is a combination of Denier 600 and 1680 polyester that prevents the bag from damage and provides lightweight flexibility
- Plastic hard bottom and double stitching reinforcement is 100% waterproof and easy to clean
- . Velcro straps store long tools on both upper sides of the bag
- Soft grip handles made of rubberized material provides a user friendly grip and isolates against cold temperature
- · Easy access to the handle through the cover
- · Pockets provide easy access to tools
- Internal detachable tool panel with Velcro system for quickly taking out and returning tools















MARCO

4750FB5B



4750FB5C

BAHCO® CLOSED TOOL BAG WITH HARD BOTTOM

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750FB2-19A | 19 | 9 | 14 |
| 4750FB2-24A | 24 | 10 | 15 |

Features

- 600 Denier polyester prevents the bag from damage and provides flexibility and is lightweight
- Plastic hard bottom and double stitching reinforcement is 100% waterproof and easy to clean
- Heavy duty PVC zippers makes closing and opening quick and easy
- · Quick adjustable straps store long tools
- Multiple internal and external pockets

BAHCO® 12" ELECTRICIAN'S BAG WITH HARD BOTTOM

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-----------------|
| 4750FB3-12 | 11 ½ | 7 1/2 | 11 ½ |

Features

- 600 Denier polyester prevents the bag from damage and provides flexibility and is lightweight
- Plastic hard bottom and double stitching reinforcement is 100% waterproof and easy to clean
- · Pockets provide easy access to tools
- · Cable loop holder
- Central big compartment for bit tools and materials

BAHCO® TOOL ORGANIZERS

| Product Code | Length (Inches) | Width (Inches) | Height (Inches) |
|--------------|-----------------|----------------|-------------------------------|
| 4750FB5B | 13 | 10 ½ | 2 ³ / ₄ |
| 4750FB5C | 16 | 12 | 3 ½ |

- Perfect for organizing tools
- Elastic straps for tool distribution in the bottom and upper side
- Card holder on the front and label holder on the side for quick identification



BAHCO® 17" OPEN TOTE CADDY TOOL BAG ORGANIZER

| Product Code | Length | Width | Height |
|--------------|----------|----------|----------|
| | (Inches) | (Inches) | (Inches) |
| 3100TB | 17 | 10 | 13 |

- Hard plastic bottom keeps moisture out of organizer
- Two Handles
- Ideal for storing and toting tools, parts and supplies

















JHW40150

UTILITY TOOLS AND SETS

| Bi-Mold C | Bi-Mold Comfort Grip Handles | | | | | | | |
|---------------------|--|-------------------------|--|--|--|--|--|--|
| Product Code | Description | Contents Include | | | | | | |
| JHW40201 | 4 Piece Mini Pick & Hook Set | Straight pick | | | | | | |
| | | 45° bent tip pick | | | | | | |
| | | 90° bent tip pick | | | | | | |
| | | Full semi-circular hook | | | | | | |
| JHW40251 | 4 Piece Utility Tool Set | Gasket scraper | | | | | | |
| | • | Scratch awl | | | | | | |
| | | Cotter pin puller | | | | | | |
| | | Hose removal tool | | | | | | |
| JHW40150 | Magnetic pick-up tool with telescoping shaft | N/A | | | | | | |

Features

- Bi-mold handles provide comfortable grip, reducing hand fatigue
- · Use for scribing, alignment, o-ring removal, and parts cleaning
- · Small size makes them ideal for hard to reach work surfaces
- Telescopic pick-up tool features powerful magnetic tip
- Magnetic pick-up tool extended length is 181/4, pick-up weight is 11/4 pounds
- 40201 Overall length: 6 inches, handle length: 2 3/4"





CREEPERS

Heavy Duty - Low Profile

| Product Code | Description | Weight Capacity (lb) |
|--------------|---------------------------------------|----------------------|
| JHW42301 | Heavy-Duty Drop-Shoulder Creeper | 570 |
| JHW42302 | Mechanic's Seat Creeper | 380 |
| JHW42304A | Adjustable-Height Swivel Seat-Creeper | 380 |

Features - Heavy-Duty Drop-Shoulder Creeper

- . Low-profile design rests only 2" from the ground
- . Drop-rail design allows greater shoulder and arm clearance
- 16 gauge, 3/4" square-stock steel frame
- 1" padding on bed and 2" padding on headrest
- Six 2-1/2" diameter hooded casters shield user's clothing from dirt and grease

Features - Mechanic's Seat Creeper

- Seat is topped with comfortable 1-1/2" thick foam padding
- 1" square-stock steel frame
- Four 2-1/2" diameter hooded casters shield user's clothing from dirt and grease
- . Heavy-duty 3-section plastic pan stores tools and small parts

Features - Adjustable-Height Swivel Seat-Creeper

- Height adjusts from 17" to 22"
- Seat swivels a full 360°
- Four 2-1/2" diameter hooded casters shield user's clothing from dirt and grease
- Steel tube frame supports cylinder for ultimate strength
- · Bottom pan serves as storage for tools and small parts



SET-UP WEDGES

| Heavy Duty | Machine Sho | p Tools | |
|-------------------|-------------|---------|-----------|
| Product Code | Length | Width | Thick End |
| JHWWG-3 | 3 | 1 | 1/4 |
| JHWWG-5 | 5 | 1 | 1/2 |
| JHWWG-6 | 6 | 1 1/4 | 3/4 |

Features

Set-up wedges are used for setting-up work on planers, shapers, milling machines and other similar applications





JHWWG-5

EYEBOLTS

| Plain Pa | ttern | | | | | | | |
|-----------|----------------|----------|---------------------|----------------|---------------------------------|--------------------|---------------------------------|-------------------|
| Product | Shank Diameter | Threads | Capacity of | Length of | Inner Diameter | Head Cross Section | Overall | Ultimate Strength |
| Code | (Inches) | per Inch | Vertical Load (lbs) | Shank (Inches) | (Inches) | Thickness (Inches) | Length (Inches) | (lbs) |
| JHWEB-1T | 1/4 | 20 | 500 | 1 | 3/4 | 9/32 | 21/4 | 2500 |
| JHWEB-2T | 5/16 | 18 | 900 | 1 1/8 | 27/32 | 9/32 | 2 5/8 | 4500 |
| JHWEB-3T | 3/8 | 16 | 1,300 | 1 1/4 | 1 1/32 | 5/16 | 2 ²⁹ / ₃₂ | 6500 |
| JHWEB-4T | 7/16 | 14 | 1,800 | 1 % | 1 1/16 | 3/8 | 3 1/4 | 9000 |
| JHWEB-5T | 1/2 | 13 | 2,400 | 1 1/2 | 1 1/8 | 5/32 | 3 % | 12000 |
| JHWEB-6T | 9/16 | 12 | 3,000 | 1 % | 1 1/4 | 1/2 | 3 31/32 | 15000 |
| JHWEB-7T | 5/8 | 11 | 4,000 | 1 3/4 | 1 5/16 | 9/16 | 4 % | 20000 |
| JHWEB-8T | 3/4 | 10 | 5,000 | 2 | 1 ¹⁷ / ₃₂ | 5/8 | 4 ²⁵ / ₃₂ | 25000 |
| JHWEB-9T | 7/8 | 9 | 7,000 | 2 1/4 | 1 % | 13/16 | 5 %16 | 35000 |
| JHWEB-10T | 1 | 8 | 9,000 | 2 ½ | 1 3/4 | 29/32 | 6 1/8 | 45000 |
| JHWEB-11T | 1 1/8 | 7 | 12,000 | 2 3/4 | 1 ¹⁵ / ₁₆ | 1 1/16 | 6 % | 60000 |
| JHWEB-12T | 1 1/4 | 7 | 15,000 | 3 ½ | 2 1/32 | 1 5/32 | 7 ½ | 75000 |
| JHWEB-14T | 1 1/2 | 6 | 21,000 | 3 3/4 | 2 1/16 | 1 13/32 | 8 13/16 | 105000 |
| JHWEB-15T | 1 3/4 | 5 | 28,000 | 3 3/4 | 2 ²⁵ / ₃₂ | 1 21/32 | 9 % | 140000 |
| JHWEB-16T | 2 | 4 1/2 | 38,000 | 4 | 3 1/32 | 1 27/32 | 11 | 190000 |
| JHWEB-17T | 2 1/2 | 4 | 56,000 | 5 | 4 | 2 1/4 | 13 ½ | 280000 |



Features

- Forged from the best quality carbon steel, hardened and tempered to ensure increased strength and toughness and reduce liability or breakage
- Each lot is tested and inspected to insure conformance to specifications Available with UNC Class 2A thread only Plain pattern eyebolts must never be used to lift an angular load

- Eyebolt shanks should never be undercut or eyebolt shank diameters reduced
- To obtain greatest strength from an eye bolt, it must fit reasonably tight in the hole into which it is screwed to prevent unscrewing due to twist of cable Tightness and seating must be checked after initial load





| | Shank Diameter | Threads per | Length of | Inner Diameter | Head Cross-Section | Overall | Shoulder Width | |
|--------------|----------------|-------------|----------------|---------------------------------|--------------------|-----------------|---------------------------------|--------|
| Product Code | (Inches) | Inch | Shank (Inches) | (Inches) | Thickness (Inches) | Length (Inches) | (Inches) | (lbs) |
| JHWEB-21T | 1/4 | 20 | 1 | 3/4 | 9/32 | 2 7/16 | 9/16 | 2500 |
| JHWEB-22T | 5/16 | 18 | 1 1/8 | 27/32 | 9/32 | 2 1/8 | 19/32 | 4500 |
| JHWEB-23T | 3/8 | 16 | 1 1/4 | 1 | 5/16 | 3 11/32 | 21/32 | 6500 |
| JHWEB-24T | 7/16 | 14 | 1 3/8 | 1 1/16 | 3/8 | 3 23/32 | 27/32 | 9000 |
| JHWEB-25T | 1/2 | 13 | 1 1/2 | 1 5/32 | 7/16 | 4 1/32 | 29/32 | 12000 |
| JHWEB-26T | 9/16 | 12 | 1 % | 1 11/32 | 7/32 | 4 13/32 | ¹⁵ / ₁₆ | 15000 |
| JHWEB-27T | 5/8 | 11 | 1 3/4 | 1 11/32 | 9/16 | 4 3/4 | 1 1/32 | 20000 |
| JHWEB-28T | 3/4 | 10 | 2 | 1 1/2 | 11/16 | 5 11/32 | 1 5/16 | 25000 |
| JHWEB-29T | 7/8 | 9 | 2 1/4 | 1 % | ¹³ /16 | 6 | 1 7/16 | 35000 |
| JHWEB-30T | 1 | 8 | 2 1/2 | 1 ¹³ / ₁₆ | 7/8 | 6 ¾ | 1 % | 45000 |
| JHWEB-31T | 1 1/8 | 7 | 2 ¾ | 1 ¹⁵ / ₁₆ | 1 1/16 | 7 1/2 | 1 3/4 | 60000 |
| JHWEB-32T | 1 1/4 | 7 | 3 | 2 1/8 | 1 3/16 | 8 % | 2 1/32 | 75000 |
| JHWEB-34T | 1 1/2 | 6 | 3 1/2 | 2 19/32 | 1 ½ | 9 % | 2 3/16 | 105000 |
| JHWEB-35T | 1 3/4 | 5 | 3 3/4 | 2 27/32 | 1 19/32 | 10 ¾ | 2 1/2 | 140000 |
| JHWEB-36T | 2 | 4 1/2 | 4 | 3 5/32 | 1 1/8 | 12 | 2 ²⁹ / ₃₂ | 190000 |

ANSI Spec: B18.15 1985

- . Forged from the best quality carbon steel, hardened and tempered to ensure increased strength and toughness and reduce liability or breakage

- Each lot is tested and inspected to insure conformance to specifications
 Available with UNC Class 2A thread only
 Eyebolt shanks should never be undercut or eyebolt shank diameters reduced
- Shoulder eye bolts must be properly seated (should bear firmly against the mating part) otherwise the working loads must be reduced substantially
- A steel washer or spacer may be required for proper seating
 To obtain greatest strength from an eye bolt, it must fit reasonably tight in the hole into which it is screwed to prevent unscrewing due to twist of cable
- Tightness and seating must be checked after initial load













JHWEB-29T



EYEBOLT ANGULAR LOADING RATED CAPACITY

Material Data

Grade: Carbon Steel Heat Treat: Quench & Draw

Mechanical Properties

Grain Size: 5 or finer Tensile: 65,000 PSI Min Yield: 30,000 PSI Min Elongation: 30% Min Reduction of Area: 60% Min

| | | | | | Angular | Loading Rat | ed Capacity | (Pounds) |
|----------------------|-------------------|---------------------|------------------------------------|----------------------------|-------------|--------------|--------------|--------------|
| Part Number Plain | Shank Diameter | Threads Per Inch | Capacity of Vertical Load (lbs) | Ultimate Strength (lbs) | 0 Degree | 30 Degree | 60 Degree | 90 Degree |
| JHWEB-1T | 1/4 | 20 | 500 | 2,500 | | | | |
| JHWEB-2T | 5/16 | 18 | 900 | 4,500 | | | | |
| JHWEB-3T | 3/8 | 16 | 1,300 | 6,500 | | | | |
| JHWEB-4T | 7/16 | 14 | 1,800 | 9,000 | | | | |
| JHWEB-5T | 1/2 | 13 | 2,400 | 12,000 | | | | |
| JHWEB-6T | 9/16 | 12 | 3,000 | 15,000 | | | | |
| JHWEB-7T | 5/8 | 11 | 4,000 | 20,000 | | | | |
| JHWEB-8T | 3/4 | 10 | 5,000 | 25,000 | | | | |
| JHWEB-9T | 7/8 | 9 | 7,000 | 35,000 | | | | |
| JHWEB-10T | 1 | 8 | 9,000 | 45,000 | | | | |
| JHWEB-11T | 1 1/8 | 7 | 12,000 | 60,000 | | | | |
| JHWEB-12T | 1 1/4 | 7 | 15,000 | 75,000 | | | | |
| JHWEB-14T | 1 1/2 | 6 | 21,000 | 105,000 | | | | |
| JHWEB-15T | 1 3/4 | 5 | 28,000 | 140,000 | | | | |
| JHWEB-16T | 2 | 4 1/2 | 38,000 | 190,000 | | | | |
| JHWEB-17T | 2 1/2 | 4 | 56,000 | 280,000 | | | | |
| JHWEB-21T | 1/4 | 20 | 500 | 2,500 | 440 | 70 | NR | NR |
| JHWEB-22T | 5/16 | 18 | 900 | 4,500 | 720 | 170 | NR | NR |
| JHWEB-23T | 3/8 | 16 | 1,300 | 6,500 | 1,080 | 335 | 185 | 150 |
| JHWEB-24T | 7/16 | 14 | 1,800 | 9,000 | 1,480 | 435 | 275 | 215 |
| JHWEB-25T | 1/2 | 13 | 2,400 | 12,000 | 1,960 | 695 | 460 | 365 |
| JHWEB-26T | 9/16 | 12 | 3,000 | 15,000 | 3,140 | 1,220 | 735 | 600 |
| JHWEB-27T | 5/8 | 11 | 4,000 | 20,000 | 3,140 | 1,220 | 735 | 600 |
| JHWEB-28T | 3/4 | 10 | 5,000 | 25,000 | 4,600 | 1,950 | 1,095 | 960 |
| JHWEB-29T | 7/8 | 9 | 7,000 | 35,000 | 6,400 | 2,710 | 1,750 | 1,485 |
| JHWEB-30T | 1 | 8 | 9,000 | 45,000 | 8,400 | 3,595 | 2,450 | 2,160 |
| JHWEB-31T | 1 1/8 | 7 | 12,000 | 60,000 | 10,600 | 4,235 | 3,380 | 2,985 |
| JHWEB-32T | 1 1/4 | 7 | 15,000 | 75,000 | 13,400 | 5,540 | 3,675 | 3,285 |
| JHWEB-34T | 1 1/2 | 6 | 21,000 | 105,000 | 19,600 | 8,410 | 5,590 | 5,080 |
| JHWEB-35T | 1 3/4 | 5 | 28,000 | 140,000 | 28,000 | 12,100 | 8,250 | 7,370 |
| JHWEB-36T | 2 | 4 1/2 | 38,000 | 190,000 | 38,000 | 15,970 | 10,910 | 9,740 |

NR = Not Recommended.

- No greater load should be allowed than that given under rated capacity in each table of dimensional data
- Safety Factor: Rated capacity is figured with 5:1 safety factor for zero degree straight vertical pull



FLUTED SCREW EXTRACTORS

| Straight, Tap | ered Flutes | |
|---------------|---------------------|--------------------------------|
| Product Code | Drill Size (Inches) | For Use on Bolt Sizes (Inches) |
| JHWEX-21A | 1/8 | ½ to 5/16 |
| JHWEX-21B | 3/16 | 3/8 |
| JHWEX-22A | 7/32 | 7/16 |
| JHWEX-24A | 5/16 | ½ to %16 |
| JHWEX-25B | 3/8 | 5/8 |
| JHWEX-25A | 15/32 | 3/4 |
| JHWEX-26A | 9/16 | 7∕8 |
| JHWEX-28 | 21/32 | 1 to 1 1/8 |
| JHWEX-29 | 13/16 | 1 ¼ to 1 ¾ |
| JHWEX-30 | 1 1/16 | 1 ½ |

JHWEXS-30 6 Piece Screw Extractor Set Contents Include:

| Product Code | Product Code | Product Code |
|--------------|--------------|--------------|
| JHWEX-21A | JHWEX-22A | JHWEX-25B |
| JHWEX-21B | JHWEX-24A | JHWEX-25A |

JHWEXS-10 10 Piece Screw Extractor Set **Contents Include:**

| Product Code | Product Code | Product Code | Product Code | Product Code |
|--------------|--------------|--------------|--------------|--------------|
| JHWEX-21A | JHWEX-22A | JHWEX-25B | JHWEX-26A | JHWEX-29 |
| JHWEX-21B | JHWEX-24A | JHWEX-25A | JHWEX-28 | JHWEX-30 |

Features

- Designed for quick, easy removal of left or right-handed broken screws, bolts, studs or
- Drill bit sizes to be used are stamped on each extractor
 A hole is first drilled in the broken stem and the right size Williams extractor is then inserted





FEELER GAUGE SET

| Heavy Duty Machine Shop Tools | | | |
|-------------------------------|-------------------------|--------------|------------------|
| Product Code | Description | Thickness | Number of Blades |
| JHWGS-1 | Master Feeler Gauge Set | .0015 - 1/32 | 25 |

Features

- 25 blades 3-5/16" x 1/2" in the following thicknesses: .0015, .002, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .018, .020, .022, .024, .025, .028, .030. .032. and .035
- Both decimal and equivalent metric size etched in each blade
- Gauges supplied in holder with knurled lock-nut which allows the user to select the required blade size and lock it into position

| Product Code | Description | Thickness | Number of Blades |
|--------------|---------------------------|-----------|------------------|
| JHWGS-2 | Standard Feeler Gauge Set | .002015 | 10 |

Features

- 10 blades 3" x 1/2" in the following thicknesses: .002, .003, .004, .005, .006, .007, .008,
- Both decimal and equivalent metric size etched in each blade Gauges supplied in holder with knurled lock-nut which allows the user to select the required blade size and lock it into position

| Product Code | Description | Thickness | Number of Blades |
|--------------|------------------------------|-----------|------------------|
| JHWGS-3 | Combination Feeler Gauge Set | .002025 | 22 |

Features

- Contains total of 22 blades
- 10 blades 3" x 1/2" in the following thicknesses: .002, .003, .004, .005, .006, .007, .008, .010, .013, .015
- 12 blades 1-3/4" x 1/4" in the following thicknesses: .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .022, .025 Overall length 5"
- Both decimal and equivalent metric size etched in each blade
- Gauges supplied in holder with knurled lock-nut which allows the user to select the required blade size and lock it into position

| Product Code | Description | Thickness | Number of Blades |
|--------------|-------------------------|-----------|------------------|
| JHWGS-4 | Piston Feeler Gauge Set | .002015 | 8 |

- 8 blades 9" x 1/2" in the following thicknesses: .002, .003, .004, .005, .006, .008, .010, .015
- Both decimal and equivalent metric size etched in each blade Gauges supplied in holder with knurled lock-nut which allows the user to select the required blade size and lock it into position







JHWGS-2



JHWGS-3












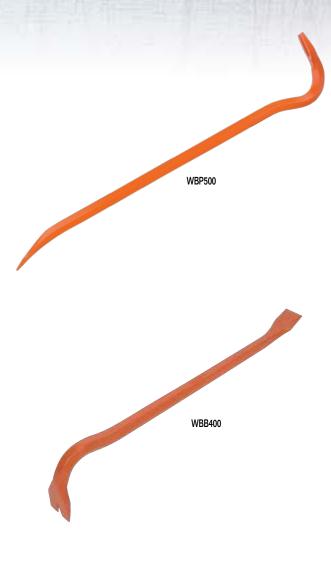

BAHCO® PREMIUM WRECKING BARS WITH BENT AND FLAT END

Blunt Tip

| Product Code | Overall Length (Inch) | |
|--------------|-----------------------|--|
| WBP300 | 12 | |
| WBP500 | 20 | |
| WBP625 | 25 | |
| WBP710 | 28 | |
| WBP900 | 36 | |

Features

- Octagonal bar
- 346 mm to 890 mm
- Steel SCM440

- Polished and given a grey coated
 Bent end and flat end
 Nail claw on one end especially designed for easy operation
 Uniform head treatment in the whole bar
 Uniform hardness: 49 HRC to 52.5 HRC

BAHCO® WRECKING BARS WITH BENT AND FLAT END

Blunt Tip

| Product Code | Overall Length (Inch) | |
|--------------|-----------------------|--|
| WBB400 | 12 | |
| WBB500 | 21 | |
| WBB600 | 24 | |
| WBB700 | 28 | |

Features

- Hexagonal barSteel C45E body
- Fully painted in orange RAL2009 Bent end and flat end body

- Heat treatment on the nail's areas Shaft hardness 25 HRC to 36 HRC, 45 HRC to 53 HRC in the nails





LAP-KNIFE

BAHCO® LAPLANDER FOLDING SAW AND MULTIPURPOSE KNIFE

General Purpose Folding Saw

| Product Code | Blade Length (Inch) | Teeth Per Inch | |
|--------------|---------------------|----------------|--|
| 396-LAP | 9 | 7 | |

Saw and Knife Set

| Product Code | Description |
|--------------|----------------------------------|
| LAP-KNIFE | Folding saw & Multipurpose Knife |

- A general purpose folding saw for cutting both green and dry wood, plastic, bone etc.
- Specially designed for wild-life enthusiasts, hunting and campers
- XT toothing, 7TPI
- Blade specially coated for rust protection and low friction
- Two-component plastic handle for perfect grip, with leather strap
- Safety lock, locked also when folded



BAHCO® RESCUE FLOATING KNIFE

Stainless Steel Blade

Product Code

1446-FLOAT **Features**

- . Floating knife with Stainless Steel blade and serrated cutting edge
- . The knives helps to prevent high recovery cost when it is dropped in the water and helps to avoid plastic in the aquatic environment
- · The knife is designed to float straight up for better visibility
- . To increase visibility in darkness the handle and holster luminizes when using UV light
- . The handle contains a hole to attached to a wrist strap or lanyard

BAHCO® SAFETY KNIFE WITH STAINLESS STEEL BLADES

Blunt Tip

| Product Code | Overall Length (Inch) | |
|--------------|-----------------------|--|
| 2446-SAFE | 8 ½ | |

Features

- Safety knife with blunt tip to avoid accidental injuries
- Comfortable two-component handle provides excellent grip
- Robust multipurpose knife with a solid stainless steel blade
- Supplied with a practical sheath for carrying on a belt
- . Holster includes a double fix button for attaching a holster with second knife

BAHCO® CARPENTER'S MULTI-PURPOSE KNIFE WITH HOLSTER

With Holster

| Product Code | Description | Length (Inches) |
|--------------|--|-----------------|
| 1446 | Multi Purpose Knife with Holster Multi | 9 |
| 2446 | Purpose Knife with Holster | 9 |

Features

- . Multi purpose knife with high quality steel and bi-component handle
- · Polished stainless steel blade
- Two component handle for comfortable grip
- Knife comes in plastic case with belt clip
- · Ideal for fishermen, hunters and for working in the garden

BAHCO® WRECKING KNIFE

With Holster

| Product Code | Description | Length (Inches) |
|--------------|----------------|-----------------|
| 2448 | Wrecking Knife | 9 |

- · The wrecking chisel knife has been designed to be used like a regular chisel or when turned sideways a 4in wide knife
- . The blade is 4mm thick and made from hardened steel and can be used like a 4in chisel with a hammer on the back of the blade for added force
- . The handle has a curved guard to protect the knuckles while in use and can also be used with a hammer
- . The wrecking knife comes in handy for all those woodworking tasks
- . The knife comes complete with a holster with button clip





















BAHCO® SPORTS KNIVES

| Product Code | Description |
|--------------|--|
| KBTU-01 | Knife with Twin Blade - Utility & Sports Blade |
| KBSK-01 | Knife with 3 Inch Sport Blade-Only |

Features

- Sports knives have an aluminum handle
- Stainless steel blade and mechanism
- Blade locks in position when fully unfolded
- . Unlock button to avoid accidental folding



BAHCO® ERGO™ SNAP BLADE KNIFE

| Product Code | Description |
|--------------|----------------------------------|
| KB18-01 | 18mm Snap Off Knife TPR |
| KE18-01 | ERGO® 18 mm Snap Off Knife |
| KSBG18-10D | Replacement Snap Blade - 10 pack |

Features

- ABS body with comfortable TPR grip
- . Blade storage in backside of the body
- Closed front of body to simplify blade snapping



BAHCO® SNAP BLADE KNIFE

| Product Code | Description |
|--------------|----------------------------------|
| KG09-01 | 9mm Snap Off Knife |
| KSBG09-10D | Replacement Snap Blade - 10 pack |
| KE18-01 | ERGO® 18 mm Snap Blade Knife |

Features

- ABS body smooth textured button
- Precise steel mechanism for distinct blade positioning







BAHCO® ERGO™ UTILITY KNIFE

| Product Code | Description |
|--------------|---------------------------------|
| KERU-01 | ERGO® Retractable Utility Knife |

- Integrated button for smooth action and to shift blade in three distinct positions
- Curved handle for wide variety of grips
- · Smart button to replace blades
- Narrow head for optimal visibility and precision
- Ideal angle for minimized muscle stress
- Optimized handle size and weight
- Smart button to store blades without opening the body



AUTOLOAD QUICK-BLADE UTILITY KNIFE

Includes Heavy-Duty .025" Thick 2-Notch Blades

| Product Code | Description |
|--------------|------------------------------------|
| JHW40052 | Autoload Quick-Blade Utility Knife |

Features

- . Blade is easily removed or reversed from the front with push-button ease
- . New blade is automatically loaded from 5-blade magazine
- · Spring-loaded cover makes reloading quick and tool-free
- Includes (5) .025" blades



BAHCO® SQUEEZE GRIP SAFETY KNIFE

Bi-Mold Comfort Grip Handle

| Product Code | - Description |
|----------------|---------------------------|
| SQZ150003 | Squeeze Grip Safety Knife |
| SQZ150003-HSBL | 12 Pack Hook Blades |
| SQZ150005-SBL | 12 Pack Standard Blades |

- . Automatically loads new knife blade with the squeeze of the handle
- · Quick release button to remove blade
- Comfort handle with thumb groove for greater control and comfort
- Extremely fast blade operation and change with side button for retraction and lower lever for extension
- . Single button press for blade removal, squeeze lower lever for new blade
- Six spare blades stored in special compartment
- Includes: 6 heavy-duty blades





















DISPOSABLE SAFETY CUTTER

| Product Code | Description |
|--------------|---|
| JHW40082 | Lightweight, ergonomic, ambidextrous disposable safety cutter |

Features

- · Retracting safety hooded guard prevents cuts
- · NSF certified for food areas
- Safety point blade included standard
- Integrated tape splitter
- Stainless steel blade for hygiene
- 3-button mechanism for top and side cuts
- Applications: multi purpose cutting, food processing areas, cuts corrugate, cartons, taped boxes, film and shrink



DISPOSABLE FILM CUTTER

| Product Code | Description |
|--------------|---|
| JHW40084 | Durable plastic construction and a long-lasting super sharp blade |

Features

- · Suitable for use in food areas
- · Integrated tape slitter
- Stainless steel blade for hygiene
- Applications: cuts tape, strapping, shrink wrap and film



ALUMINUM PEN LIGHT

UV Spotlight

| Product Code | Overall Length (inch) |
|--------------|-----------------------|
| JHWLLED-150 | 7 |

Features

- Premium slim aluminum design
- Compact size for easy carrying
- Built-in magnet on clip for hand free
- Main light provide 150lm output
- Spot light with UV LED for leak detection
- Micro-USB charge port
- · Light in weight
- Design for mechanical



ULTRA-COMPACT LIGHTWEIGHT FLASHLIGHT

Streamlight JR® Reach Flashlight

| Product Code | Description |
|----------------|---|
| JHW71605BULK48 | 48 PC case of flashlights with flexible cable with magnetic clip holder |

- Ultra-compact, lightweight flashlight featuring a flexible cable protected by a durable silicone coating
- Packaged with a magnetic clip holder for mounting and positioning the light
 Case material made from machined aircraft aluminum with black anodized finish
- One meter impact resistance tested
 IPX4 rated for water resistant operation
 Unbreakable polycarbonate lens
- C4° LED technology, impervious to shock with a 50,000-hour lifetime
- 70 lumen output with textured parabolic reflector produces an even, wide beam hotspot
- · Batteries not included



LED ROTATING WORKLIGHT

| Product Code | Description |
|--------------|-------------------------------------|
| JHW5103 | 48 LED Rotating Magnetic Work light |

Features

- Rotating head allow directional positioning
- Powerful magnetic base for secure mounting
- · Includes alkaline batteries
- 5103 is two times as bright as 5102



JHW5103

BAHCO® MAGNETIC PICK-UP TOOL WITH LIGHT

| Product Code | Description | Extended Length (Inches) |
|--------------|----------------------------------|--------------------------|
| 2535L | Magnetic Pick-up Tool with Light | 30 |

Features

- Wide area lighting
- Soft grip handle
- · Powerful magnetic tip
- Pick-up weight is 11/4 pounds

| Product Code | # of Claws | Max Jaw Opening (inches) | Flexible Section length, inches | Overall Length (inches) |
|--------------|------------|--------------------------|------------------------------------|-------------------------|
| JHW40159 | 4 | 3/4" | 16" | 23 ½" |

Features

- Tightly wound, Flexible spring snakes into tight areas
- Four-jaw claw opens wide to secure hard to reach objects

FLEXIBLE SPRING CLAW

| Product Code | # of Claws | Max Jaw Opening (inches) | Flexible Section length, inches | Overall Length (inches) |
|--------------|------------|-----------------------------|------------------------------------|-------------------------|
| JHW40159 | 4 | 3/4" | 16" | 23 ½" |

TELESCOPING MAGNETIC PICK UP TOOLS

| Product Code | Lifts (lbs) | Overall Length (Inches) | Extends to |
|--------------|-------------|---------------------------------|------------|
| JHW40151 | 2 1/2 | 6 5/8" | 33 1/4" |
| JHW40152 | 5 | 6 5/8" | 33 1/4" |
| JHW40153 | 10 | 8 ¹ / ₄ " | 30 1/4" |
| JHW40155 | 1 1/2 | 5 %" | 25 %16" |
| JHW40155-30P | | 30 nack counter display | |

- Stainless Steel Shaft
- JHW40155 Chrome Shaft
- Black cushion grip will not slip in oily or wet hands
- Powercap® shields sides of magnet for focused lifting
- Includes pocket clip















JHW40253

JHW40254

LED TELESCOPING MIRRORS

| Product Code | Mirror Diameter | Overall Length (Inches) | Extends to |
|--------------|-----------------|-------------------------|------------|
| JHW40255 | 2 3/8" | 6 1/2" | 37" |
| JHW40256 | 2 1/4" x 3 1/2" | 6 1/2" | 30 1/4" |

Features

- Stainless Steel Shaft
- Cushion grip will not slip in oily or wet hands
- Batteries included

TELESCOPING INSPECTION MIRRORS

| Product Code | Mirror Diameter | Overall Length (Inches) | Extends to |
|--------------|-----------------|-------------------------|----------------------------------|
| JHW40252 | 1 1/4" | 6 1/2" | 35" |
| JHW40253 | 2 1/4" | 6 1/2" | 36 ³ / ₈ " |
| JHW40254 | 3 1/4" | 6 1/2" | 29 1/2" |

Features

- Stainless Steel Shaft
- Cushion grip will not slip in oily or wet hands



SWIVEL INSPECTION RECTANGULAR MIRROR

| Product Code | Mirror Diameter | Overall Length (Inches) | Extends to |
|--------------|-----------------|-------------------------|------------|
| JHW40257 | 2 1/8" x 3 1/2" | 11 1/4" | 15 1/4" |

- Vinyl Grip
- Double ball joints allow mirror to swivel 360 degrees
- Glass Mirror
- Stainless Steel Mirror Back
- Non-rotating telescoping rods



HEARING PROTECTION

| Foam Ear Plugs | |
|----------------|--------------------------|
| Product Code | Comtents: |
| JHW-EFP33 | 100 pairs foam ear plugs |

Features

- Individually packaged in handy dispenser box
- Reusable
- Super soft feel, expands to comfortably fit ear canal
- · One size fits most
- · Reduces loud noises, noise reduction rating: NRR 33 Db





Safety Earmuffs

| Product Code | Description: |
|--------------|--------------------------------|
| JHW-EM26 | Noise reducing earmuffs |
| JHW-EMHV26 | Hi-Viz noise reducing earmuffs |

Features

- Skin-friendly materials, rotatable cups and ultra-soft ear cushions
- Effective and reliable ear protection
- Adjustable headband and 360° rotatable ear cups
- · Noise reduction rating: NRR 26 dB
- Fully padded, reinforced headband offers maximum comfort, stability and durability
- Effectively reduces harmful noise without blocking out all sounds
- · Compact folding design for easy storage
- Bright yellow earcups provide ultra-high visibility and contrast (Hi-Viz only)





BAHCO® SAFETY GLASSES

| Product Code | |
|--------------|--|
| 3870-SG11 | |
| | |

Features

- Scratch resistant
- Polycarbonate
- 99.9% UV protection



WILLIAMS® WORK GLOVES

| Product Code | Size |
|--------------|-------------|
| JHWGLV13M | Medium |
| JHWGLV13L | Large |
| JHWGLV13XL | Extra Large |

Features

- Stretch knit with padded back to provide extra feel and flexibility to grasp small objects
- · Extra knuckle protection
- Heat resistant synthetic double layered leather palm for long life
- · Elastic cuff with velcro strap

WILLIAMS TOUCH SCREEN WORK GLOVES

| Product Code | Size |
|--------------|-------------|
| JHWGLVM12M | Medium |
| JHWGLVM12L | Large |
| JHWGLVM12XL | Extra Large |

- · Touch screen compatible
- Breathable and rugged with impact protection
- Elastic cuff with velcro strap














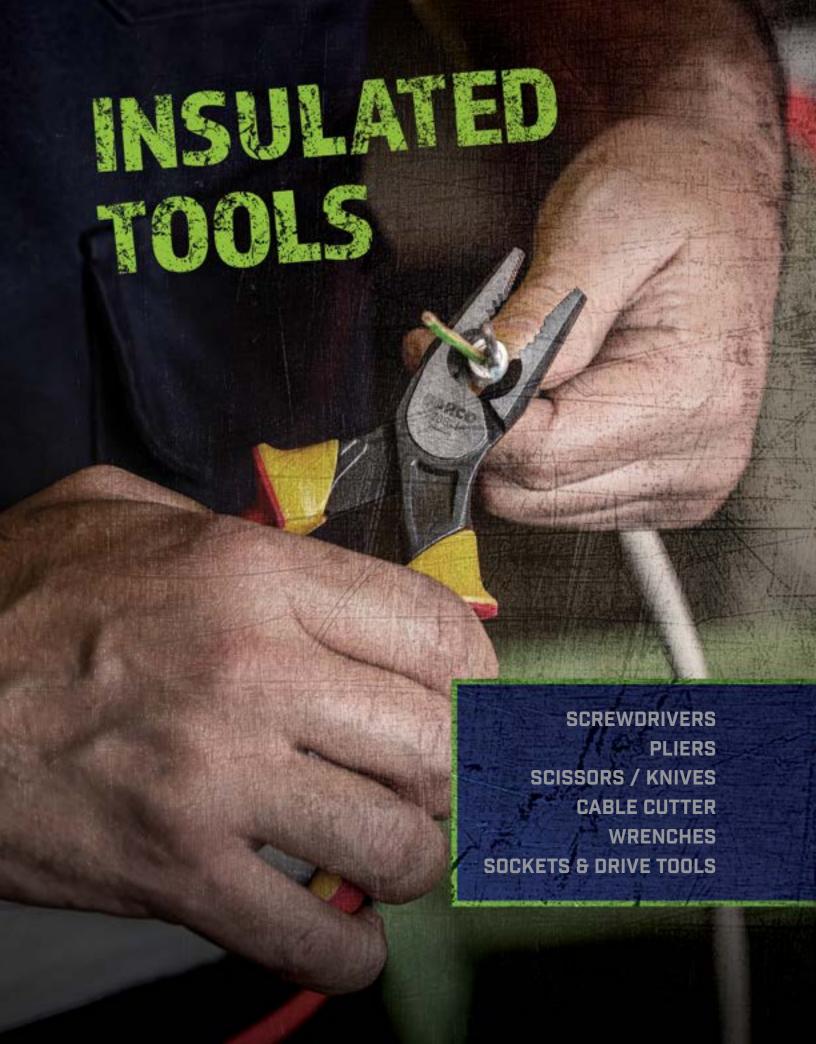



Quality guarantee

Bahco is one of the few hand-tool manufacturers that make the tools and the insulation in-house. Both the PVC dipped insulated version (most of the tools) and the handle version (pliers and screwdrivers) are manufactured entirely in Bahco factories.

Each tool is tested to 10,000 V for a period of 10 seconds to provide a high level of protection during live work.

Bahco's three-layer insulated tools have a color coded, multi layer insulation coating. This provides protection as well as creating a visual warning system. If the outer insulation layer gets damaged, the lighter color underneath will become

1000 V



visible and warn the user.
This makes it easier to detect damage to the insulation.





Routine tests in accordance with IEC60900 specification



Dielectric test

The tools are immersed in water for 24 hours. A voltage of 10 kV is then continuously applied for 3 minutes. The test is considered successful if no electrical puncture, spark over, or flashover occurs during the test period. Leakage limits must not be exceeded.



Retaining force test

This test is applied to tools that can be assembled. A force is applied to the assembled parts in an effort to separate them. If, after a minute, the parts remain assembled, the test is passed.



Impact test

The tools are cooled to -25°C for 2 hours. Then, a special hammer is used with some force on the insulating layer. The test is considered successful if the insulating material shows no breaks and passes the dielectric test.



Permanent marking durability

The markings are rubbed for 15 seconds with a rag soaked in water, and then for 15 seconds with a rag soaked in isopropanol. The test is passed if, after this process, the markings are still legible.



Insulation adhesion test

The tools are stored at a temperature of 70°C for 168 hours. Then, a force of 490 N is applied in the direction of the line dividing the insulating material from the conductive part for 3 minutes. During this test the insulation material must stay firmly attached to the tools.



Penetration test

The insulated surfaces of the tools are pressed with a special device. A voltage of 5000 V is then applied to the tool for 3 minutes. The test is considered successful if no electrical puncture, spark-over, or flash-over occurs during the test period.



Flame test

When placed over a fire, where the height of the flames on the tools does not exceed 120 mm, if the insulation material does not melt or leak, then the test is passed.



Visual and dimensional

The tools, and in particular the insulation, are visually controlled and have to be free from external defects. The markings have to be perfectly legible and the dimensions have to be in accordance with the standard.


INSULATED TOOLS

1000V ERGO™ SLOTTED SCREWDRIVERS

YOUR SAFETY IS OUR HIGHEST PRIORITY



1000V ERGO™ DIAGONAL CUTTING PLIERS

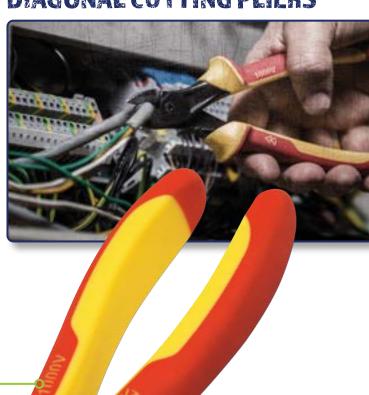

For work on live equipment up to 1000 V

High-performance alloy steel

Insulation molded directly onto blade

Black oxide tips prevent chipping of chrome to reduce possible contamination at work location

Phosphate finish, anticorrosion treated

Round-shaped jaws give improved accessibility in confined spaces Two-component insulated handles with thumb stops require less effort than conventional cutting pliers and provides superior grip

Heavy-duty induction hardened cutting edge suitable for cutting Cu, Fe+ and piano wire. Made from specially hardened steel to stay sharp longer

Edges near the joint are shaped for cutting hard materials and towards the tip they are adapted for soft materials and for stripping wires of thinner dimensions



BAHCO® 7 PIECE INSULATED RATCHETING SCREWDRIVER SETS



A must have tool for electricians.

| Product Code | Style | Blade Tip Sizes Included |
|-----------------|------------------------------|--|
| 808061 | Phillips® and Slotted Blades | PH1, PH2, 0.4 x 2.5, 0.5 x 3.0, 0.8 x 4.0, 1.0 x 5.5, Handle |
| 808062 | Pozidriv® and Slotted Blades | PZ1, PZ2, 0.4 x 2.5, 0.5 x 3.0, |

Features

- The blade release system built in the comfortable handle makes it easy and safe to change the slim blades without the blades falling out
- The blades are 30% slimmer than the blade of a regular insulated screwdriver for better accessibility and more applications such as sunken screws and spring elements
- For working on live equipment up to 1000 volts
- Complete with roll up pouch with clear 1000v indication
- IEC 60900 compliant



The blade release system built in the comfortable handle makes it easy and safe to change the slim blades without the blades falling out. The blades are 30% slimmer than the blade of a regular insulated screwdriver for better accessibility and more applications (e.g. sunken screws and spring elements). A must have tool for electricians.



















- For work on live equipment up to 1000 volts
- The three component ergonomically designed handle provides comfort and maximum grip even with oily hands
- Color coded handles indicate tip type. Tip type symbol is also printed on bottom of handle for quick identification
- Chrome blades prevent corrosion and can be easily cleaned
- Black oxide tips prevent chipping of chrome to reduce possible contamination at work location

BAHCO® ERGO™ 5 PIECE **1000V SCREWDRIVER SET**





| | _ | _ | | _ | | | |
|-------|-----|--------|--------|------|-------|-------|------|
| Three | Com | ponent | Handle | with | Black | Oxide | Tips |

| Product Code | Description |
|--------------|---|
| BE-9881S | 5 Piece ERGO™ Screwdriver Set Phillips® / Slotted |
| Contents le | aduda. |

Contents Include:

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip Width /Point Size |
|--------------|-------------------------------|--------------------------------|-----------------------|
| BE-8220S | 9 | 4 | 1/8 |
| BE-8040S | 8 3/4 | 4 | 5/32 |
| BE-8050S | 8 ³ / ₄ | 4 | 7/32 |
| BE-8610S | 8 | 3 ⁵ / ₃₂ | #1 |
| | | | |

Features

Contains 3 slotted and 2 Phillips[®] screwdrivers







BAHCO® ERGO™ 1000V **SLOTTED SCREWDRIVERS**





| Product Code | Overall Length (Inches) | Blade Length (Inches) | Tip Width (Inches) |
|--------------|--------------------------------|-----------------------|--------------------|
| BE-8010S | 8 | 3 | 3/32 |
| BE-8220S | 8 3/4 | 4 | 1/8 |
| BE-8230S | 9 3/4 | 5 | 9/64 |
| BE-8040S | 8 ³ / ₄ | 4 | 5/32 |
| BE-8050S | 9 ³ / ₄ | 5 | 7/32 |
| BE-8255S | 10 ³ / ₄ | 6 | 1/4 |
| BE-8065S | 11 3/4 | 7 | 5/16 |







BAHCO® ERGO™ 1000V **PHILLIPS® SCREWDRIVERS**



Three Component Handle with Black Oxide Tips

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Point Size |
|--------------|--------------------------------|--------------------------------|------------|
| BE-8600S | 6 ³ / ₈ | 2 3/8 | 0 |
| BE-8610S | 8 | 3 ⁵ / ₃₂ | 1 |
| BE-8620S | 8 ³ / ₄ | 4 | 2 |
| BE-8630S | 10 ³ / ₄ | 6 | 3 |
| BF-8640S ** | 14 1/4 | 8 | 4 |

** Dual grip handle for two-handed operation provides extra torque when necessary












2 PLIERS IN 1

The ERGO™ side cutting pliers have a progressive edge. Effectively, this means you can cut soft, thin wire close to the tip, and hard wire close to the screw. At the tip, the cutting edge is sharper so that it can cut softer materials such as copper, instead of simply squeezing them like most of the heavy duty pliers would.

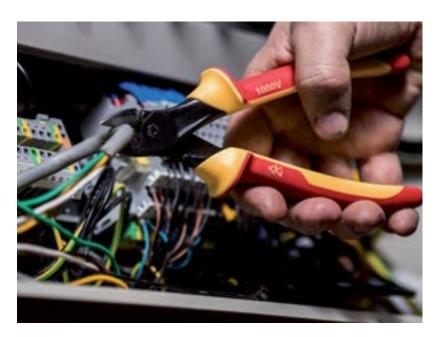






BAHCO® ERGO™ 1000V SIDE CUTTING PLIERS WITH PROGRESSIVE EDGE

For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Max Cutting Capacity (Inches) |
|-----------------|-------------------------------|------------------------|----------------------------------|
| 2101S-140 | 5 ¹ / ₂ | 5/8 | 1/16 Piano Wire |
| 2101S-160 | 6 ¹ / ₂ | 3/4 | 1/16 Piano Wire |
| 2101S-180 | 7 | 13/16 | 5/64 Piano Wire |

- . Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene provides superior grip
- Suitable for cutting Cu, Fe+ and piano wire
- Insulated side cutting pliers developed according to the scientific ERGO™ process for working on live equipment up to 1000V
- Distance from joint to center of cutting edges is reduced for greater leverage and increased cutting capacity
- . Cutting radius progresses along edge in order to cut hard material such as piano wire close to the joint as well as soft materials
- Screw joint provides excellent running and accurate alignment of cutting edges
- · Round-shaped jaws give improved accessibility in confined spaces
- · Less effort required compared to conventional cutting pliers
- . Reduced shank width ideally for carrying in the pocket













BAHCO® ERGO™ 1000V WIRE STRIPPING PLIERS

For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) |
|-----------------|-------------------------|------------------------|
| 2223S-150 | 5 3/4 | 1 1/8 |

Features

- Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene base provides superior grip
- Developed according to the scientific ERGO™ process
- For working on live equipment up to 1000 V in compliance with IEC 60900
- Stripping capacity: 0.5 mm to 5 mm
- Easy wire cutting and stripping pliers for copper and aluminum
- For stripping copper wire up to 5 mm
- High-performance alloy steel
- Phosphate finish, anti-corrosion treated
- Standards: IEC 60900
- Every tool is tested at 10,000 V for 10 seconds at the end of the manufacturing process









BAHCO® ERGO™ 1000V FLAT NOSE PLIERS

For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) |
|-----------------|-------------------------------|------------------------|
| 2421S-140 | 5 ¹ / ₂ | 1 1/4 |
| 2421S-160 | 6 1/4 | 2 |
| 2421S-180 | 7 | 2 1/4 |

- Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene base provides superior grip
- Developed according to the scientific ERGO™ process
- For working on live equipment up to 1000 V in compliance with IEC 60900
- . Tips provide good grip and improved accessibility in confined spaces
- Particularly designed for gripping flat material
- · High-performance alloy steel
- Phosphate finish, anti-corrosion treated
- Standards: ISO 5745, IEC 60900









BAHCO® ERGO™ 1000V 45° CURVED NOSE PLIERS

For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Max Cutting Capacity (Inches) |
|-----------------|-------------------------------|-------------------------------|-------------------------------|
| 2427S-160 | 6 ¹ / ₄ | 1 13/16 | 5/64 Hard Steel |
| 2427S-200 | 7 | 2 ³ / ₄ | 5/64 Hard Steel |

Features

- Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene base provides superior grip
- Developed according to the scientific ERGO™ process
- For working on live equipment up to 1000 V in compliance with IEC 60900
- Cutting capacity: 2.5 mm to 3 mm copper, 1.8 mm iron, 1.4 mm to 1.6 mm iron alloy
- Half-round serrated jaws for gripping flat and round material with great accessibility in confined spaces
- Bent jaws with hardened cutting edges for cutting soft and hard wire
- High-performance alloy steel
- Phosphate finish, anti-corrosion treated
- Standards: ISO 5745, IEC 60900









For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Max Cutting Capacity (Inches) |
|-----------------|-------------------------------|------------------------|-------------------------------|
| 2430S-140 | 5 1/2 | 1 1/4 | 1/16 Hard Steel |
| 2430S-160 | 6 ¹ / ₄ | 1 5/16 | 1/16 Hard Steel |
| 2430S-200 | 7 | 2 3/4 | 5/64 Hard Steel |

- Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene base provides superior grip
- Developed according to the scientific ERGO™ process
- For working on live equipment up to 1000 V in compliance with IEC 60900
- Cutting capacity: 2.5 mm to 3 mm copper, 1.8 mm iron, 1.4 mm to 1.6 mm iron alloy
- Half-round serrated jaws for gripping flat and round material with great accessibility in confined spaces
- Straight jaws with hardened cutting edges for cutting soft and hard wire
- High-performance alloy steel
- Phosphate finish, anti-corrosion treated
- Standards: ISO 5745, IEC 60900















BAHCO® ERGO™ 1000V 45° ROUND NOSE PLIERS

For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | |
|-----------------|----------------------------|------------------------|--|
| 2521S-140 | 5 1/2 | 1 1/8 | |
| 2521S-160 | 6 1/4 | 1 1/4 | |

Features

- Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene base provides superior grip
- Developed according to the scientific ERGO™ process
- For working on live equipment up to 1000 V in compliance with IEC 60900
- · Round thin tips for improved accessibility
- Specifically designed for wire bending
- High-performance alloy steel
- · Phosphate finish, anti-corrosion treated
- Standards: ISO 5745, IEC 60900
- Every tool is tested at 10,000 V for 10 seconds at the end of the manufacturing process









BAHCO® ERGO™ 1000V COMBINATION PLIERS

For working on live equipment up to 1000 volts

| Product Code | Overall Length (Inches) | Jaw Length (Inches) | Max Cutting Capacity (Inches) |
|-----------------|-------------------------|------------------------|-------------------------------|
| 2628S-160 | 6 1/4 | 1 5/16 | 1/16 Hard Steel |
| 2628S-180 | 7 | 1 7/16 | 5/64 Hard Steel |
| 2628S-200 | 8 | 1 1/2 | 7/64 Hard Steel |

- Two-component ERGO™ insulated handles: thermoplastic surface on tough polypropylene base provides superior grip
- Developed according to the scientific ERGO™ process
- For working on live equipment up to 1000 V in compliance with IEC 60900
- Gripping surfaces particularly suited for flat and round material
- Special head design for better accessibility, with hardened cutting edges for cutting soft and hard wire
- High-performance alloy steel
- · Phosphate finish, anti-corrosion treated
- Standards: ISO 5746, IEC 60900









BAHCO® 1000V QUICK ADJUST WATER PUMP PLIERS

For working on live equipment up to 1000 volts

| Product | Overall Length (Inches) | Jaw Length | Tip Width |
|---------|-------------------------|------------|-----------|
| Code | | (Inches) | (Inches) |
| 7224S | 10 | 2 | 5/8 |


- 1000V quick-adjust water pump pliers
- Sturdy box joint frame and slim design
- High performance alloy steel, two-component handles for maximum grip comfort
 Phosphate finish, anti-corrosion treated
- Self-adjusting patented lateral lever
- Flat and round grip shape with auto-tightening device
- Up to 35% bigger mouth opening compared to market standard
- Narrow design head for great accessibility in confined spaces
- Hardened teeth (60 HRC to 62 HRC) for a long product life and strong gripping on any shape
- Slim jaws provide easy accessibility
- Designed to prevent fingers being pinched
- ISO 8976, IEC 60900









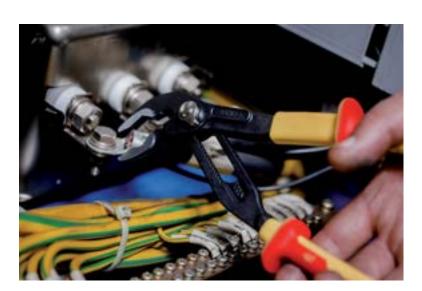





BAHCO® 1000V ELECTRICIAN SCISSORS

For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Length (inches) |
|--------------|-----------------|
| SC127V | 5 |

Features

- Single layer coating (only red coating).
 Small groove in the blade for stripping cables.
- 2" cutting length.
 Guard to avoid fingers touching the metallic part by mistake.

| Product Code | Length (inches) |
|--------------|-----------------|
| SC150NGV | 6 |

Features

- 2 layer coating: Red: safety. Yellow: danger
- Finger stops in both legs to avoid fingers touching the metallic part by mistake
- The longer handle allows to apply less force to cut a certain wire
- 1-1/2" cutting length





BAHCO® 1000V ELECTRICIAN KNIVES

For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Description | |
|--------------|---------------------------|--|
| 2820VP | Knife with Straight Blade | |
| 2820VPC | Knife with Curved Blade | |
| | | |

Features

- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: danger. Yellow: high danger
 Available in straight and curved blade versions

Features

- Insulated 1000 V knife with guide
- Single layer, injection molded, with protection cap
- Special blade with cable guard show for cable dismantling Stainless steel blade; handle shock resistant plastic



BAHCO® 1000 V TWEEZERS

For protection against inadvertent shock when working on circuits up to 1000 volts

Product Code 2820VTEE

Double layer coating - red layer indicates safety, yellow layer indicates danger, plus a 3rd one in black to further protect handle edges







BAHCO® 1000V BOLT CUTTER

For protection against inadvertent shock when working on circuits up to 1000 volts

| | | Wire types Ø mm w | | |
|--------------|-----------------|----------------------|-----------------------|-----------------------|
| Product Code | Length (inches) | 80kg/mm ² | 120kg/mm ² | 160kg/mm ² |
| 2820VBC | 25 | 9 | 8 | 7 |

- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: danger. Yellow: high danger
- Forged head; Induction hardened cutting edges
- Long arms with lever-action head, allows cutting of hard wires with very little effort









BAHCO® 1000V ADJUSTABLE WRENCHES

For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Length (inches) | Max Jaw Opening (Inches) | Head Thickness (Inches) |
|--------------|-----------------|-----------------------------|-------------------------------|
| 8070V | 6 | 3/4 | 7/16 |
| 8071V | 8 | 1 1/16 | 1/2 |
| 8072V | 10 | 1 3/16 | 5/8 |
| 8073V | 12 | 1 5/16 | 3/4 |
| 8074V | 15 | 1 3/4 | ¹⁵ / ₁₆ |

Features

- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: Caution. Yellow: danger
- Material: Chrome-Vanadium steel
- The movable jaw slides easily by smoothly operating the thumb screw
- . Complies with ISO and ANSI torque requirements
- Head dimensions comply with ISO 6787 standards





BAHCO® 1000V OPEN END WRENCH - METRIC

For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Size (mm) | Overall Length (Inches) | Open End Width (Inches) | Open End Thickness (Inches) | Layers Coating |
|--------------|--------------|----------------------------|-------------------------|--------------------------------|-------------------|
| 6MV6 | 6 | 3 1/8 | 9/16 | 1/8 | 2 |
| 6MV7 | 7 | 3 1/8 | 11/16 | 1/8 | 2 |
| 6MV8 | 8 | 3 5/8 | 11/16 | 3/16 | 2 |
| 6MV9 | 9 | 3 1/8 | 13/16 | 3/16 | 2 |
| 6MV10 | 10 | 4 1/4 | 15/16 | 3/16 | 2 |
| 6MV11 | 11 | 4 %16 | 1 | 3/16 | 2 |
| 6MV12 | 12 | 5 | 1 1/8 | 3/16 | 2 |
| 6MV13 | 13 | 5 5/16 | 1 1/4 | 3/16 | 2 |
| 6MV14 | 14 | 5 1/2 | 1 1/4 | 1/4 | 2 |
| 6MV15 | 15 | 6 | 1 1/4 | 1/4 | 2 |
| 6MV16 | 16 | 6 3/16 | 1 1/4 | 1/4 | 2 |
| 6MV17 | 17 | 6 3/8 | 1 1/16 | 1/4 | 3 |
| 6MV18 | 18 | 6 ² /3 | 1 %16 | 1/4 | 3 |
| 6MV19 | 19 | 6 ½ | 1 1/8 | 1/4 | 3 |

Features

- 2 layer coating insulation with different colors plus a 3rd one in black to further protect handle edges on spanners from 6 mm to 16 mm. Red: safety. Yellow: danger
- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges on spanners from 17 mm to 32 mm. Red: safety. Orange: danger. Yellow: high danger
- Material: Chrome-Vanadium steel
- · Opening tolerance according to ISO 691





Clear transparent plastic hand, impact resistant

| Product Code | Overall Length (Inches) | Blade Length (Inches) | Size (Inches) |
|--------------|-------------------------|-----------------------|---------------|
| 806-1-1 | 6 | 3 1/3 | 1/8 |

- Mains tester 150-250V
- Handle is clear transparent plastic handle, impact resistant
- Blade is high quality steel, Nickel plated blade. Plastic protection up to the tip





BAHCO® 1000V 1/2" RATCHET

For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Length (inches) | Head Width A (Inches) | Head Thickness B (Inches) | Drive Size C (Inches) |
|--------------|--------------------|--------------------------|---------------------------|--------------------------|
| 8150-1/2V | 10 1/2 | 3 | 2 | 1/2 |

Features

- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: danger. Yellow: high danger
- Material: Chrome-Vanadium steel
- One of the buttons is a lever to change the ratcheting direction; the other is a push button to lock or release the socket to the male square drive
- 28 teeth ratchet to operate at a 13° angle
- . Static and endurance tests with 50,000 cycles
- Complies with the ISO standards



BAHCO® 1000V 1/2" EXTENSION

For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Length (inches) |
|--------------|-----------------|
| 8160-1/2V | 5 |

Features

- · 2 layer coating insulation with different colors. Red: safety. Yellow: danger
- Material: Chrome-Vanadium steel
- The male square drive is having a slotted screw to move the ball outward or inward and block or unblock the socket to it
- The male square tolerances and torque requirements comply with the respective ISO standard



BAHCO® 1000V 1/2" DRIVE SOCKETS - METRIC





For protection against inadvertent shock when working on circuits up to 1000 volts

| Product Code | Size (mm) | Overall Length (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Nose Length (Inches) |
|--------------|--------------|-------------------------|--------------------------------|----------------------------------|-------------------------|
| 7800DMV-8 | 8 | 2 | 7/8 | 2/3 | 1/4 |
| 7800DMV-10 | 10 | 2 | 7/8 | 3/4 | 1/4 |
| 7800DMV-11 | 11 | 2 | 7/8 | 3/4 | 1/4 |
| 7800DMV-12 | 12 | 2 | 7/8 | 3/4 | 1/4 |
| 7800DMV-13 | 13 | 2 | 7/8 | 1 | 1/4 |
| 7800DMV-14 | 14 | 2 | 7/8 | 1 | 3/8 |
| 7800DMV-15 | 15 | 2 | 7/8 | 1 | 3/8 |
| 7800DMV-16 | 16 | 2 | 7/8 | 1 | 3/8 |
| 7800DMV-17 | 17 | 2 | 7/8 | 1 1/8 | 3/8 |
| 7800DMV-18 | 18 | 2 | 7/8 | 1 1/8 | 1/2 |
| 7800DMV-19 | 19 | 2 | 7/8 | 1 ³ ⁄ ₁₆ | 1/2 |



- . 2 layer coating insulation with different colors
- Material: Chrome-Vanadium steel
- 12 point Dynamic Drive Profile
- Both square and 12 point openings according to the tolerance and torque requirements given in ISO standards







7800DMV



| 1/64 1/32 3/64 1/16 5/64 3/32 7/64 1/8 9/64 5/32 | .0156 .0312 .0394 .0469 .0625 .0781 .0787 .0937 .1094 .1181 | 0.397 0.794 1.000 1.191 1.587 1.984 | 26 27 28 | 1.0236 1.0630 | 94 | 3.7008 | FOOT POUNDS | 24.4 | 85 | 115.2 |
|---|--|--|----------------|------------------|-------------|---------------|--------------|--------------|-------------|-----------------|
| 3/64 1/16 5/64 3/32 7/64 1/8 9/64 | .0394 .0469 .0625 .0781 .0787 .0937 .1094 | 1.000 1.191 1.587 | | 1.0630 | | | | | | |
| 1/16 5/64 3/32 7/64 1/8 9/64 | .0625 .0781 .0787 .0937 .1094 | 1.587 | 28 | | 95 | 3.7402 | 19 | 25.8 | 86 | 116.6 |
| 3/32 7/64 1/8 9/64 | .0781 .0787 .0937 .1094 | | | 1.1024 | 96 | 3.7795 | 20 | 27.1 | 87 | 117.9 |
| 3/32 7/64 1/8 9/64 | .0787 .0937 .1094 | 1.904 | 29 | 1.1417 | 97 | 3.8189 | 21 | 28.4 | 88 | 119.3 |
| 7/64 1/8 9/64 | .0937 .1094 | 2.000 | 30 | 1.1811 | 98 | 3.8583 | 22 | 29.8 | 89 | 120.7 |
| 1/8 9/64 | | 2.381 | 31 | 1.2205 | 99 | 3.8976 | 23 | 31.2 | 90 | 122.0 |
| 9/64 | | 2.778 3.000 | 32 | 1.2598 | 100 | 3.9370 | 24 | 32.5 | 91 | 123.4 |
| 9/64 | .1250 | 3.175 | 33 | 1.2992 | 110 | 4.3307 | 25 | 33.9 | 92 | 124.7 |
| 5/32 | .1406 | 3.572 | 34 | 1.3386 | 120 | 4.7244 | 26 | 35.3 | 93 | 126.0 |
| | .1562 .1575 | 3.969 4.000 | 35 | 1.3780 | 130 | 5.1181 | 27 | 36.6 | 94 | 127.4 |
| 11/64 | .1719 | 4.366 | 36 37 | 1.4173 | 140 | 5.5118 | 28 | 38.0 | 95 | 128.8 |
| 3/16 | .1875 | 4.762 | 38 | 1.4567 | 150 | 5.9055 | 29 | 39.3 | 96 | 130.2 |
| 12/64 | .1968 | 5.000 | 39 | 1.4961 1.5354 | 160 | 6.2992 | 30 | 40.7 | 97 | 131.5 |
| 13/64 7/32 | .2031 .2187 | 5.159 5.556 | 40 | 1.5748 | 200 | 7.8740 | 31 | 42.0 | 98 | 132.9 |
| 15/64 | .2344 | 5.953 6.000 | 41 | 1.6142 | 300 | 11.8110 | 32 | 43.4 | 99 | 134.2 |
| 1/4 | .2362 | 6.350 | 42 | 1.6535 | 400 | 15.7480 | 33 | 44.7 | 100 | 135.6 |
| 17/64 | .2656 | 6.747 | 43 | 1.6929 | 500 | 19.6850 | 34 | 46.1 | 110 | 149.0 |
| | .2756 | 7.000 | 44 | 1.7323 | 600 | 23.6220 | 35 | 47.5 | 115 | 156.0 |
| 9/32 19/64 | .2812 .2969 | 7.144 7.541 | 45 | 1.7717 | 700 | 27.5591 | 36 | 48.8 | 120 | 163.0 |
| 5/16 | .3125 | 7.937 | 46 | 1.8110 | 800 | 31.4961 | 37 | 50.2 | 125 | 170.0 |
| L | .3150 | 8.000 | 47 | 1.8504 | 900 | 35.4331 | 38 | 51.5 | 130 | 176.0 |
| 21/64 11/32 | .3281 .3437 | 8.334 8.731 | 48 | 1.8898 | 1000 | 39.3701 | 39 | 52.9 | 135 | 183.0 |
| 11/32 | .3543 | 9.000 | 49 | 1.9291 | INCH POUNDS | NEWTON METERS | 40 | 54.2 | 140 | 190.0 |
| 23/64 | .3594 | 9.128 | 50 | 1.9685 | 5 | 0.565 | 41 | 55.6 | 145 | 197.0 |
| 3/8 25/64 | .3750 .3906 | 9.525 9.922 | 51 | 2.0079 | 10 | 1.13 | 42 | 56.9 | 150 | 203.0 |
| 20/04 | .3937 | 10.000 | 52 | 2.0472 | 15 | 1.70 | 43 | 58.3 | 155 | 210.0 |
| 13/32 | .4062 | 10.319 | 53 | 2.0866 | 20 | 2.26 | 44 | 59.7 | 160 | 217.0 |
| 27/64 | .4219 .4331 | 10.716 11.000 | 54 | 2.1260 | 25 | 2.83 | 45 46 | 61.0 62.4 | 165 | 224.0 |
| 7/16 | .4375 | 11.112 | 55 | 2.1654 | 30 | 3.39 | 40 | 63.7 | 170 | 231.0 |
| 29/64 | .4531 | 11.509 | 56 | 2.2047 | 35 | 3.96 | 48 | 65.7 65.0 | 175 | 237.0 |
| 15/32 | .4687 .4724 | 11.906 12.000 | 57 | 2.2441 | 40 | 4.52 | 49 | 66.4 | 180 | 244.0 |
| 31/64 | .4844 | 12.303 | 58 | 2.2835 | 45 | 5.09 | 50 | 67.8 | 185 | 251.0 |
| 1/2 | .5000 | 12.700 | 59 | 2.3228 | 50 | 5.65 | 50 51 | 69.1 | 190 | 258.0 |
| 33/64 | .5118 .5156 | 13.000 13.097 | 60 | 2.3622 | 60 | 6.78 | 52 | 70.5 | 195 | 264.0 |
| 17/32 | .5312 | 13.494 | 61 | 2.4016 | 70 | 7.91 | 53 | 71.9 | 200 | 271.0 |
| 35/64 | .5469 .5512 | 13.891 14.000 | 62 | 2.4409 | 80 | 9.04 | 54 | 73.2 | 225 | 305.0 |
| 9/16 | .5625 | 14.287 | 63 | 2.4803 | 90 | 10.17 | 55 | 74.6 | 250 | 339.0 |
| 37/64 | .5781 | 14.684 | 64 | 2.5197 | 100 | 11.3 | 56 | 75.9 | 275 | 373.0 |
| | .5906 | 15.000 | 65 | 2.5591 | 110 | 12.4 | 57 | 77.3 | 300 | 407.0 |
| 19/32 39/64 | .5937 .6094 | 15.081 15.478 | 66 | 2.5984 | 120 | 13.6 | 58 | 78.6 | 350 | 474.0 |
| 5/8 | .6250 | 15.875 | 67 68 | 2.6378 2.6772 | 130 | 14.7 | 59 | 80.0 | 400 | 542.0 |
| 44 (0.4 | .6299 | 16.000 | 69 | 2.7165 | 140 | 15.8 | 60 | 81.3 | HEX S | OCKET |
| 41/64 21/32 | .6406 .6562 | 16.272 16.669 | 70 | 2.7103 | 150 | 17.0 | 61 | 82.7 | CONVERSIONS | |
| | .6693 | 17.000 | 70 | 2.7953 | 160 | 18.1 | 62 | 84.0 | | 0.004" |
| 43/64 | .6719 | 17.066 | 72 | 2.7933 | 170 | 19.2 | 63 | 85.4 | 10mm= | =0.394" |
| 11/16 45/64 | .6875 .7031 | 17.462 17.859 | 73 | 2.8740 | 180 | 20.3 | 64 | 86.8 | 11mm | =0.433" |
| | .7087 | 18.000 | 74 | 2.9134 | 190 | 21.5 | 65 | 88.1 | 1 11111111 | -3.733 |
| 23/32 47/64 | .7187 .7344 | 18.256 18.653 | 75 | 2.9528 | 200 | 22.6 | 66 | 89.5 | 12mm= | =0.472" |
| 7,704 | .7344 | 19.000 | 76 | 2.9921 | FOOT POUNDS | NEWTON METERS | 67 | 90.8 | | |
| 3/4 | .7500 | 19.050 | 77 | 3.0315 | 1 | 1.356 | 68 | 92.2 | 13mm= | =0.512" |
| 49/64 25/32 | .7656 .7812 | 19.447 19.844 | 78 | 3.0709 | 2 | 2.7 | 69 | 93.5 | 44 | O EE4" |
| 20/32 | .7874 | 20.000 | 79 | 3.1102 | 3 | 4.0 | 70 | 94.9 | 14mm= | =0.551" |
| 51/64 | .7969 | 20.241 | 80 | 3.1496 | 4 | 5.4 | 71 | 96.3 | 15mm- | =0.591" |
| 13/16 | .8125 .8268 | 20.637 21.000 | 81 | 3.1890 | 5 | 6.8 | 72 | 97.6 | | 3.001 |
| 53/64 | .8281 | 21.034 | 82 | 3.2283 | 6 | 8.1 | 73 | 99.0 | 16mm= | =0.630" |
| 27/32 | .8437 | 21.431 | 83 | 3.2677 | 7 | 9.5 | 74 | 100.3 | | |
| 55/64 | .8594 .8661 | 21.828 22.000 | 84 | 3.3071 | 8 | 10.8 | 75 | 101.7 | 17mm= | =0.669" |
| 7/8 | .8750 | 22.225 | 85 | 3.3465 | 9 | 12.2 | 76 | 103.0 | 18mm=0.704" | |
| 57/64 | .8906 | 22.622 | 86 | 3.3858 | 10 | 13.5 | 77 | 104.4 | 18mm= | =0.704 |
| 29/32 | .9055 .9062 | 23.000 23.019 | 87 | 3.4252 | 11 | 14.9 | 78 | 105.8 | 19mm= | =0.748" |
| 59/64 | .9062 | 23.416 | 88 | 3.4646 | 12 | 16.3 | 79 | 107.1 | | 5.1. 1.5 |
| 15/16 | .9375 | 23.812 | 89 | 3.5039 | 13 | 17.6 | 80 | 108.5 | 20mm= | =0.787" |
| 61/64 | .9449 .9531 | 24.000 24.209 | 90 | 3.5433 | 14 | 18.9 | 81 | 109.8 | ٠, | 0.007" |
| 31/32 | .9687 | 24.606 | 91 | 3.5827 | 15 | 20.3 | 82 | 111.2 | 21mm= | =0.827" |
| L | .9843 | 25.000 | 92 | 3.6220 | 16 | 21.7 | 83 | 112.5 | | |
| 63/64 | .9844 1.0000 | 25.003 25.400 | 93 | 3.6614 | 17 | 23.0 | 84 | 113.9 | | |
| | | _555 | Inch Lbs | s. x 0.113=Nr | m; Nm x 8. | 849=Inch Lbs | .; Ft. Lbs > | 1.356=Nm; | Nm x 0.73 | 7=Ft. Lbs. |



Important Words About Safety for Users and Bystanders

Following these basic safety rules is a good start toward protecting yourself — and others in the vicinity — from injury while using tools.

Wear safety goggles
Use the right tool
Use the tool properly
Maintain the tool regularly
Keep tools away from children
Do not use tools on live electrical circuits
unless specifically designed for such use
Read and follow instructions



THIS SYMBOL INDICATES PROHIBITED ACTION



DO NOT OVER-TORQUE NO PIPES OR LEVER EXTENSIONS



NO HAMMERING



NO PRYING



DO NOT STRIKE HARD OBJECTS



NO IMPACT/POWER DRIVE



DO NOT STEP IN OR ON DRAWERS



DO NOT OPEN MULTIPLE DRAWERS



DO NOT PULL TO MOVE



KEEP CHILDREN AWAY



THIS SYMBOL INDICATES MANDATORY ACTION



MANDATORY EAR PROTECTION



MANDATORY FACE SHIELD



MANDATORY MASK



MANDATORY RESPIRATOR



MANDATORY PROTECTIVE CLOTHING



MANDATORY PROTECTIVE GLOVES



MANDATORY EYE PROTECTION



MUST READ INSTRUCTIONS BEFORE USE



THIS SYMBOL INDICATES A HAZARD ALERT, GENERAL WARNING SIGN



VIBRATION HAZARD



RISK OF EXPLOSION



OVERHEAD/ OVERLOAD HAZARD



RISK OF ELECTRIC SHOCK



RISK OF FIRE



RISK OF ENTANGLEMENT

Safety messages in this catalog use the guidelines of the American National Standard ANSI Z535.4 for Product Safety Signs and Labels and ANSI Z535.3 Criteria for Safety Symbols. Messages associated with specific products use a triangular hazard alert symbol, signal word (CAUTION, WARNING, DANGER) and how to avoid the hazard. Each message refers to pages (754-756) which provides additional safety symbols and three-part messages advising of:

- The hazard
- · How to avoid the hazard
- The probable consequence of not avoiding the hazard

PLEASE READ AND FOLLOW these messages to avoid injury to yourself and bystanders.

^{*} These symbols are excerpted from ISO 7010: 2011 with the permission of ANSI on behalf of ISO. © ISO 2014 - All rights reserved.



Electrical, Electronic Service

(pliers, cutters, mini-torch)

↑ WARNING



Broken tips or cut material can fly.

Wear safety shield. (User and bystanders)

Flying material can cause injury.



Material can cause sparks or flying particles when heated.
 Wear safety goggles. (User and bystanders)
 Sparks and flying particles can cause injury.



Butane will explode or burn when ignited.
Do not store butane at a temperature above 120°.
Hold Butane away from body and face.



Explosion or flames can cause injury.

• Electrical shock hazard.



Do not use on live electrical circuits. Electrical shock can cause injury.

Extractors

△WARNING

Drilling pilot holes, inserting extractors and using extractors can cause flying chips. Extractors can break if overloaded.



Wear safety goggles. (User and bystanders) For hand use only.

Flying chips and broken tools can cause injury.

Gear Head Torque Multipliers

△WARNING

 Use of gear head torque multipliers for torque control may result in inaccurate torque application.

For accurate control of torque use an Electrotork®, a Torqometer® or other measuring device located directly on the fastener.

Limited accuracy of the torque ratio of a gear head torque multiplier may cause improper preload of the fastener if it is used for torque control.

Hand Tools

MARNING

Chrome and industrial finish hand tools can break if overloaded or used for the wrong application.



Wear safety goggles. (User and bystanders)
Do not use chrome or industrial finish hand tools with power drivers.

Use only impact sockets and accessories with impact wrenches.

Use only power sockets and accessories with power wrenches.

Broken hand tools, sockets or accessories can cause injury.

• Electrical shock hazard.



Do not use on live electrical circuits.

Electrical shock can cause injury.

Impact Drivers

<u>∧</u>WARNING



Impact drivers can cause tool breakage or flying objects.
 Wear safety goggles. (User and bystanders)
 Flying objects can cause injury.



Wear hearing protection. (User and bystanders)

Knives

↑ WARNING

• Blades are sharp and can cut. Blades can break causing flying objects.



Wear safety goggles. (User and bystanders)
Do not pry or bend blade.

Keep away from children.

Sharp edges and flying objects can cause injury.

Nut Splitters

MARNING



Use of impact wrench can cause nut splitter to break.
 Wear safety goggles. (User and bystanders)
 Do not use with impact wrench.
 Broken tools can cause injury.

Plastic Handled Tools

▲WARNING



Plastic handles do not protect from electrical shock.
 Do not use on live electrical circuits.
 Electrical shock can cause injury.

Pliers/Cutters

MWARNING



Broken tips or cut material can fly.

Wear safety goggles. (User and bystanders)

Flying material can cause injury.

Prybars

⚠WARNING



 Prying can cause flying chips. Chipped or cracked prybars can cause flying chips. Prybars can chip if struck.
 Wear safety goggles. (User and bystanders)



Do not use pipe or lever extension.

Do not use a prybar if chipped or cracked.

Do not use a prybar as a punch or hammer.

Flying chips can cause injury.

Pullers, Presses

▲WARNING



Puller parts under stress can break.
 Wear safety goggles. (User and bystanders)
 Broken parts can cause injury.

Ratchets

MARNING

Ratchet mechanism may slip or break if dirty. Mismatched or partially worn parts can cause ratchet to slip or break.
 Frequently inspect, clean and lubricate all non-sealed ratchet mechanisms with light oil.
 Do not immerse sealed ratchet in fluids.
 Do not replace worn parts individually, use entire contents of the service kit.
 Ratchets that slip or break can cause injury.

Riveting, Sanding, Door Tools

MWARNING



• Riveting and nut setting tools can cause flying chips.

Wear safety goggles. (User and bystanders) Flying chips can cause injuries.

Scrapers

⚠WARNING



 Scrapers and putty knives can break if used for prying or chiseling.



Wear safety goggles. (User and bystanders) Do not use a scraper or putty knife as a prybar or chisel.

Broken tools can cause injury.

Screwdrivers

△WARNING



Screwdrivers can break if used as prybar, chisel or punch.
 Wear safety goggles. (User and bystanders)
 Do not use a screwdriver as a prybar, chisel



or punch.
Broken screwdriver can cause injury.



Socket Usage

Select the proper type of socket for the application.

MWARNING



. Hand Sockets - All chrome plated sockets and black finished sockets identified as hand sockets are for hand use only.



Impact Sockets - Sockets designed for durability when used with impact drivers; use only impact sockets with impact drivers.

Wear safety goggles. (Users and bystanders) Broken tools can cause injury.

Storage Units

▲WARNING



Storage units can tip or strike you.




Do not open more than one loaded drawer at a time. Keep children away.



Close lid and lock drawers and doors before moving. Apply brakes on locking casters when not moving unit.



Do not step in or on drawers.





Tipping of storage unit or unit striking you can cause injury.

Units edges can cut or pinch.

Do not pull; push to move.

Wear gloves when lifting by edges.

Keep feet and fingers clear of edges when stacking, hanging or moving units.

Unit edges can cause injury.

Striking and Struck Tools, Punches/Chisels

⚠WARNING



· Striking and struck tools can break or chip. Chipped or mushroomed punch and chisel ends or metal weakened by improper grinding can fragment.

Oversized hammer can chip the punch or chisel. Wear safety goggles. (Users and bystanders) Do not use punch or chisel having mushroomed ends; dress edges or mushroomed ends to original shape with a hand file.

Hammer head diameter should be approximately 3/8" larger than head of punch or chisel. Flying objects can cause injury.

Steel punches and chisels can cause sparks during use.



Do not use near flammable substance.


Flammable substances can ignite causing injury.

Power Tools

(impact wrenches, ratchets, hammers, sanders, grinders, cut-off tools)




• Power tools can cause flying particles Wear safety goggles (user and bystanders).





· Power tools generate noise Wear hearing protection (user and bystanders).





Avoid prolonged exposure to vibration.

Prolonged exposure to vibration can cause injury.

Improper use of power tools and accessories can cause broken tools

Do not use without all guards in place. Use accessories rated at tool RPM or higher. Read and follow instructions before using power tools.

Broken tools can cause injury.

Hammers

▲WARNING



· Hammers can cause flying chips. Chipped, mushroomed or cracked hammers can cause flying chips. Glancing blows can cause flying chips. Striking hard surface can cause flying chips. Body hammers can chip or break if struck against hard surfaces.

Wear safety goggles. (Users and bystanders) Do not use chipped, mushroomed or cracked hammers.


Strike squarely and avoid glancing blows. Do not strike other hammers or similar hard surfaces.

Use body hammers only for striking automotive type sheet metal; do not strike hard surfaces.

Flying chips can cause injury.

Steel hammers can cause sparks during use.





COMPOTHANE® or urethane hammers can rupture or ignite if exposed to liquid oxygen.

Do not use COMPOTHANE® or urethane

hammers near liquid oxygen.
Ruptured and/or ignited COMPOTHANE® or urethane can cause injury.

Threading

⚠WARNING



· Threading and rethreading tools can cause flying chips. Wear safety goggles. (Users and bystanders) Flying chips can cause injury.

Torque Testers

△WARNING



· Calibration weights can cause tester and its base to tip. Wear safety goggles. (Users and bystanders) Counterbalance or anchor mounting base. Tipping base can cause injury.

Torque Wrenches

△WARNING



Overtorguing can cause breakage. Wrench can break while breaking fasteners loose. Force against flex stops on flex head torque wrenches can cause head breakage. An out of calibration torque wrench can cause part or tool breakage.



Wear safety goggles. (Users and bystanders) Do not exceed rated torque.

Do not use a torque wrench to break

fasteners loose. Do not force head of flex head torque wrenches

against stops. Periodic recalibration is necessary to maintain accuracy.

Broken tools can cause injury.

Wrenches

MWARNING



· Excess force can cause crowfoot or flare nut wrench slippage.




Do not over-torque, no pipes or lever extensions. Use only moderate force on crowfoot and flare

Broken or slipping wrenches can cause injury.

Slimline wrenches can break if overloaded.

Wear safety goggles. (Users and bystanders) Broken wrench jaw can cause injury.



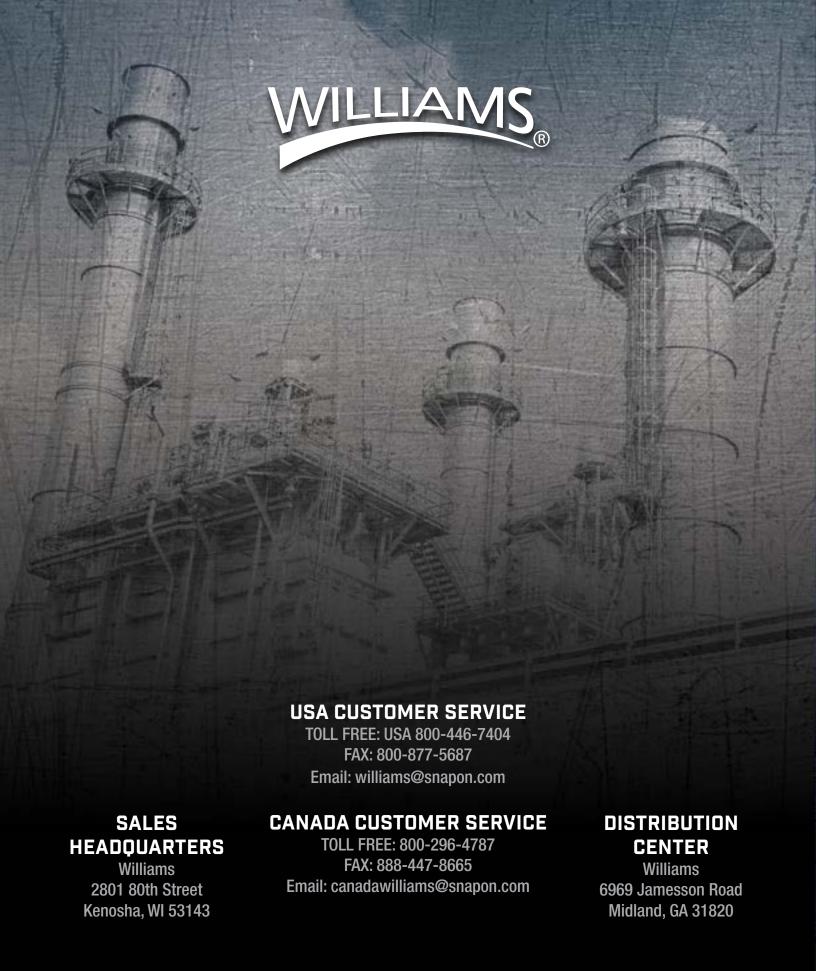

WILLIAMS-INDUSTRIAL.COM