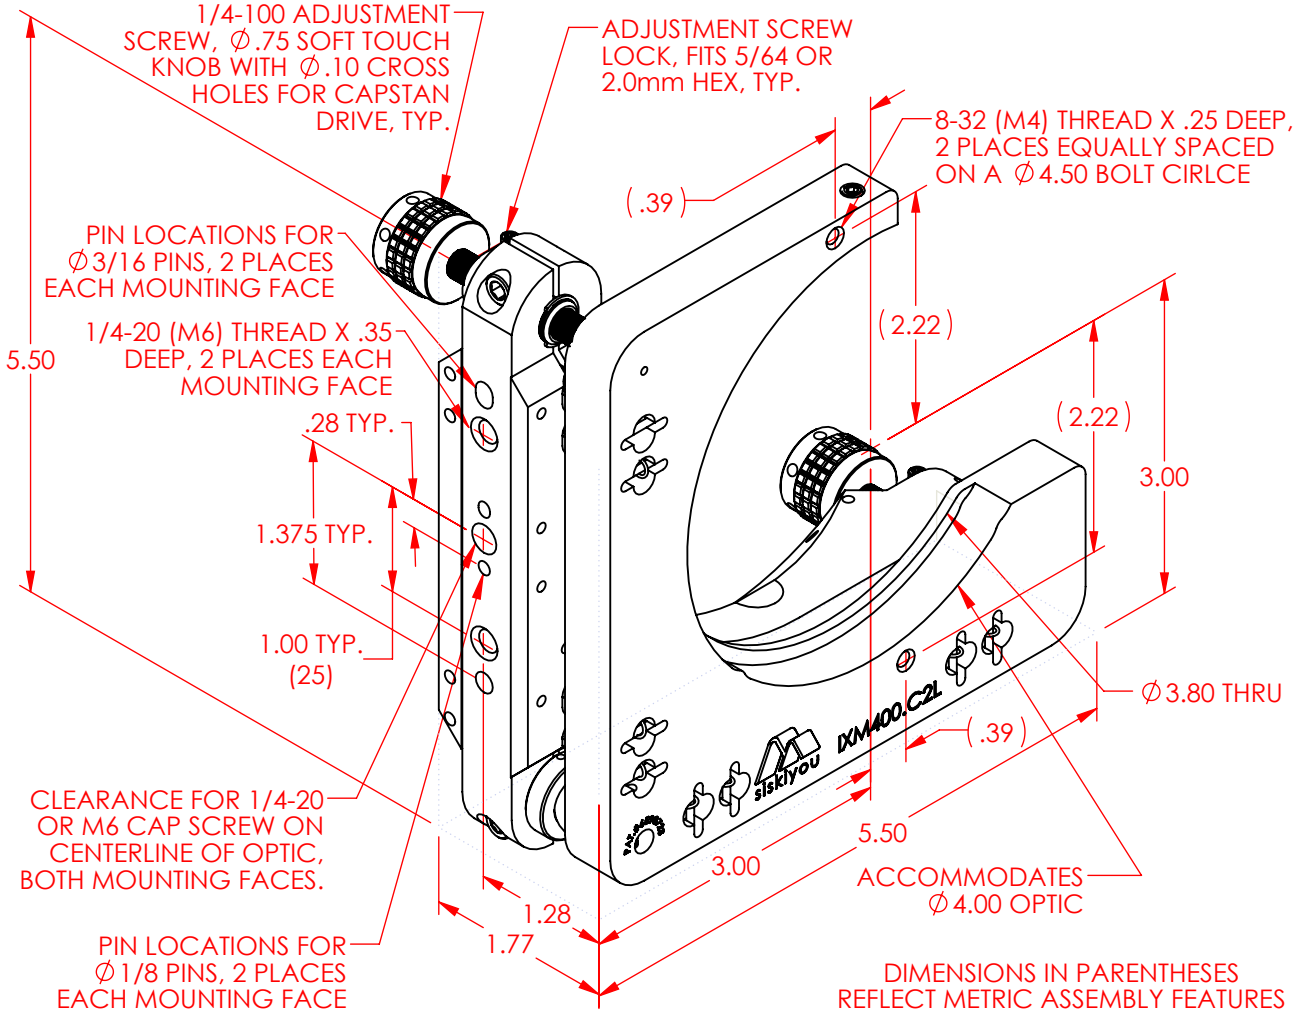

1/4-100 ADJUSTMENT SCREW, ∅.75 SOFT TOUCH KNOB WITH ∅.10 CROSS HOLES FOR CAPSTAN DRIVE, TYP.
ADJUSTMENT SCREW LOCK, FITS 5/64 OR 2.0mm HEX, TYP.
8-32 (M4) THREAD X .25 DEEP, 2 PLACES EQUALLY SPACED ON A ∅4.50 BOLT CIRLCE
PIN LOCATIONS FOR ∅3/16 PINS, 2 PLACES EACH MOUNTING FACE
1/4-20 (M6) THREAD X .35 DEEP, 2 PLACES EACH MOUNTING FACE
5.50
.28 TYP.
1.375 TYP.
1.00 TYP. (25)
(.39)
(2.22)
(2.22)
3.00
∅3.80 THRU
(.39)
CLEARANCE FOR 1/4-20 OR M6 CAP SCREW ON CENTERLINE OF OPTIC, BOTH MOUNTING FACES.
PIN LOCATIONS FOR ∅1/8 PINS, 2 PLACES EACH MOUNTING FACE
1.28
1.77
3.00
5.50
ACCOMMODATES ∅4.00 OPTIC
DIMENSIONS IN PARENTHESES REFLECT METRIC ASSEMBLY FEATURES
siskiyou
DXM400.C2L