



.050 (1.5) HEX LOCK FOR
ADJUSTMENT SCREW, CAN BE
MOUNTED NEAR SIDE OR FAR SIDE

M3 X .25 DEEP THREADED
HOLE, 4 PLACES EQUALLY
SPACED ON A ϕ 2.21 BOLT
CIRCLE, NS & FS

8-100 ADJUSTMENT
SCREW FITS 5/64
OR 2.0mm HEX

ϕ 1.90 THRU

ϕ 2.05 X .325 DEEP,
HOLDS ϕ 2.0 OPTIC
BOTH SIDES

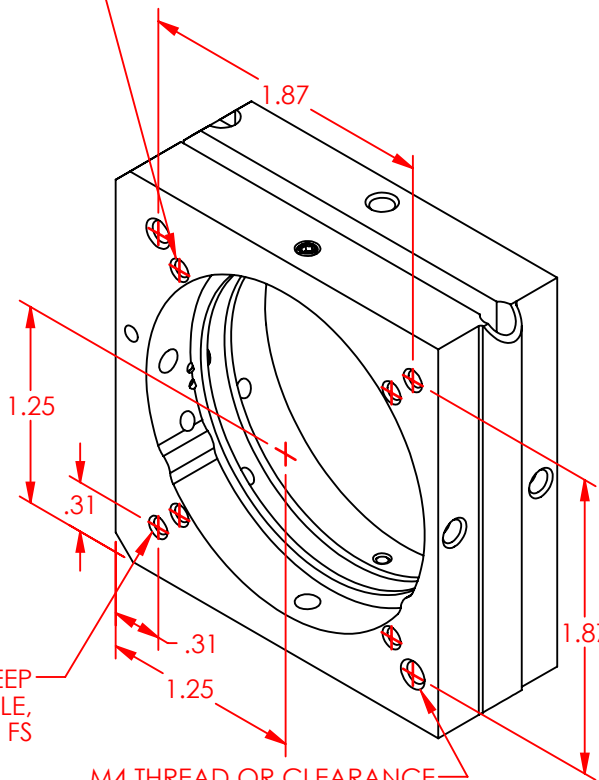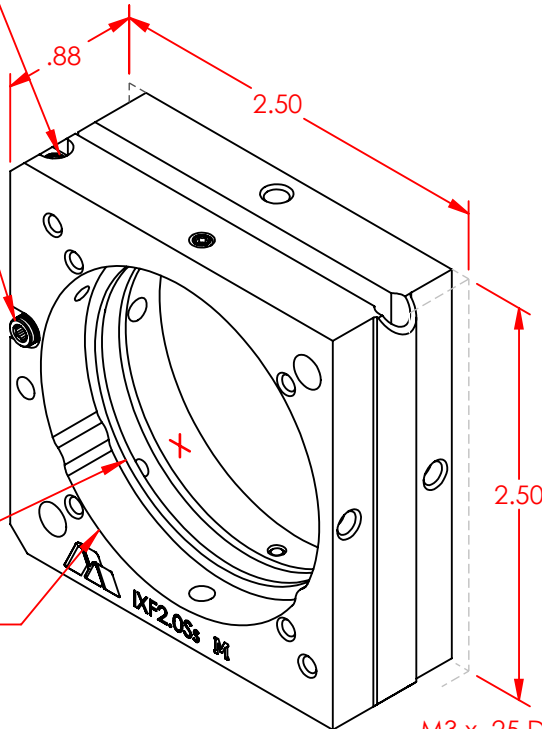

M3 x .25 DEEP
THREADED HOLE,
2 PLACES, NS & FS

M4 THREAD OR CLEARANCE
FOR M3 CAP SCREW, 2
PLACES