


ADJUSTMENT PRE-TENSIONING
SCREW FITS 5/64 OR 2.0mm
HEX, RECOMMENDED
TORQUE 16 oz-in (.11 N-m)

8-100 ADJUSTMENT SCREW,
FITS 5/64 OR 2.0mm HEX,

CLEARANCE FOR M4
THREAD 2 PLACES,
SLOTTED FOR MOUNTING
TO 50.25d† AND 50.5cr

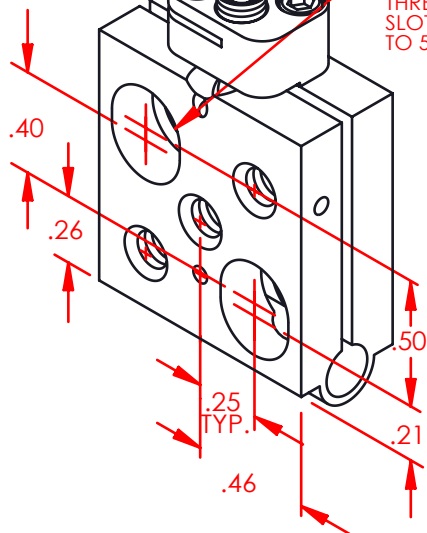

M4 THREAD THRU,
3 PLACES
BOTH SIDES

