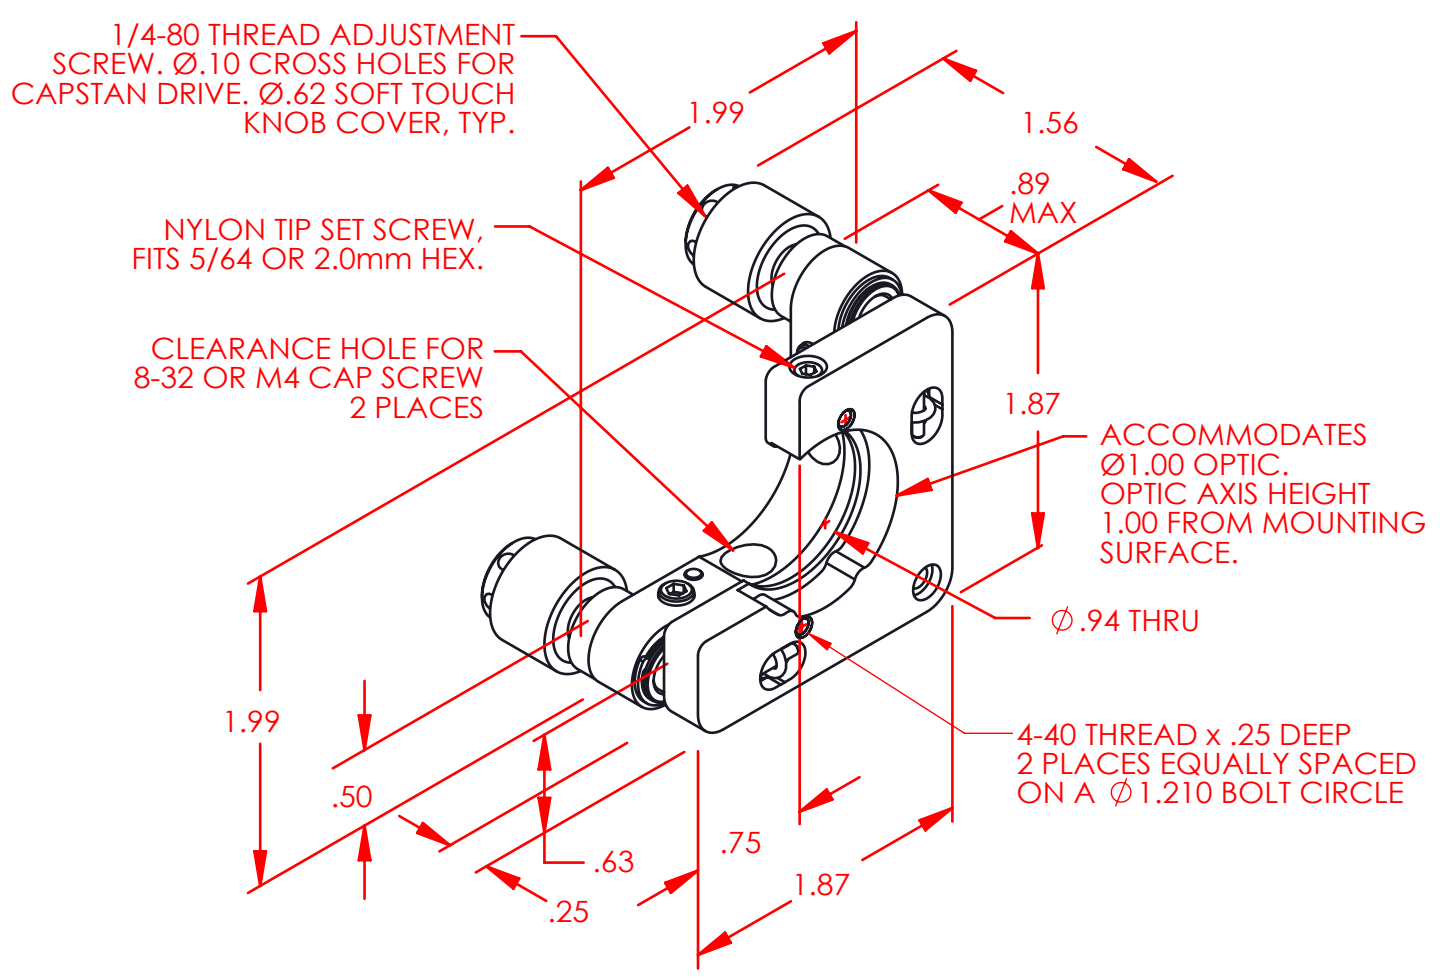

1/4-80 THREAD ADJUSTMENT SCREW. Ø.10 CROSS HOLES FOR CAPSTAN DRIVE. Ø.62 SOFT TOUCH KNOB COVER, TYP.
NYLON TIP SET SCREW, FITS 5/64 OR 2.0mm HEX.
CLEARANCE HOLE FOR 8-32 OR M4 CAP SCREW 2 PLACES
1.99
1.56
.89 MAX
1.87
ACCOMMODATES Ø1.00 OPTIC. OPTIC AXIS HEIGHT 1.00 FROM MOUNTING SURFACE.
∅.94 THRU
4-40 THREAD x .25 DEEP 2 PLACES EQUALLY SPACED ON A ∅1.210 BOLT CIRCLE
1.99
.50
.63
.25
.75
1.87