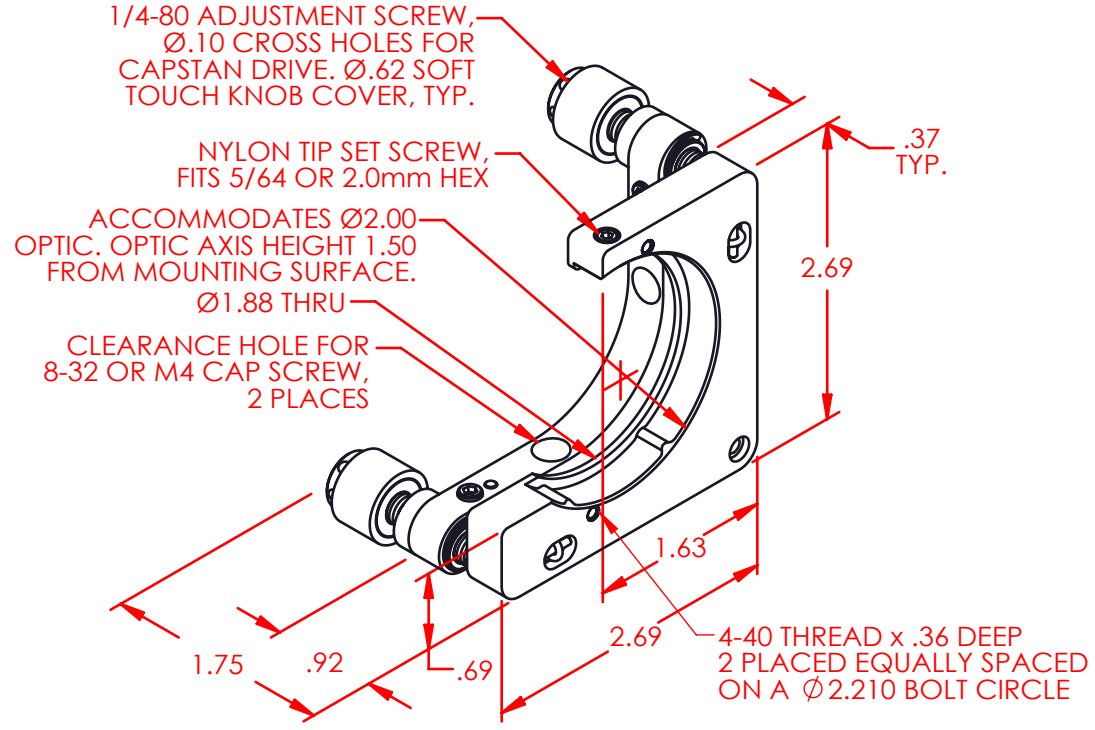

1/4-80 ADJUSTMENT SCREW, Ø.10 CROSS HOLES FOR CAPSTAN DRIVE. Ø.62 SOFT TOUCH KNOB COVER, TYP.
NYLON TIP SET SCREW, FITS 5/64 OR 2.0mm HEX
ACCOMMODATES Ø2.00 OPTIC. OPTIC AXIS HEIGHT 1.50 FROM MOUNTING SURFACE.
Ø1.88 THRU
CLEARANCE HOLE FOR 8-32 OR M4 CAP SCREW, 2 PLACES
.37 TYP.
2.69
1.63
2.69
4-40 THREAD x .36 DEEP 2 PLACED EQUALLY SPACED ON A ∅2.210 BOLT CIRCLE
1.75
.92
.69