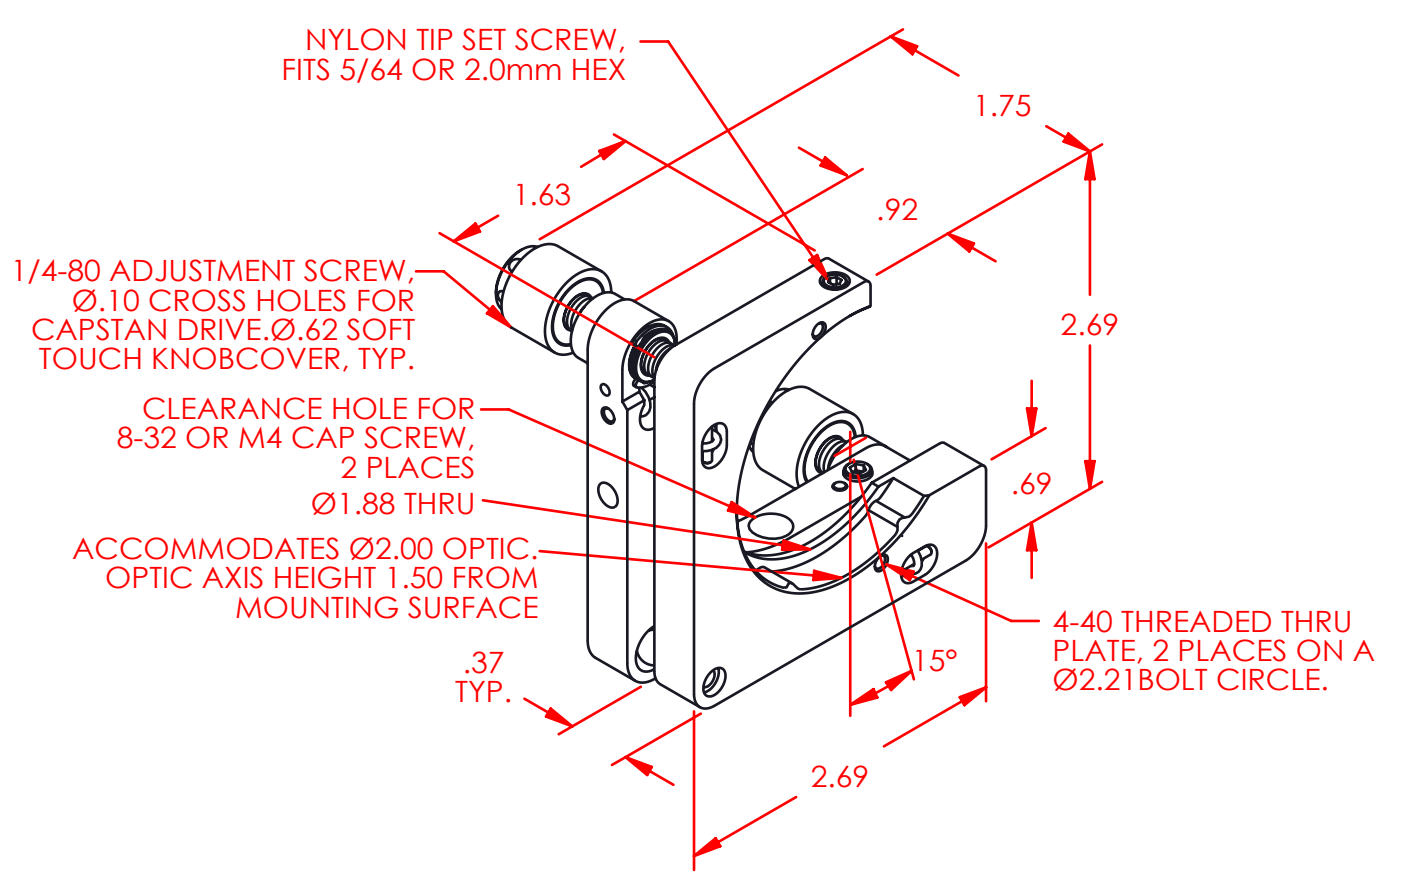

NYLON TIP SET SCREW,
FITS 5/64 OR 2.0mm HEX
1.75
1.63
.92
1/4-80 ADJUSTMENT SCREW,
Ø.10 CROSS HOLES FOR
CAPSTAN DRIVE.Ø.62 SOFT
TOUCH KNOBCOVER, TYP.
2.69
CLEARANCE HOLE FOR
8-32 OR M4 CAP SCREW,
2 PLACES
Ø1.88 THRU
.69
ACCOMMODATES Ø2.00 OPTIC.
OPTIC AXIS HEIGHT 1.50 FROM
MOUNTING SURFACE
4-40 THREADED THRU
PLATE, 2 PLACES ON A
Ø2.21BOLT CIRCLE.
.37
TYP.
15°
2.69