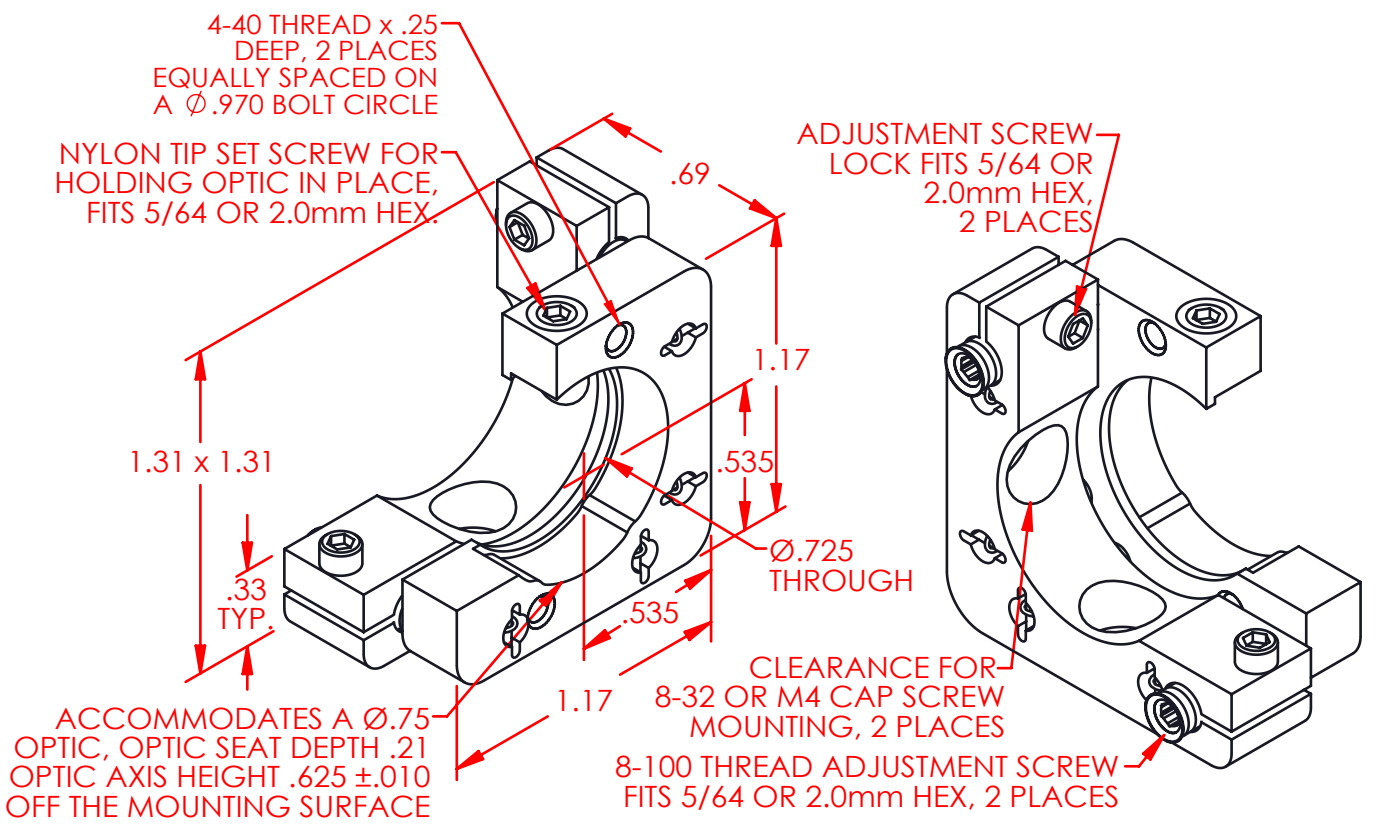

4-40 THREAD x .25
DEEP, 2 PLACES
EQUALLY SPACED ON
A Ø.970 BOLT CIRCLE
NYLON TIP SET SCREW FOR
HOLDING OPTIC IN PLACE,
FITS 5/64 OR 2.0mm HEX.
.69
1.17
1.31 x 1.31
.535
.33
TYP.
Ø.725
THROUGH
.535
1.17
ACCOMMODATES A Ø.75
OPTIC, OPTIC SEAT DEPTH .21
OPTIC AXIS HEIGHT .625 ±.010
OFF THE MOUNTING SURFACE
ADJUSTMENT SCREW
LOCK FITS 5/64 OR
2.0mm HEX,
2 PLACES
CLEARANCE FOR
8-32 OR M4 CAP SCREW
MOUNTING, 2 PLACES
8-100 THREAD ADJUSTMENT SCREW
FITS 5/64 OR 2.0mm HEX, 2 PLACES