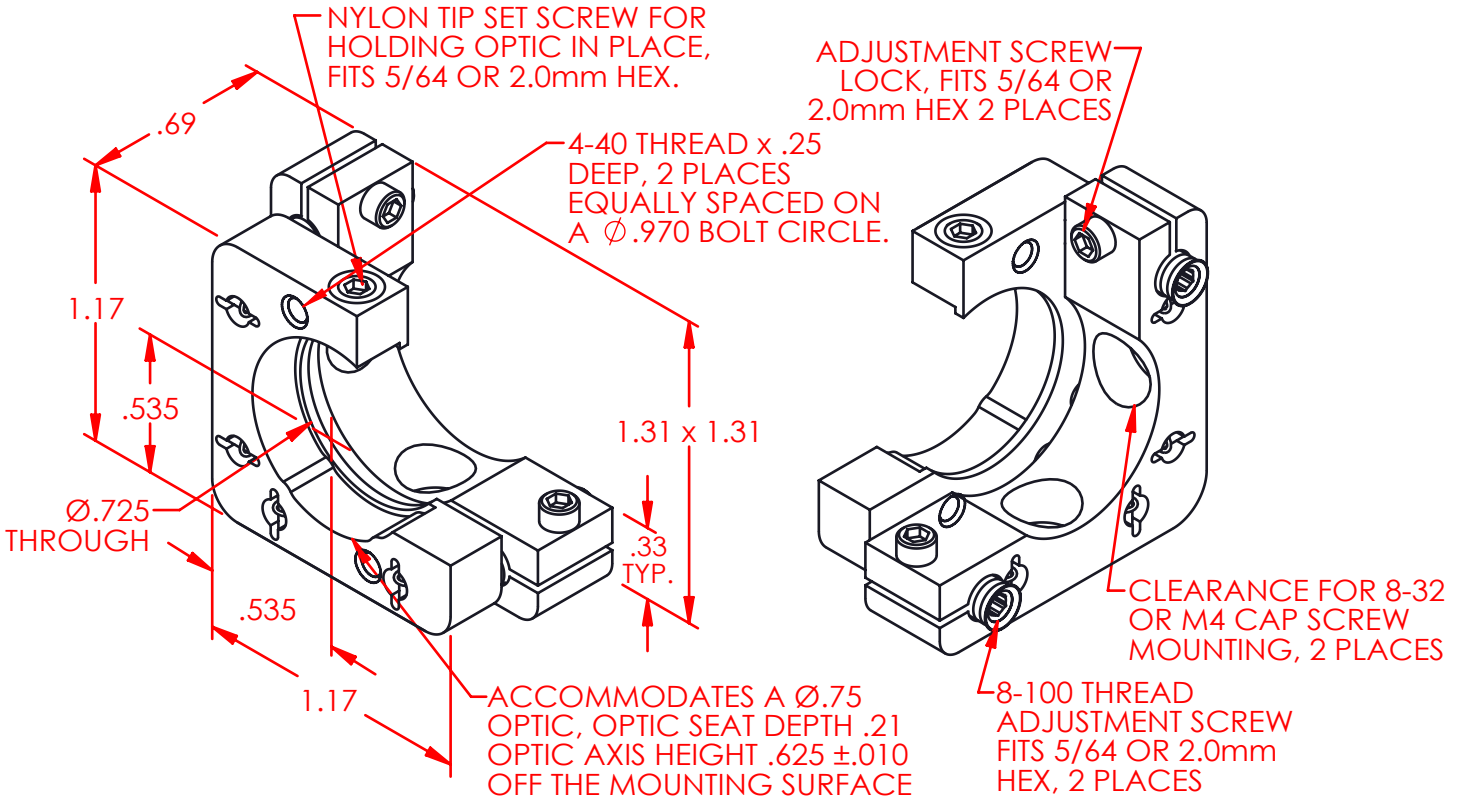

NYLON TIP SET SCREW FOR HOLDING OPTIC IN PLACE, FITS 5/64 OR 2.0mm HEX.
.69
4-40 THREAD x .25 DEEP, 2 PLACES EQUALLY SPACED ON A ∅.970 BOLT CIRCLE.
1.17
.535
1.31 x 1.31
Ø.725 THROUGH
.33 TYP.
.535
1.17
ACCOMMODATES A Ø.75 OPTIC, OPTIC SEAT DEPTH .21 OPTIC AXIS HEIGHT .625 ±.010 OFF THE MOUNTING SURFACE
ADJUSTMENT SCREW LOCK, FITS 5/64 OR 2.0mm HEX 2 PLACES
CLEARANCE FOR 8-32 OR M4 CAP SCREW MOUNTING, 2 PLACES
8-100 THREAD ADJUSTMENT SCREW FITS 5/64 OR 2.0mm HEX, 2 PLACES