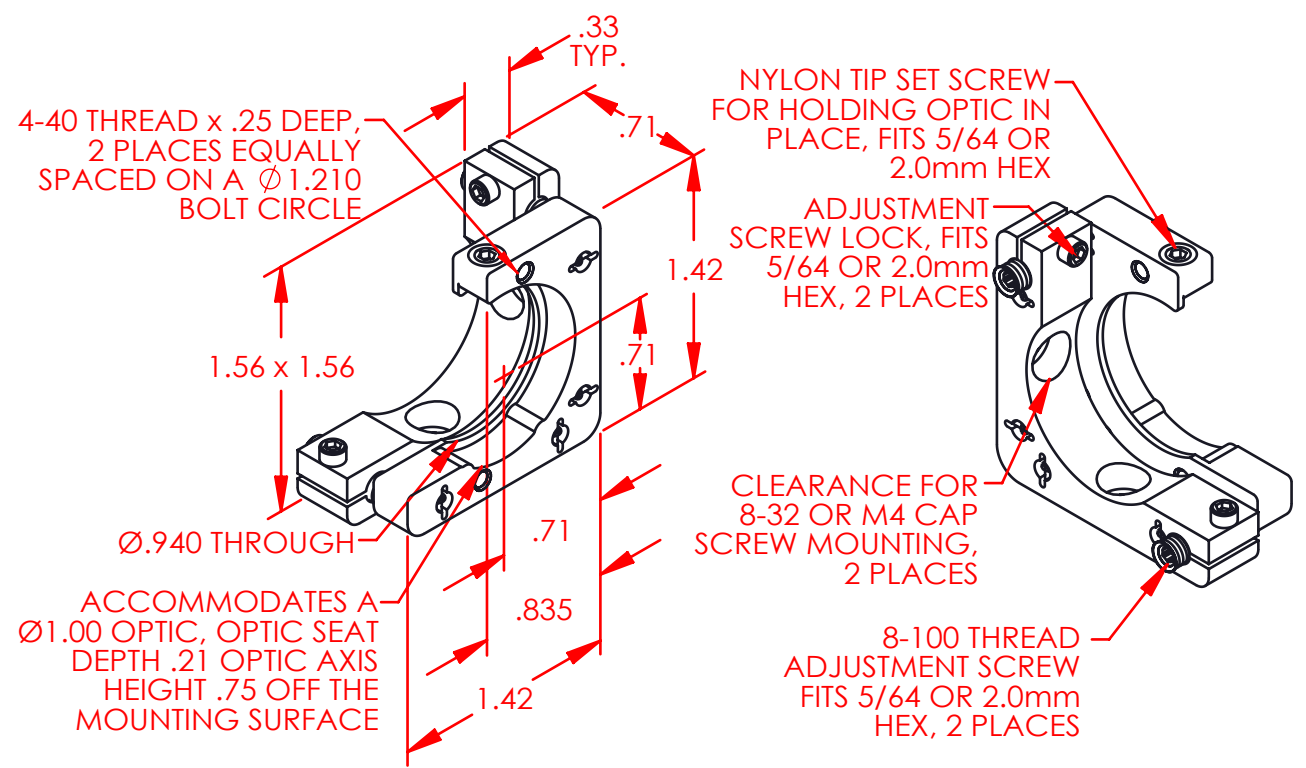

.33
TYP.
.71
4-40 THREAD x .25 DEEP,
2 PLACES EQUALLY
SPACED ON A ∅1.210
BOLT CIRCLE
1.42
1.56 x 1.56
.71
Ø.940 THROUGH
.71
ACCOMMODATES A
Ø1.00 OPTIC, OPTIC SEAT
DEPTH .21 OPTIC AXIS
HEIGHT .75 OFF THE
MOUNTING SURFACE
.835
1.42
NYLON TIP SET SCREW
FOR HOLDING OPTIC IN
PLACE, FITS 5/64 OR
2.0mm HEX
ADJUSTMENT
SCREW LOCK, FITS
5/64 OR 2.0mm
HEX, 2 PLACES
CLEARANCE FOR
8-32 OR M4 CAP
SCREW MOUNTING,
2 PLACES
8-100 THREAD
ADJUSTMENT SCREW
FITS 5/64 OR 2.0mm
HEX, 2 PLACES