


ADJUSTMENT PRE-TENSIONING
SCREW FITS 2.0mm HEX,
RECOMMENDED TORQUE .10 N-m.

8-100 ADJUSTMENT
SCREW FITS 2.0mm HEX.

• CLEARANCE FOR M4 SOCKET CAP SCREW, 2 PLACES, SLOTTED FOR MOUNTING TO 50.25dt AND 50cr STAGES.

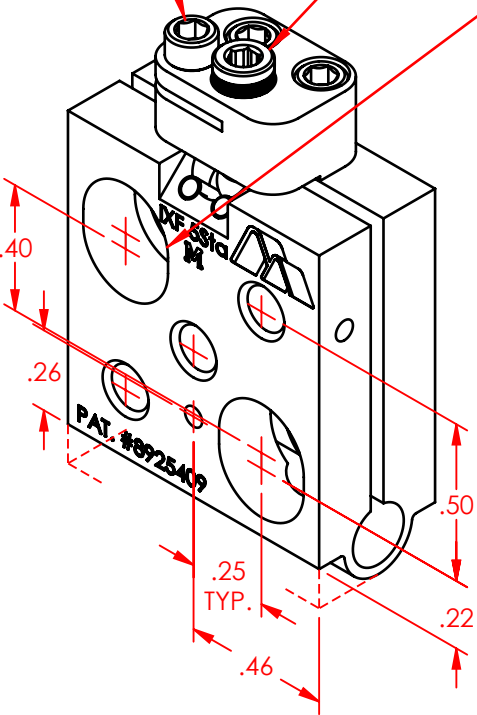

M4 THREAD THROUGH,
3 PLACES, BOTH SIDES

