


ADJUSTMENT PRE-TENSIONING SCREW FITS 5/64 (2.0mm) HEX, RECOMMENDED TORQUE 10 oz-in (.07 N-m)

8-100 ADJUSTMENT SCREW,
FITS 5/64 OR 2.0mm HEX

M3 SET SCREW FITS
1.5mm HEX, 2 PLACES


M3 x .16 DEEP THREADED HOLE,
4 PLACES EQUALLY SPADED ON
A $\phi 1.21$ BOLT CIRCLE, BOTH SIDES

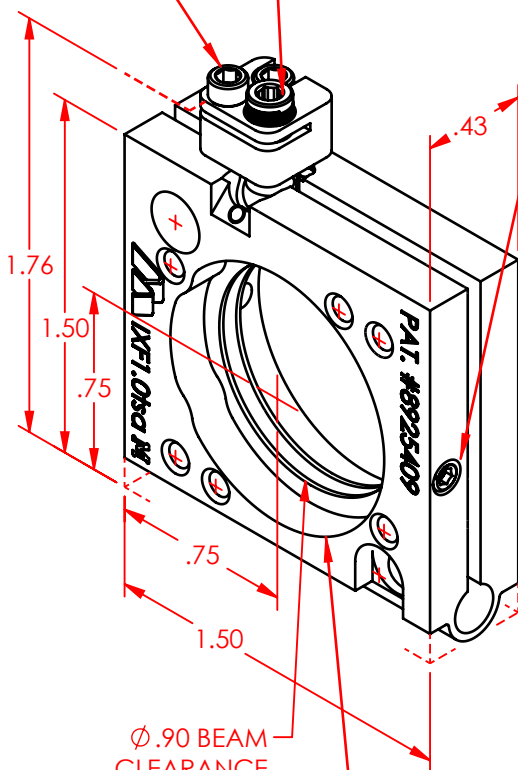

$\phi .90$ BEAM
CLEARANCE
THROUGH

$\phi 1.05 \times .165$ DEEP
HOLDS $\phi 1.0$ OPTIC,
BOTH SIDES

M4 THREAD OR CLEARANCE
FOR M3 CAP SCREW,
2 PLACES

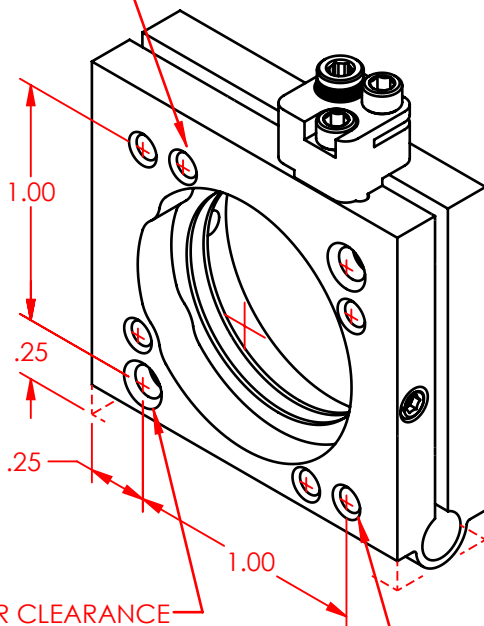

M3 x .18 DEEP THREADED
HOLE, 2 PLACES, BOTH SIDES