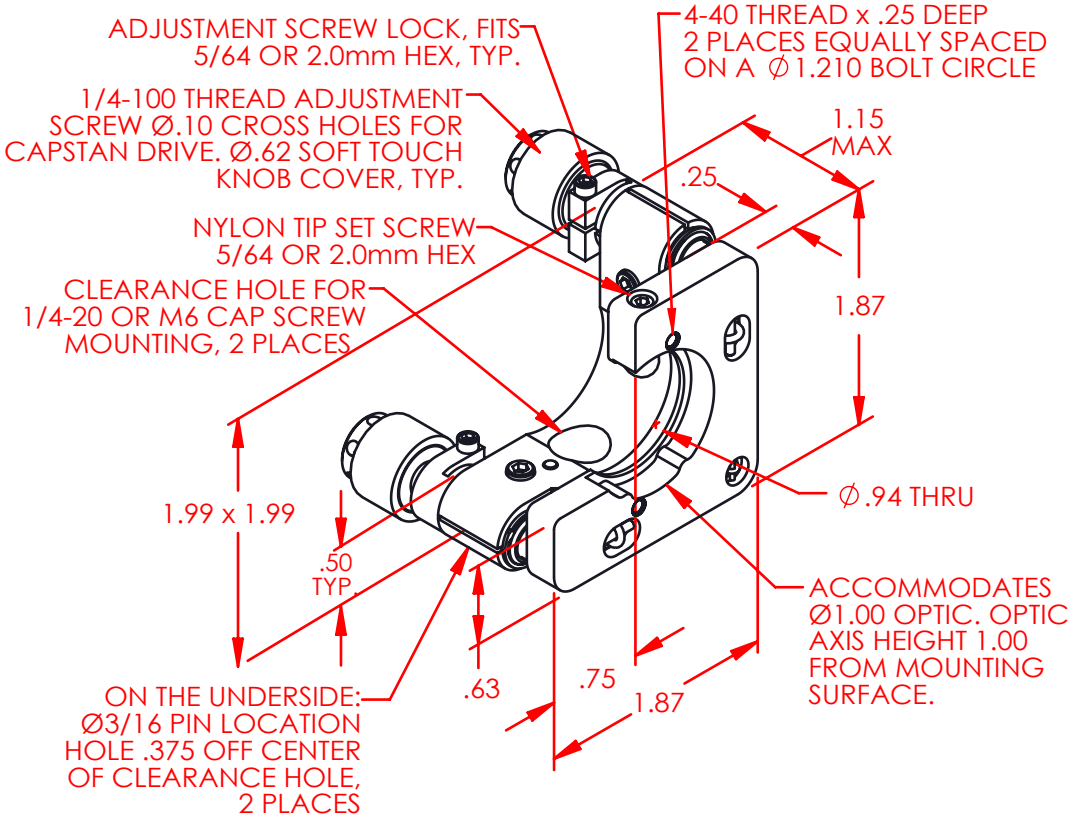

ADJUSTMENT SCREW LOCK, FITS 5/64 OR 2.0mm HEX, TYP.
4-40 THREAD x .25 DEEP 2 PLACES EQUALLY SPACED ON A ∅1.210 BOLT CIRCLE
1/4-100 THREAD ADJUSTMENT SCREW Ø.10 CROSS HOLES FOR CAPSTAN DRIVE. Ø.62 SOFT TOUCH KNOB COVER, TYP.
1.15 MAX
.25
NYLON TIP SET SCREW 5/64 OR 2.0mm HEX
CLEARANCE HOLE FOR 1/4-20 OR M6 CAP SCREW MOUNTING, 2 PLACES
1.87
1.99 x 1.99
∅.94 THRU
.50 TYP.
ACCOMMODATES Ø1.00 OPTIC. OPTIC AXIS HEIGHT 1.00 FROM MOUNTING SURFACE.
.63
.75
1.87
ON THE UNDERSIDE: Ø3/16 PIN LOCATION HOLE .375 OFF CENTER OF CLEARANCE HOLE, 2 PLACES