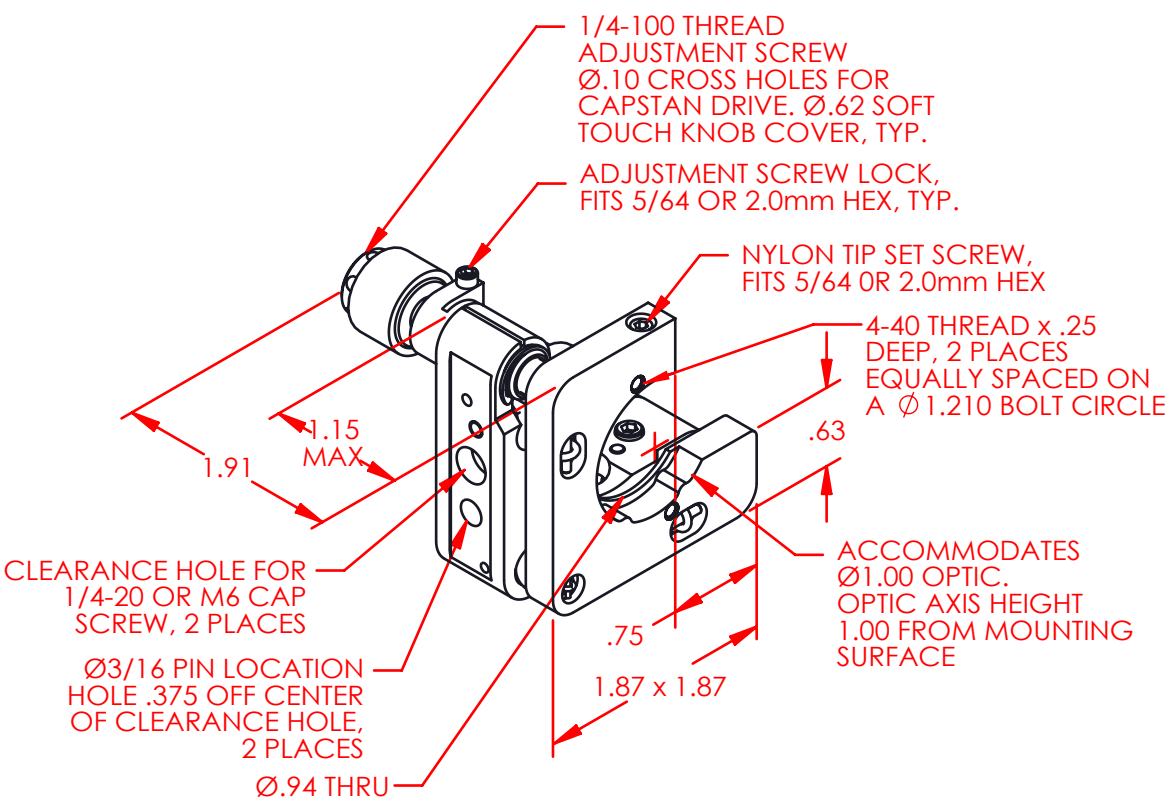

1/4-100 THREAD
ADJUSTMENT SCREW
Ø.10 CROSS HOLES FOR
CAPSTAN DRIVE. Ø.62 SOFT
TOUCH KNOB COVER, TYP.
ADJUSTMENT SCREW LOCK,
FITS 5/64 OR 2.0mm HEX, TYP.
NYLON TIP SET SCREW,
FITS 5/64 0R 2.0mm HEX
4-40 THREAD x .25
DEEP, 2 PLACES
EQUALLY SPACED ON
A ∅1.210 BOLT CIRCLE
1.91
1.15
MAX.
.63
CLEARANCE HOLE FOR
1/4-20 OR M6 CAP
SCREW, 2 PLACES
ACCOMMODATES
Ø1.00 OPTIC.
OPTIC AXIS HEIGHT
1.00 FROM MOUNTING
SURFACE
.75
Ø3/16 PIN LOCATION
HOLE .375 OFF CENTER
OF CLEARANCE HOLE,
2 PLACES
1.87 x 1.87
Ø.94 THRU