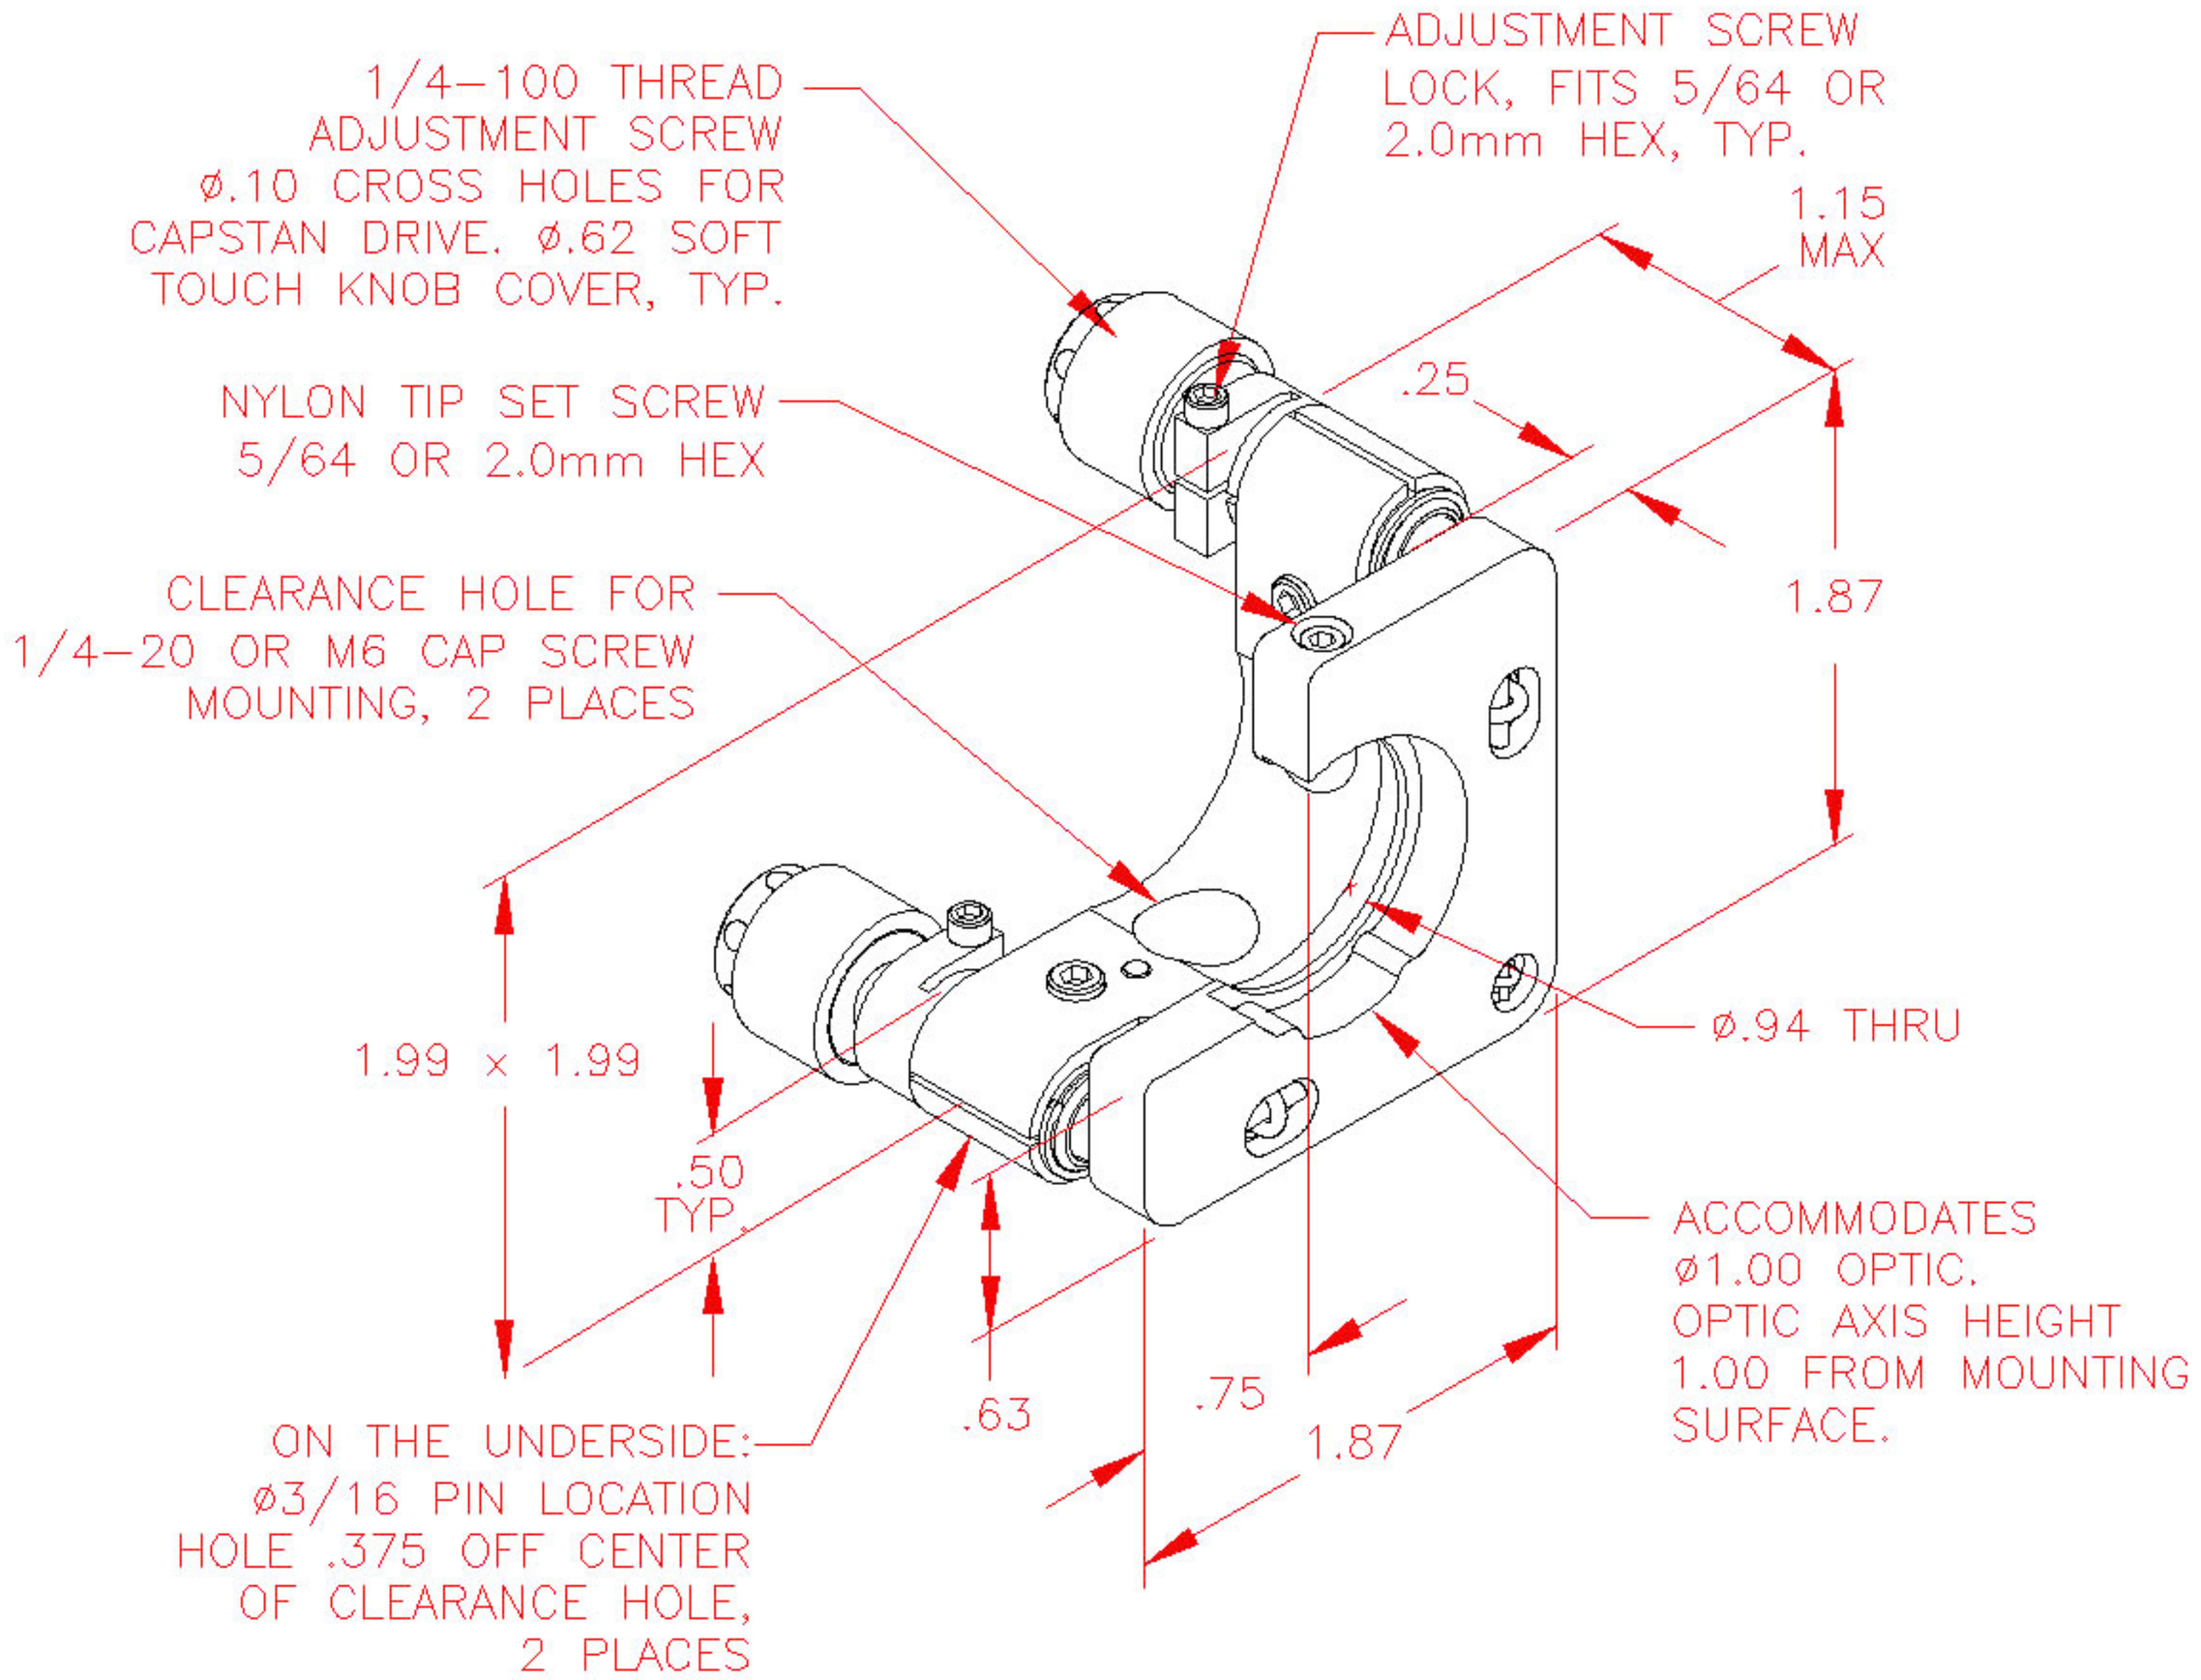

1/4–100 THREAD
ADJUSTMENT SCREW
ø.10 CROSS HOLES FOR
CAPSTAN DRIVE. ø.62 SOFT
TOUCH KNOB COVER, TYP.
NYLON TIP SET SCREW
5/64 OR 2.0mm HEX
CLEARANCE HOLE FOR
1/4–20 OR M6 CAP SCREW
MOUNTING, 2 PLACES
ADJUSTMENT SCREW
LOCK, FITS 5/64 OR
2.0mm HEX, TYP.
1.15
MAX
.25
1.87
ø.94 THRU
1.99 × 1.99
.50
TYP.
.63
.75
1.87
ACCOMMODATES
ø1.00 OPTIC.
OPTIC AXIS HEIGHT
1.00 FROM MOUNTING
SURFACE.
ON THE UNDERSIDE:
ø3/16 PIN LOCATION
HOLE .375 OFF CENTER
OF CLEARANCE HOLE,
2 PLACES