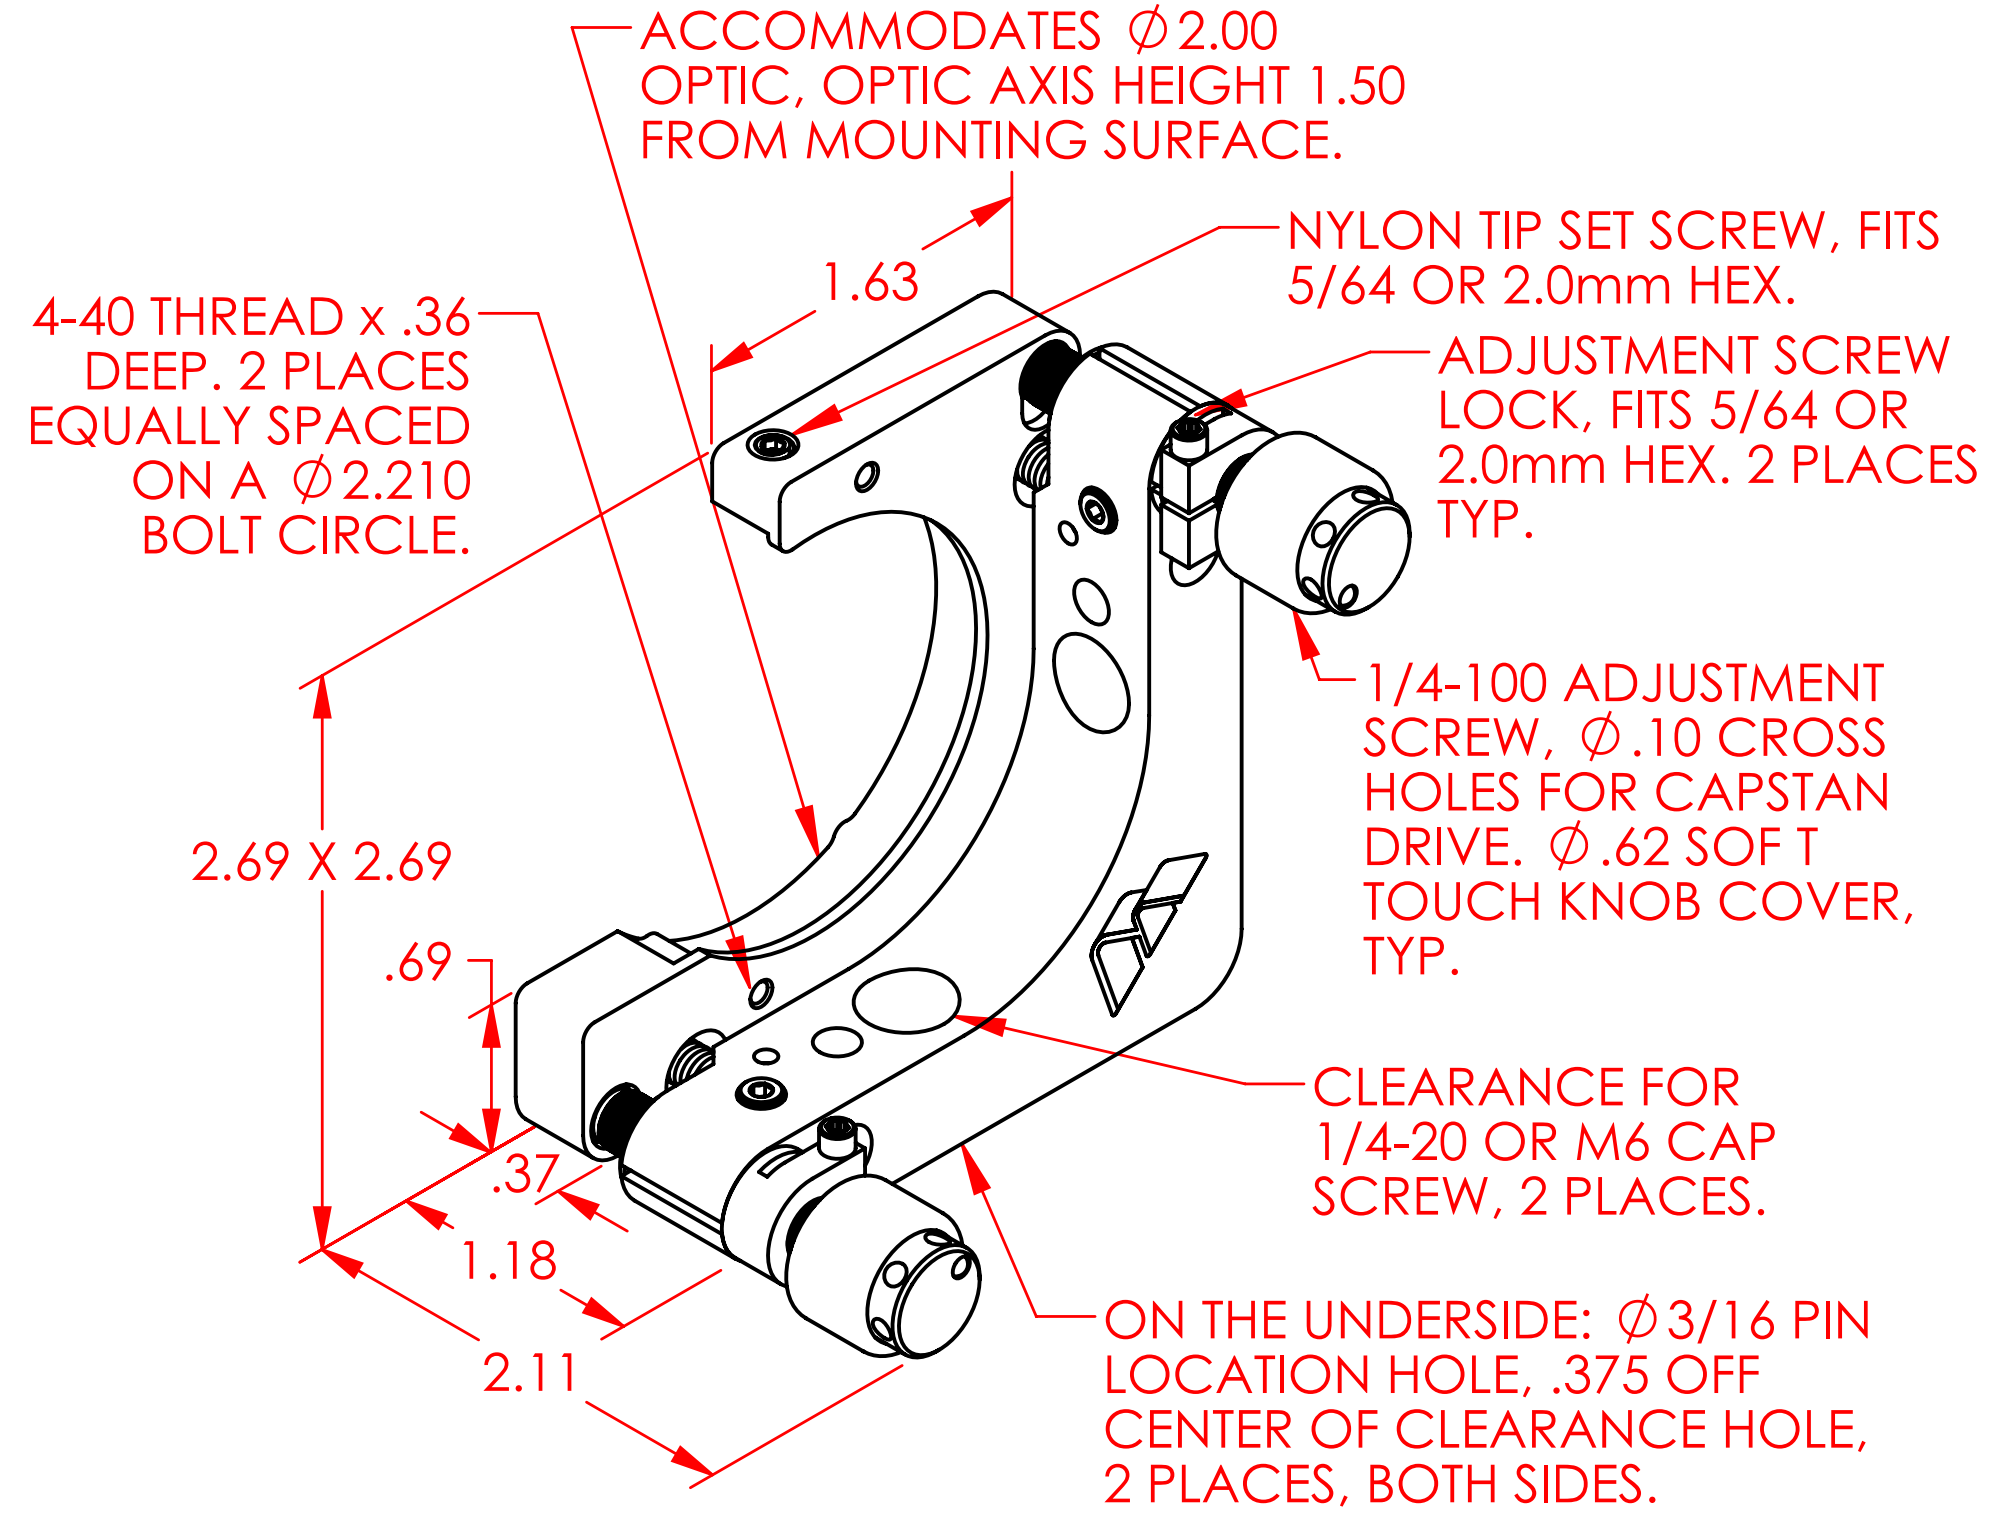

ACCOMMODATES ∅2.00 OPTIC, OPTIC AXIS HEIGHT 1.50 FROM MOUNTING SURFACE.
NYLON TIP SET SCREW, FITS 5/64 OR 2.0mm HEX.
1.63
4-40 THREAD x .36 DEEP. 2 PLACES EQUALLY SPACED ON A ∅2.210 BOLT CIRCLE.
ADJUSTMENT SCREW LOCK, FITS 5/64 OR 2.0mm HEX. 2 PLACES TYP.
1/4-100 ADJUSTMENT SCREW, ∅.10 CROSS HOLES FOR CAPSTAN DRIVE. ∅.62 SOF T TOUCH KNOB COVER, TYP.
2.69 X 2.69
.69
CLEARANCE FOR 1/4-20 OR M6 CAP SCREW, 2 PLACES.
.37
1.18
2.11
ON THE UNDERSIDE: ∅3/16 PIN LOCATION HOLE, .375 OFF CENTER OF CLEARANCE HOLE, 2 PLACES, BOTH SIDES.