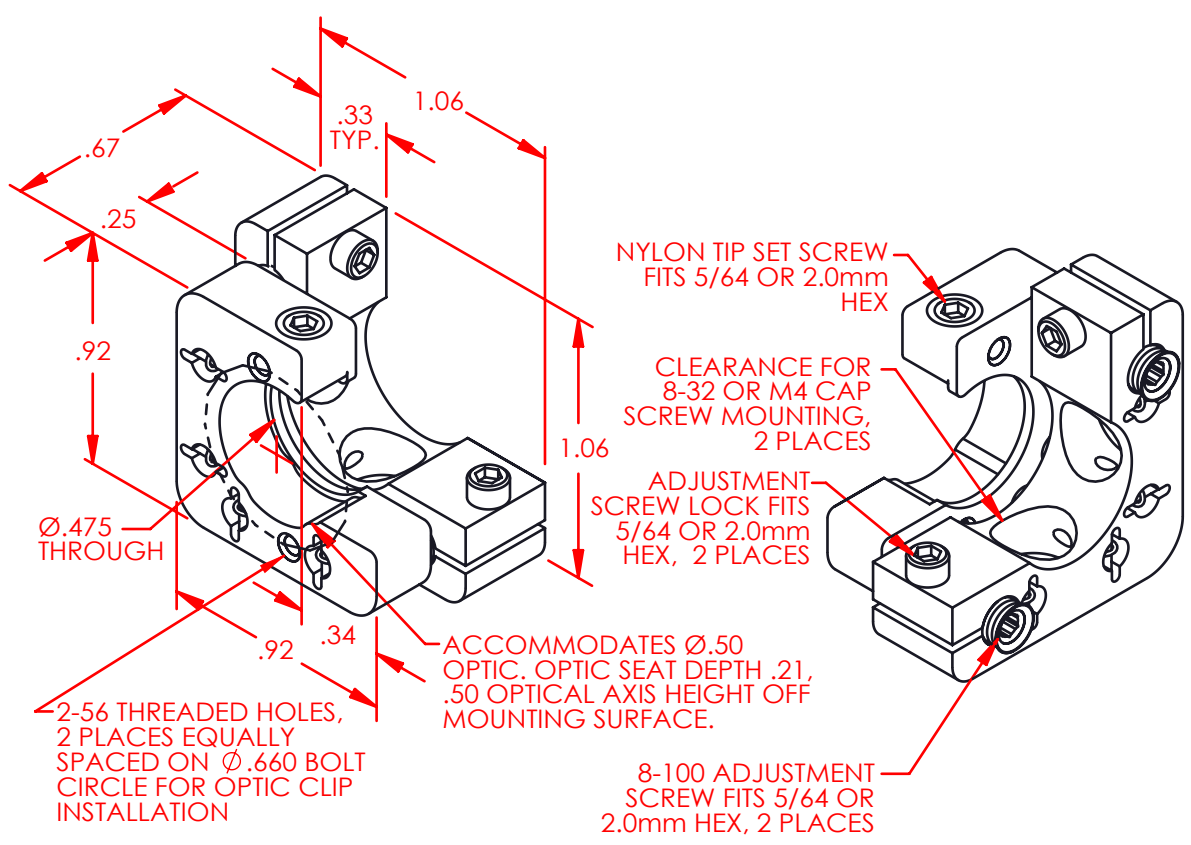

.67
.33
TYP.
1.06
.25
.92
1.06
Ø.475
THROUGH
.92
.34
2-56 THREADED HOLES,
2 PLACES EQUALLY
SPACED ON Ø.660 BOLT
CIRCLE FOR OPTIC CLIP
INSTALLATION
ACCOMMODATES Ø.50
OPTIC. OPTIC SEAT DEPTH .21,
.50 OPTICAL AXIS HEIGHT OFF
MOUNTING SURFACE.
NYLON TIP SET SCREW
FITS 5/64 OR 2.0mm
HEX
CLEARANCE FOR
8-32 OR M4 CAP
SCREW MOUNTING,
2 PLACES
ADJUSTMENT
SCREW LOCK FITS
5/64 OR 2.0mm
HEX, 2 PLACES
8-100 ADJUSTMENT
SCREW FITS 5/64 OR
2.0mm HEX, 2 PLACES