



These instructions can be found in color and expandable at QA1.net

Technical Support Line: (952) 985-5675 Email: sales@QA1.net

INSTALLATION INSTRUCTIONS

1988-1998 C1500 FRONT SWAY BAR P/N 52867

TOOLS AND SUPPLIES REQUIRED

- Floor Jack
- Jack Stands
- SAE Wrench Set
- Ratchet & SAE Socket Set

PRE-INSTALLATION NOTES:

This sway bar was not designed to work with the factory lower control arms.

INSTALLATION:

1. Mount the sway bar (1) to the original sway bar frame mounts with the locator tabs on the provided bushings (2), and the 3/8" sway bar mount hardware (not shown).
2. Center the sway to the frame and torque the bolts to 30 lb-ft. **(Figure 1)**

Note: Do not discard the right-hand frame rail bolt-on OE frame bracket during disassembly. The 1988-1992 C1500 models must reuse this frame bracket (circled) during installation of the new sway bar. **(Figure 2)**

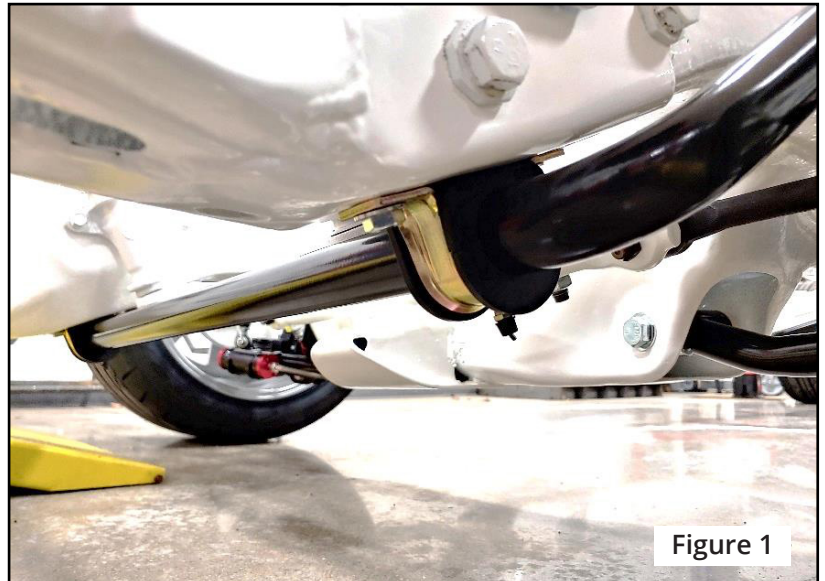


Figure 1

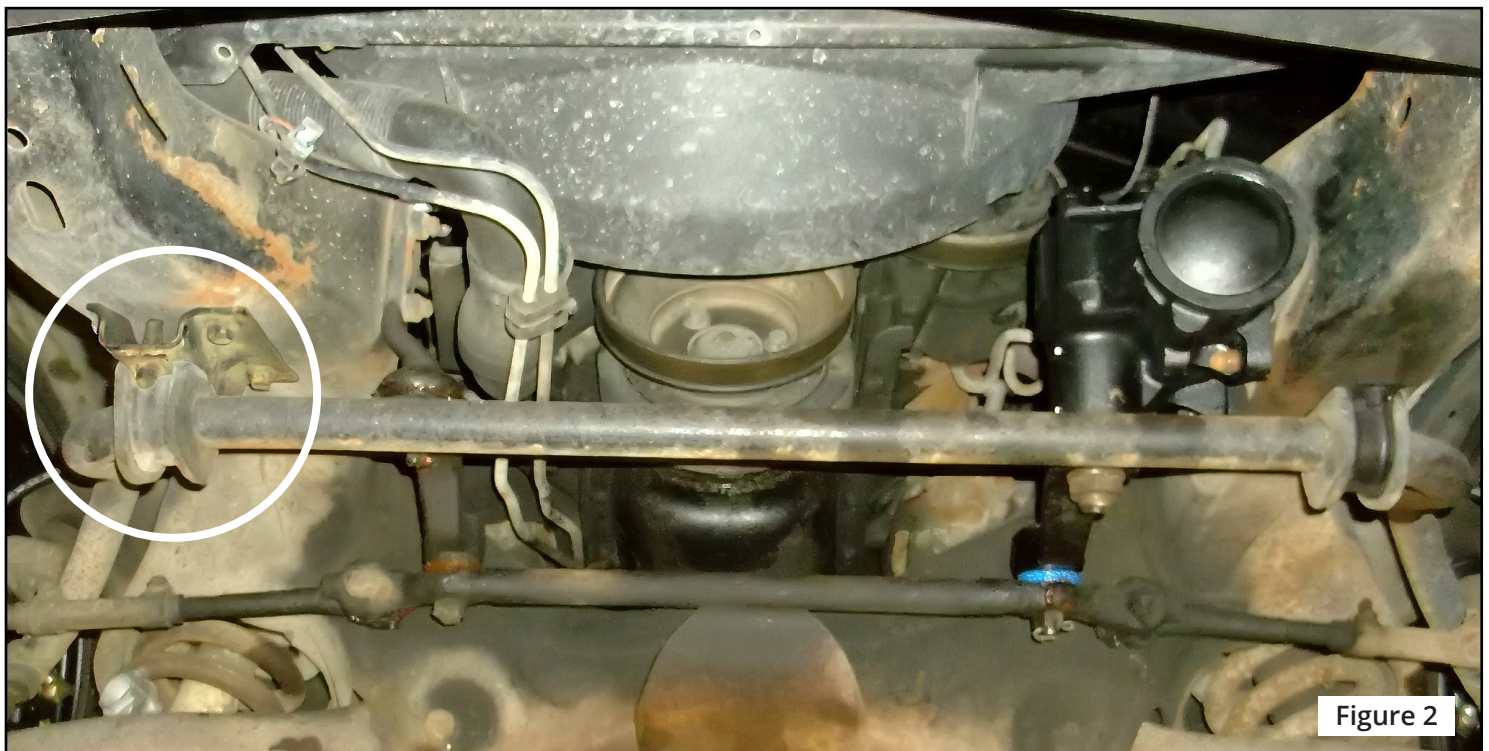


Figure 2

3. Install the 1/2" right-hand threaded jam nuts (11) onto the right-hand threaded rod ends (9).

Turn both right-hand jam nuts and rod ends into the anodized red adjustment sleeve (8).

Make sure that the threads match the sleeve orientation. **(Figure 3)**

4. Repeat the procedure on the left-hand side of the adjuster sleeve and use a left-hand threaded jam nuts (12) on the left-hand threaded rod end (10).

Turn the rod ends all the way into the adjustment sleeve.


5. Attach the sway bar to the adjuster links with the specialty high misalignment studs (3), 1/2" flat washers (4), and 1/2" Nylock jam nuts (5) on the sway bar side.

Note: The end link must attach outboard of the sway bar on each side. (Figure 4)

6. Attach the link side with a high misalignment spacers (6), and 3/8" Nylock nuts (7). Torque the nuts to 31 lb. ft.


7. Install two stepped spacers (13) into each lower rod end on the control arm side of the linkage.

8. Fasten the rod end hardware to the lower control arm with the 3/8" x 2" bolta (14), two washers (15) each side and outside of the tabs, and the 3/8" Nylock nuts (7).

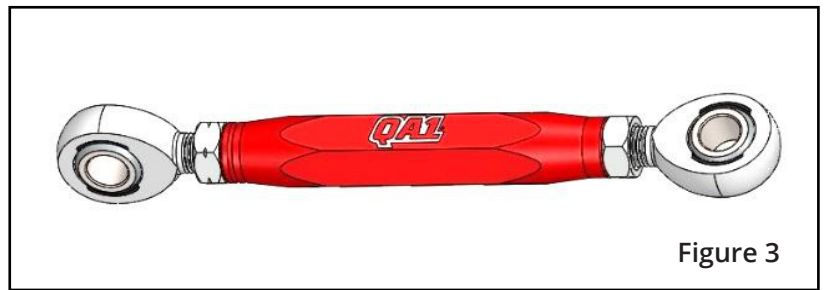

1988-1998 C1500 FRONT SWAY BAR-52867

POSITION	DESCRIPTION	QTY
1	SWAY BAR, FRONT 1-3/8", BLACK	1
2	BUSHING, SWAY BAR FRAME MOUNT 1-1/4"	2
3	HIGH MISALIGNMENT STUD	2
4	WASHER, FLAT, 1/2", SAE	2
5	JAM NUT, NYLOCK, 3/8-16	2
6	HIGH MISALIGNMENT SPACER, .50" OD	2
7	NUT, NYLOCK, 3/8-16	4
8	SLEEVE, .875" HEX ALUMINUM, ANODIZED	2
9	2-PIECE ROD END	2
10	ROD END (C) 2-PC CARBON	2
11	JAM NUT, STEEL, 1/2-20, RH	2
12	JAM NUT, STEEL, 1/2-20, LH	2
13	SPACER, STEPPED, 1/2" OD x .125"	4
14	BOLT, HEX, 3/8-16 x 2"	2
15	WASHER, FLAT, 3/8", SAE	4

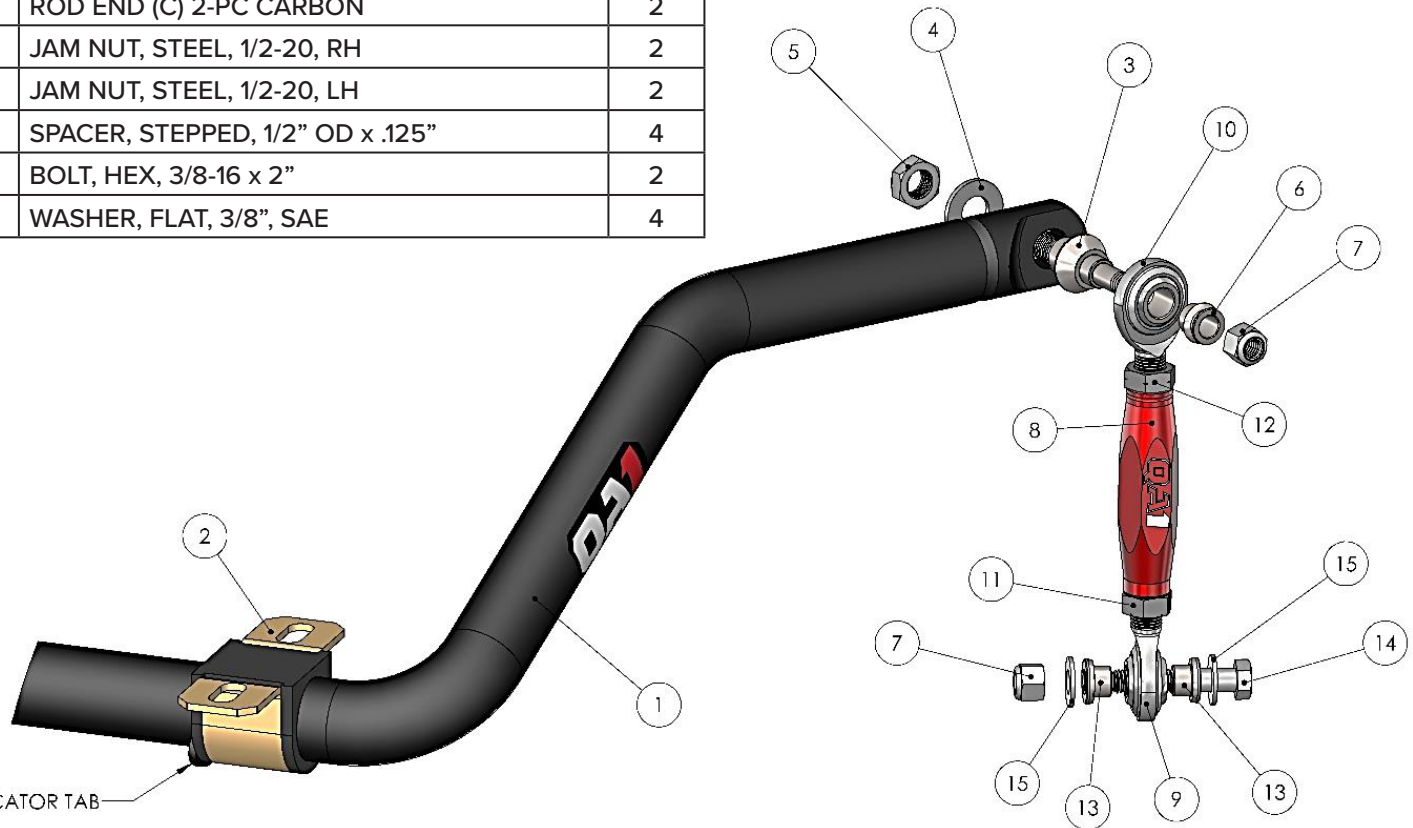

QA1

READ ALL INSTRUCTIONS CAREFULLY AND THOROUGHLY PRIOR TO STARTING INSTALLATION. PRODUCTS THAT HAVE BEEN INSTALLED ARE NOT ELIGIBLE FOR RETURN. USE THE PROPER JACKING LOCATIONS. DEATH OR SERIOUS INJURY CAN RESULT IF INSTRUCTIONS ARE NOT CORRECTLY FOLLOWED. A GOOD CHASSIS MANUAL, AVAILABLE AT YOUR LOCAL PARTS STORE, MAY ALSO AID IN YOUR INSTALLATION.

• DISCLAIMER / WARRANTY •

QA1 WARRANTS THAT THE PRODUCTS WILL BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP FOR ONE YEAR FROM DATE OF SALE TO THE ORIGINAL PURCHASER. QA1 MAKES NO OTHER WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. QA1 SHALL HAVE NO OBLIGATION UNDER THE FOREGOING WARRANTY WHERE THE DEFECT IS THE RESULT OF IMPROPER OR ABNORMAL USE, YOUR NEGLIGENCE, VEHICLE ACCIDENT, IMPROPER OR INCORRECT INSTALLATION OR MAINTENANCE, NOR WHEN THE PRODUCT HAS BEEN REPAIRED OR ALTERED IN ANY WAY. QA1'S LIABILITY IN THE CASE OF DEFECTIVE PRODUCTS SUBJECT TO THE FOREGOING WARRANTY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT, AT QA1'S OPTION, OF THE DEFECTIVE PRODUCTS.

THE USER UNDERSTANDS AND RECOGNIZES THAT RACING PARTS, SPECIALIZED STREET ROD EQUIPMENT, AND ALL PARTS AND SERVICES SOLD BY QA1 ARE EXPOSED TO MANY AND VARIED CONDITIONS DUE TO THE MANNER IN WHICH THEY ARE INSTALLED AND USED. QA1 SHALL BEAR NO LIABILITY FOR ANY LOSS, DAMAGE OR INJURY, EITHER TO A PERSON OR TO PROPERTY, RESULTING FROM THE INSTALLATION, DIRECT OR INDIRECT USE OF ANY QA1 PRODUCTS OR INABILITY BY THE BUYER TO DETERMINE PROPER USE OR APPLICATION OF QA1 PRODUCTS. WITH THE EXCEPTION OF THE LIMITED LIABILITY WARRANTY SET FORTH ABOVE, QA1 SHALL NOT BE LIABLE FOR ANY CLAIMS, DEMANDS, INJURIES, DAMAGES, ACTIONS, OR CAUSES OF ACTION WHATSOEVER TO BUYER ARISING OUT OF OR CONNECTED WITH THE USE OF ANY QA1 PRODUCTS. MOTORSPORTS ARE DANGEROUS; AS SUCH, NO WARRANTY OR REPRESENTATION IS MADE AS TO THE PRODUCT'S ABILITY TO PROTECT THE USER FROM INJURY OR DEATH. THE USER ASSUMES THAT RISK!