



**DON'T FORGET**

These instructions can be found in color and expandable at QA1.net

Technical Support Line: (952) 985-5675 Email: sales@QA1.net

## **INSTALLATION INSTRUCTIONS**

QA1 REV™ Series Carbon Fiber Driveshafts  
QA1 P/N JJC-AA0230, JJC-AA0310, JJC-AC0320


**WARNING:** Be sure to inspect all components regularly, especially following a crash. Do not use any components which may have been damaged.

**WARNING:** Composite driveshafts are fragile and if dropped or damaged will be considered scrap and should be replaced.

### **Installation of a Carbon Fiber Driveshaft**

Ensure all components are clean and free of contaminants and debris.

1. Check the slip yoke fit and travel in transmission.
  - a) Install the slip yoke into the transmission. Apply the transmission manufacturer's recommended lubricant to the slip yoke before installation.
  - b) Verify that the slip yoke will fully engage into the transmission tail housing by sliding the slip yoke in until it stops.
  - c) Make note of where the slip yoke stops, either against the transmission seal or if it bottoms out internally against the transmission output shaft and record this for future reference. If the slip yoke bottoms out internally, use a permanent marker to draw a line where the slip yoke stops. (See **Figure 1**) It is important to reference this point when making chassis adjustments, such as wheelbase or vehicle ride height, in order to verify the driveshaft does not bottom out in the transmission as the suspension moves through its full range of travel. If the driveshaft ever fully bottoms out on the transmission, it will damage the transmission or the driveshaft.
  - d) Verify the slip yoke movement in transmission. The yoke should be a slip fit and be able to slide smoothly in and out of the transmission.


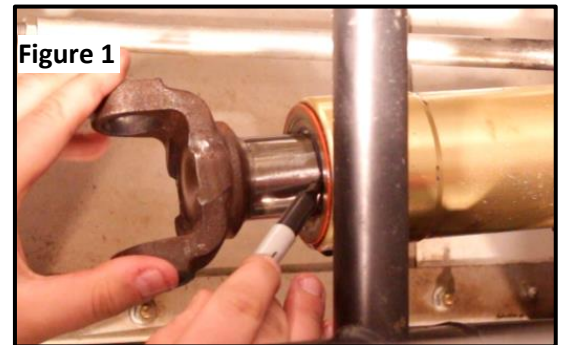


**Figure 1**

e) Check the fit between the slip yoke and the transmission tail housing bushing. Position the slip yoke in the transmission to the approximate racing location. Hold on to the universal joint end of the slip yoke and move it up and down ensuring there is not an excessive amount of slip yoke movement. If the amount of movement is excessive, the bushing in the transmission tail housing may need to be replaced.

2. With the front of the driveshaft installed, verify the fit of the rear driveshaft universal joint to the pinion yoke. **For vehicles with flange yokes, skip to step 3.**

- a) Ensure the rear suspension is at the full droop position
- b) Ensure the pinion yoke universal cap area is clean and free of dirt or debris. Pay close attention to the area next to the locating tab, which can be seen in **Figure 2**.
- c) Install the driveshaft universal joint into the pinion yoke.
- d) Verify that the universal joint fits snugly between the locating tabs on the pinion yoke. (**Figure 2**)
- e) Ensure the universal joint cap diameter matches that of the pinion yoke.
- f) Check the clearance between the driveshaft and pinion yokes. Put the transmission in neutral and spin driveshaft to look for any points of contact between the driveshaft and pinion yoke. Now is also a good time to ensure that there is no contact between the slip yoke and the front of the driveshaft.
- g) Examine the U-bolts and nuts to ensure that they are long enough for full thread engagement and are in good condition.
- h) Install and torque the U-bolts to the correct spec below. Be careful not to over-tighten the U-bolts as this can deform the universal joint cap and cause premature wear or failure.

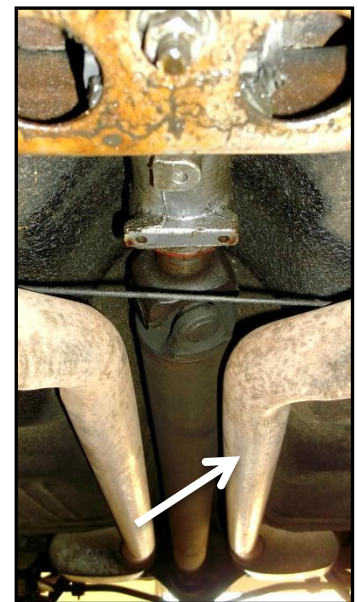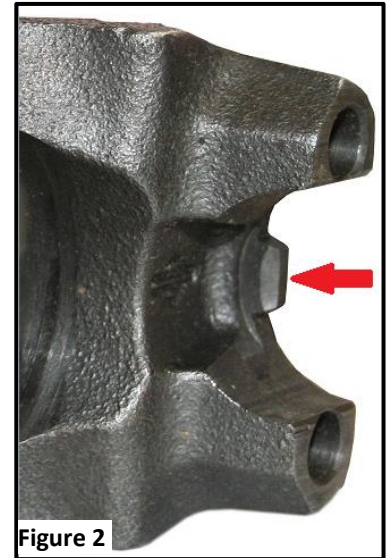

**U-bolt Torque Specs**

Series	Torque Spec
1310	14-17 Lb Ft
1330	14-17 Lb Ft
1350	20-24 Lb Ft

3. Vehicles with flange yokes

- a) Ensure the rear suspension is at the full droop position
- b) Ensure the pinion yoke flange area is clean and free of dirt or debris.
- c) Install the driveshaft flange yoke into the pinion flange yoke.
- d) Ensure the driveshaft flange yoke is properly seated against the transmission output as the bolts are tightened. **Apply Blue Loctite and torque these bolts to 85 lb. ft.**



4. Traveling the Rear Suspension

- a) Always travel the suspension through its full range of motion to ensure that the driveshaft is able to handle the misalignment and that driveshaft does not contact components on the bottom side of the vehicle. Pay close attention to any seat belt bolts, frame members, suspension components, floor pan, and exhaust to make sure they do not touch the driveshaft. (See **Figure 3**) Be sure to use good shop practices and always use jack stands.

- b) Using a floor jack, raise the rear end housing to its maximum travel. Verify that the slip yoke does not come out of or plunge into the transmission too far throughout the entire range of suspension motion. Also, check that the driveshaft will rotate around the universal joints without binding or hitting any other components.
- c) Note in **Figure 5** where the U-bolts can contact the yoke during extreme pinion angle changes. This is one area to watch for interference between the U-bolt and tube yoke. Be sure to check all around yokes to ensure clearance.

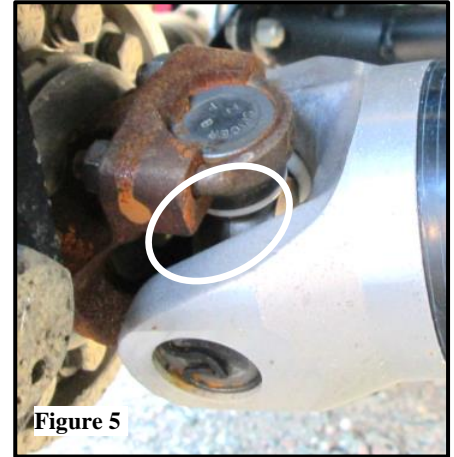


Figure 5

## Additional Driveshaft Information

### Washing Recommendations


It is recommended to wash the composite driveshaft with soap and water only. Avoid contact with chemicals.

### Proper Universal Joint Installation Procedure

It is recommended to cold press the universal joints in and out of the driveshaft for replacement as the addition of heat to the tube yoke will cause the bond between the yoke and tube to fail. Do not mix bearing cups and bearing journals, see note below. Ensure retaining clips are fully seated by tapping them into place with a hammer and punch. Each cap has a small removable thrust washer inside it - take care not to lose these.

### Spicer Sealed Universal Joints

Do not mix bearing cups on bearing journals. Due to the exact amount of lubrication required for each cup, cups must remain matched with cross journals. Mismatching of cups on cross journals will result in improper quantities of lubrication in cups, causing premature joint failure. Addition of lubrication may damage bearing cup seals, leading to premature joint failure. Numbering the bearing cups and journals is recommended to prevent mixing them up. Please refer to Dana Spicer document J311-21 and **Figure 6**.

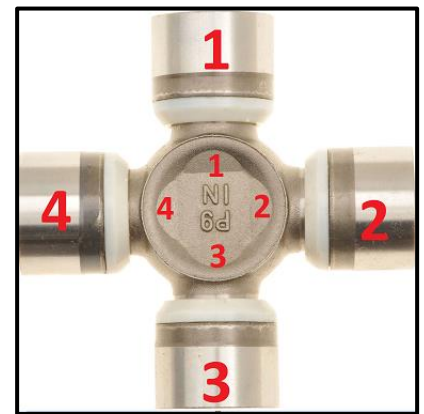

READ ALL INSTRUCTIONS CAREFULLY AND THOROUGHLY PRIOR TO STARTING INSTALLATION. PRODUCTS THAT HAVE BEEN INSTALLED ARE NOT ELIGIBLE FOR RETURN. USE PROPER JACKING LOCATIONS. DEATH OR SERIOUS INJURY CAN RESULT IF INSTRUCTIONS ARE NOT CORRECTLY FOLLOWED. A QUALITY CHASSIS MANUAL, AVAILABLE AT YOUR LOCAL PARTS STORE, MAY ALSO AID IN YOUR INSTALLATION.

#### • DISCLAIMER / WARRANTY •

QA1 WARRANTS THAT THE PRODUCTS WILL BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP FOR ONE YEAR FROM DATE OF SALE TO THE ORIGINAL PURCHASER. QA1 MAKES NO OTHER WARRANTY OF ANY KIND, EXPRESSED OR IMPLIED. QA1 SHALL HAVE NO OBLIGATION UNDER THE FOREGOING WARRANTY WHERE THE DEFECT IS THE RESULT OF IMPROPER OR ABNORMAL USE, YOUR NEGLIGENCE, VEHICLE ACCIDENT, IMPROPER OR INCORRECT INSTALLATION OR MAINTENANCE, NOR WHEN THE PRODUCT HAS BEEN REPAIRED OR ALTERED IN ANY WAY. QA1'S LIABILITY IN THE CASE OF DEFECTIVE PRODUCTS SUBJECT TO THE FOREGOING WARRANTY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT, AT QA1'S OPTION, OF THE DEFECTIVE PRODUCTS.

THE USER UNDERSTANDS AND RECOGNIZES THAT RACING PARTS, SPECIALIZED STREET ROD EQUIPMENT, AND ALL PARTS AND SERVICES SOLD BY QA1 ARE EXPOSED TO MANY AND VARIED CONDITIONS DUE TO THE MANNER IN WHICH THEY ARE INSTALLED AND USED. QA1 SHALL BEAR NO LIABILITY FOR ANY LOSS, DAMAGE OR INJURY, EITHER TO A PERSON OR TO PROPERTY, RESULTING FROM THE INSTALLATION, DIRECT OR INDIRECT USE OF ANY QA1 PRODUCTS OR INABILITY BY THE BUYER TO DETERMINE PROPER USE OR APPLICATION OF QA1 PRODUCTS. WITH THE EXCEPTION OF THE LIMITED LIABILITY WARRANTY SET FORTH ABOVE, QA1 SHALL NOT BE LIABLE FOR ANY CLAIMS, DEMANDS, INJURIES, DAMAGES, ACTIONS, OR CAUSES OF ACTION WHATSOEVER TO BUYER ARISING OUT OF OR CONNECTED WITH THE USE OF ANY QA1 PRODUCTS. MOTORSPORTS ARE DANGEROUS; AS SUCH, NO WARRANTY OR REPRESENTATION IS MADE AS TO THE PRODUCT'S ABILITY TO PROTECT THE USER FROM INJURY OR DEATH. THE USER ASSUMES THAT RISK!

# Dedicated Technical Support Team

QA1 is dedicated to providing quality support and instructions. We employ passionate racers and car enthusiasts that know our products and the industry to better serve you.

Check out our tech videos at [www.YouTube.com/QA1Tech](http://www.YouTube.com/QA1Tech) for:

- Frequently Asked Questions
- Quick Tips
- Install Information
- Tuning and Repair Guides
- Other technical information

Or call to speak with one of our experts: **1.800.721.7761**

\*Our technical support and order lines are open Monday - Friday, 8 am to 5 pm CST.

 [Facebook.com/QA1Motorsports](https://www.facebook.com/QA1Motorsports)

 [Twitter.com/QA1Motorsports](https://twitter.com/QA1Motorsports)

 [Instagram.com/QA1Motorsports](https://www.instagram.com/QA1Motorsports)



[www.QA1.net/Tech](http://www.QA1.net/Tech)